



ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

4.1 UNDIRECTED GRAPHS

- ▶ *introduction*
- ▶ *graph API*
- ▶ *depth-first search*
- ▶ *breadth-first search*
- ▶ *connected components*
- ▶ *challenges*

Algorithms

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

4.1 UNDIRECTED GRAPHS



- ▶ *introduction*
- ▶ *graph API*
- ▶ *depth-first search*
- ▶ *breadth-first search*
- ▶ *connected components*
- ▶ *challenges*

Undirected graphs


Graph. Set of vertices connected pairwise by edges.

Why study graph algorithms?

- Thousands of practical applications.
 - Hundreds of graph algorithms known.
 - Interesting and broadly useful abstraction.
 - Challenging branch of computer science and discrete math.

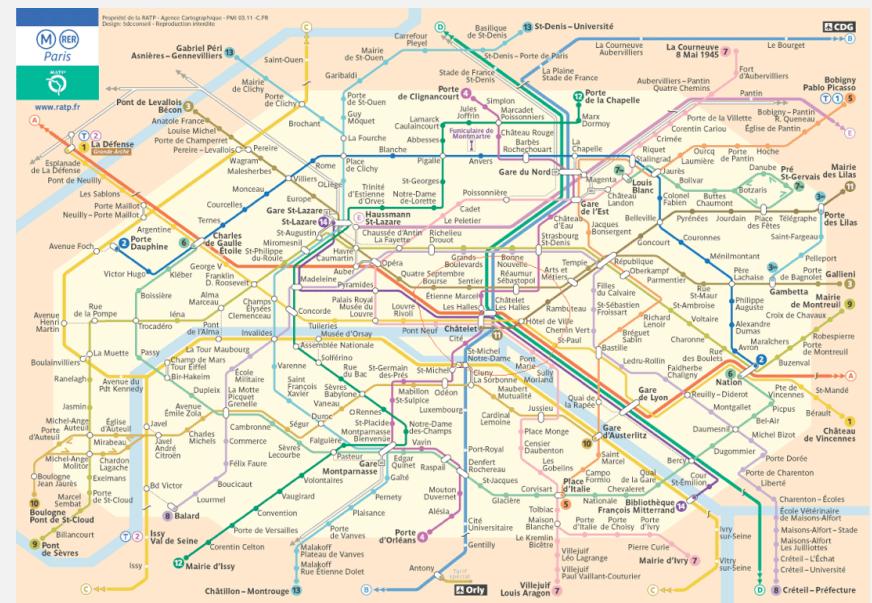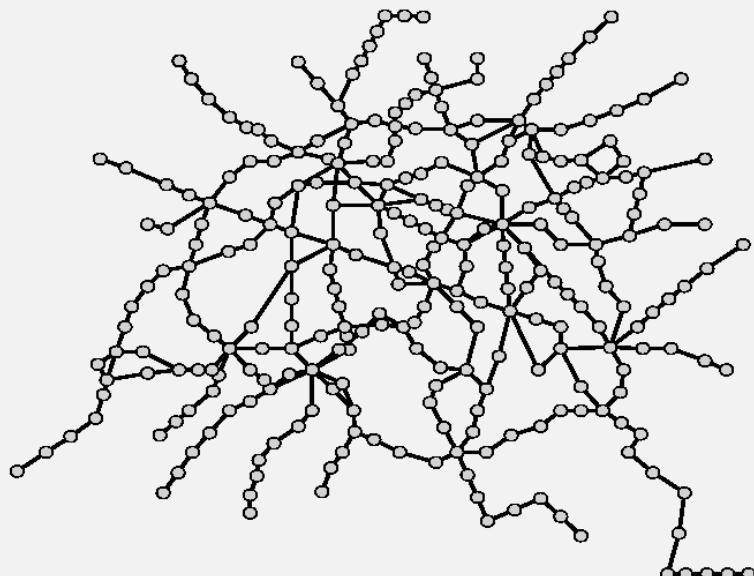


Protein-protein interaction network

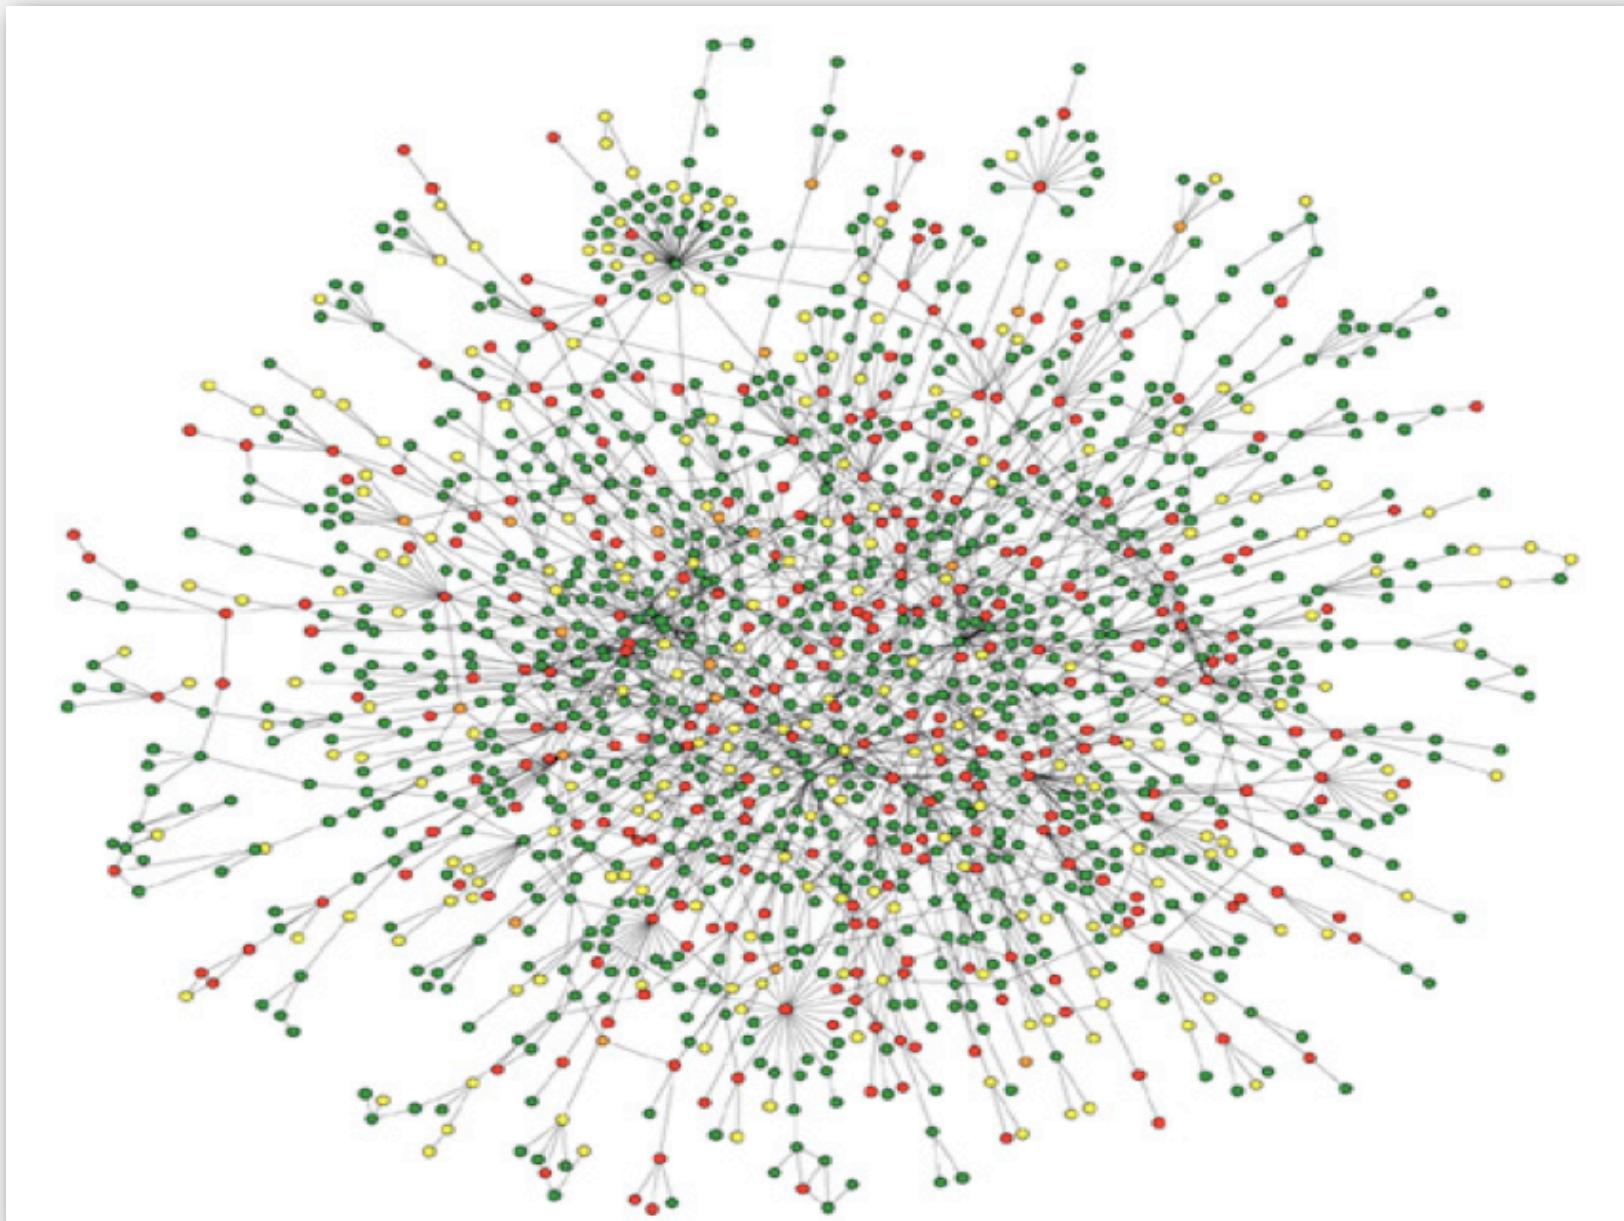


Reference: Jeong et al, Nature Review | Genetics

The Internet as mapped by the Opte Project

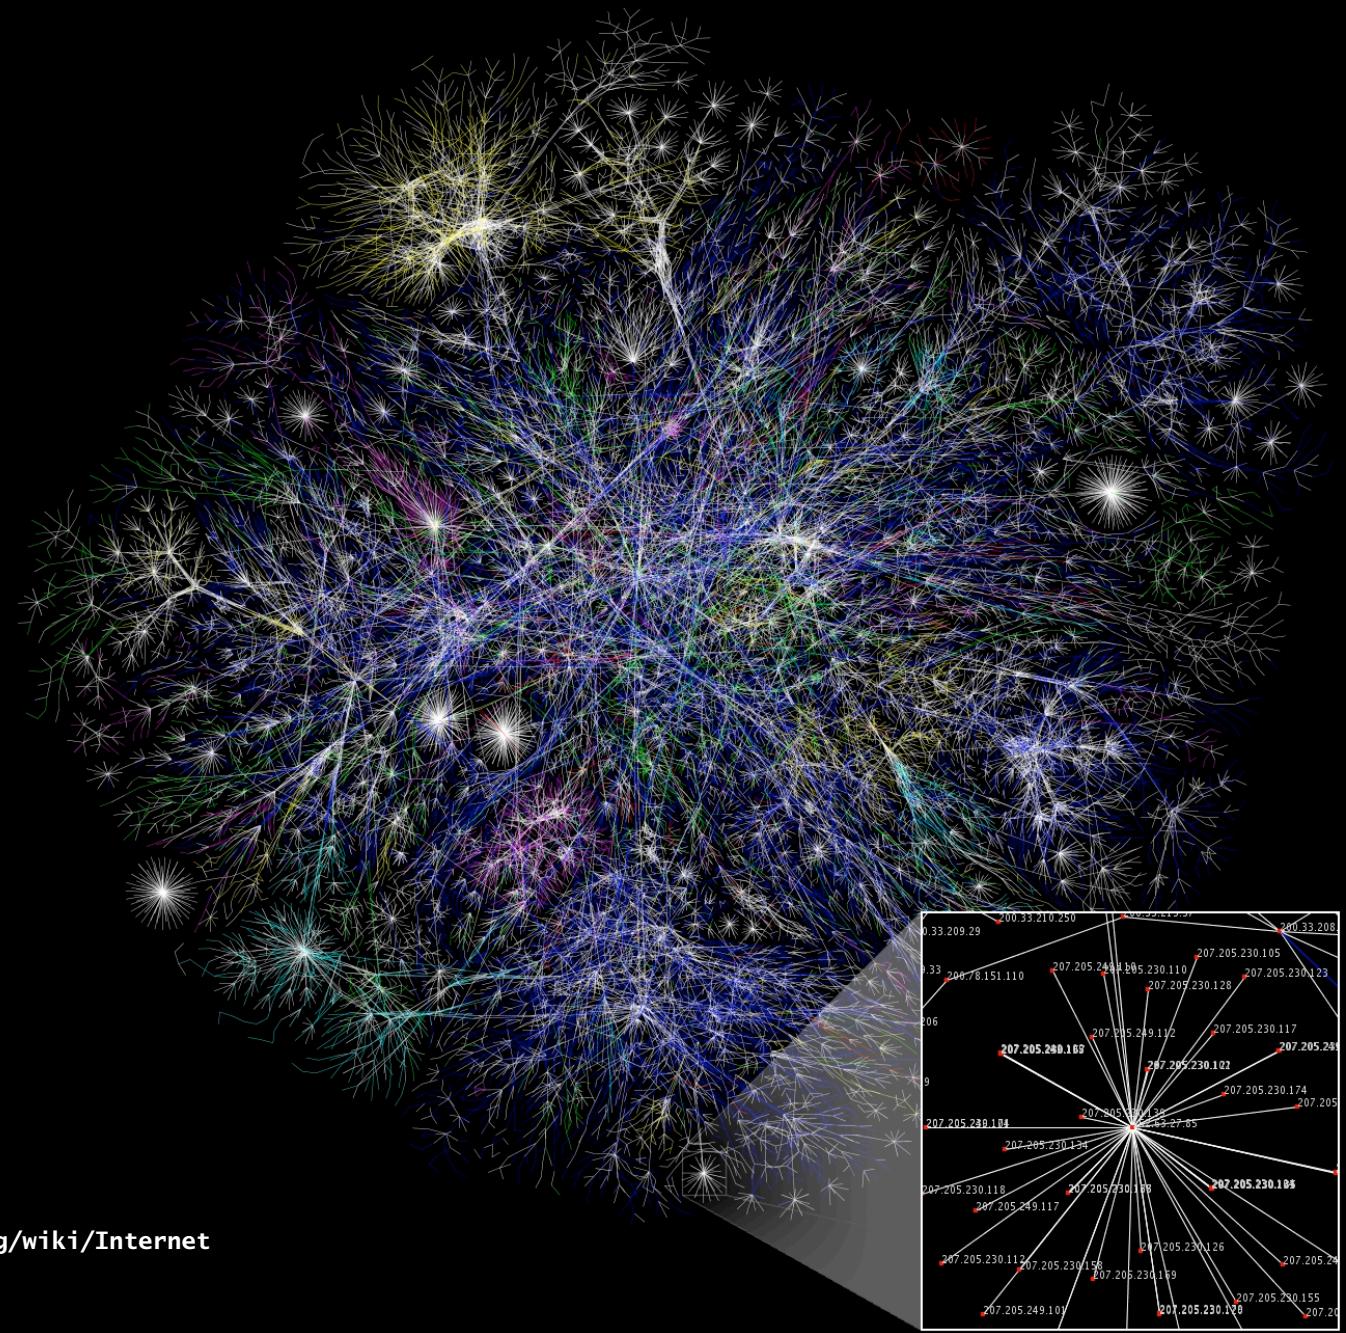

<http://en.wikipedia.org/wiki/Internet>

Map of science clickstreams

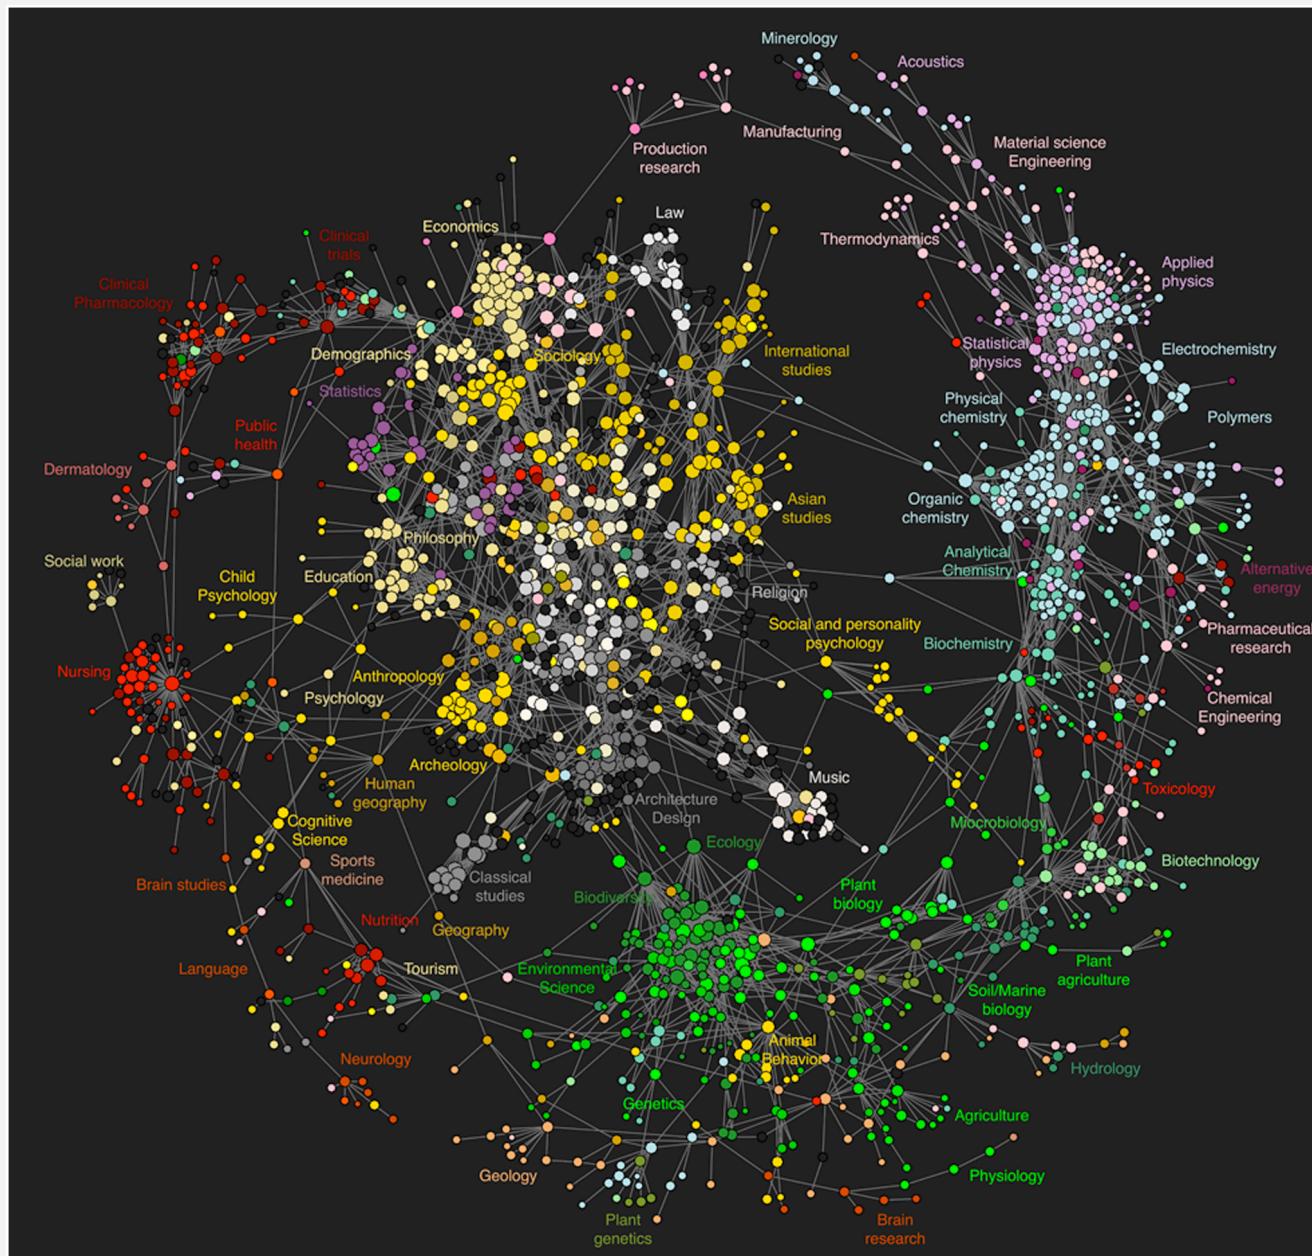


<http://www.plosone.org/article/info:doi/10.1371/journal.pone.0004803>

10 million Facebook friends




"Visualizing Friendships" by Paul Butler

One week of Enron emails

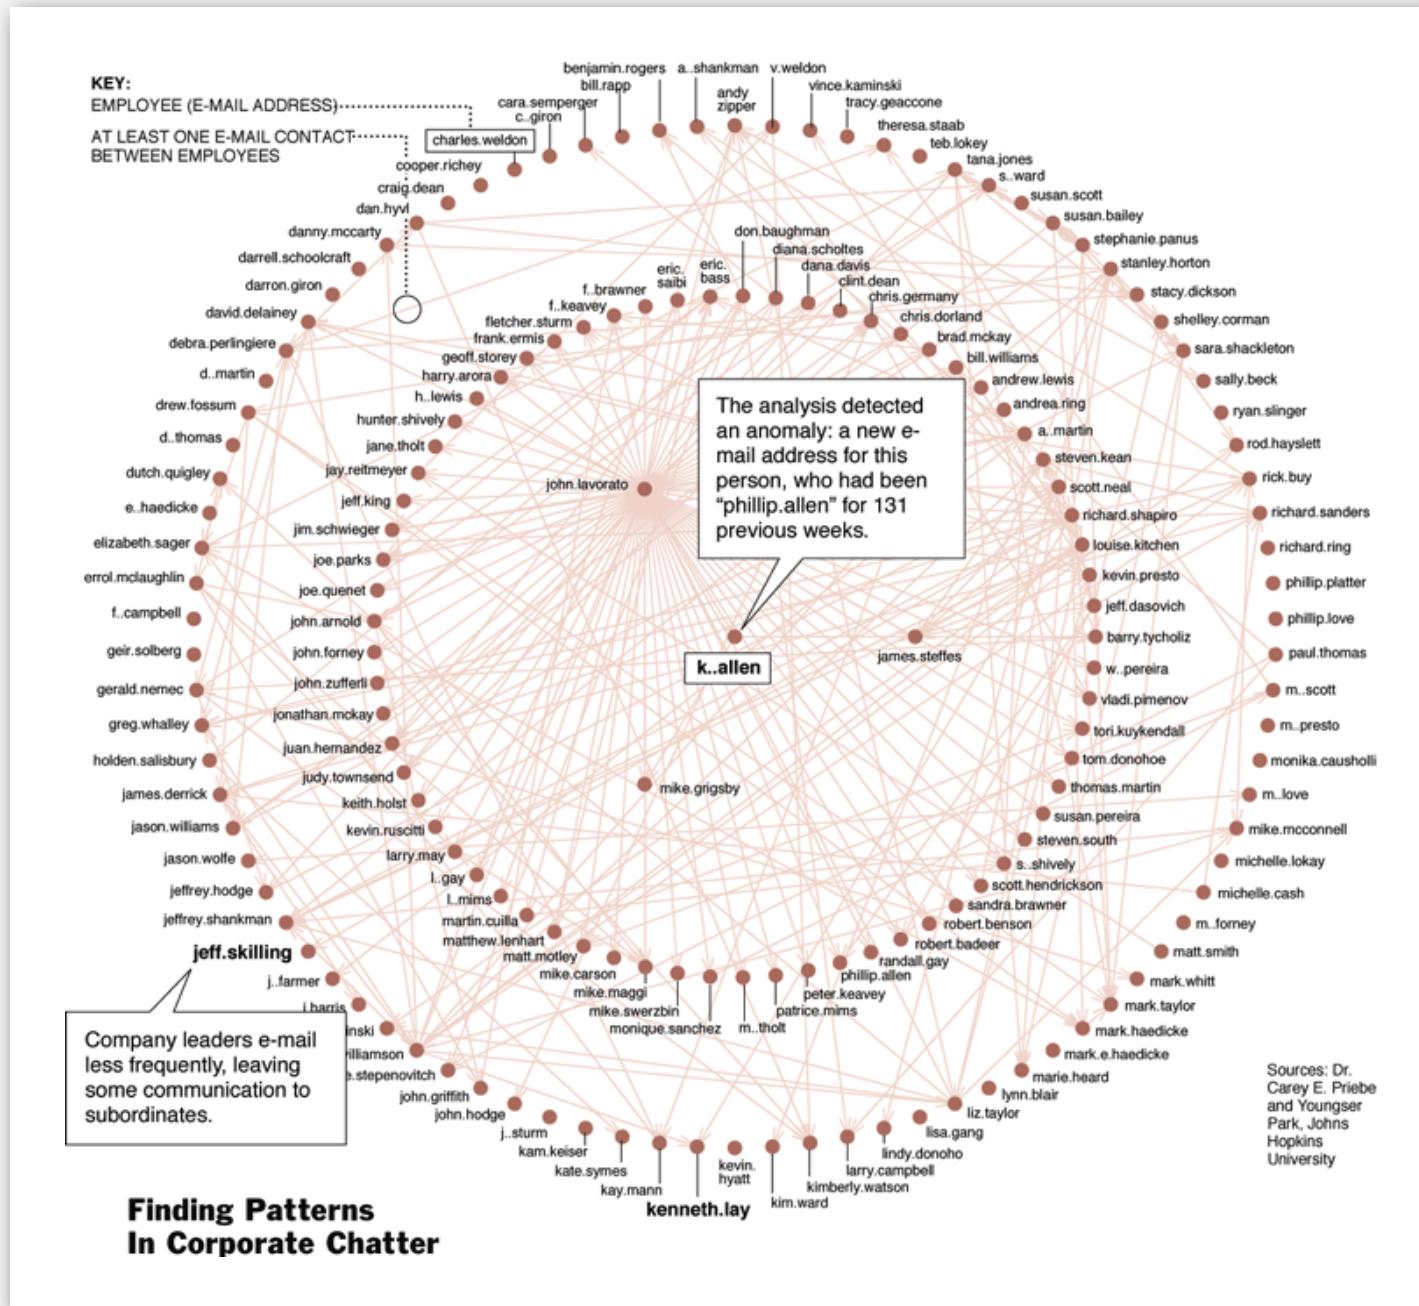

The evolution of FCC lobbying coalitions

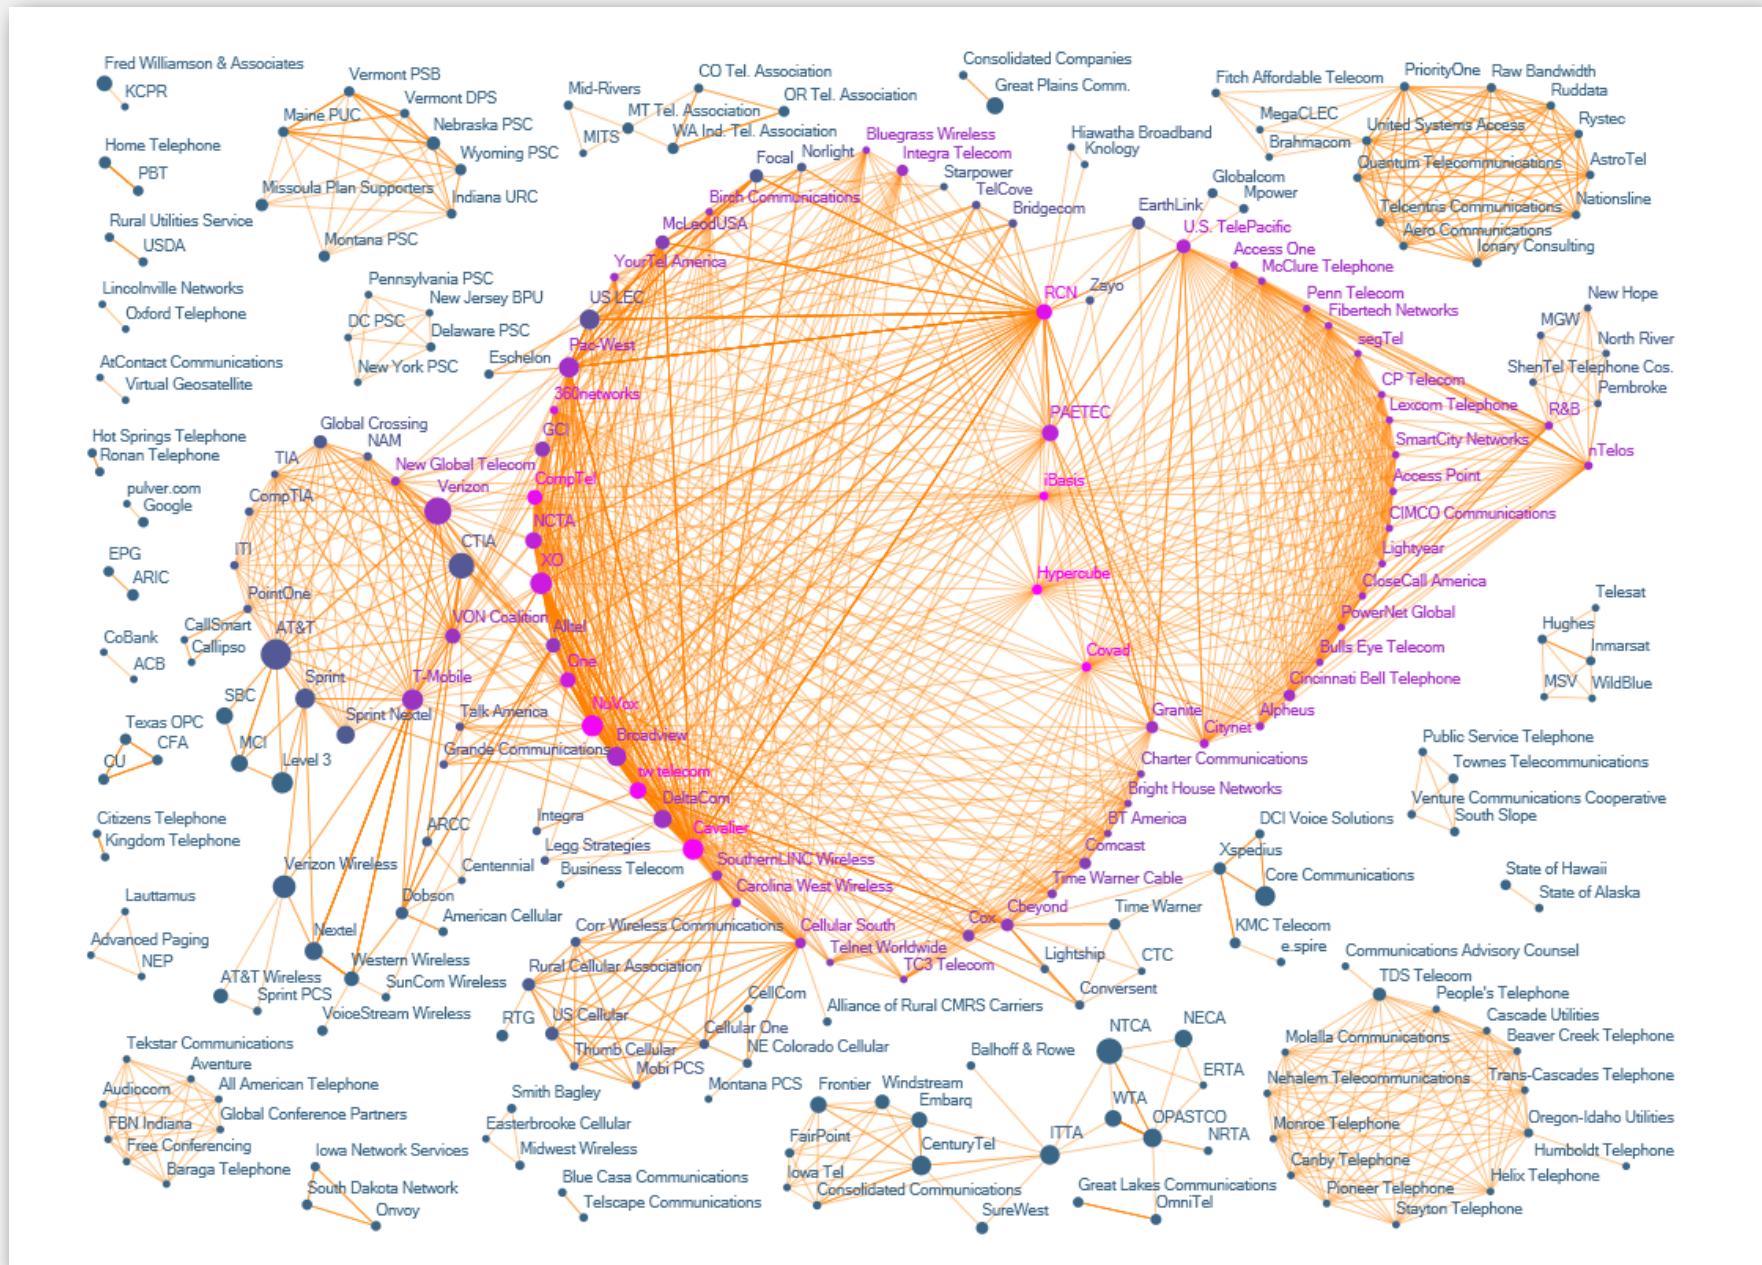

"The Evolution of FCC Lobbying Coalitions" by Pierre de Vries in IoSS Visualization Symposium 2010

Framingham heart study

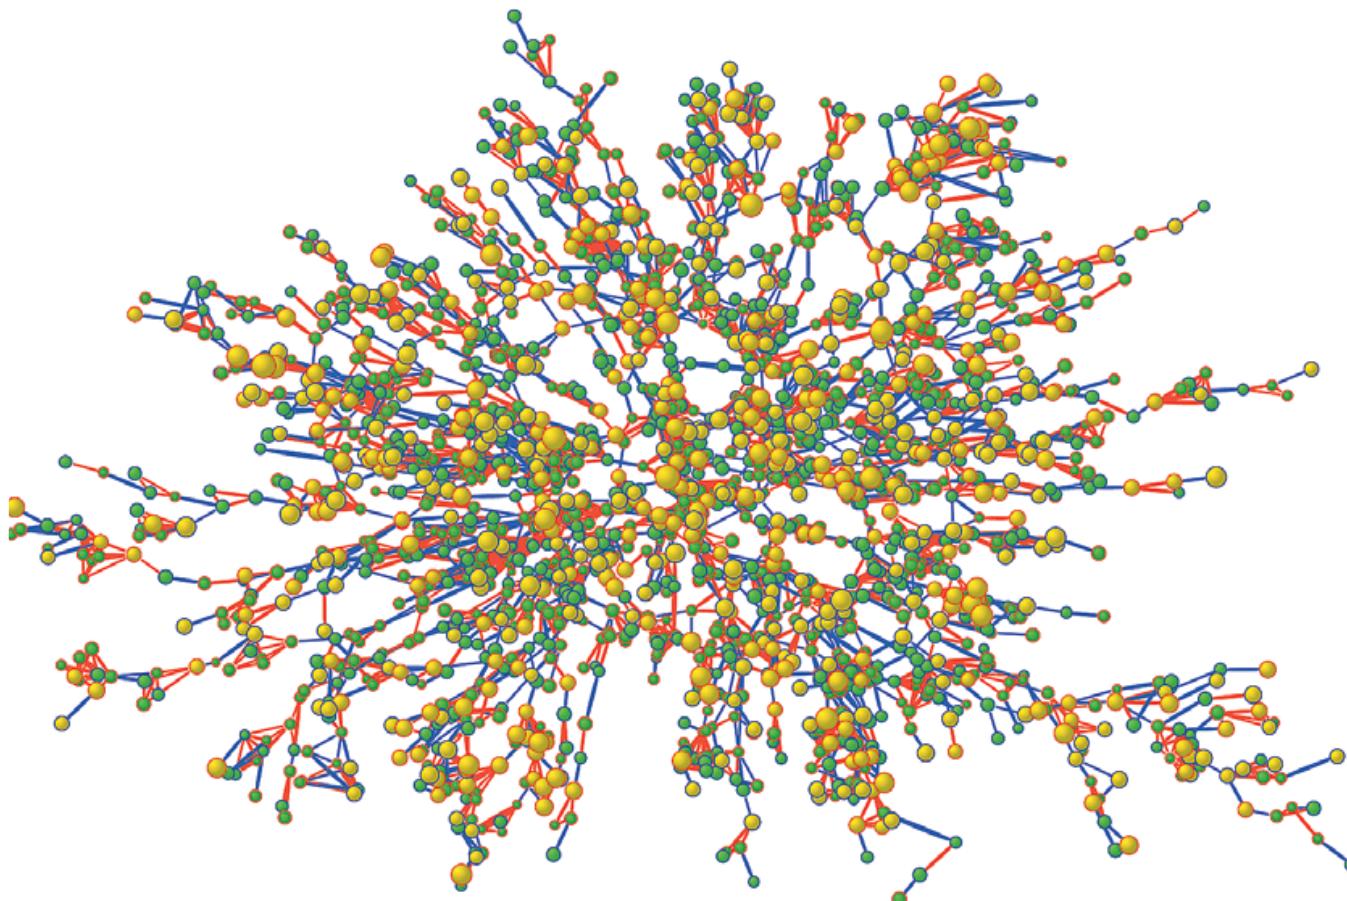


Figure 1. Largest Connected Subcomponent of the Social Network in the Framingham Heart Study in the Year 2000.

Each circle (node) represents one person in the data set. There are 2200 persons in this subcomponent of the social network. Circles with red borders denote women, and circles with blue borders denote men. The size of each circle is proportional to the person's body-mass index. The interior color of the circles indicates the person's obesity status: yellow denotes an obese person (body-mass index, ≥ 30) and green denotes a nonobese person. The colors of the ties between the nodes indicate the relationship between them: purple denotes a friendship or marital tie and orange denotes a familial tie.

Graph applications


| graph | vertex | edge |
|---------------------|------------------------------|-----------------------------|
| communication | telephone, computer | fiber optic cable |
| circuit | gate, register, processor | wire |
| mechanical | joint | rod, beam, spring |
| financial | stock, currency | transactions |
| transportation | street intersection, airport | highway, airway route |
| internet | class C network | connection |
| game | board position | legal move |
| social relationship | person, actor | friendship, movie cast |
| neural network | neuron | synapse |
| protein network | protein | protein-protein interaction |
| molecule | atom | bond |

Graph terminology

Path. Sequence of vertices connected by edges.

Cycle. Path whose first and last vertices are the same.

Two vertices are **connected** if there is a path between them.

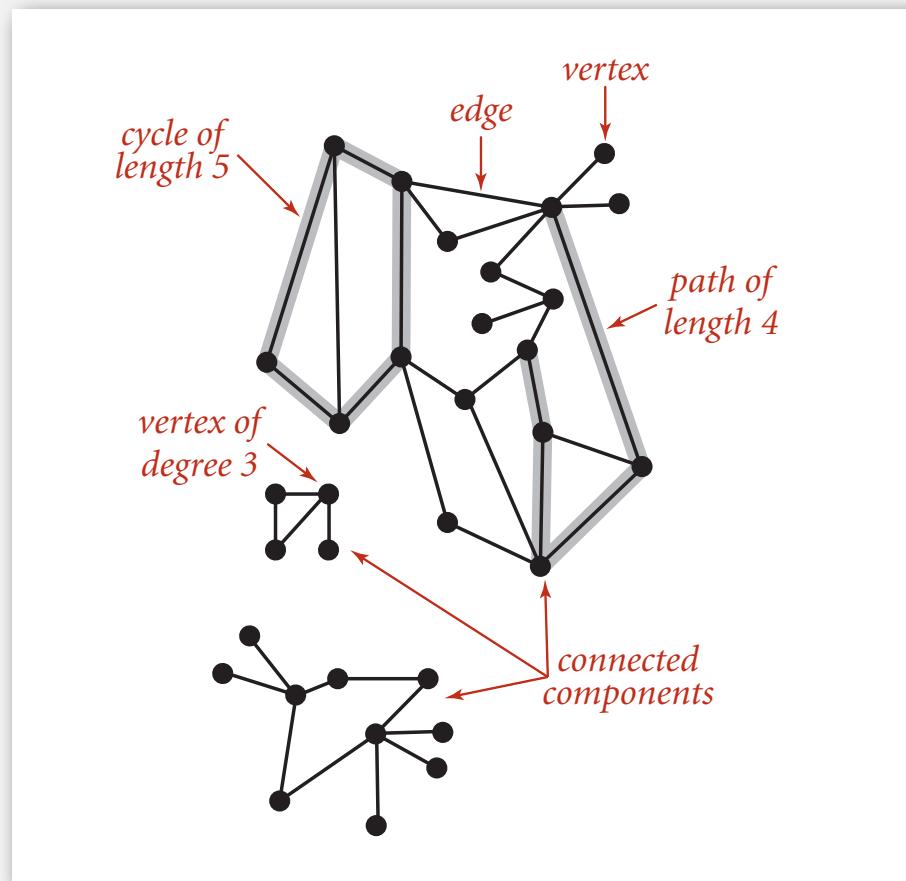

Some graph-processing problems

Path. Is there a path between s and t ?

Shortest path. What is the shortest path between s and t ?

Cycle. Is there a cycle in the graph?

Euler tour. Is there a cycle that uses each edge exactly once?

Hamilton tour. Is there a cycle that uses each vertex exactly once.

Connectivity. Is there a way to connect all of the vertices?

MST. What is the best way to connect all of the vertices?

Biconnectivity. Is there a vertex whose removal disconnects the graph?

Planarity. Can you draw the graph in the plane with no crossing edges?

Graph isomorphism. Do two adjacency lists represent the same graph?

Challenge. Which of these problems are easy? difficult? intractable?

Algorithms

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

4.1 UNDIRECTED GRAPHS

- ▶ *introduction*
- ▶ *graph API*
- ▶ *depth-first search*
- ▶ *breadth-first search*
- ▶ *connected components*
- ▶ *challenges*

Algorithms

ROBERT SEDGEWICK | KEVIN WAYNE



<http://algs4.cs.princeton.edu>

4.1 UNDIRECTED GRAPHS

- ▶ *introduction*
- ▶ *graph API*
- ▶ *depth-first search*
- ▶ *breadth-first search*
- ▶ *connected components*
- ▶ *challenges*

Graph representation

Graph drawing. Provides intuition about the structure of the graph.

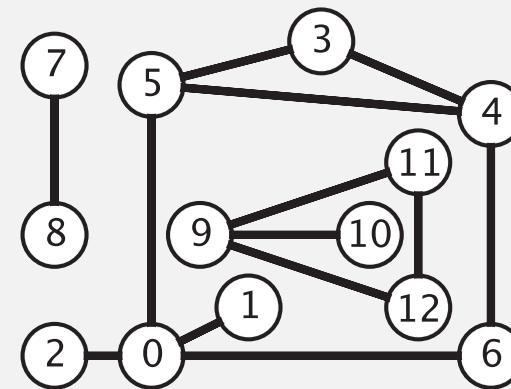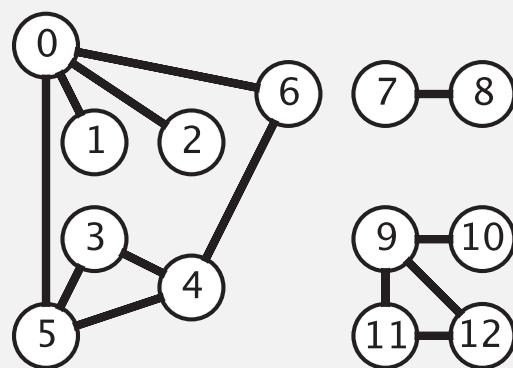


two drawings of the same graph

Caveat. Intuition can be misleading.


Graph representation

Vertex representation.

- This lecture: use integers between 0 and $V - 1$.
- Applications: convert between names and integers with symbol table.

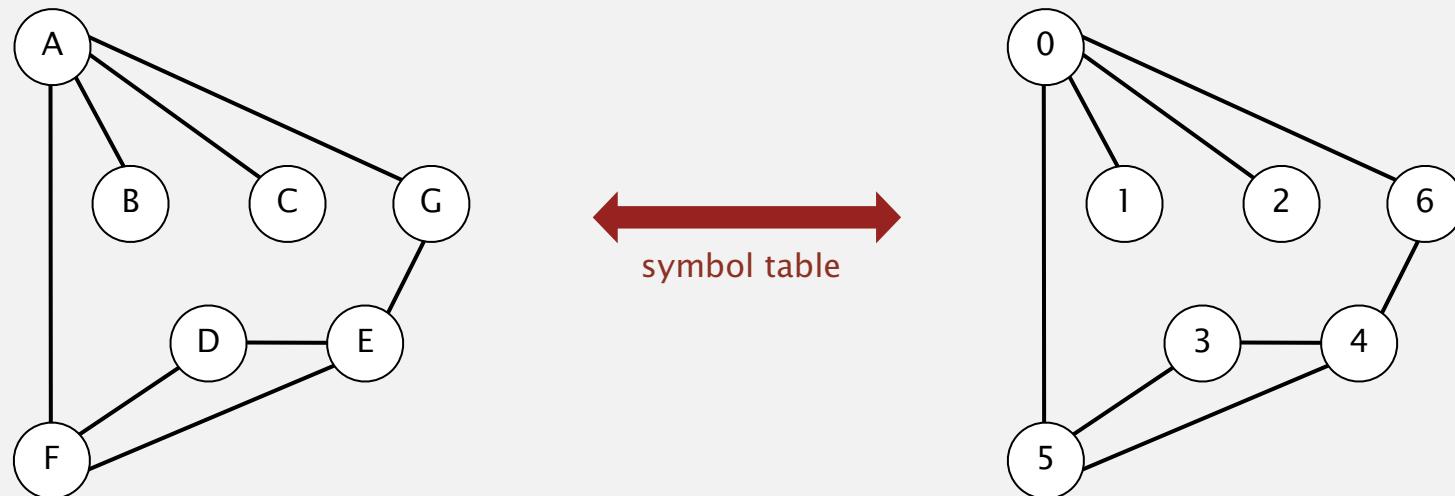

Anomalies.

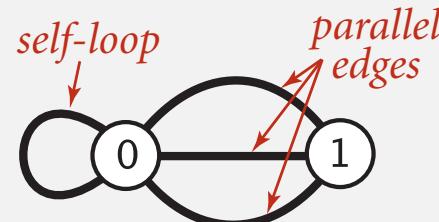

Graph API

```
public class Graph
```

```
    Graph(int V)
```

create an empty graph with V vertices

```
    Graph(In in)
```

create a graph from input stream

```
    void addEdge(int v, int w)
```

add an edge v-w

```
    Iterable<Integer> adj(int v)
```

vertices adjacent to v

```
    int V()
```

number of vertices

```
    int E()
```

number of edges

```
    String toString()
```

string representation

```
In in = new In(args[0]);  
Graph G = new Graph(in);
```

read graph from
input stream

```
for (int v = 0; v < G.V(); v++)  
    for (int w : G.adj(v))  
        StdOut.println(v + "-" + w);
```

print out each
edge (twice)


Graph API: sample client

Graph input format.

tinyG.txt

$V \rightarrow 13$
 $13 \leftarrow E$

0 5
4 3
0 1
9 12
6 4
5 4
0 2
11 12
9 10
0 6
7 8
9 11
5 3

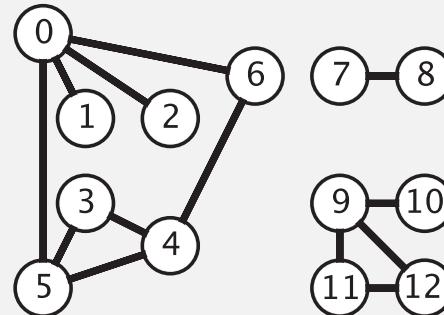

% java Test tinyG.txt

0-6
0-2
0-1
0-5
1-0
2-0
3-5
3-4
...
12-11
12-9

```
In in = new In(args[0]);  
Graph G = new Graph(in);
```

read graph from
input stream

```
for (int v = 0; v < G.V(); v++)  
    for (int w : G.adj(v))  
        StdOut.println(v + " - " + w);
```

print out each
edge (twice)

Typical graph-processing code

```
public static int degree(Graph G, int v)
{
    int degree = 0;
    for (int w : G.adj(v)) degree++;
    return degree;
}

public static int maxDegree(Graph G)
{
    int max = 0;
    for (int v = 0; v < G.V(); v++)
        if (degree(G, v) > max)
            max = degree(G, v);
    return max;
}

public static double averageDegree(Graph G)
{   return 2.0 * G.E() / G.V(); }

public static int numberOfSelfLoops(Graph G)
{
    int count = 0;
    for (int v = 0; v < G.V(); v++)
        for (int w : G.adj(v))
            if (v == w) count++;
    return count/2; // each edge counted twice
}
```

compute the degree of v


compute maximum degree

compute average degree

count self-loops

Set-of-edges graph representation


Maintain a list of the edges (linked list or array).

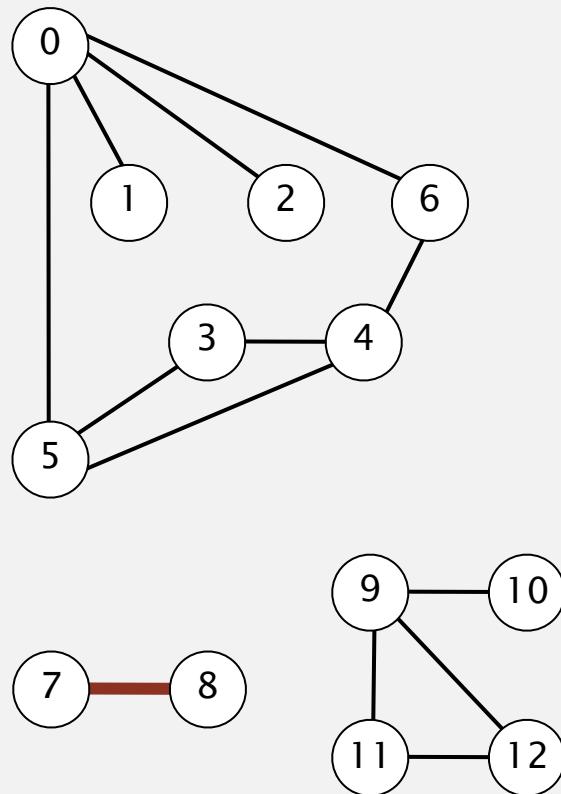

| | |
|----|----|
| 0 | 1 |
| 0 | 2 |
| 0 | 5 |
| 0 | 6 |
| 3 | 4 |
| 3 | 5 |
| 4 | 5 |
| 4 | 6 |
| 7 | 8 |
| 9 | 10 |
| 9 | 11 |
| 9 | 12 |
| 11 | 12 |

Adjacency-matrix graph representation

Maintain a two-dimensional V -by- V boolean array;
for each edge $v-w$ in graph: $\text{adj}[v][w] = \text{adj}[w][v] = \text{true}$.


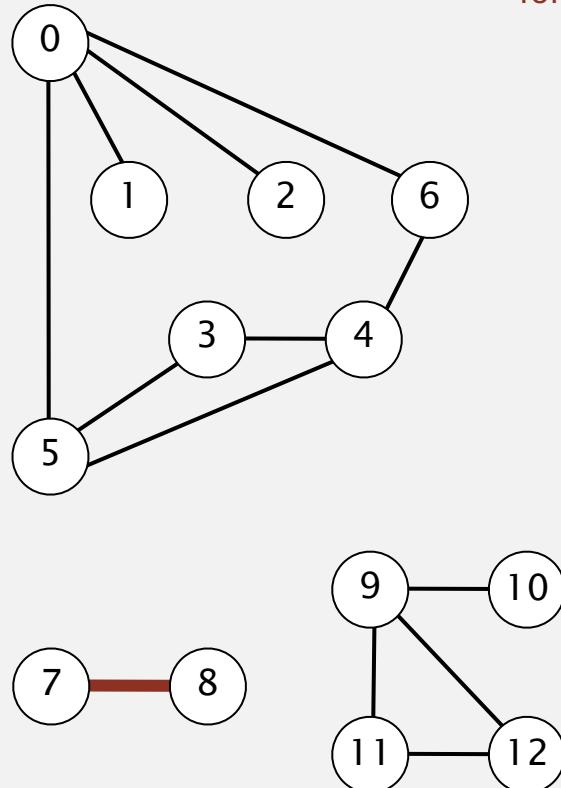


two entries
for each edge

| | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|----|---|---|---|---|---|---|---|---|---|---|----|----|----|
| 0 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 2 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 3 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 4 | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| 5 | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 6 | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 7 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 |
| 8 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 |
| 9 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 |
| 10 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 |
| 11 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 |
| 12 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 |

Adjacency-list graph representation

Maintain vertex-indexed array of lists.

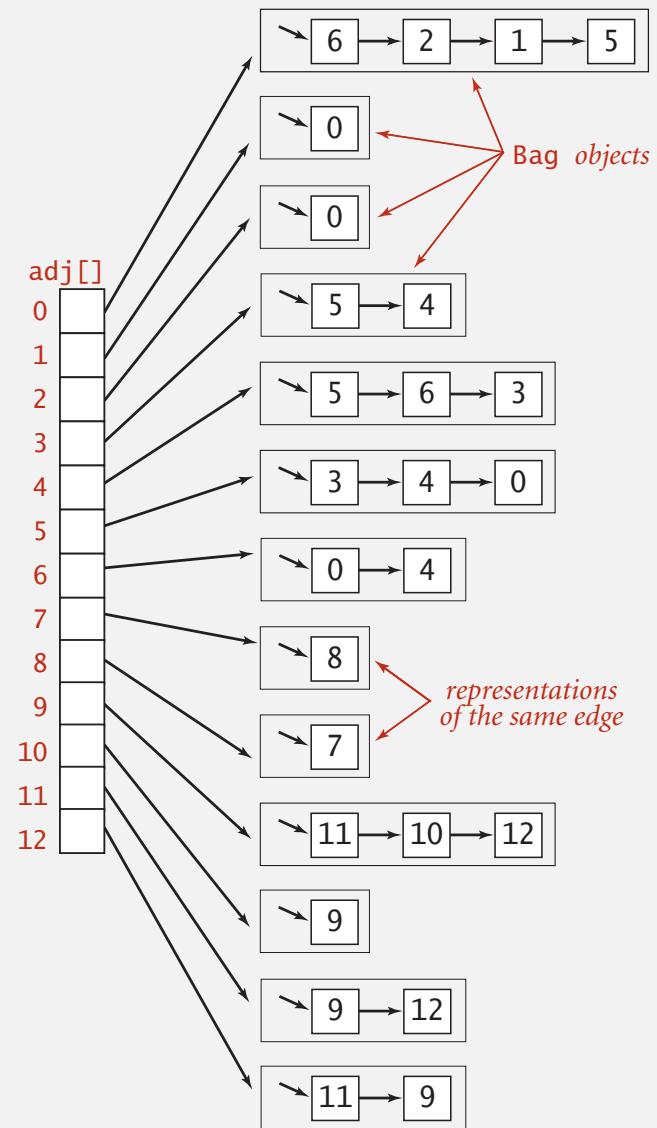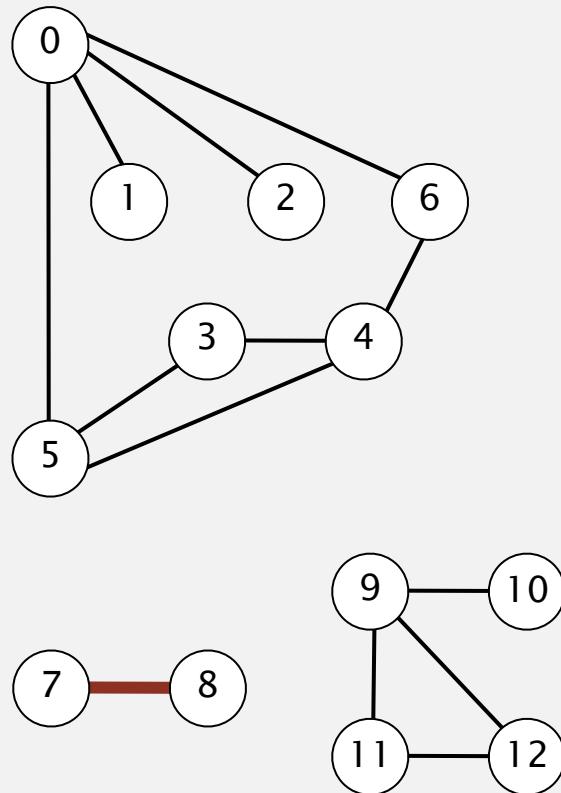

Adjacency-list graph representation: Java implementation

```
public class Graph
{
    private final int V;
    private Bag<Integer>[] adj;
```

adjacency lists
(using Bag data type)

```
public Graph(int V)
{
    this.V = V;
    adj = (Bag<Integer>[]) new Bag[V];
    for (int v = 0; v < V; v++)
        adj[v] = new Bag<Integer>();
}
```

create empty graph
with V vertices

```
public void addEdge(int v, int w)
{
    adj[v].add(w);
    adj[w].add(v);
}
```

add edge v-w
(parallel edges and
self-loops allowed)

```
public Iterable<Integer> adj(int v)
{ return adj[v]; }
```


iterator for vertices adjacent to v

Graph representations

In practice. Use adjacency-lists representation.

- Algorithms based on iterating over vertices adjacent to v .
- Real-world graphs tend to be **sparse**.

huge number of vertices,
small average vertex degree

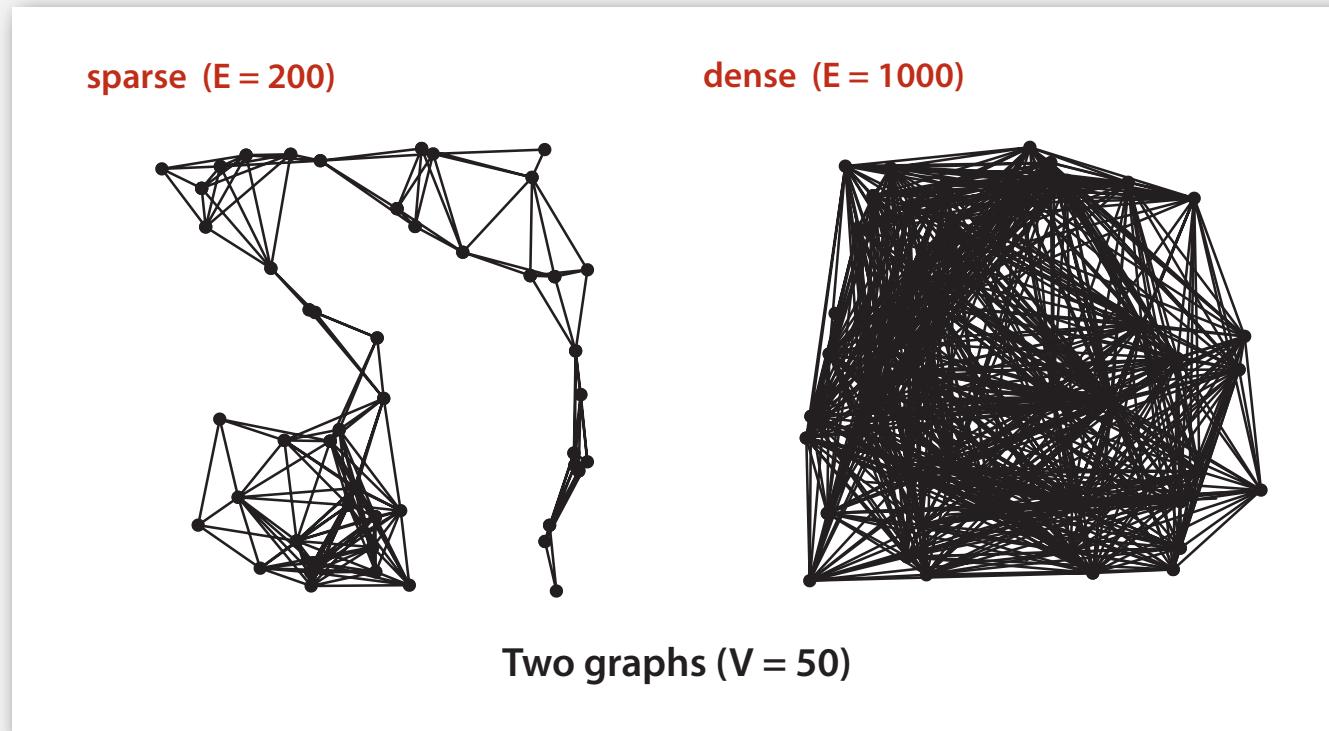

Graph representations

In practice. Use adjacency-lists representation.

- Algorithms based on iterating over vertices adjacent to v .
- Real-world graphs tend to be **sparse**.

huge number of vertices,
small average vertex degree

| representation | space | add edge | edge between v and w ? | iterate over vertices adjacent to v ? |
|------------------|---------|----------|----------------------------|---|
| list of edges | E | 1 | E | E |
| adjacency matrix | V^2 | 1^* | 1 | V |
| adjacency lists | $E + V$ | 1 | $\text{degree}(v)$ | $\text{degree}(v)$ |

* disallows parallel edges

Algorithms

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

4.1 UNDIRECTED GRAPHS

- ▶ *introduction*
- ▶ *graph API*
- ▶ *depth-first search*
- ▶ *breadth-first search*
- ▶ *connected components*
- ▶ *challenges*

Algorithms

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>


4.1 UNDIRECTED GRAPHS

- ▶ *introduction*
- ▶ *graph API*
- ▶ *depth-first search*
- ▶ *breadth-first search*
- ▶ *connected components*
- ▶ *challenges*

Maze exploration

Maze graph.

- Vertex = intersection.
- Edge = passage.

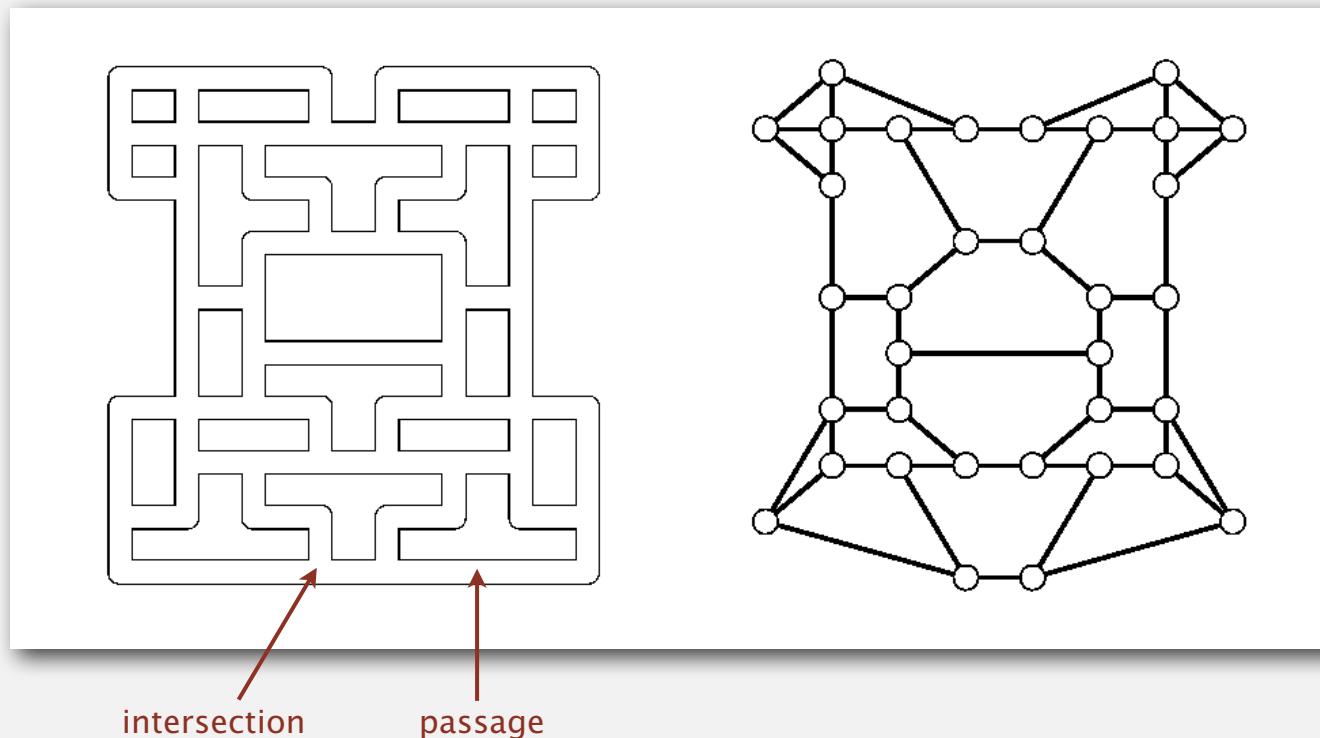


Goal. Explore every intersection in the maze.

Trémaux maze exploration

Algorithm.

- Unroll a ball of string behind you.
- Mark each visited intersection and each visited passage.
- Retrace steps when no unvisited options.

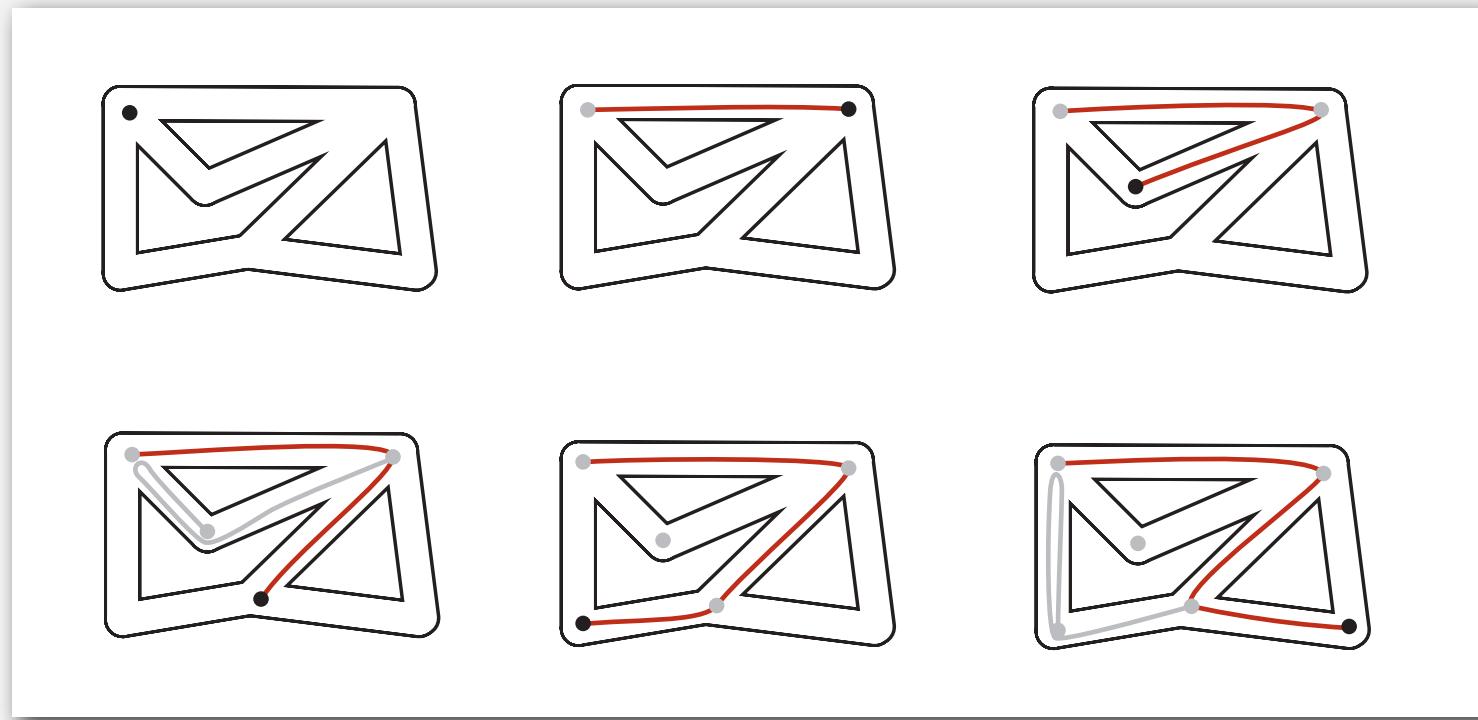

Trémaux maze exploration

Algorithm.


- Unroll a ball of string behind you.
- Mark each visited intersection and each visited passage.
- Retrace steps when no unvisited options.

First use? Theseus entered Labyrinth to kill the monstrous Minotaur; Ariadne instructed Theseus to use a ball of string to find his way back out.




Claude Shannon (with Theseus mouse)

Maze exploration

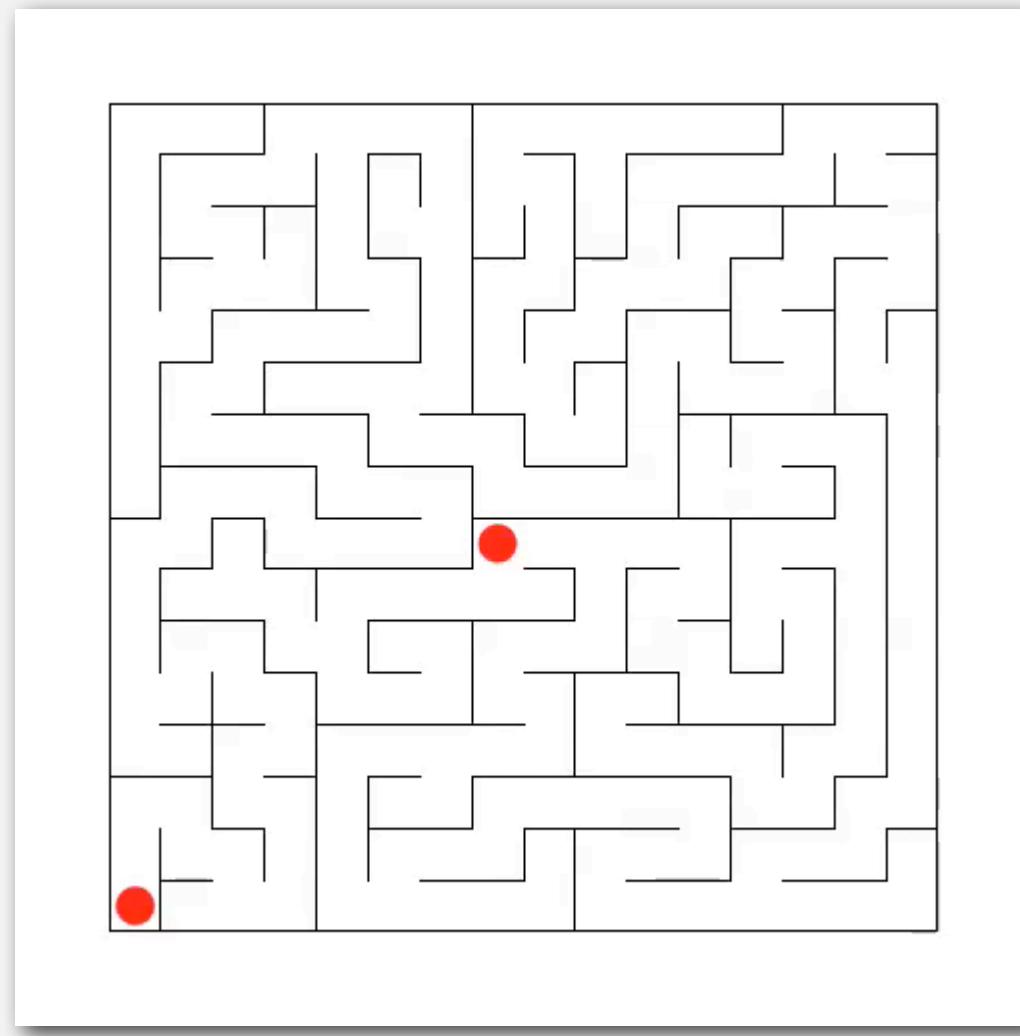

Maze exploration

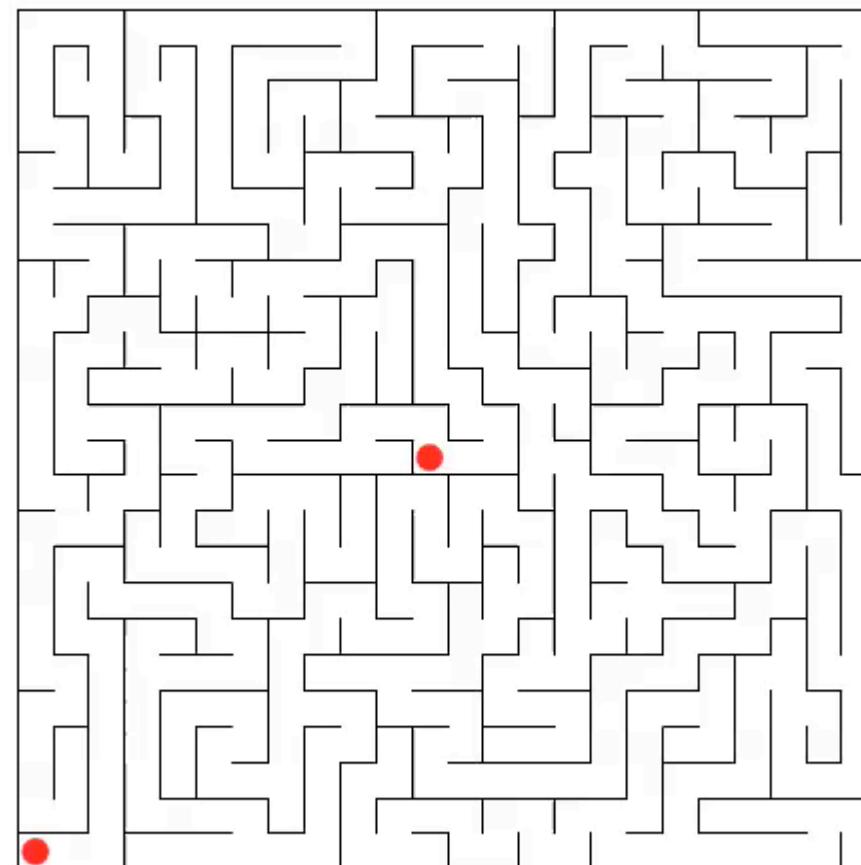

Depth-first search

Goal. Systematically search through a graph.

Idea. Mimic maze exploration.

DFS (to visit a vertex v)

Mark v as visited.

**Recursively visit all unmarked
vertices w adjacent to v.**

Typical applications.

- Find all vertices connected to a given source vertex.
- Find a path between two vertices.

Design challenge. How to implement?

Design pattern for graph processing

Design pattern. Decouple graph data type from graph processing.

- Create a Graph object.
- Pass the Graph to a graph-processing routine.
- Query the graph-processing routine for information.

```
public class Paths
```

```
    Paths(Graph G, int s)
```

find paths in G from source s

```
    boolean hasPathTo(int v)
```

is there a path from s to v?

```
    Iterable<Integer> pathTo(int v)
```

path from s to v; null if no such path



```
Paths paths = new Paths(G, s);
for (int v = 0; v < G.V(); v++)
    if (paths.hasPathTo(v))
        StdOut.println(v);
```

print all vertices
connected to s

Depth-first search demo

To visit a vertex v :

- Mark vertex v as visited.
- Recursively visit all unmarked vertices adjacent to v .

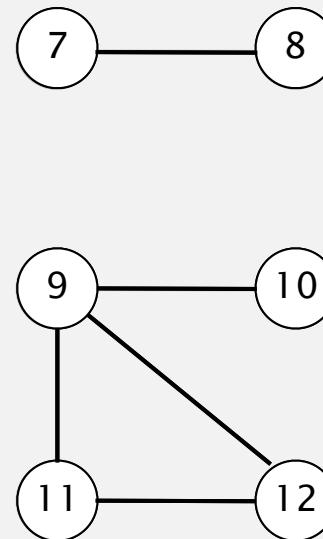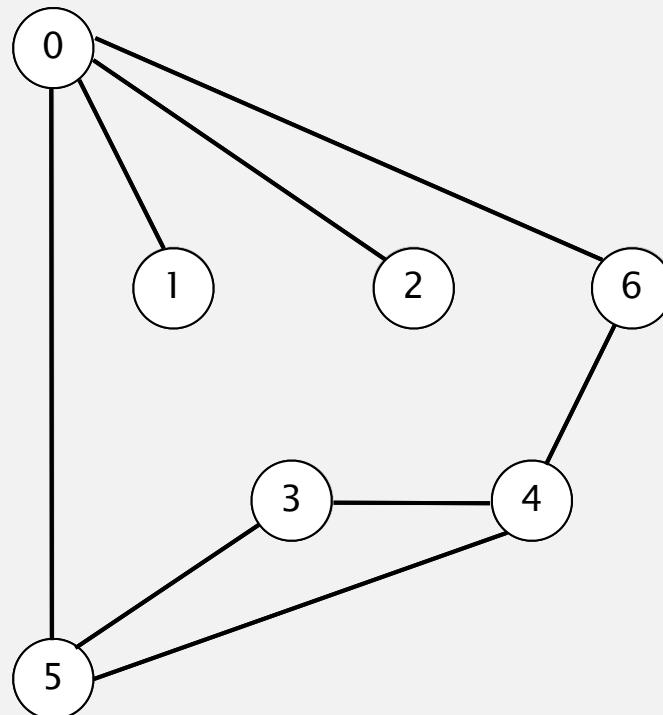



graph G

tinyG.txt
V → 13
E → 13
0 5
4 3
0 1
9 12
6 4
5 4
0 2
11 12
9 10
0 6
7 8
9 11
5 3

Depth-first search demo

To visit a vertex v :

- Mark vertex v as visited.
- Recursively visit all unmarked vertices adjacent to v .

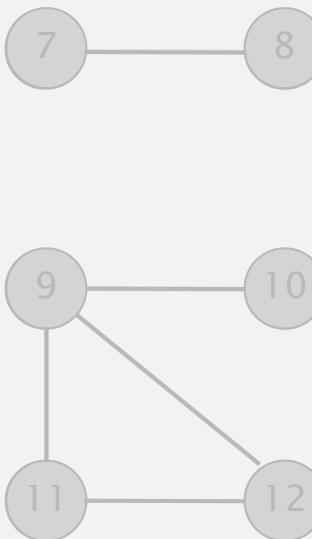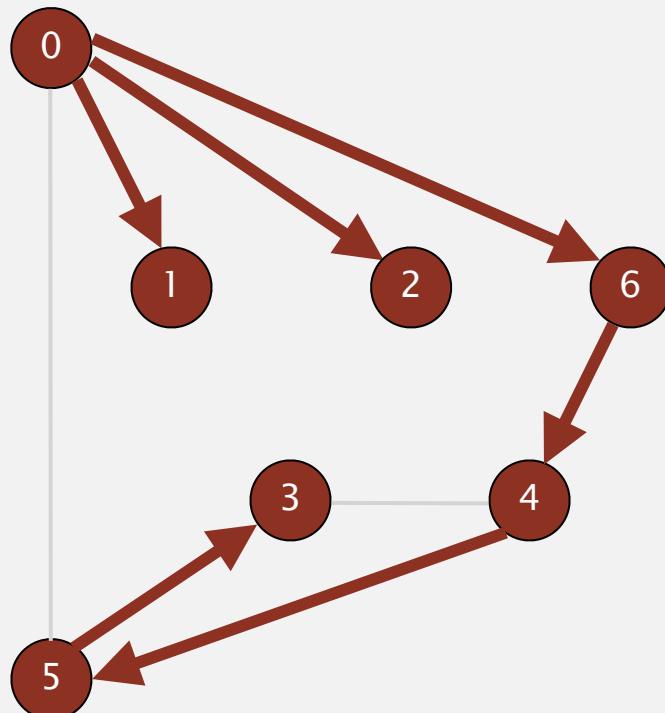

vertices reachable from 0

| v | marked[] | edgeTo[v] |
|-----|----------|---------------|
| 0 | T | - |
| 1 | T | 0 |
| 2 | T | 0 |
| 3 | T | 5 |
| 4 | T | 6 |
| 5 | T | 4 |
| 6 | T | 0 |
| 7 | F | - |
| 8 | F | - |
| 9 | F | - |
| 10 | F | - |
| 11 | F | - |
| 12 | F | - |

Depth-first search

Goal. Find all vertices connected to s (and a corresponding path).

Idea. Mimic maze exploration.

Algorithm.

- Use recursion (ball of string).
- Mark each visited vertex (and keep track of edge taken to visit it).
- Return (retrace steps) when no unvisited options.

Data structures.

- `boolean[] marked` to mark visited vertices.
- `int[] edgeTo` to keep tree of paths.
 $(\text{edgeTo}[w] == v)$ means that edge $v-w$ taken to visit w for first time

Depth-first search

```
public class DepthFirstPaths
{
    private boolean[] marked;
    private int[] edgeTo;
    private int s;
```

marked[v] = true
if v connected to s
edgeTo[v] = previous
vertex on path from s to v

```
public DepthFirstPaths(Graph G, int s)
{
    ...
    dfs(G, s);
}
```

initialize data structures
find vertices connected to s

```
private void dfs(Graph G, int v)
{
    marked[v] = true;
    for (int w : G.adj(v))
        if (!marked[w])
        {
            dfs(G, w);
            edgeTo[w] = v;
        }
}
```

recursive DFS does the work

Depth-first search properties


Proposition. DFS marks all vertices connected to s in time proportional to the sum of their degrees.

Pf. [correctness]

- If w marked, then w connected to s (why?)
- If w connected to s , then w marked.
(if w unmarked, then consider last edge on a path from s to w that goes from a marked vertex to an unmarked one).

Pf. [running time]

Each vertex connected to s is visited once.

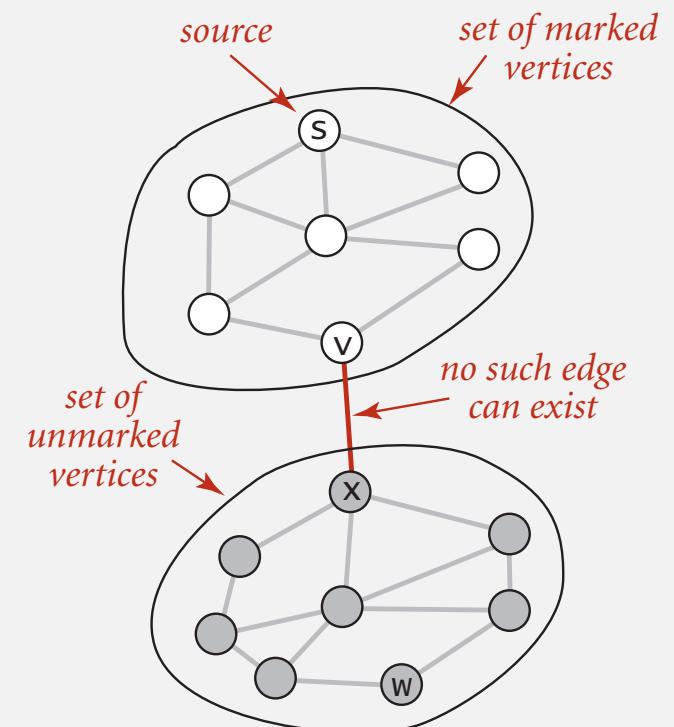


Depth-first search properties

Proposition. After DFS, can find vertices connected to s in constant time and can find a path to s (if one exists) in time proportional to its length.


Pf. `edgeTo[]` is parent-link representation of a tree rooted at s .

```
public boolean hasPathTo(int v)
{   return marked[v]; }

public Iterable<Integer> pathTo(int v)
{
    if (!hasPathTo(v)) return null;
    Stack<Integer> path = new Stack<Integer>();
    for (int x = v; x != s; x = edgeTo[x])
        path.push(x);
    path.push(s);
    return path;
}
```

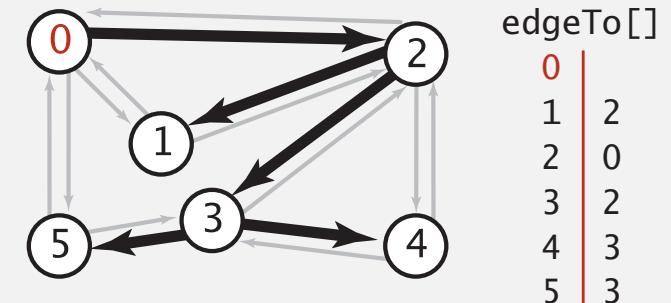

Depth-first search application: preparing for a date

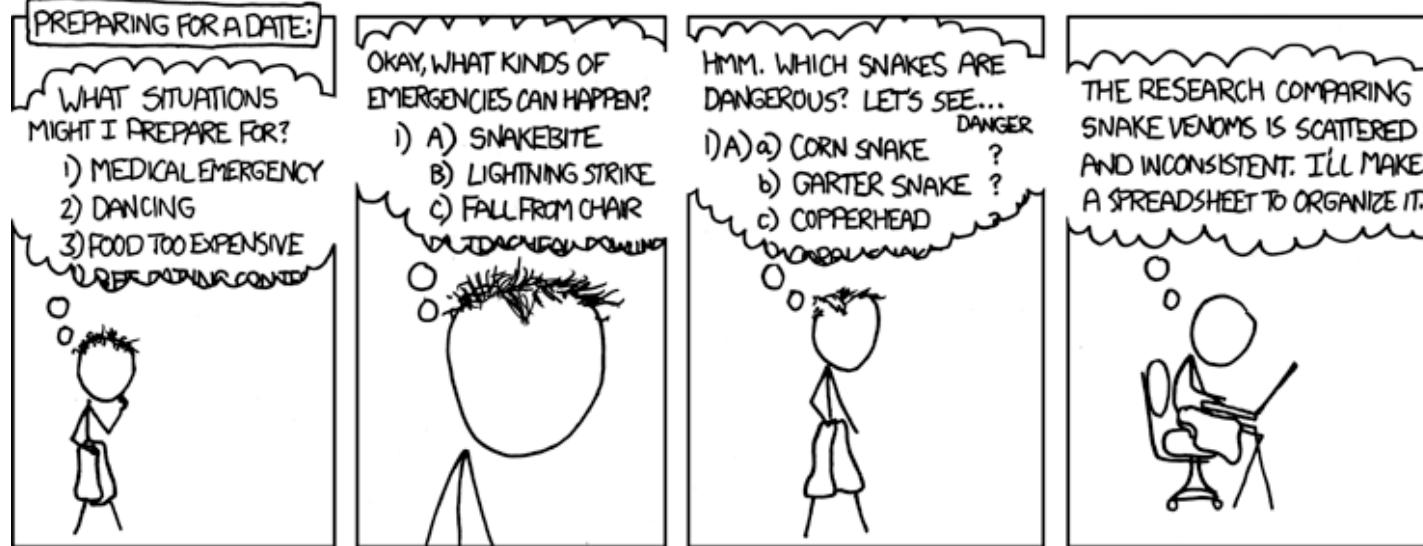

I REALLY NEED TO STOP
USING DEPTH-FIRST SEARCHES.



<http://xkcd.com/761/>

Depth-first search application: flood fill


Challenge. Flood fill (Photoshop magic wand).

Assumptions. Picture has millions to billions of pixels.



Solution. Build a grid graph.

- Vertex: pixel.
- Edge: between two adjacent gray pixels.
- Blob: all pixels connected to given pixel.

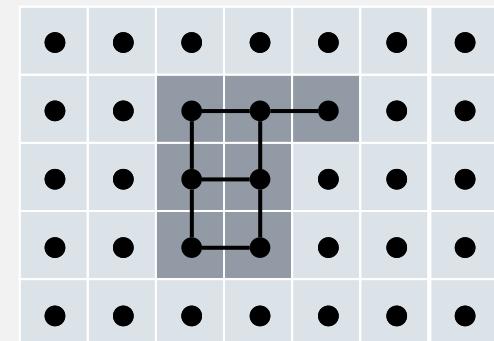

Algorithms

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

4.1 UNDIRECTED GRAPHS

- ▶ *introduction*
- ▶ *graph API*
- ▶ *depth-first search*
- ▶ *breadth-first search*
- ▶ *connected components*
- ▶ *challenges*

Algorithms

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>


4.1 UNDIRECTED GRAPHS

- ▶ *introduction*
- ▶ *graph API*
- ▶ *depth-first search*
- ▶ *breadth-first search*
- ▶ *connected components*
- ▶ *challenges*

Breadth-first search demo

Repeat until queue is empty:

- Remove vertex v from queue.
- Add to queue all unmarked vertices adjacent to v and mark them.

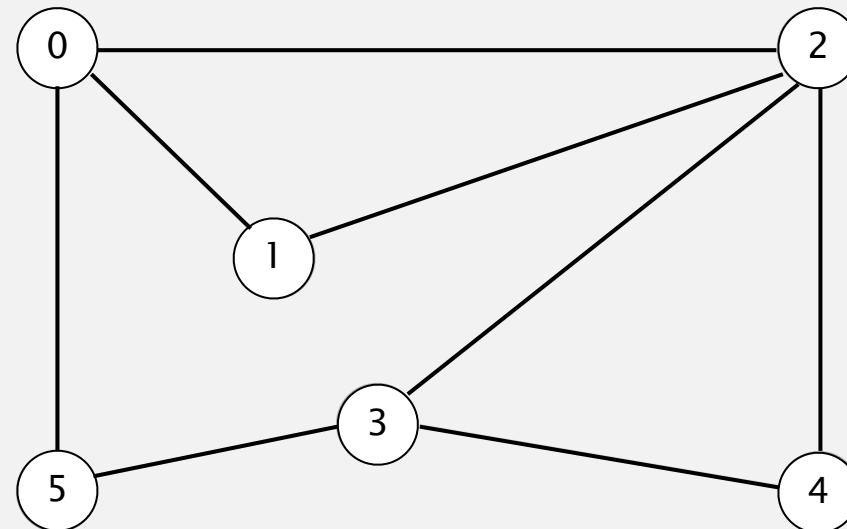

tinyCG.txt

$V \rightarrow$ 6
8
0 5
2 4
2 3
1 2
0 1
3 4
3 5
0 2


$E \leftarrow$

graph G

Breadth-first search demo

Repeat until queue is empty:

- Remove vertex v from queue.
- Add to queue all unmarked vertices adjacent to v and mark them.

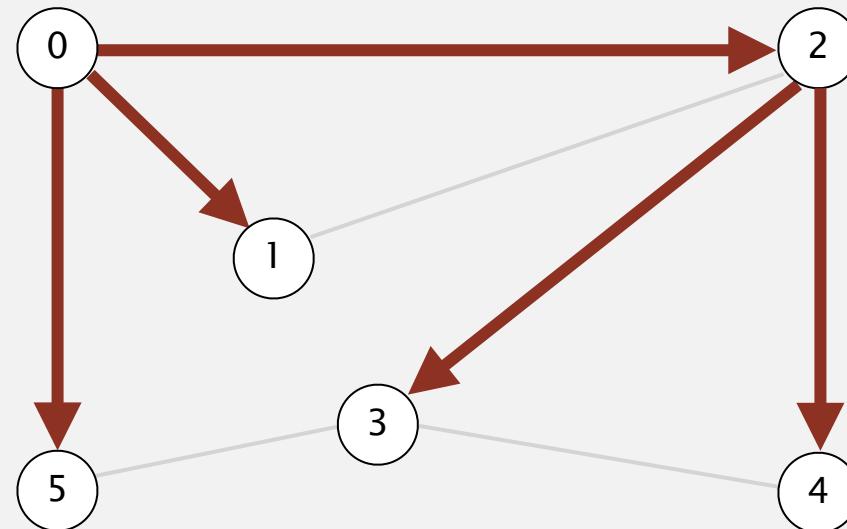

| v | edgeTo[] | distTo[] |
|-----|----------|----------|
| 0 | - | 0 |
| 1 | 0 | 1 |
| 2 | 0 | 1 |
| 3 | 2 | 2 |
| 4 | 2 | 2 |
| 5 | 0 | 1 |

done

Breadth-first search

Depth-first search. Put unvisited vertices on a **stack**.

Breadth-first search. Put unvisited vertices on a **queue**.


Shortest path. Find path from s to t that uses **fewest number of edges**.

BFS (from source vertex s)

Put s onto a FIFO queue, and mark s as visited.

Repeat until the queue is empty:

- **remove the least recently added vertex v**
 - **add each of v 's unvisited neighbors to the queue,**
and mark them as visited.
-

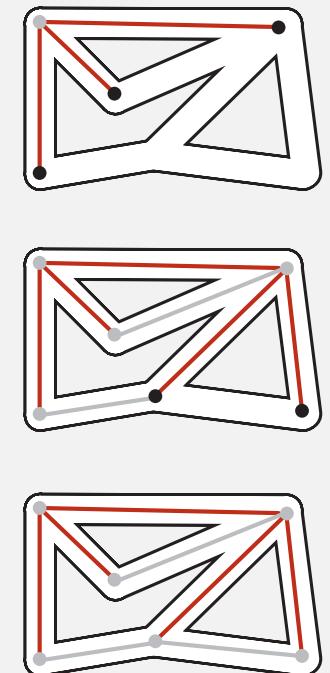


Intuition. BFS examines vertices in increasing distance from s .

Breadth-first search properties


Proposition. BFS computes shortest paths (fewest number of edges) from s to all other vertices in a graph in time proportional to $E + V$.

Pf. [correctness] Queue always consists of zero or more vertices of distance k from s , followed by zero or more vertices of distance $k + 1$.

Pf. [running time] Each vertex connected to s is visited once.

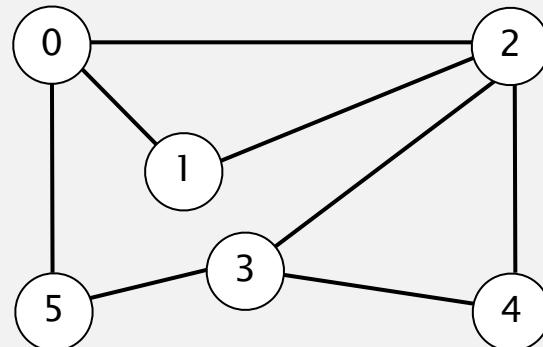

graph

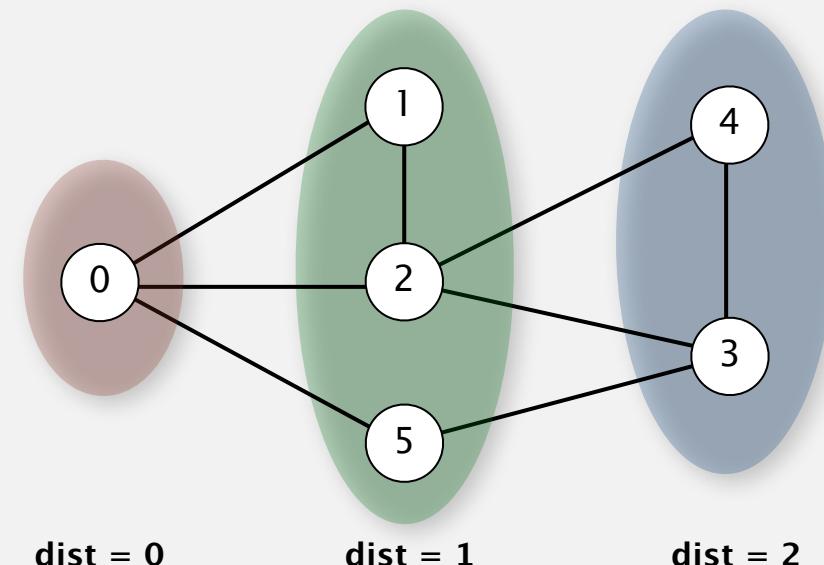


Breadth-first search

```
public class BreadthFirstPaths
{
    private boolean[] marked;
    private int[] edgeTo;
    ...

    private void bfs(Graph G, int s)
    {
        Queue<Integer> q = new Queue<Integer>();
        q.enqueue(s);
        marked[s] = true;
        while (!q.isEmpty())
        {
            int v = q.dequeue();
            for (int w : G.adj(v))
            {
                if (!marked[w])
                {
                    q.enqueue(w);
                    marked[w] = true;
                    edgeTo[w] = v;
                }
            }
        }
    }
}
```


Breadth-first search application: routing

Fewest number of hops in a communication network.

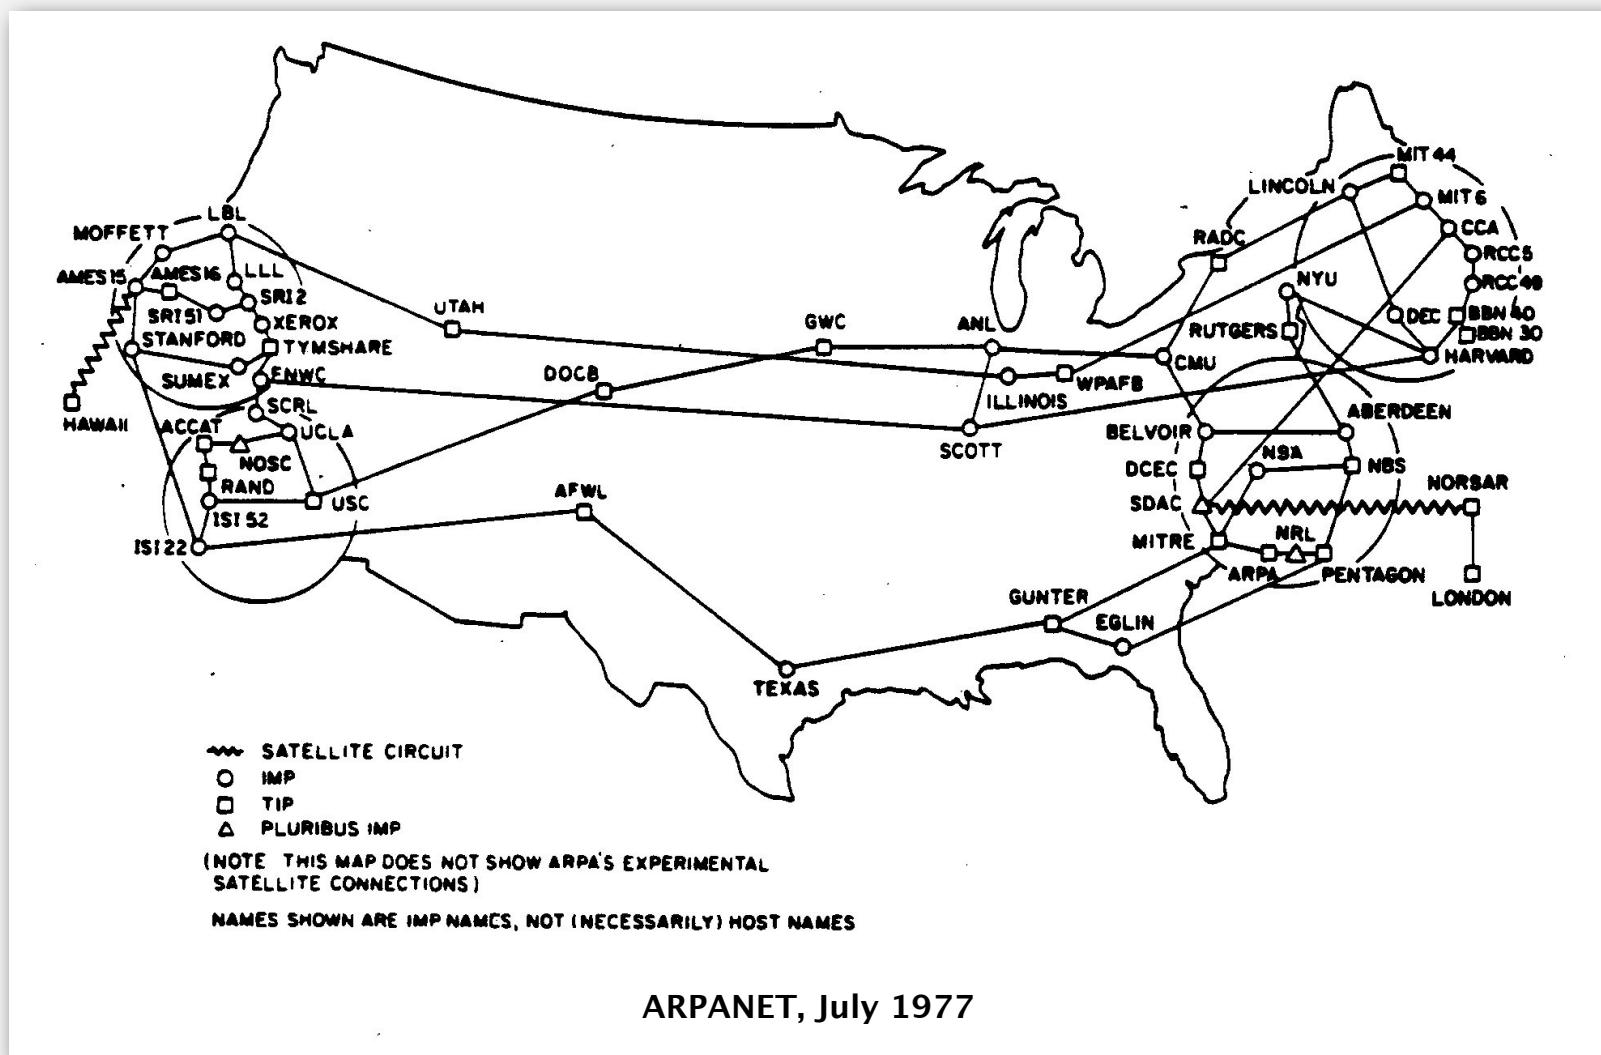

Breadth-first search application: Kevin Bacon numbers

Kevin Bacon numbers.

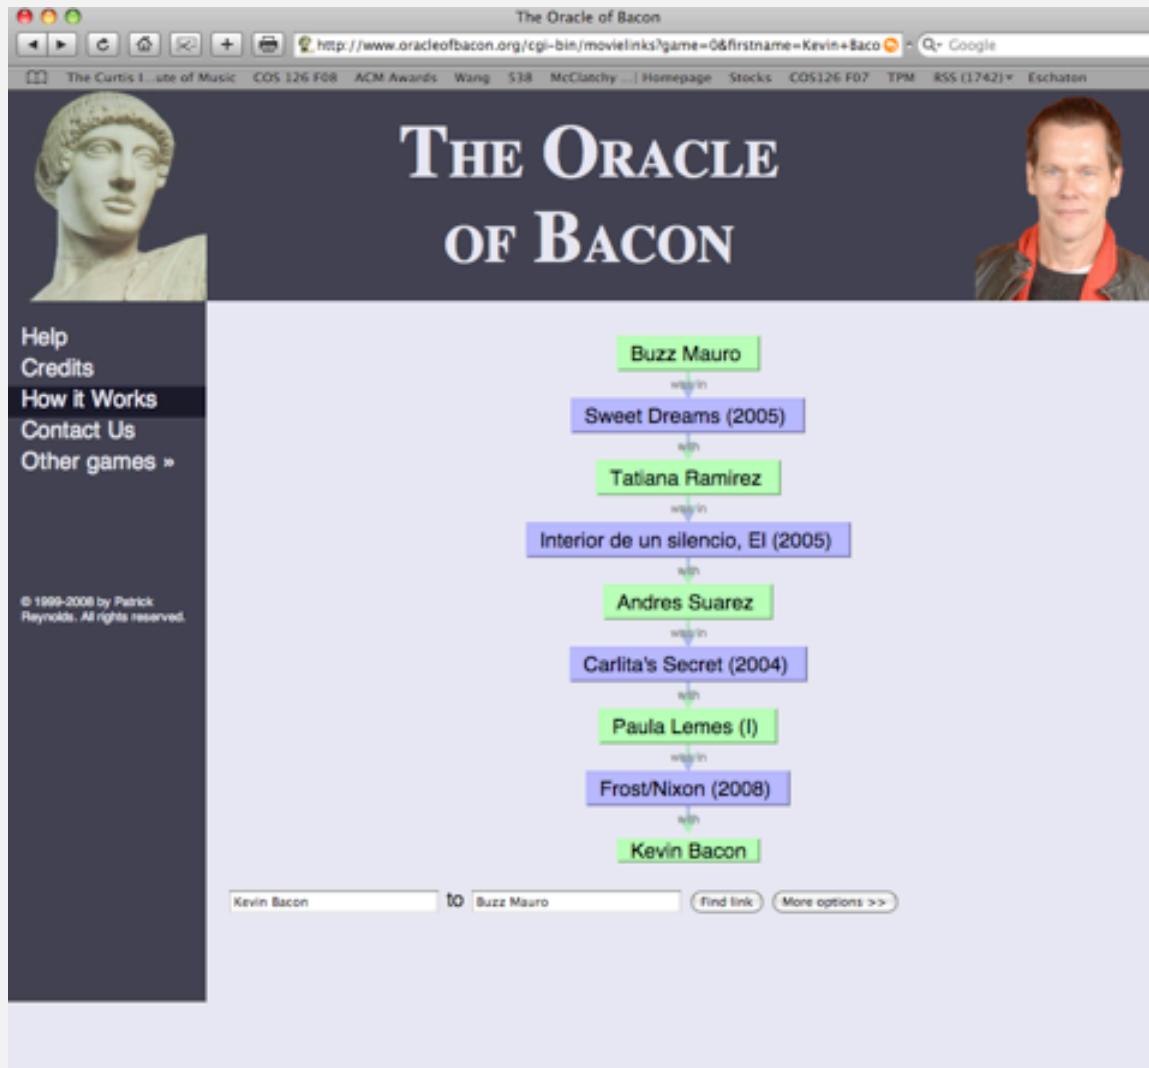

<http://oracleofbacon.org>



Endless Games board game

New 2 Degrees


Uma Thurman acted in Be Cool (2005) with Scott Adsit who acted in The Informant! (2009) with Matt Damon

Lookup Trivia Guess Degrees Scoreboard


SixDegrees iPhone App

Kevin Bacon graph

- Include one vertex for each performer **and** one for each movie.
- Connect a movie to all performers that appear in that movie.
- Compute shortest path from $s = \text{Kevin Bacon}$.

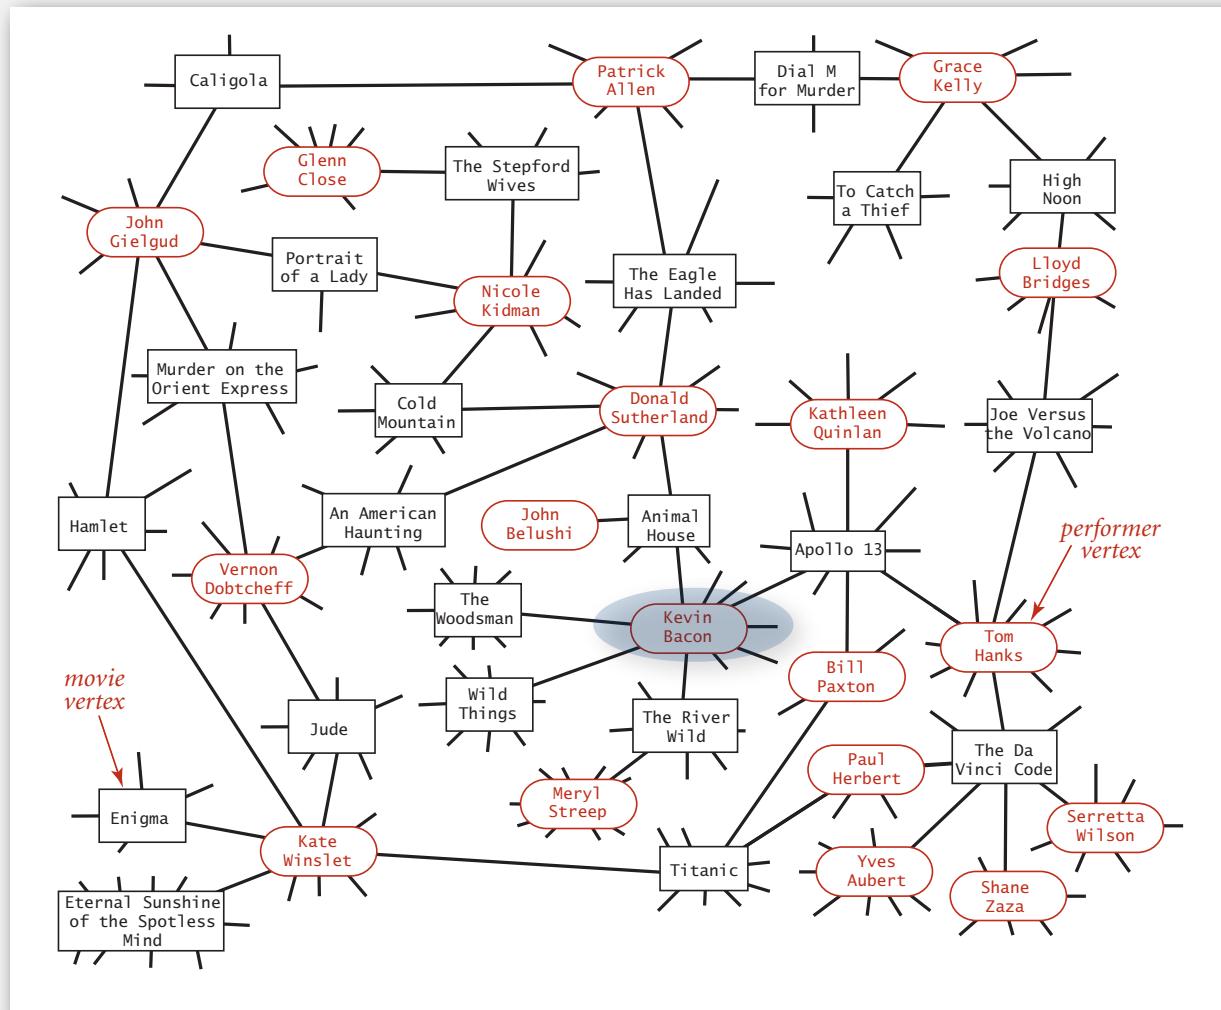

Breadth-first search application: Erdős numbers

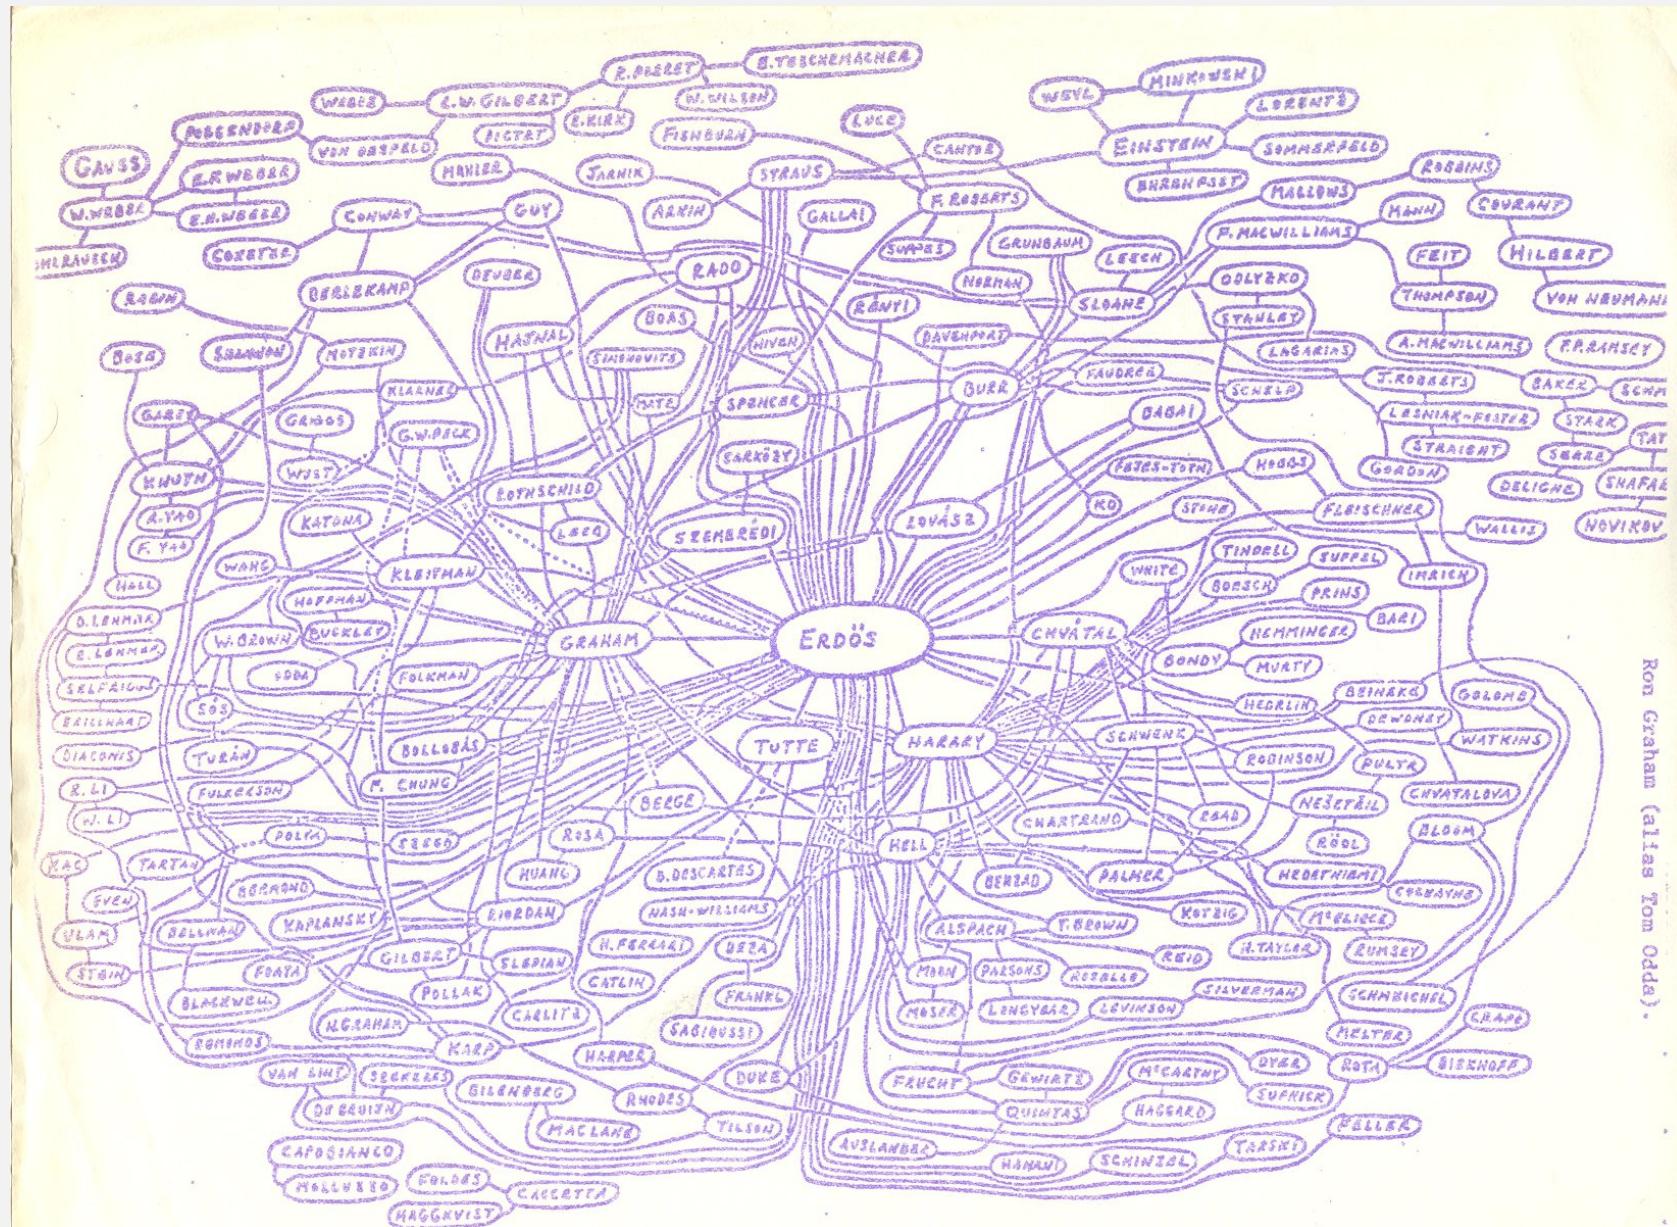

hand-drawing of part of the Erdős graph by Ron Graham

RUMI Gamanus (alias Lou Sava)

Algorithms

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

4.1 UNDIRECTED GRAPHS

- ▶ *introduction*
- ▶ *graph API*
- ▶ *depth-first search*
- ▶ *breadth-first search*
- ▶ *connected components*
- ▶ *challenges*

Algorithms

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

4.1 UNDIRECTED GRAPHS

- ▶ *introduction*
- ▶ *graph API*
- ▶ *depth-first search*
- ▶ *breadth-first search*
- ▶ ***connected components***
- ▶ *challenges*

Connectivity queries

Def. Vertices v and w are **connected** if there is a path between them.

Goal. Preprocess graph to answer queries of the form *is v connected to w ?* in **constant time**.

| | |
|---------------------------------|---|
| public class CC | |
| CC(Graph G) | <i>find connected components in G</i> |
| boolean connected(int v, int w) | <i>are v and w connected?</i> |
| int count() | <i>number of connected components</i> |
| int id(int v) | <i>component identifier for v</i> |

Union-Find? Not quite.


Depth-first search. Yes. [next few slides]

Connected components



The relation "is connected to" is an **equivalence relation**:

- Reflexive: v is connected to v .
- Symmetric: if v is connected to w , then w is connected to v .
- Transitive: if v connected to w and w connected to x , then v connected to x .

Def. A **connected component** is a maximal set of connected vertices.

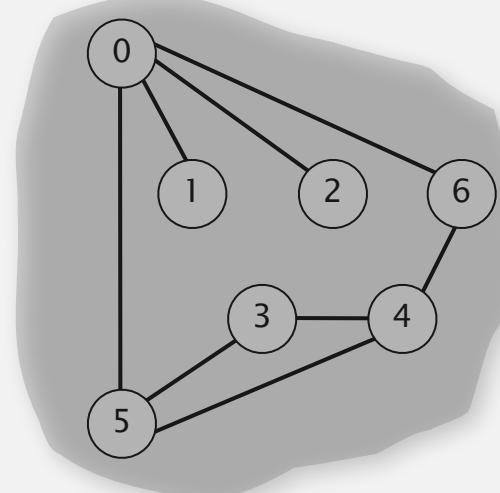

3 connected components

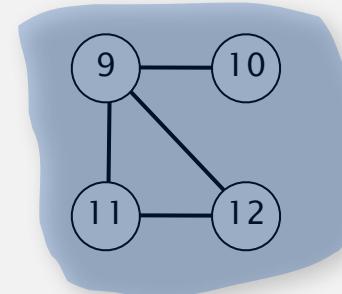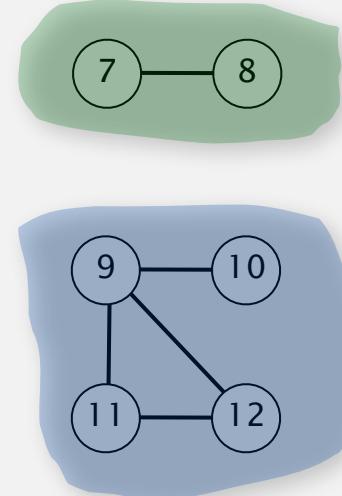


| v | id[] |
|----|------|
| 0 | 0 |
| 1 | 0 |
| 2 | 0 |
| 3 | 0 |
| 4 | 0 |
| 5 | 0 |
| 6 | 0 |
| 7 | 1 |
| 8 | 1 |
| 9 | 2 |
| 10 | 2 |
| 11 | 2 |
| 12 | 2 |

Remark. Given connected components, can answer queries in constant time.

Connected components

Def. A **connected component** is a maximal set of connected vertices.

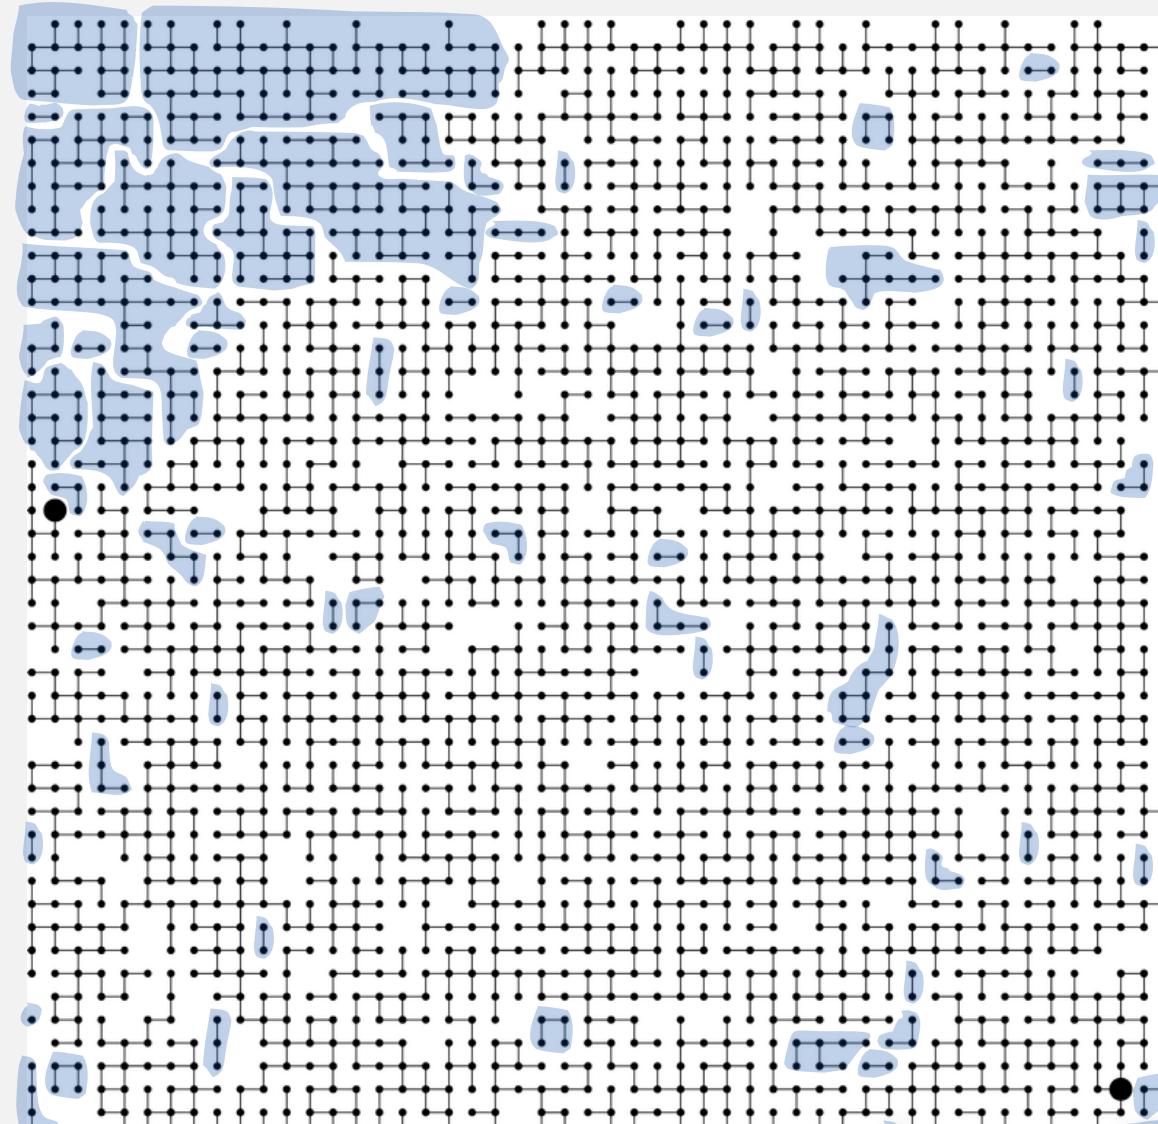

63 connected components


Connected components

Goal. Partition vertices into connected components.

Connected components

Initialize all vertices v as unmarked.

For each unmarked vertex v , run DFS to identify all vertices discovered as part of the same component.

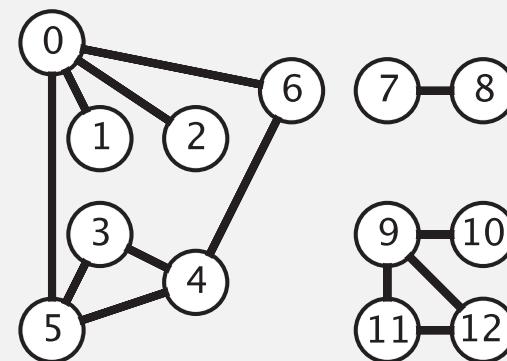

tinyG.txt



$V \rightarrow 13$ $E \leftarrow$

| | |
|-------|----|
| 13 | 13 |
| 0 5 | |
| 4 3 | |
| 0 1 | |
| 9 12 | |
| 6 4 | |
| 5 4 | |
| 0 2 | |
| 11 12 | |
| 9 10 | |
| 0 6 | |
| 7 8 | |
| 9 11 | |
| 5 3 | |

Connected components demo

To visit a vertex v :

- Mark vertex v as visited.
- Recursively visit all unmarked vertices adjacent to v .

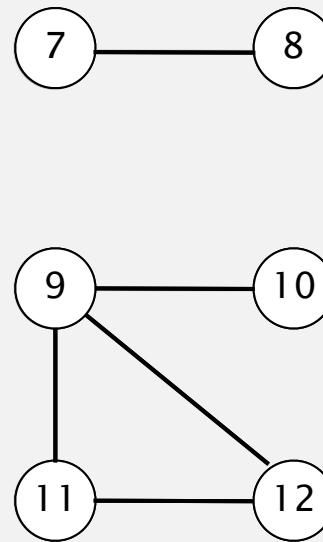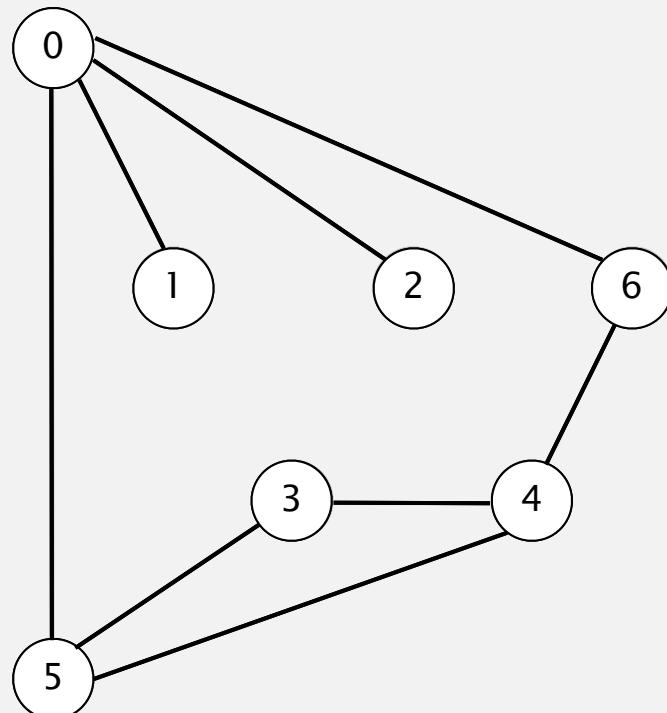



| v | marked[] | id[] |
|-----|----------|------|
| 0 | F | - |
| 1 | F | - |
| 2 | F | - |
| 3 | F | - |
| 4 | F | - |
| 5 | F | - |
| 6 | F | - |
| 7 | F | - |
| 8 | F | - |
| 9 | F | - |
| 10 | F | - |
| 11 | F | - |
| 12 | F | - |

graph G

Connected components demo

To visit a vertex v :

- Mark vertex v as visited.
- Recursively visit all unmarked vertices adjacent to v .

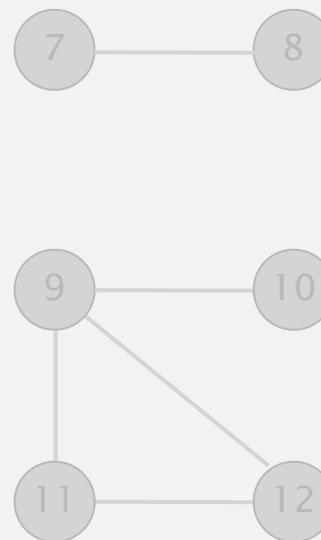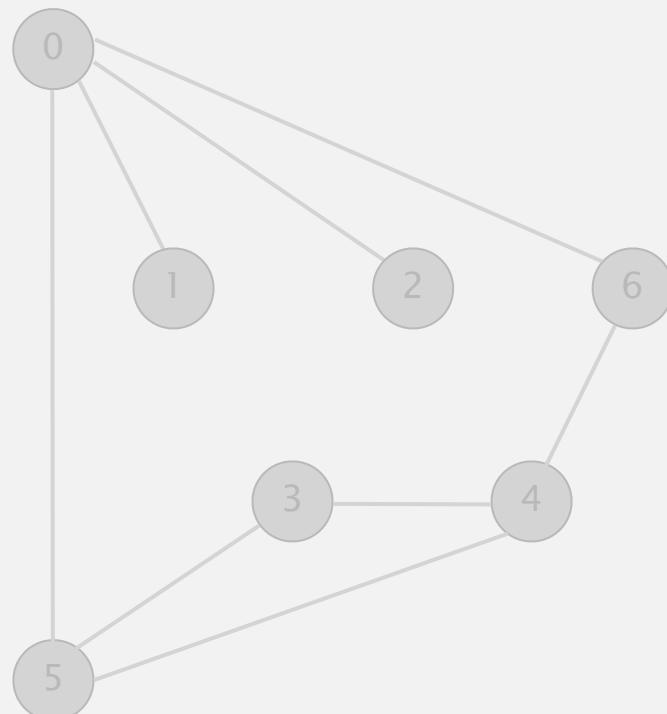

| v | marked[] | id[] |
|-----|----------|------|
| 0 | T | 0 |
| 1 | T | 0 |
| 2 | T | 0 |
| 3 | T | 0 |
| 4 | T | 0 |
| 5 | T | 0 |
| 6 | T | 0 |
| 7 | T | 1 |
| 8 | T | 1 |
| 9 | T | 2 |
| 10 | T | 2 |
| 11 | T | 2 |
| 12 | T | 2 |

done

Finding connected components with DFS

```
public class CC
{
    private boolean[] marked;
    private int[] id;
    private int count;

    public CC(Graph G)
    {
        marked = new boolean[G.V()];
        id = new int[G.V()];
        for (int v = 0; v < G.V(); v++)
        {
            if (!marked[v])
            {
                dfs(G, v);
                count++;
            }
        }
    }

    public int count()
    public int id(int v)
    private void dfs(Graph G, int v)
}
```

$\text{id}[v] = \text{id}$ of component containing v
number of components

run DFS from one vertex in
each component

see next slide

Finding connected components with DFS (continued)

```
public int count()  
{  return count;  }
```

number of components


```
public int id(int v)  
{  return id[v];  }
```

id of component containing v

```
private void dfs(Graph G, int v)  
{  
    marked[v] = true;  
    id[v] = count;  
    for (int w : G.adj(v))  
        if (!marked[w])  
            dfs(G, w);  
}
```

all vertices discovered in
same call of dfs have same id

Connected components application: study spread of STDs

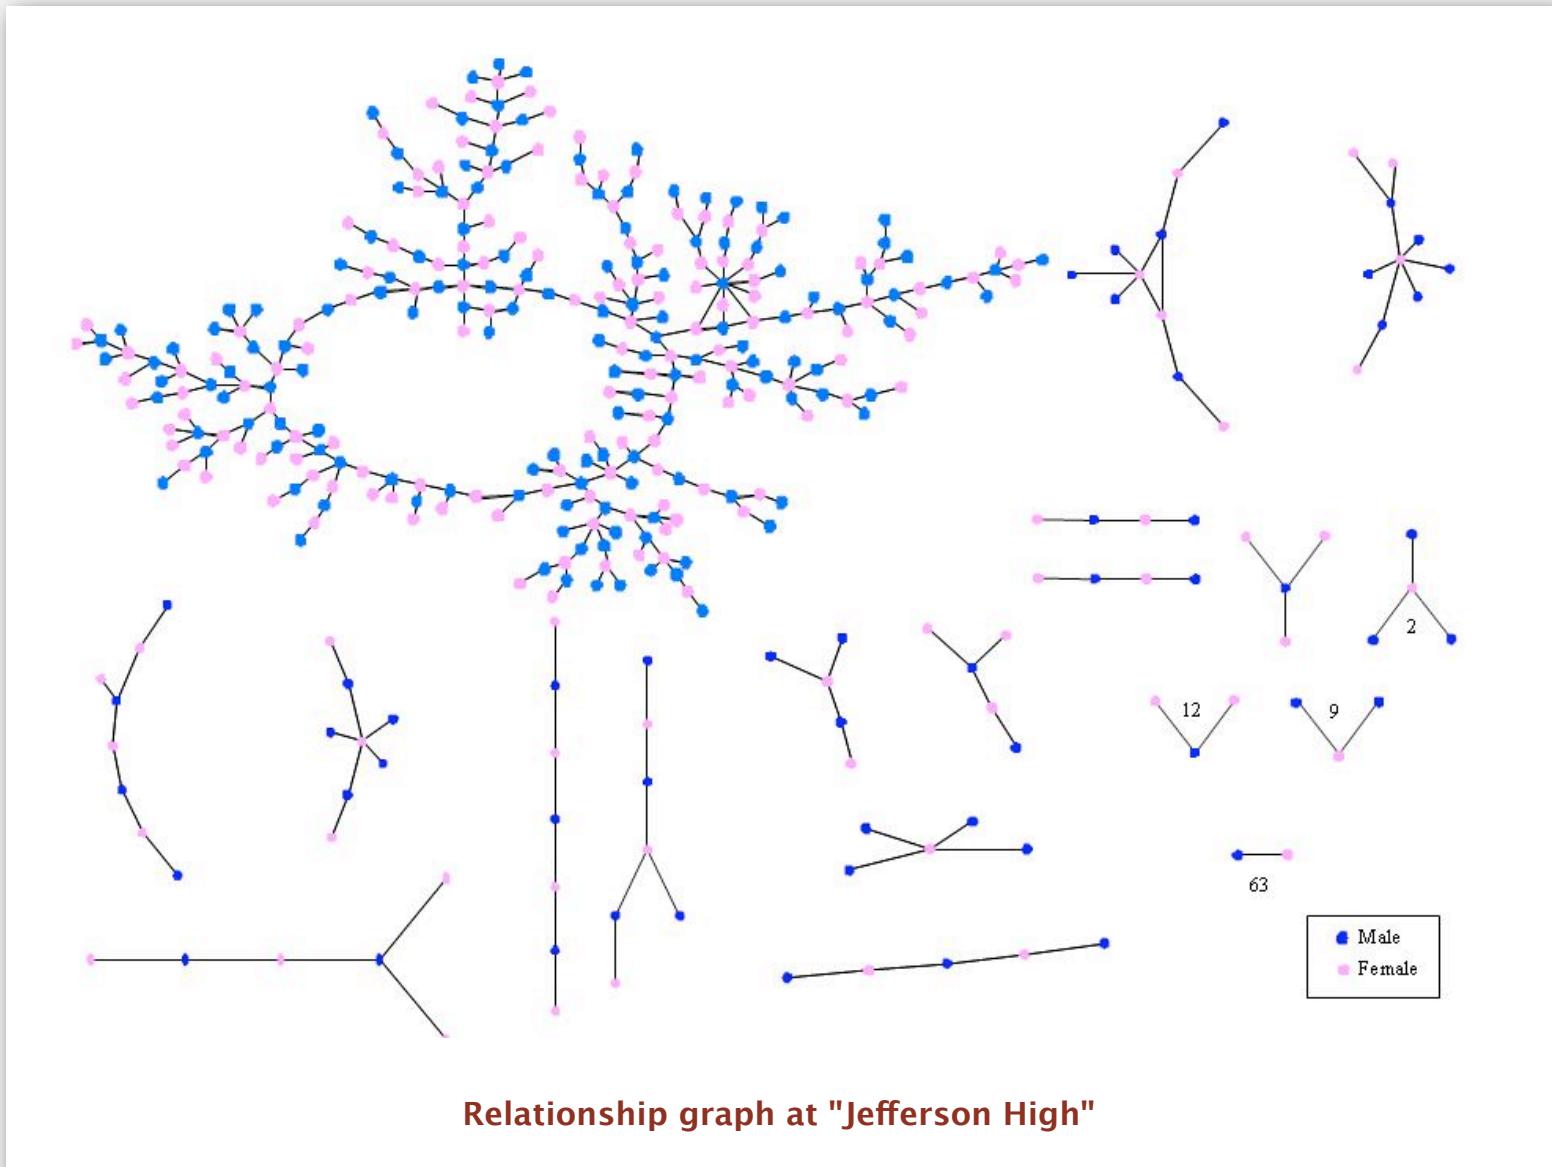



Peter Bearman, James Moody, and Katherine Stovel. *Chains of affection: The structure of adolescent romantic and sexual networks*. American Journal of Sociology, 110(1): 44–99, 2004.

Connected components application: particle detection

Particle detection. Given grayscale image of particles, identify "blobs."

- Vertex: pixel.
- Edge: between two adjacent pixels with grayscale value ≥ 70 .
- Blob: connected component of 20-30 pixels.

black = 0
white = 255

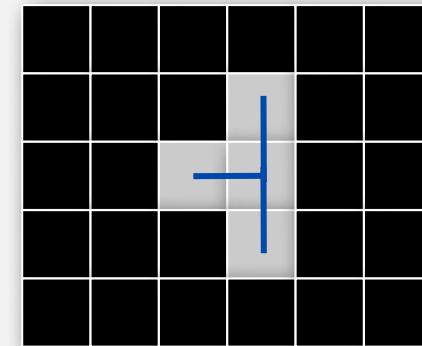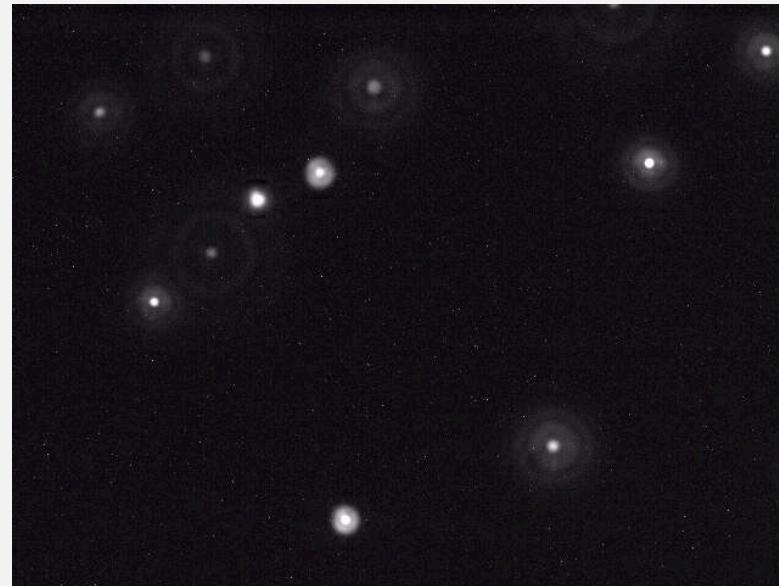

Particle tracking. Track moving particles over time.

Algorithms

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

4.1 UNDIRECTED GRAPHS

- ▶ *introduction*
- ▶ *graph API*
- ▶ *depth-first search*
- ▶ *breadth-first search*
- ▶ ***connected components***
- ▶ *challenges*

Algorithms

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

4.1 UNDIRECTED GRAPHS

- ▶ *introduction*
- ▶ *graph API*
- ▶ *depth-first search*
- ▶ *breadth-first search*
- ▶ *connected components*
- ▶ ***challenges***



Graph-processing challenge 1

Problem. Is a graph bipartite?

How difficult?

- Any programmer could do it.
- ✓ • Typical diligent algorithms student could do it.
- Hire an expert.
- Intractable.
- No one knows.
- Impossible.

simple DFS-based solution
(see textbook)

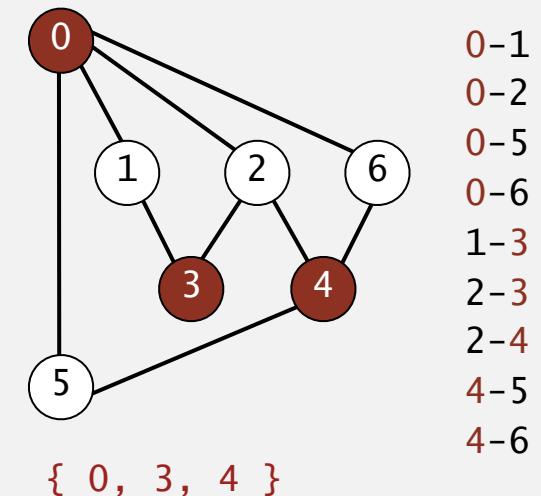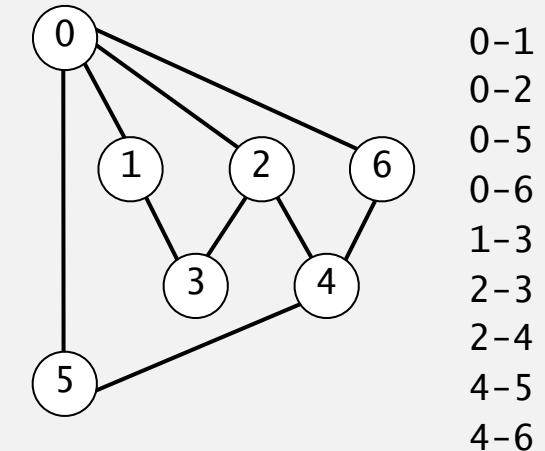

Bipartiteness application: is dating graph bipartite?

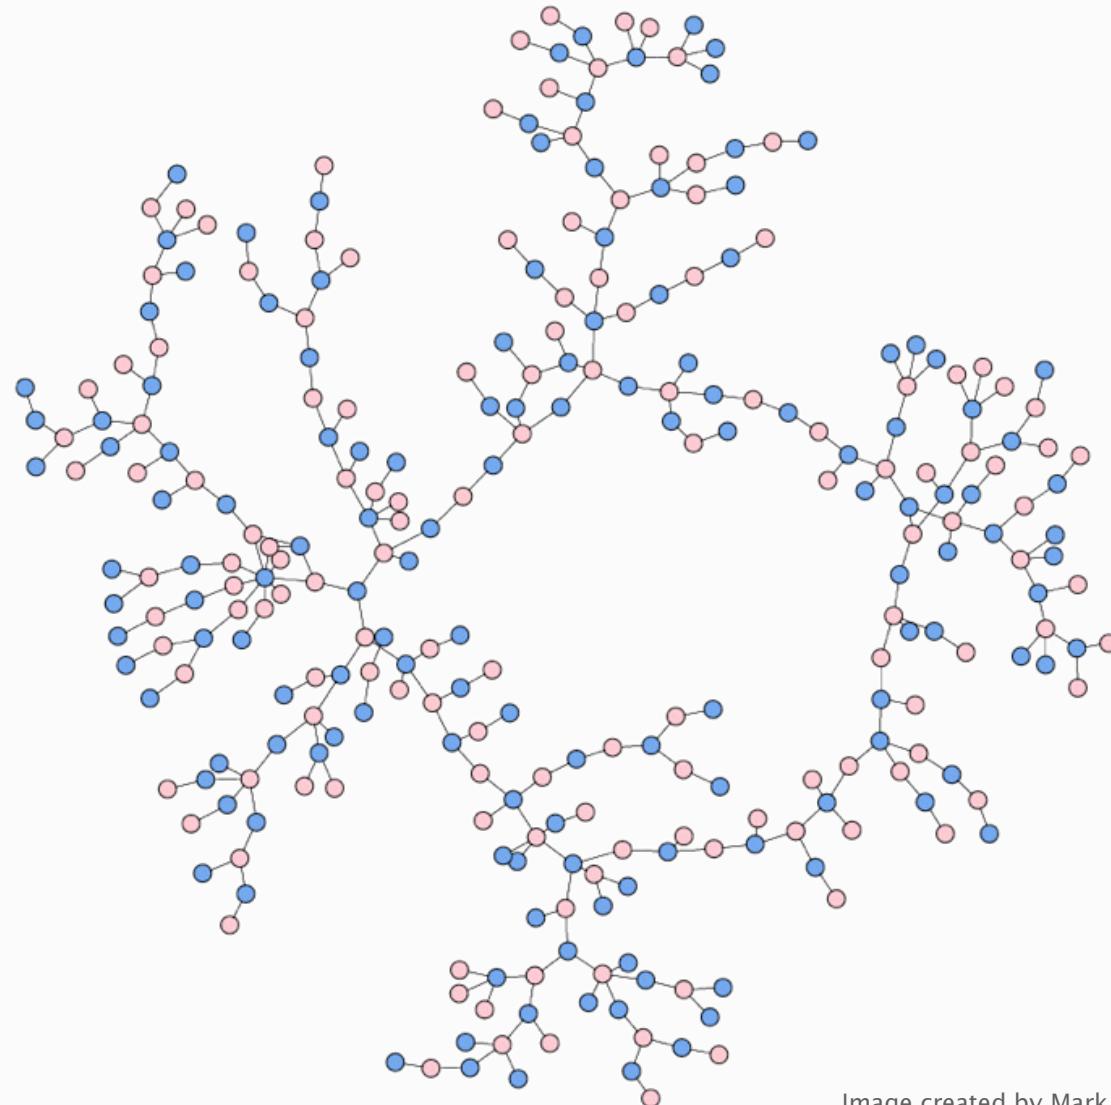


Image created by Mark Newman.


Graph-processing challenge 2

Problem. Find a cycle.

How difficult?

- Any programmer could do it.
- ✓ • Typical diligent algorithms student could do it.
- Hire an expert.
- Intractable.
- No one knows.
- Impossible.



simple DFS-based solution
(see textbook)

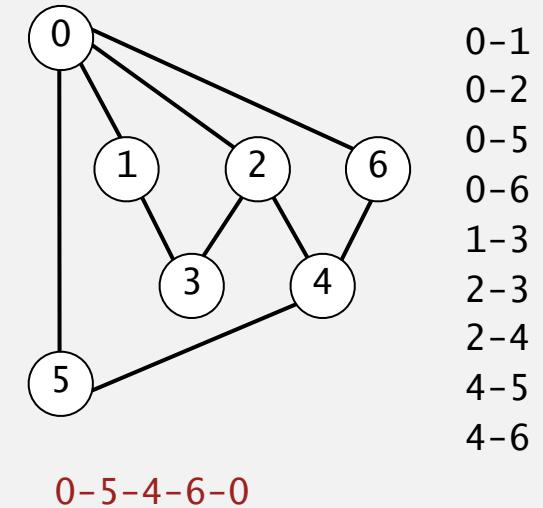

Bridges of Königsberg

The Seven Bridges of Königsberg. [Leonhard Euler 1736]

“ ... in Königsberg in Prussia, there is an island A, called the Kneiphof; the river which surrounds it is divided into two branches ... and these branches are crossed by seven bridges. Concerning these bridges, it was asked whether anyone could arrange a route in such a way that he could cross each bridge once and only once.”

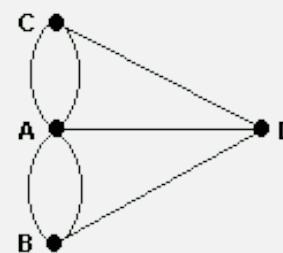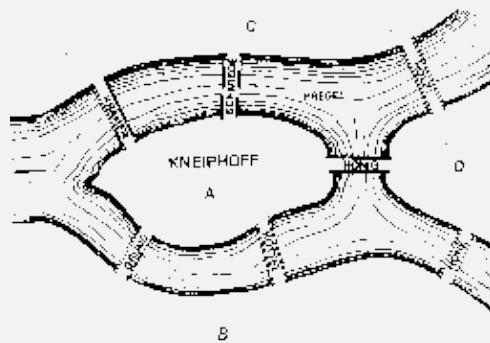

Euler tour. Is there a (general) cycle that uses each edge exactly once?

Answer. A connected graph is Eulerian iff all vertices have **even** degree.


Graph-processing challenge 3

Problem. Find a (general) cycle that uses every edge exactly once.

How difficult?

- Any programmer could do it.
- ✓ • Typical diligent algorithms student could do it.
- Hire an expert.
- Intractable.
- No one knows.
- Impossible.

Eulerian tour
(classic graph-processing problem)

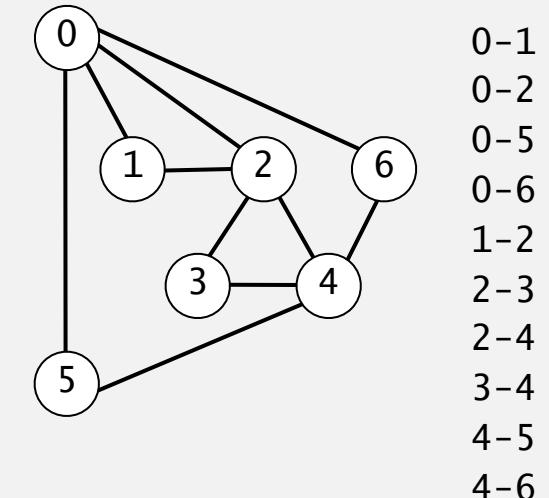

0-1-2-3-4-2-0-6-4-5-0


Graph-processing challenge 4

Problem. Find a cycle that visits every vertex exactly once.

How difficult?

- Any programmer could do it.
- Typical diligent algorithms student could do it.
- Hire an expert.
- ✓ • Intractable. ←
• No one knows.
• Impossible.

Hamiltonian cycle
(classical NP-complete problem)

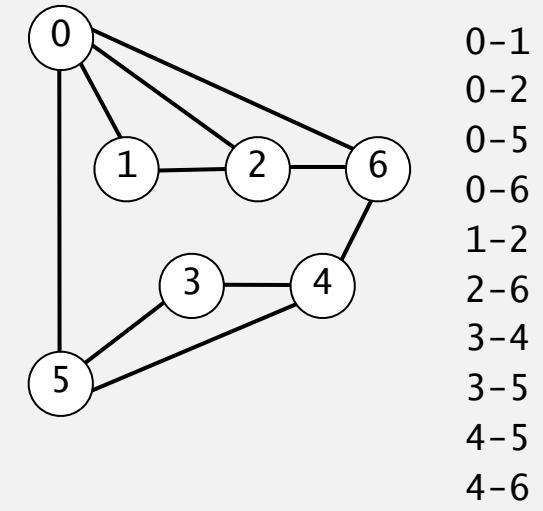



Graph-processing challenge 5

Problem. Are two graphs identical except for vertex names?

How difficult?

- Any programmer could do it.
- Typical diligent algorithms student could do it.
- Hire an expert.
- Intractable.
- ✓ • No one knows.
- Impossible.

graph isomorphism is
longstanding open problem

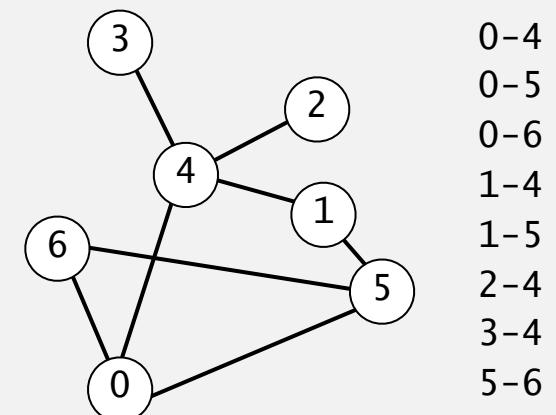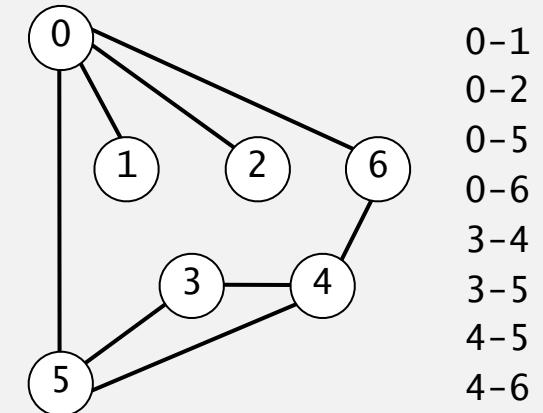

$0 \leftrightarrow 4, 1 \leftrightarrow 3, 2 \leftrightarrow 2, 3 \leftrightarrow 6, 4 \leftrightarrow 5, 5 \leftrightarrow 0, 6 \leftrightarrow 1$



Graph-processing challenge 6

Problem. Lay out a graph in the plane without crossing edges?

How difficult?

- Any programmer could do it.
- Typical diligent algorithms student could do it.
- ✓ • Hire an expert.
- Intractable.
- No one knows.
- Impossible.

linear-time DFS-based planarity algorithm
discovered by Tarjan in 1970s
(too complicated for most practitioners)

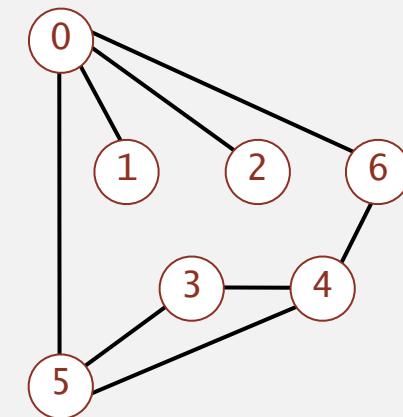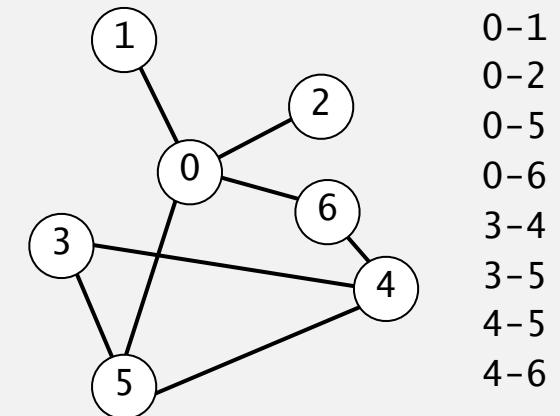


Algorithms

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

4.1 UNDIRECTED GRAPHS

- ▶ *introduction*
- ▶ *graph API*
- ▶ *depth-first search*
- ▶ *breadth-first search*
- ▶ *connected components*
- ▶ ***challenges***

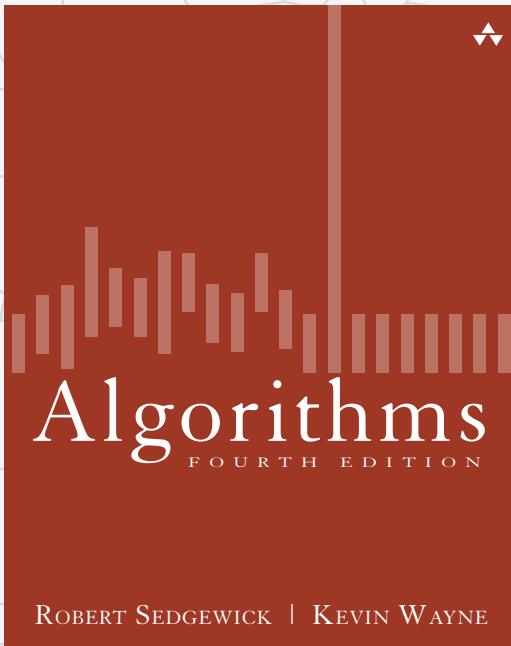

ROBERT SEDGEWICK | KEVIN WAYNE

<http://algs4.cs.princeton.edu>

4.1 UNDIRECTED GRAPHS

- ▶ *introduction*
- ▶ *graph API*
- ▶ *depth-first search*
- ▶ *breadth-first search*
- ▶ *connected components*
- ▶ *challenges*