

Better-Than-Chance Classification for Signal Detection

Jonathan Rosenblatt Roei Gilron Roy Mukamel

August 9, 2016

Abstract

[TODO]

1 Introduction

A common workflow in neuroimaging consists of fitting a classifier, and estimating its predictive accuracy using cross validation. Given that the cross validated accuracy is a random quantity, it is then common to test if the cross validated accuracy is significantly better than chance using a permutation test. Examples in the neuroscientific literature include Golland and Fischl [2003], Pereira et al. [2009], Varoquaux et al. [2016], and especially the recently popularized *multivariate pattern analysis* (MVPA) framework of Kriegeskorte et al. [2006]. This practice is also observed in very high profile publications in the genetics literature: Golub et al. [1999], Slonim et al. [2000], Radmacher et al. [2002], Mukherjee et al. [2003], Juan and Iba [2004], Jiang et al. [2008].

To fix ideas, we will adhere to a concrete example. In Gilron et al. [2016], the authors seek to detect brain regions which encode differences between vocal and non-vocal stimuli. Following the MVPA workflow, the localization problem is cast as a supervised learning problem: if the type of the stimulus can be predicted from the spatial activation pattern significantly better than chance, then a region is declared to encode vocal/non-vocal information. We call this an *accuracy test*, a.k.a. *class prediction* in Simon et al. [2003], or *pattern discrimination* in Pereira et al. [2009].

This same signal detection task can be also approached as a two-group multivariate test. Inferring that a region encodes vocal/non-vocal information, is essentially inferring that the spatial distribution of brain activations is different given a vocal/non-vocal stimulus. As put in Pereira et al. [2009]:

27 ... the problem of deciding whether the classifier learned to dis-
 28 criminate the classes can be subsumed into the more general ques-
 29 tion as to whether there is evidence that the underlying distribu-
 30 tions of each class are equal or not.

31 A practitioner may then call upon a two-group location test such as Hotelling’s
 32 T^2 [Anderson, 2003]. Alternatively, if the size of a brain region is too large
 33 compared to the number of observations, so that the spatial covariance can-
 34 not be fully estimated, then a high dimensional version of Hotelling’s test
 35 can be called upon, such as in Schäfer and Strimmer [2005] or Srivastava
 36 [2013]. For brevity, and in contrast to *accuracy tests*, we will call these two-
 37 sample multivariate tests simply *location tests*, also termed *class comparisons*
 38 in Simon et al. [2003].

39 At this point, it becomes unclear which is preferable: a location test or an
 40 accuracy test? The former with a heritage dating back to Hotelling [1931],
 41 and the latter being extremely popular, as the 959 citations¹ of Kriegeskorte
 42 et al. [2006] suggest.

43 The comparison between location and accuracy tests was precisely the
 44 goal of Ramdas et al. [2016], who compared the T^2 location test to the accu-
 45 racy of *Fisher’s linear discriminant analysis* classifier (LDA). By comparing
 46 the rates of convergence of the powers to 1, Ramdas et al. [2016] concluded
 47 that accuracy and location tests are rate equivalent.

48 Asymptotic relative efficiency measures (ARE) are typically used by statis-
 49 ticians to compare between test statistics with similar rates [van der Vaart,
 50 1998]. Ramdas et al. [2016] derive the asymptotic power functions of the
 51 two test statistics, which allow to extract the ARE between Hotelling’s T^2
 52 (location) test and Fisher’s LDA (accuracy) test. Using the Theorem 14.7 in
 53 van der Vaart [1998], we deduce that the ARE is lower bounded by $2\pi \approx 6.3$.
 54 This means that Fisher’s LDA requires at least 6.3 more samples to achieve
 55 the same (asymptotic) power than the T^2 test. In this light, the accuracy test
 56 is remarkably inefficient compared to the location test. For comparison, the
 57 t-test is only 1.04 more (asymptotically) efficient than Wilcoxon’s rank-sum
 58 test [Lehmann, 2009], so that an ARE of 2.5 is strong evidence in favor of
 59 the location test.

60 Before discarding accuracy tests as inefficient, we recall that Ramdas
 61 et al. [2016] analyzed a *half-sample* holdout. The authors conjectured that a
 62 leave-one-out approach, which makes more efficient use of the data, may have
 63 better performance. Also, the analysis in Ramdas et al. [2016] is asymptotic.
 64 This eschews the discrete nature of the accuracy statistic, which will be
 65 shown to have crucial impact. Since typical sample sizes in neuroscience are

¹GoogleScholar. Accessed on Aug 4, 2016.

not large, we seek to study which test is to be preferred in finite samples? Our conclusion will be quite simple: *location tests almost always have more power than accuracy tests.*

The main argument for our statement rests upon the observation that with typical sample sizes, the accuracy test statistic is highly discrete. Discrete test statistics are known to be conservative [Hemerik and Goeman, 2014], since they are insensitive to mild perturbations of the data, and they cannot exhaust the permissible false positive rate. The degree of discretization is governed by the number of samples. In our neuroscience example from Gilron et al. [2016], the classification is performed based on 40 trials, so that the test statistic may assume only 40 possible values. This number of examples is not unusual if considering this is the number of subjects, or the number of trial-repeats in an neuroimaging study.

The discretization effect is aggravated if the test statistic is highly concentrated. For an intuition consider the usage of a the *resubstitution accuracy* as a test statistic. This statistic simply means that the accuracy is not cross validated. If the data is high dimensional, the resubstitution accuracy will be very high due to over fitting. In a very high dimensional model, the resubstitution accuracy will be 1 for the observed data [McLachlan, 1976, Theorem 1], but also for any permutation. The concentration of resubstitution accuracy near 1, and its discreteness, render this test completely useless, with a power tending to 0 as the dimension of the model grows.

To compare the power of accuracy tests and location tests in finite samples, we perform a simulation study of a battery of test statistics. The main findings are reported in Sections 4 and 5, and the intuition for our findings is provided in Section 6, but first, the problem’s setup.

2 Problem setup

Let $y \in \mathcal{Y}$ be a class encoding. Let $x \in \mathcal{X}$ be a p dimensional feature vector. In our vocal/non-vocal example we have $\mathcal{Y} = \{-1, 1\}$ and p , the number of voxels in a brain region so that $\mathcal{X} = \mathbb{R}^{27}$.

Given n pairs of (x_i, y_i) , typically assumed i.i.d., a location test amounts to testing whether $x|y = 1$ has the the same distribution as $x|y = -1$. I.e., we test if the multivariate voxel activation pattern has the same distribution when given a vocal stimulus, as when given a non-vocal stimulus. An accuracy test amounts to learning a predictive model $\hat{f}(x)$ from some assumed model class $\hat{f} \in \mathcal{F}$. The prediction accuracy, denoted $T_{\hat{f}}^{acc}$, is defined as the probability of a given classifier \hat{f} of making a correct prediction $T_{\hat{f}}^{acc} := Prob(\hat{f}(x) = y)$ when given a randomly drawn data point, (x, y) .

104 A statistically significant “better than chance” estimate of $T_{\hat{f}}^{acc}$ is evidence
 105 that the classes are distinct.

106 2.1 Candidate Tests

107 The design of a permutation test using the prediction accuracy, requires the
 108 following design choices:

- 109 1. How to estimate accuracy?
- 110 2. Is the statistic cross validated or not?
- 111 3. For a K-fold cross validated test statistic: should the data be refolded
 112 in each permutation?
- 113 4. Permute labels of features?
- 114 5. For a K-fold cross validated test statistic: should the data folding bal-
 115 anced (a.k.a. stratified)?
- 116 6. How many folds?

117 We will now address these questions while bearing in mind that unlike the
 118 typical supervised learning setup, we are not interested in an unbiased esti-
 119 mate of the prediction error, but rather in the mere detection of a difference
 120 between two groups.

121 **How to estimate accuracy?** Given a predictor \hat{f} , a natural test statis-
 122 tic is some estimate of its accuracy $T_{\hat{f}}^{acc}$. Complicating matters: very low
 123 accuracies, even 0, is evidence that the classes are separated, and we only
 124 need to invert the predictions. We can thus consider $|T_{\hat{f}}^{acc} - 0.5|$ as the test
 125 statistic. This, however, implies that if the classes are identical, random
 126 guessing has 0.5 accuracy. This is not true if the classes are not balanced.
 127 For unbalanced data the chance level is the probability of the minority class,
 128 we denote by \hat{p}_{min} [Golland et al., 2005, Sec 4.1]. This suggests the following
 129 test statistic $|T_{\hat{f}}^{acc} - \hat{p}_{min}|$. Since we will be aggregating these statistics over
 130 random data sets where \hat{p}_{min} may vary, it seems appropriate to standard-
 131 ize the scale of this statistic. We thus also consider the z-scored accuracy:
 132 $|T_{\hat{f}}^{acc} - \hat{p}_{min}| / \sqrt{\hat{p}_{min}(1 - \hat{p}_{min})}$.

133 **Cross validate or not?** Were we interested in an unbiased estimator of
134 the prediction error, there is no question that some independent validation
135 is in order. Since we are merely interested in detecting a difference between
136 classes, a biased error estimate is not an issue provided that bias is consistent
137 over all permutations. The underlying intuition is that if the exact same
138 computation is performed over all permutations, then a permutation test
139 will be “fair”, i.e., will not inflate the false positive rate. We will thus be
140 considering both cross validated accuracies, and resubstitution accuracies as
141 our test statistics, a.k.a. *resubstitution classification*.

142 **Refolding?** The standard practice in neuroimaging is to refold the data
143 after each permutation [Pereira et al., 2009]. This is imperative if permuting
144 labels while aiming at balanced data folds. This is not, however, imperative
145 in general. For simplicity, we will adhere to the standard practice of refolding
146 the data within each permutation.

147 **Permute labels of features?** While seemingly identical, the compound-
148 ing of permutations with data foldings renders these two approaches distinct.
149 As an example, consider balanced (stratified) K-fold cross validation where
150 the initial data folding is balanced. After a label permutation, the original
151 folds will probably not be balanced. If the *features* are permuted, then the
152 labels conserve their original fold assignments, and the original folds are bal-
153 anced after each permutation. Since we only report results while refolding
154 the data in each permutation, then the only difference between permuting
155 labels and permuting features seems to be a computational one. We thus
156 adhere to the more common, albeit computationally less efficient practice of
157 permuting labels.

158 **Balanced folding?** As already implied, a standard practice when cross
159 validating is to constrain the data folds to be balanced (i.e. stratified). This
160 is well justified when aiming at unbiased accuracy estimation. This also
161 simplifies matter when aiming at signal detection, as can be seen from the
162 above discussion of the appropriate test statistic. On the other hand, it
163 may complicate matters, as can be seen from the above discussion on label
164 versus feature permutation. We will report results with both balanced and
165 unbalanced data foldings, only to discover, it does not really matter.

166 **How many folds?** Different authors suggest different rules for the num-
167 ber of folds. We will be varying the number of folds. This will affect the
168 concentration of permutation distribution of the estimated accuracy, which

will have a crucial effect on the conservativeness of the accuracy test. Our intuition suggests that since more folds imply a less concentrated estimate, then leave-one-out should be the less conservative, and 2-fold should be the most conservative.

The of tests we will be comparing is collected for convenience in Table 1.

Name	Basis	CV	Accuracy	Parameters
Hotelling	Hotelling	—	—	shrink=FALSE
Hotelling.shrink	Hotelling	—	—	shrink=TRUE
lda.CV.1	LDA	TRUE	accuracy	—
lda.CV.2	LDA	TRUE	z-accuracy	—
lda.noCV.1	LDA	FALSE	accuracy	—
lda.noCV.2	LDA	FALSE	z-accuracy	—
sd	SD	—	—	—
svm.CV.1	SVM	TRUE	accuracy	cost=1e1
svm.CV.2	SVM	TRUE	accuracy	cost=1e-1
svm.CV.3	SVM	TRUE	z-accuracy	cost=1e1
svm.CV.4	SVM	TRUE	z-accuracy	cost=1e-1
svm.noCV.1	SVM	FALSE	accuracy	cost=1e1
svm.noCV.2	SVM	FALSE	accuracy	cost=1e-1
svm.noCV.3	SVM	FALSE	z-accuracy	cost=1e1
svm.noCV.4	SVM	FALSE	z-accuracy	cost=1e-1

Table 1: This table enumerates the various test statistics we will be studying. Three are location tests: Hotelling, Hotelling.shrink, and sd. *Hotelling* is the classical two-group T^2 statistic. *Hotelling.shrink* is a high dimensional version with the regularized covariance in Schäfer and Strimmer [2005]. *sd* is another high dimensional version of the T^2 , from Srivastava et al. [2013]. The rest of the tests are variations of the linear SVM, and Fisher’s LDA, with varying accuracy measures, cross validated or not, and varying tuning parameters. For example, *svm.CV.4* is a linear SVM, with *libsvm*’s cost parameter set at 0.1, using the cross validated z-scored accuracy ($|T_f^{acc} - \hat{p}_{max}| / \sqrt{\hat{p}_{max}(1 - \hat{p}_{max})}$, see Section 2.1). Another example is *lda.noCV.1*, which is Fisher’s LDA, returning the resubstitution accuracy, without cross validation, and without z-scoring.

174

3 Controlling the False Positive Rate

175

Figure 1 demonstrates that all of the tests considered conserve the desired 0.05 false positive rate, up to varying levels of conservatism. This can be seen from the fact that the probability of rejection is no larger than 0.05 in the absence of any effect, encoded by a red circle. This is true, in particular

179

180 if: (a) the folds are balanced or not, (b) the tuning parameters of some test
 181 statistic are varied, (d) the number of folds is varied. We also observe that
 182 the most conservative tests are the resubstitution accuracy measures. We
 183 return to this matter in the Discussion.

Figure 1: The power of a permutation test with various test statistics. The power on the x axis. Effect are color and shape coded. The various statistics on the y axis. Their details are given in Table 1. Effects vary over 0 (red circle), 0.25 (green triangle), and 0.5 (blue square). Simulation details in Appendix B. Cross-validation was performed with balanced (stratified) and unbalanced data folding. See sub-captions.



184 4 Power

185 Having established that all of the tests in our battery control the false positive
 186 rate, it remains to be seen if they have similar power— especially when
 187 comparing the power of location tests to accuracy tests. From the simulation
 188 results reported in Appendix C we collect the following insights:

- 189 1. Location tests have more power than accuracy tests in all our configurations.
 190
- 191 2. The conservativeness decays as the sample grows (Figures 8a, 8b and
 192 9a), supporting the statement that discretization is responsible for
 193 power loss.

- 194 3. The power may increase or decrease with the number of folds (Figure 5).
- 195 4. The z-scoring of the accuracies was introduced to deal with unbalanced
196 foldings. If the z-scoring has any effect at all, it merely kills power.
197 There is really no reason to use it.
- 198 5. Both accuracy and location tests are inappropriate for scale alternatives
199 (Figure 7a). This was to be expected and is reported mostly as a sanity
200 check.
- 201 6. The presence of heavy tails (Figure 7b) may reduce power, but does
202 not quantitatively change results.
- 203 7. Balanced folding typically has no effect. It increased power only for
204 the z-scored statistics (Figure 1). This is surprising given they were
205 precisely designed to deal with the presence of imbalance.
- 206 8. Varying the accuracy test’s tuning parameter, such as the cost (i.e.
207 margins) has no effect on the power of the test.
- 208 9. Correlation between coordinates, mimicking temporal correlation in
209 fMRI data, has no effect on conclusions, since all test statistics account
210 for this correlation (Figure 9b).

211 The major insight from simulations is that the use of accuracy tests for
212 signal detection is underpowered compared to location tests. We now verify
213 this finding on a neuroimaging dataset.

214 5 Neuroimaging Example

215 Figure 2 is an application of both a location and an accuracy test to the data
216 of Pernet et al. [2015]. The authors of Pernet et al. [2015] collected fMRI
217 data while subjects were exposed to the sounds of human speech (vocal),
218 and other non-vocal sounds. Each subject was exposed to 20 sounds of each
219 type, totaling in $n = 40$ trials in each scan. The study was rather large and
220 consisted of about 200 subjects. The data was kindly made available by the
221 authors at the OpenfMRI website².

222 We perform group inference using within-subject permutations using the
223 pipeline of Stelzer et al. [2013], which was also reported in Gilron et al. [2016].
224 For completeness, the pipeline is described in Appendix A. To demonstrate

²<https://openfmri.org/>

our point, we compare the *sd* location test with the *svm.cv.1* accuracy test (see Table 1 for the definition of these statistics).

In agreement with our simulation results, the location test (*sd*) discovers more brain regions when compared to an accuracy test (*svm.cv.1*). The former discovers 1,232 regions, while the latter only 441, as depicted in Figure 2. We emphasize that both test statistics were compared with the same permutation scheme, and the same error controls, so that any difference in detections is due to their different power.

Having established that accuracy tests are underpowered both in simulation and in application, we wish to identify the conditions under which this will occur, and discuss implications on the practice of accuracy tests.



Figure 2: Brain regions encoding information discriminating between vocal and non-vocal stimuli. Map reports the centers of 27-voxel sized spherical regions, as discovered by an accuracy test (*svm.cv.1*), and a location test (*sd*). *svm.cv.1* was computed using 5-fold cross validation, and a cost parameter of 1. Region-wise significance was determined using the permutation scheme of Stelzer et al. [2013], followed by region-wise $FDR \leq 0.05$ control using the Benjamini-Hochberg procedure [Benjamini and Hochberg, 1995]. Number of permutations equals 400. The location test detect 1,232 regions, and the accuracy test 441, 399 of which are common to both. For the details of the analysis see Appendix A and Gilron et al. [2016].

236 6 Discussion

237 We have set out to understand which of the tests is more powerful: the ac-
238 curacy test or the location test. Using simulations, we have concluded that
239 the location tests are preferable. Their high dimensional versions such as
240 Srivastava [2013] and Schäfer and Strimmer [2005] are preferable for typical
241 neuroimaging problems such as MVPA. We attribute this to several phe-
242 nomena: (a) Discretization introduced in finite samples by the accuracy test
243 statistic. (b) Inefficient use of the data for the validation holdout set. In our
244 high dimensional setup, we also confirmed that high-dimensional versions of
245 the T^2 test, such as Srivastava [2013] or Schäfer and Strimmer [2005] are
246 preferable over the original T^2 .

247 The sensitivity of the power to the number of folds suggests that most
248 of the power is lost due to the discretization and not to the holdout. The
249 degree of discretization is governed by the sample size. For this reason, an
250 asymptotic analysis such as Ramdas et al. [2016] may uncover the holdout
251 inefficiency, but will not uncover the discretization effect. The practical ad-
252 vice for the practitioner, is that for the purpose of signal detection, there
253 is typically a multivariate test (be it a location test or other), that is more
254 powerful than an accuracy test. There is also a good chance that it would
255 be easier to implement, since no validation will be involved.

256 6.1 Ease of implementation

257 A very important point is the ease of implementation. The need for cross
258 validation of the accuracy test greatly increases its computational complexity.
259 Moreover, anyone who has actually implemented tests with discrete statistics,
260 will attest they are considerably harder to implement. This is because their
261 unforgiveness to the type of inequality. Indeed, mistakenly replacing a weak
262 inequality with a strong inequality in one's program may considerably change
263 the results. This is not the case for continuous test statistics.

264 6.2 A good accuracy test

265 In Section 6.4 we discuss cases where an accuracy test cannot replace a
266 location test. For such cases we collect some conclusions from our simulations
267 on the best practices for accuracy tests.

- 268 1. The conservativeness due to discretization decreases with sample size.
- 269 2. Cross validating the accuracy statistic increases power in moderate
270 sample sizes. The power loss due to the holdout inefficiency is smaller

271 than the power loss due to the concentration of the resubstitution ac-
 272 curacy. For large sample sizes, discretization and concentration have
 273 weaker effects, and the cross validated accuracy may be replaced with
 274 the computationally more efficiency resubstitution accuracy.

275 3. Permuting features is easier than permuting labels. It allows to preserve
 276 balanced folds after a permutation without refolding, thus reducing
 277 computational complexity.

278 4. There is no gain in z-scoring the accuracy scores.

279 5. Cross validated accuracy with balanced folds has more power than un-
 280 balanced folds. We currently have no intuition to offer for this phe-
 281 nomenon.

282 6. It is unclear what is the effect of the number of folds. More folds in-
 283 crease power by reducing the number of holdout samples. On the other
 284 hand, it increases the concentration of the accuracy statistic. Com-
 285 pounded with the discreteness of the accuracy statistic, this decreases
 286 power.

287 7. The value of the tuning parameters of a classifier have little to no
 288 effect.

289 It may be possible to alleviate the effect of discretization by appropriate
 290 cross-validation. The discreteness of the accuracy statistic can be “smoothed”
 291 by allowing the test sample to be drawn with replacement. The *bootstrap* may
 292 seem like a candidate approach, but since the original data always serves as
 293 a test set, the accuracy can still only assume $1/n$ values. This is not the case,
 294 however, for the *leave-one-out bootstrap estimator* [Hastie et al., 2003, Sec
 295 7.11]. It is a simplified version of the *0.632 bootstrap estimator* [Efron and
 296 Tibshirani, 1997], and suffices for our purpose since we are not interested in
 297 unbiased risk estimation, but merely signal detection. By the same rational,
 298 the degree of conservatism should decrease with the number of bootstrap
 299 samples. The naming conventions of the bootstrapped estimates are detailed
 300 in Table 2. As seen in Figure 3...

Name	Basis	B	Accuracy	Parameters
lda.Boot.1	LDA	50	accuracy	—
svm.Boot.1	SVM	50	accuracy	cost=1e1
svm.Boot.2	SVM	50	accuracy	cost=1e-1

Table 2: The same as Table 1 for bootstrapped accuracy estimates.

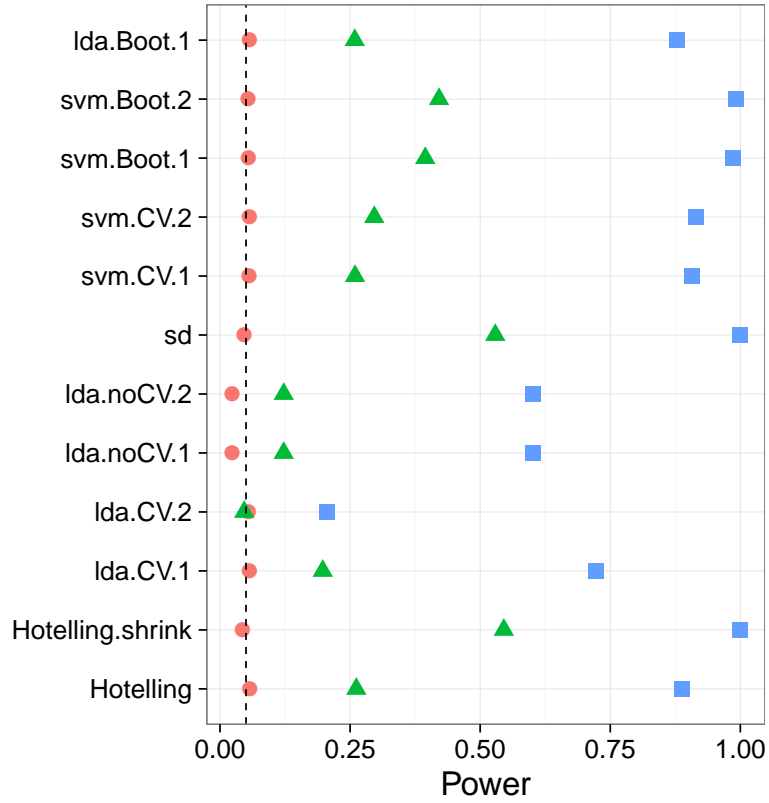


Figure 3: **Bootstrap:**

6.3 Related Literature

Olivetti et al. [2012] and Olivetti et al. [2014] looked into the problem of choosing a good accuracy test. They propose a new test they call an *independence test*, and demonstrate by simulation that it has more power than other accuracy tests, and can deal with non-balanced data sets. We did not include this test in the battery we compared, but we note the following:

(a) The independence test of Olivetti et al. [2012] relies on a discrete test statistic. This means that in the cases that the accuracy test is called upon for discriminating populations, it will probably be underpowered compared to location tests. (b) In contrast with the underlying motivation of Olivetti et al. [2012]’s independence test, we did not find that balancing the data folds is crucial for an accuracy test.

Golland et al. [2005] study accuracy tests using simulation, neuroimaging data, genetic data, and analytically. Their analytic results formalize our intuition from Section 1 on the effect of concentration of the accuracy statistic: The finite Vapnik–Chervonenkis (VC) dimension requirement [Golland and Fischl, 2003, Sec 4.3] prevents the permutation p-value from (asymptotically) concentrating. They also find that the power decreases with the level of discretization of the statistic. This is seen in their Figure 4, where the size of the test-set, K , governs the discretization. Since they permute features, and not labels, then all their permutation samples are balanced, and there is no issue of refolding.

Golland et al. [2005] simulate the power of an accuracy test using a multivariate Gaussian mixture, with a parameter p governing the separation between classes. Under their model $(x_i|y_i = 1) \sim p\mathcal{N}(\mu_1, I) + (1 - p)\mathcal{N}(\mu_2, I)$ and $(x_i|y_i = -1) \sim (1 - p)\mathcal{N}(\mu_1, I) + p\mathcal{N}(\mu_2, I)$. Varying p interpolates between the null distribution ($p = 0.5$) and a location shift model ($p = 0$). We perform the same simulation as Golland et al. [2005], after reparametrizing p so that $p = 0$ corresponds to the null model, and $p = 23$ to be comparable to our other simulations. We find that in this mixture class of models, like the location class of models, a location test has more power than an accuracy test (Figure 4).

6.4 Reservations

Some reservations to the generality of our findings are in order. Firstly, not all accuracy tests are concerned with signal detection. Indeed, it is possible that the purpose of the test is not to detect a difference between classes, but to actually test the performance of a particular classifier. Examples include brain decoding for machine interfaces, and clinical diagnosis, where the presence of a medical condition is predicted from imaging data. [e.g. Olivetti et al., 2012, Wager et al., 2013]

Secondly, it may be argued that accuracy tests permits the separation between classes in high dimensions, such as in *reproducing kernel Hilbert spaces* (RKHS) by using non-linear predictors. This is a false argument—accuracy test do not have any more flexibility than location tests. Indeed, it is possible to test for location in the same dimension the classifier is learned.

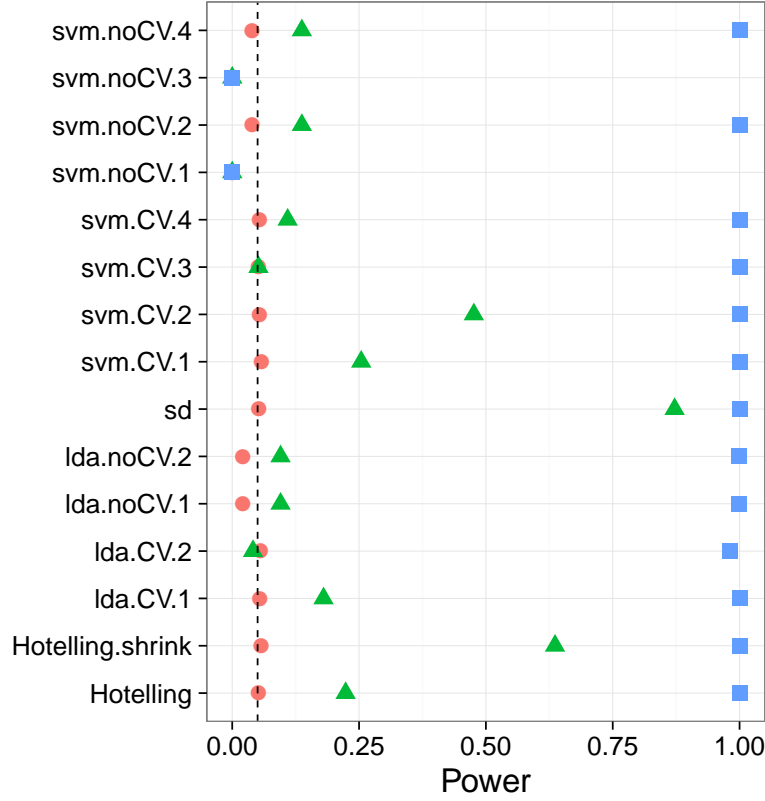


Figure 4: **Mixture:** $\mathbf{x}_i = \chi_i \mu + \eta_i$; $\chi_i = \{-1, 1\}$ and $\text{Prob}(\chi_i = 1) = (1/2 - p)^{y_i^*} (1/2 + p)^{1 - y_i^*}$. μ is a p -vector with $3/\sqrt{p}$ in all coordinates. The effect, p , is color and shape coded and varies over 0 (red circle), 1/4 (green triangle) and 1/2 (blue square).

347 Gretton et al. [2012] is an example where the test for location is performed
 348 in the RKHS of the data. It is also possible to test for the equality of two
 349 multivariate distributions without specifying any a-priori alternative [e.g.
 350 Heller et al., 2012]).

351 By augmenting the feature space, χ , any multivariate test can be cast as
 352 a location test, so that the our focus on *location tests* does not restrict the
 353 type of multivariate tests we advocate. On the other hand, based on our
 354 reported neuroimaging example, and others, we find that a location test in
 355 the original feature space is indeed a simple and powerful approach to signal
 356 detection.

357 6.5 Epilogue

358 Given all the above, we find the popularity of accuracy tests quite puzzling.
359 We believe this is due to a reversal of the inference cascade. Researchers
360 first fit a classifier, and then ask if the classes are any different. Were they
361 to start by asking if classes are any different, and only then try to classify,
362 then location tests would naturally arise as the preferred method. As put by
363 Ramdas et al. [2016]:

364 The recent popularity of machine learning has resulted in the ex-
365 tensive teaching and use of prediction in theoretical and applied
366 communities and the relative lack of awareness or popularity of
367 the topic of Neyman-Pearson style hypothesis testing in the com-
368 puter science and related “data science” communities.

369 And more simply by Frank Harrell in the `CrossValidated` Q&A site³:

370 ... your use of proportion classified correctly as your accuracy
371 score. This is a discontinuous improper scoring rule that can be
372 easily manipulated because it is arbitrary and insensitive.

³[http://stats.stackexchange.com/questions/17408/
how-to-assess-statistical-significance-of-the-accuracy-of-a-classifier](http://stats.stackexchange.com/questions/17408/how-to-assess-statistical-significance-of-the-accuracy-of-a-classifier).

References

- T. W. Anderson. *An Introduction to Multivariate Statistical Analysis*. Wiley-Interscience, Hoboken, NJ, 3 edition edition, July 2003. ISBN 978-0-471-36091-9.
- Y. Benjamini and Y. Hochberg. Controlling the false discovery rate: a practical and powerful approach to multiple testing. *JOURNAL-ROYAL STATISTICAL SOCIETY SERIES B*, 57:289–289, 1995.
- B. Efron and R. Tibshirani. Improvements on Cross-Validation: The .632+ Bootstrap Method. *Journal of the American Statistical Association*, 92(438):548–560, June 1997. ISSN 0162-1459. doi: 10.2307/2965703.
- R. Gilron, J. Rosenblatt, O. Koyejo, R. A. Poldrack, and R. Mukamel. Quantifying spatial pattern similarity in multivariate analysis using functional anisotropy. *arXiv:1605.03482 [q-bio]*, May 2016.
- P. Golland and B. Fischl. Permutation tests for classification: towards statistical significance in image-based studies. In *IPMI*, volume 3, pages 330–341. Springer, 2003.
- P. Golland, F. Liang, S. Mukherjee, and D. Panchenko. Permutation Tests for Classification. In P. Auer and R. Meir, editors, *Learning Theory*, number 3559 in Lecture Notes in Computer Science, pages 501–515. Springer Berlin Heidelberg, June 2005. ISBN 978-3-540-26556-6 978-3-540-31892-7. doi: 10.1007/11503415_34.
- T. R. Golub, D. K. Slonim, P. Tamayo, C. Huard, M. Gaasenbeek, J. P. Mesirov, H. Coller, M. L. Loh, J. R. Downing, M. A. Caligiuri, C. D. Bloomfield, and E. S. Lander. Molecular Classification of Cancer: Class Discovery and Class Prediction by Gene Expression Monitoring. *Science*, 286(5439):531–537, Oct. 1999. ISSN 0036-8075, 1095-9203. doi: 10.1126/science.286.5439.531.
- A. Gretton, K. M. Borgwardt, M. J. Rasch, B. Schölkopf, and A. Smola. A Kernel Two-sample Test. *J. Mach. Learn. Res.*, 13:723–773, Mar. 2012. ISSN 1532-4435.
- T. Hastie, R. Tibshirani, and J. Friedman. *The Elements of Statistical Learning*. Springer, July 2003. ISBN 0-387-95284-5.
- R. Heller, Y. Heller, and M. Gorfine. A consistent multivariate test of association based on ranks of distances. *Biometrika*, page ass070, Dec. 2012. ISSN 0006-3444, 1464-3510. doi: 10.1093/biomet/ass070.

- 408 J. Hemerik and J. Goeman. Exact testing with random permutations.
409 *arXiv:1411.7565 [math, stat]*, Nov. 2014.
- 410 H. Hotelling. The Generalization of Student’s Ratio. *The Annals of Math-*
411 *ematical Statistics*, 2(3):360–378, Aug. 1931. ISSN 0003-4851, 2168-8990.
412 doi: 10.1214/aoms/1177732979.
- 413 W. Jiang, S. Varma, and R. Simon. Calculating confidence intervals for
414 prediction error in microarray classification using resampling. *Statistical*
415 *Applications in Genetics and Molecular Biology*, 7(1), 2008.
- 416 L. Juan and H. Iba. Prediction of tumor outcome based on gene expression
417 data. *Wuhan University Journal of Natural Sciences*, 9(2):177–182, Mar.
418 2004. ISSN 1007-1202, 1993-4998. doi: 10.1007/BF02830598.
- 419 N. Kriegeskorte, R. Goebel, and P. Bandettini. Information-based functional
420 brain mapping. *Proceedings of the National Academy of Sciences of the*
421 *United States of America*, 103(10):3863–3868, July 2006. ISSN 0027-8424,
422 1091-6490. doi: 10.1073/pnas.0600244103.
- 423 E. L. Lehmann. Parametric versus nonparametrics: two alternative method-
424 ologies. *Journal of Nonparametric Statistics*, 21(4):397–405, 2009. ISSN
425 1048-5252. doi: 10.1080/10485250902842727.
- 426 G. J. McLachlan. The bias of the apparent error rate in discriminant analysis.
427 *Biometrika*, 63(2):239–244, Jan. 1976. ISSN 0006-3444, 1464-3510. doi:
428 10.1093/biomet/63.2.239.
- 429 S. Mukherjee, P. Tamayo, S. Rogers, R. Rifkin, A. Engle, C. Campbell,
430 T. R. Golub, and J. P. Mesirov. Estimating dataset size requirements
431 for classifying DNA microarray data. *Journal of Computational Biology:*
432 *A Journal of Computational Molecular Cell Biology*, 10(2):119–142, 2003.
433 ISSN 1066-5277. doi: 10.1089/10665270321825928.
- 434 E. Olivetti, S. Greiner, and P. Avesani. Induction in Neuroscience with
435 Classification: Issues and Solutions. In G. Langs, I. Rish, M. Grosse-
436 Wentrup, and B. Murphy, editors, *Machine Learning and Interpretation*
437 *in Neuroimaging*, number 7263 in Lecture Notes in Computer Science,
438 pages 42–50. Springer Berlin Heidelberg, 2012. ISBN 978-3-642-34712-2
439 978-3-642-34713-9. doi: 10.1007/978-3-642-34713-9_6.
- 440 E. Olivetti, S. Greiner, and P. Avesani. Statistical independence for the
441 evaluation of classifier-based diagnosis. *Brain Informatics*, 2(1):13–19, Dec.
442 2014. ISSN 2198-4018, 2198-4026. doi: 10.1007/s40708-014-0007-6.

- 443 F. Pereira, T. Mitchell, and M. Botvinick. Machine learning classifiers and
444 fMRI: A tutorial overview. *NeuroImage*, 45(1, Supplement 1):S199–S209,
445 Mar. 2009. ISSN 1053-8119. doi: 10.1016/j.neuroimage.2008.11.007.
- 446 C. R. Pernet, P. McAleer, M. Latinus, K. J. Gorgolewski, I. Charest, P. E. G.
447 Bestelmeyer, R. H. Watson, D. Fleming, F. Crabbe, M. Valdes-Sosa, and
448 P. Belin. The human voice areas: Spatial organization and inter-individual
449 variability in temporal and extra-temporal cortices. *NeuroImage*, 119:164–
450 174, Oct. 2015. ISSN 1053-8119. doi: 10.1016/j.neuroimage.2015.06.050.
- 451 M. D. Radmacher, L. M. McShane, and R. Simon. A Paradigm for
452 Class Prediction Using Gene Expression Profiles. *Journal of Computa-*
453 *tional Biology*, 9(3):505–511, June 2002. ISSN 1066-5277. doi: 10.1089/
454 106652702760138592.
- 455 A. Ramdas, A. Singh, and L. Wasserman. Classification Accuracy as a Proxy
456 for Two Sample Testing. *arXiv:1602.02210 [cs, math, stat]*, Feb. 2016.
- 457 J. Schäfer and K. Strimmer. A Shrinkage Approach to Large-Scale Covariance
458 Matrix Estimation and Implications for Functional Genomics. *Statistical*
459 *Applications in Genetics and Molecular Biology*, 4(1), Jan. 2005. ISSN
460 1544-6115. doi: 10.2202/1544-6115.1175.
- 461 R. Simon, M. D. Radmacher, K. Dobbin, and L. M. McShane. Pitfalls in the
462 Use of DNA Microarray Data for Diagnostic and Prognostic Classification.
463 *Journal of the National Cancer Institute*, 95(1):14–18, Jan. 2003. ISSN
464 0027-8874, 1460-2105. doi: 10.1093/jnci/95.1.14.
- 465 D. K. Slonim, P. Tamayo, J. P. Mesirov, T. R. Golub, and E. S. Lander. Class
466 Prediction and Discovery Using Gene Expression Data. In *Proceedings of*
467 *the Fourth Annual International Conference on Computational Molecular*
468 *Biology*, RECOMB ’00, pages 263–272, New York, NY, USA, 2000. ACM.
469 ISBN 978-1-58113-186-4. doi: 10.1145/332306.332564.
- 470 M. S. Srivastava. On testing the equality of mean vectors in high dimension.
471 *Acta et Commentationes Universitatis Tartuensis de Mathematica*, 17(1):
472 31–56, June 2013. ISSN 2228-4699. doi: 10.12697/ACUTM.2013.17.03.
- 473 M. S. Srivastava, S. Katayama, and Y. Kano. A two sample test in high
474 dimensional data. *Journal of Multivariate Analysis*, 114:349–358, Feb.
475 2013. ISSN 0047-259X. doi: 10.1016/j.jmva.2012.08.014.
- 476 J. Stelzer, Y. Chen, and R. Turner. Statistical inference and multiple test-
477 ing correction in classification-based multi-voxel pattern analysis (MVPA):

- 478 Random permutations and cluster size control. *NeuroImage*, 65:69–82, Jan.
479 2013. ISSN 1053-8119. doi: 10.1016/j.neuroimage.2012.09.063.
- 480 A. W. van der Vaart. *Asymptotic Statistics*. Cambridge University Press,
481 Cambridge, UK ; New York, NY, USA, Oct. 1998. ISBN 978-0-521-49603-
482 2.
- 483 G. Varoquaux, P. R. Raamana, D. Engemann, A. Hoyos-Idrobo, Y. Schwartz,
484 and B. Thirion. Assessing and tuning brain decoders: cross-validation,
485 caveats, and guidelines. working paper or preprint, June 2016.
- 486 T. D. Wager, L. Y. Atlas, M. A. Lindquist, M. Roy, C.-W. Woo, and E. Kross.
487 An fMRI-Based Neurologic Signature of Physical Pain. *New England Jour-*
488 *nal of Medicine*, 368(15):1388–1397, Apr. 2013. ISSN 0028-4793. doi:
489 10.1056/NEJMoa1204471.

490 A Analysis pipeline

491 Here is the analysis pipeline of Stelzer et al. [2013] we for the auditory data in
 492 Gilron et al. [2016]. Denoting by $i = 1, \dots, I$ the subject index, $v = 1, \dots, V$
 493 the voxel index, and $s = 1, \dots, S$ the permutation index. Since regions⁴ are
 494 centered around a unique voxel, the voxel index v also serves as a unique
 495 region index. Algorithm 1 computes a region-wise test statistic, which is
 496 compared to its permutation null distribution computed by Algorithm 2.

Algorithm 1: Compute a group parametric map.

Data: fMRI scans, and experimental design.
Result: Brain map of group statistics: $\{\bar{T}_v\}_{v=1}^V$

```

1 for  $v \in 1, \dots, V$  do
497 2   for  $i \in 1, \dots, I$  do
3      $T_{i,v} \leftarrow$  test statistic for subject  $i$  in a region centered at  $v$ .
4    $\bar{T}_v \leftarrow \frac{1}{I} \sum_{i=1}^I T_{i,v}$ .
```

Algorithm 2: Compute a permutation p-value map.

Data: fMRI scans of 20 subjects, experimental design.
Result: Brain map of permutation p-values: $\{p_v\}_{v=1}^V$

```

498 1 for  $s \in 1, \dots, S$  do
2   permute labels;
3    $\bar{T}_v^s \leftarrow$  parametric map
```

⁴*searchlight* or *sphere* in the MVPA parlance

499 B Simulation Details


500 The following details are common to all the reported simulations, unless stated
501 otherwise in a figure’s caption. The R code for the simulations can be found
502 in [TODO].

503 Each simulation is based on 4,000 replications. In each replication, we
504 generate n i.i.d. samples from a shift model $\mathbf{x}_i = \mu \mathbf{y}_i^* + \eta_i$. Where $y_i^* = \{0, 1\}$
505 is the class of subject i in dummy coding. Recalling that $y_i = \{-1, 1\}$ is the
506 class in effect coding, then clearly $y_i = 2y_i^* - 1$. The noise is distributed as
507 $\eta_i \sim \mathcal{N}_p(0, \Sigma)$. The sample size $n = 40$. The dimension of the data is $p = 23$.
508 The covariance $\Sigma = I$. Effects, i.e. shifts μ , are equal coordinate p -vectors
509 with coordinates that vary over $\mu \in \{0, 1/4, 1/2\}$.


510 Having generated the data, we compute each of the test statistics in Ta-
511 ble 1. For test statistics that require data folding, we used 8 folds. We then
512 compute a permutation p-value by permuting the class labels, and recomput-
513 ing each test statistic. We perform 400 such permutations. We then reject
514 the $\mu_i = 0$ null hypothesis if the permutation p-value is smaller than 0.05.
515 The reported power is the proportion of replication where the permutation
516 p-value falls below 0.05.

C Simulation Results

Figure 5: *Simulation details in Appendix B except the changes in the sub-captions.*

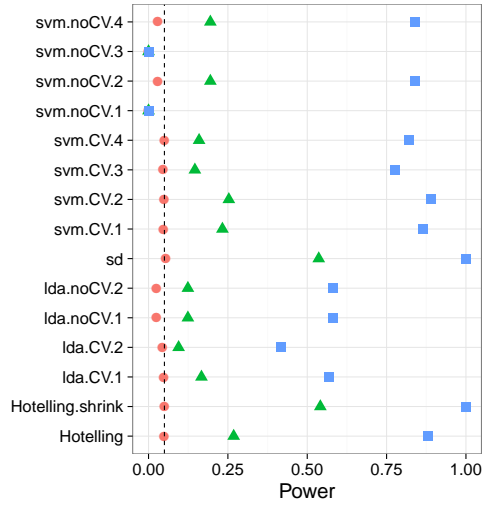

(a) 2-fold cross validation.
Balanced folding.

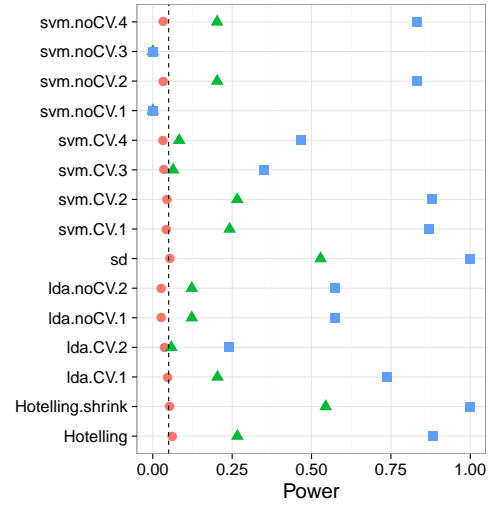

(b) 20-fold cross validation.
Balanced folding

Figure 6: *Simulation details in Appendix B except the changes in the sub-captions.*

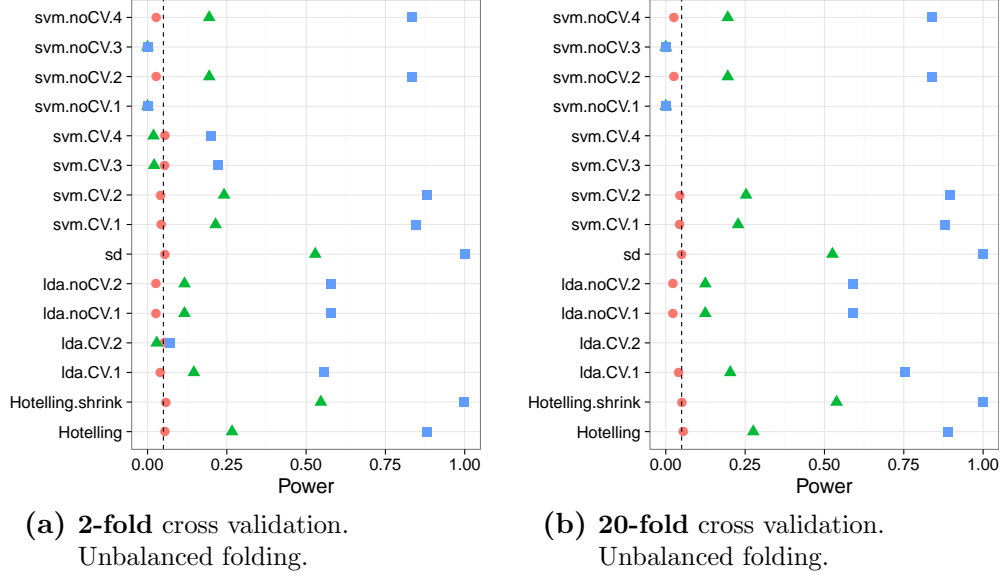


Figure 7: *Simulation details in Appendix B except the changes in the sub-captions.*



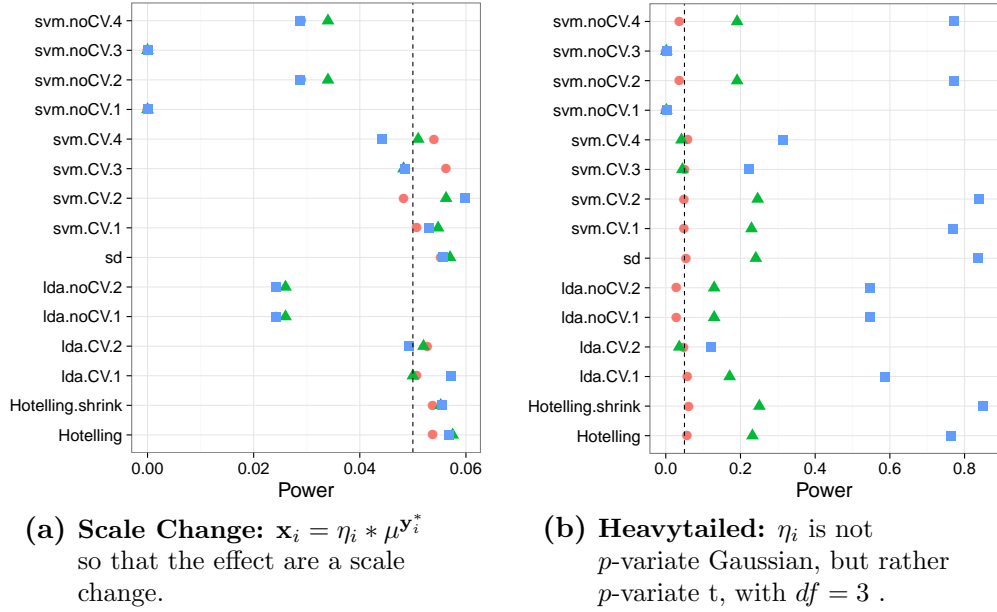


Figure 8: *Simulation details in Appendix B except the changes in the sub-captions.*

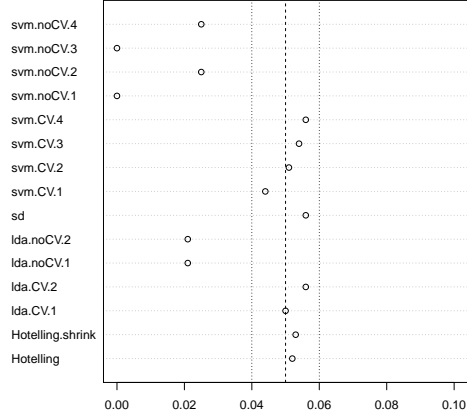

(a) **Low-Dimension:** False positive rates for $n = 40$.

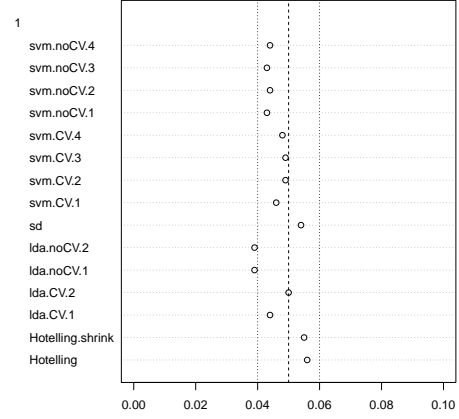


(b) **High-Dimension:** False positive rates for $n = 400$.

Figure 9: *Simulation details in Appendix B except the changes in the sub-captions.*



(a) **High-Dimension, local alternative:**
 $n = 400$,
 $\mu \in \frac{\sqrt{40}}{\sqrt{400}} \times \{0, 1/4, 1/2\}$.

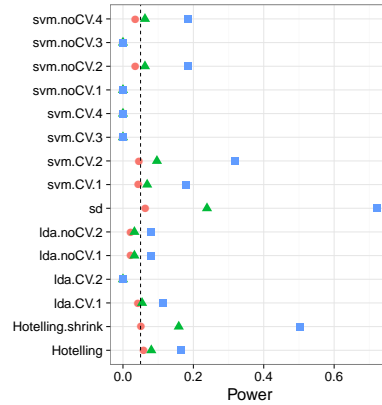

(b) **AR(1) dependence:**
 $\Sigma_{k,l} = \rho^{|k-l|}; \rho = 0.8$.