

# Better-Than-Chance Classification for Signal Detection

Jonathan Rosenblatt      Roei Gilron      Roy Mukamel

August 6, 2016

## Abstract

[TODO]

## 1 Introduction

A common workflow in neuroimaging consists of fitting a classifier, and estimating its predictive accuracy using cross validation. Given that the cross validated accuracy is a random quantity, it is then common to test if the cross validated accuracy is significantly better than chance using a permutation test. Examples in the neuroscientific literature include Golland and Fischl [2003], Pereira et al. [2009], Varoquaux et al. [2016], and especially the recently popularized *multivariate pattern analysis* (MVPA) framework of Kriegeskorte et al. [2006]. This practice is also observed in very high profile publications in the genetics literature: Golub et al. [1999], Slonim et al. [2000], Radmacher et al. [2002], Mukherjee et al. [2003], Juan and Iba [2004], Jiang et al. [2008].

To fix ideas, we will adhere to a concrete example. In Gilron et al. [2016], the authors seek to detect brain regions which encode differences between vocal and non-vocal stimuli. Following the MVPA workflow, the localization problem is cast as a supervised learning problem: if the type of the stimulus can be predicted from the spatial activation pattern significantly better than chance, then a region is declared to encode vocal/non-vocal information. We call this an *accuracy test*, a.k.a. *class prediction* in Simon et al. [2003], or *pattern discrimination* in Pereira et al. [2009].

This same signal detection task can be also approached as a two-group multivariate test. Inferring that a region encodes vocal/non-vocal information, is essentially inferring that the spatial distribution of brain activations is different given a vocal/non-vocal stimulus. As put in Pereira et al. [2009]:

... the problem of deciding whether the classifier learned to discriminate the classes can be subsumed into the more general question as to whether there is evidence that the underlying distributions of each class are equal or not.

A practitioner may then call upon a two-group location test such as Hotelling’s  $T^2$  [Anderson, 2003]. Alternatively, if the size of a brain region is too large compared to the number of observations, so that the spatial covariance cannot be fully estimated, then a high dimensional version of Hotelling’s test can be called upon, such as in Schäfer and Strimmer [2005] or Srivastava [2013]. For brevity, and in contrast to *accuracy tests*, we will call these two-sample multivariate tests simply *location tests*, also termed *class comparisons* in Simon et al. [2003].

At this point, it becomes unclear which is preferable: a location test or an accuracy test? The former with a heritage dating back to Hotelling [1931], and the latter being extremely popular, as the 959 citations<sup>1</sup> of Kriegeskorte et al. [2006] suggest.

The comparison between location and accuracy tests was precisely the goal of Ramdas et al. [2016], who compared the  $T^2$  location test to the accuracy of *Fisher’s linear discriminant analysis* classifier (LDA). By comparing the rates of convergence of the powers to 1, Ramdas et al. [2016] concluded that accuracy and location tests are rate equivalent. Judging by convergence rates alone, not much is (asymptotically) lost by using an accuracy test.

Asymptotic relative efficiency measures (ARE) are typically used by statisticians to compare between test statistics with similar rates [van der Vaart, 1998]. The ARE between Hotelling’s  $T^2$  (location) test and Fisher’s LDA (accuracy) test in Ramdas et al. [2016] is lower bounded by  $\sqrt{2\pi} \approx 2.5$ . This means that Fisher’s LDA requires at least 2.5 more samples to achieve the same (asymptotic) power than the  $T^2$  test. In this light, the accuracy test is remarkably inefficient compared to the location test. For comparison, the t-test is only 1.04 more (asymptotically) efficient than Wilcoxon’s rank-sum test [Lehmann, 2009], so that an ARE of 2.5 is strong evidence in favor of the location test.

Before discarding accuracy tests as inefficient, we recall that Ramdas et al. [2016] analyzed a *half-sample* holdout. The authors conjectured that a leave-one-out approach, which makes more efficient use of the data, may have better performance. Also, the analysis in Ramdas et al. [2016] is asymptotic. This eschews the discrete nature of the accuracy statistic, which will be shown to have crucial impact. Since typical sample sizes in neuroscience are not large, we seek to study which test is to be preferred in finite samples?

---

<sup>1</sup>GoogleScholar. Accessed on Aug 4, 2016.

66 Our conclusion will be quite simple: *location tests almost always have more*  
 67 *power than accuracy tests.*

68 The main argument for our statement rests upon the observation that  
 69 with typical sample sizes, the accuracy test statistic is highly discrete. Dis-  
 70 crete test statistics are known to be conservative [Hemerik and Goeman,  
 71 2014], since they are insensitive to mild perturbations of the data, and they  
 72 cannot exhaust the permissible false positive rate. The degree of discretiza-  
 73 tion is governed by the number of samples. In our neuroscience example  
 74 from Gilron et al. [2016], the classification is performed based on 40 trials,  
 75 so that the test statistic may assume only 40 possible values. This number  
 76 of examples is not unusual if considering this is the number of subjects, or  
 77 the number of trial-repeats in an neuroimaging study.

78 The discretization effect is aggravated if the test statistic is highly concen-  
 79 trated. For an intuition consider the usage of a the *resubstitution accuracy*  
 80 as a test statistic. This statistic simply means that the accuracy is not cross  
 81 validated. If the data is high dimensional, the resubstitution accuracy will  
 82 be very high due to over fitting [McLachlan, 1976, Theorem 1]. In an extreme  
 83 case, the resubstitution accuracy will be 1 for the observed data, but also for  
 84 any permutation. The concentration of resubstitution accuracy near 1, and  
 85 its discreteness, render this test completely useless, with a power of 0.

86 To compare the power of accuracy tests and location tests in finite sam-  
 87 ples, we perform a simulation study of a battery of test statistics. The main  
 88 findings are reported in Section 4, and the intuition for our findings is pro-  
 89 vided in Section 6, but first, the problem’s setup.

## 90 2 Problem setup

91 Let  $y \in \mathcal{Y}$  be a class encoding. Let  $x \in \mathcal{X}$  be a  $p$  dimensional feature vector.  
 92 In our vocal/non-vocal example we have  $\mathcal{Y} = \{-1, 1\}$  and  $p$ , the number of  
 93 voxels in a brain region so that  $\mathcal{X} = \mathbb{R}^{27}$ .

94 Given  $n$  pairs of  $(x_i, y_i)$ , typically assumed i.i.d., a location test amounts  
 95 to testing whether  $x|y = 1$  has the the same distribution as  $x|y = -1$ .  
 96 I.e., we test if the multivariate voxel activation pattern has the same dis-  
 97 tribution when given a vocal stimulus, as when given a non-vocal stimulus.  
 98 An accuracy test amounts to learning a predictive model  $\hat{f}(x)$  from some  
 99 assumed model class  $\hat{f} \in \mathcal{F}$ . The prediction accuracy, denoted  $T_{\hat{f}}^{acc}$ , is de-  
 100 fined as the probability of a given classifier  $\hat{f}$  of making a correct prediction  
 101  $T_{\hat{f}}^{acc} := Prob(\hat{f}(x) = y)$  when given a randomly drawn data point,  $(x, y)$ .  
 102 A statistically significant “better than chance” estimate of  $T_{\hat{f}}^{acc}$  is evidence

103 that the classes are distinct.

## 104 2.1 Candidate Tests

105 The design of a permutation test using the prediction accuracy, requires the  
106 following design choices:

- 107 1. How to estimate accuracy?
- 108 2. Is the statistic cross validated or not?
- 109 3. For a K-fold cross validated test statistic: should the data be refolded  
110 in each permutation?
- 111 4. Permute labels of features?
- 112 5. For a K-fold cross validated test statistic: should the data folding be bal-  
113 anced (a.k.a. stratified)?
- 114 6. How many folds?

115 We will now address these questions while bearing in mind that unlike the  
116 typical supervised learning setup, we are not interested in an unbiased esti-  
117 mate of the prediction error, but rather in the mere detection of a difference  
118 between two groups.

119 **How to estimate accuracy?** Given a predictor  $\hat{f}$ , a natural test statis-  
120 tic is some estimate of its accuracy  $T_{\hat{f}}^{acc}$ . Complicating matters: very low  
121 accuracies, even 0, is evidence that the classes are separated, and we only  
122 need to invert the predictions. We can thus consider  $|T_{\hat{f}}^{acc} - 0.5|$  as the test  
123 statistic. This, however, implies that if the classes are identical, random  
124 guessing has 0.5 accuracy. This is not true if the classes are not balanced.  
125 The chance level in which case is the prevalence of the dominant class, we  
126 denote by  $\hat{p}_{max}$ . This suggests the following test statistic  $|T_{\hat{f}}^{acc} - \hat{p}_{max}|$ . Since  
127 we will be aggregating these statistics over random data sets where the dom-  
128 inant class may have varying frequencies, it seems appropriate to standard-  
129 ize the scale of this statistic. We thus also consider the z-scored accuracy:  
130  $|T_{\hat{f}}^{acc} - \hat{p}_{max}| / \sqrt{\hat{p}_{max}(1 - \hat{p}_{max})}$ .

131 **Cross validate or not?** Were we interested in an unbiased estimator of  
132 the prediction error, there is no question that some independent validation  
133 is in order. Since we are merely interested in detecting a difference between  
134 classes, a biased error estimate is not an issue provided that bias is consistent  
135 over all permutations. The underlying intuition is that if the exact same  
136 computation is performed over all permutations, then a permutation test  
137 will be “fair”, i.e., will not inflate the false positive rate. We will thus be  
138 considering both cross validated accuracies, and resubstitution accuracies as  
139 our test statistics, a.k.a. *resubstitution classification*.

140 **Refolding?** The standard practice in neuroimaging is to refold the data  
141 after each permutation [Pereira et al., 2009]. This is imperative if permuting  
142 labels while aiming at balanced data folds. This is not, however, imperative  
143 in general. For simplicity, we will adhere to the standard practice of refolding  
144 the data within each permutation.

145 **Permute labels of features?** While seemingly identical, the compound-  
146 ing of permutations with data foldings renders these two approaches distinct.  
147 As an example, consider balanced (stratified) K-fold cross validation where  
148 the initial data folding is balanced. After a label permutation, the original  
149 folds will probably not be balanced. If the *features* are permuted, then the  
150 labels conserve their original fold assignments, and the original folds are bal-  
151 anced after each permutation. Since we only report results while refolding  
152 the data in each permutation, then the only difference between permuting  
153 labels and permuting features seems to be a computational one. We thus  
154 adhere to the more common, albeit computationally less efficient practice of  
155 permuting labels.

156 **Balanced folding?** As already implied, a standard practice when cross  
157 validating is to constrain the data folds to be balanced (i.e. stratified). This  
158 is well justified when aiming at unbiased accuracy estimation. This also  
159 simplifies matter when aiming at signal detection, as can be seen from the  
160 above discussion of the appropriate test statistic. On the other hand, it  
161 may complicate matters, as can be seen from the above discussion on label  
162 versus feature permutation. We will report results with both balanced and  
163 unbalanced data foldings, only to discover, it does not really matter.

164 **How many folds?** Different authors suggest different rules for the num-  
165 ber of folds. We will be varying the number of folds. This will affect the  
166 concentration of permutation distribution of the estimated accuracy, which

will have a crucial effect on the conservativeness of the accuracy test. Our intuition suggests that since more folds imply a less concentrated estimate, then leave-one-out should be the less conservative, and 2-fold should be the most conservative.

The of tests we will be comparing is collected for convenience in Table 1.

Name	Basis	CV	Accuracy	Parameters
Hotelling	Hotelling	—	—	shrink=FALSE
Hotelling.shrink	Hotelling	—	—	shrink=TRUE
lda.CV.1	LDA	TRUE	accuracy	—
lda.CV.2	LDA	TRUE	z-accuracy	—
lda.noCV.1	LDA	FALSE	accuracy	—
lda.noCV.2	LDA	FALSE	z-accuracy	—
sd	SD	—	—	—
svm.CV.1	SVM	TRUE	accuracy	cost=1e1
svm.CV.2	SVM	TRUE	accuracy	cost=1e-1
svm.CV.3	SVM	TRUE	z-accuracy	cost=1e1
svm.CV.4	SVM	TRUE	z-accuracy	cost=1e-1
svm.noCV.1	SVM	FALSE	accuracy	cost=1e1
svm.noCV.2	SVM	FALSE	accuracy	cost=1e-1
svm.noCV.3	SVM	FALSE	z-accuracy	cost=1e1
svm.noCV.4	SVM	FALSE	z-accuracy	cost=1e-1

Table 1: This table enumerates the various test statistics we will be studying. Three are location tests: Hotelling, Hotelling.shrink, and sd. *Hotelling* is the classical two-group  $T^2$  statistic. *Hotelling.shrink* is a high dimensional version with the regularized covariance in Schäfer and Strimmer [2005]. *sd* is another high dimensional version of the  $T^2$ , from Srivastava et al. [2013]. The rest of the tests are variations of the linear SVM, and Fisher’s LDA, with varying accuracy measures, cross validated or not, and varying tuning parameters. For example, *svm.CV.4* is a linear SVM, with *libsvm*’s cost parameter set at 0.1, using the cross validated z-scored accuracy ( $|T_f^{acc} - \hat{p}_{max}| / \sqrt{\hat{p}_{max}(1 - \hat{p}_{max})}$ , see Section 2.1). Another example is *lda.noCV.1*, which is Fisher’s LDA, returning the resubstitution accuracy, without cross validation, and without z-scoring.

172

### 3 Controlling the False Positive Rate

173

Figure 1 demonstrates that all of the tests considered conserve the desired 0.05 false positive rate, up to varying levels of conservatism. This can be seen from the fact that the probability of rejection is no larger than 0.05 in the absence of any effect, encoded by a red circle. This is true, in particular

177

178 if: (a) the folds are balanced or not, (b) the tuning parameters of some test  
 179 statistic are varied, (d) the number of folds is varied. We also observe that  
 180 the most conservative tests are the resubstitution accuracy measures. We  
 181 return to this matter in the Discussion.

*Figure 1: The power of a permutation test with various test statistics. The power on the x axis. Effect are color and shape coded. The various statistics on the y axis. Their details are given in Table 1. Effects vary over 0 (red circle), 0.25 (green triangle), and 0.5 (blue square). Simulation details in Appendix B. Cross-validation was performed with balanced (stratified) and unbalanced data folding. See sub-captions.*



## 182 4 Power

183 Having established that all of the tests in our battery control the false positive  
 184 rate, it remains to be seen if they have similar power— especially when  
 185 comparing the power of location tests to accuracy tests. From the simulation  
 186 results reported in Appendix C we collect the following insights:

- 187 1. Location tests have more power than accuracy tests in all our configurations.  
 188
- 189 2. The conservativeness decays as the sample grows (Figures 6a, 6b and  
 190 7a), supporting the statement that discretization is responsible for  
 191 power loss.

- 192 3. The power may increase or decrease with the number of folds (Figure 3).
- 193 4. The z-scoring of the accuracies was introduced to deal with unbalanced  
194 foldings. If the z-scoring has any effect at all, it merely kills power.  
195 There is really no reason to use it.
- 196 5. Both accuracy and location tests are inappropriate for scale alternatives  
197 (Figure 5a). This was to be expected and is reported mostly as a sanity  
198 check.
- 199 6. The presence of heavy tails (Figure 5b) may reduce power, but does  
200 not quantitatively change results.
- 201 7. Balanced folding typically has no effect. It increased power only for  
202 the z-scored statistics (Figure 1). This is surprising given they were  
203 precisely designed to deal with the presence of imbalance.
- 204 8. Varying the accuracy test’s tuning parameter, such as the cost (i.e.  
205 margins) has no effect on the power of the test.
- 206 9. Correlation between coordinates, mimicking temporal correlation in  
207 fMRI data, has no effect on conclusions, since all test statistics account  
208 for this correlation (Figure 7b).

209 The major insight from simulations is that the use of accuracy tests for  
210 signal detection is underpowered compared to location tests. We now verify  
211 this finding on a neuroimaging dataset.

## 212 5 Neuroimaging Example

213 Figure 2 is an application of both a location and an accuracy test to the data  
214 of Pernet et al. [2015]. The authors of Pernet et al. [2015] collected fMRI  
215 data while subjects were exposed to the sounds of human speech (vocal),  
216 and other non-vocal sounds. Each subject was exposed to 20 sounds of each  
217 type, totaling in  $n = 40$  trials in each scan. The study was rather large and  
218 consisted of about 200 subjects. The data was kindly made available by the  
219 authors at the OpenfMRI website<sup>2</sup>.

220 We perform group inference using within-subject permutations using the  
221 pipeline of Stelzer et al. [2013], which was also reported in Gilron et al. [2016].  
222 For completeness, the pipeline is described in Appendix A. To demonstrate

---

<sup>2</sup><https://openfmri.org/>



our point, we compare the *sd* location test with the *svm.cv.1* accuracy test (see Table 1 for the definition of these statistics).

In agreement with our simulation results, the location test (*sd*) discovers more brain regions when compared to an accuracy test (*svm.cv.1*). The former discovers 1,232 regions, while the latter only 441, as depicted in Figure 2. We emphasize that both test statistics were compared with the same permutation scheme, and the same error controls, so that any difference in detections is due to their different power.

Having established that accuracy tests are underpowered both in simulation and in application, we wish to identify the conditions under which this will occur, and discuss implications on the practice of accuracy tests.



*Figure 2: Brain regions encoding information discriminating between vocal and non-vocal stimuli. Map reports the centers of 27-voxel sized spherical regions, as discovered by an accuracy test (*svm.cv.1*), and a location test (*sd*). *svm.cv.1* was computed using 5-fold cross validation, and a cost parameter of 1. Region-wise significance was determined using the permutation scheme of Stelzer et al. [2013], followed by region-wise  $FDR \leq 0.05$  control using the Benjamini-Hochberg procedure [Benjamini and Hochberg, 1995]. Number of permutations equals 400. The location test detect 1,232 regions, and the accuracy test 441, 399 of which are common to both. For the details of the analysis see Appendix A and Gilron et al. [2016].*

## 234 6 Discussion

235 We have set out to understand which of the tests is more powerful: the  
236 accuracy test or the location test. Using simulations, we have concluded that  
237 the location tests are preferable. We attribute this to several phenomena:  
238 (a) Discretization introduced in finite samples by the accuracy test statistic.  
239 (b) Inefficient use of the data for the validation holdout set. In our high  
240 dimensional setup, we also confirmed that high-dimensional versions of the  $T^2$   
241 test, such as Srivastava [2013] or Schäfer and Strimmer [2005] are preferable  
242 over the original  $T^2$ .

243 The sensitivity of the power to the number of folds suggests that most  
244 of the power is lost due to the discretization and not to the holdout. The  
245 degree of discretization is governed by the sample size. For this reason, an  
246 asymptotic analysis such as Ramdas et al. [2016] may uncover the holdout  
247 inefficiency, but will not uncover the discretization effect. The practical ad-  
248 vice for the practitioner, is that for the purpose of signal detection, there  
249 is typically a multivariate test (be it a location test or other), that is more  
250 powerful than an accuracy test. There is also a good chance that it would  
251 be easier to implement, since no validation will be involved.

### 252 6.1 Neyman-Pearson Classification

253 [TODO]

### 254 6.2 A good accuracy test

255 In Section 6.6 we discuss cases where an accuracy test cannot replace a  
256 location test. For such cases we collect some conclusions from our simulations  
257 on the best practices for accuracy tests.

- 258 1. The conservativeness due to discretization decreases with sample size.
- 259 2. Cross validating the accuracy statistic increases power in moderate  
260 sample sizes. The power loss due to the holdout inefficiency is smaller  
261 than the power loss due to the concentration of the resubstitution ac-  
262 curacy. For large sample sizes, discretization and concentration have  
263 weaker effects, and the cross validated accuracy may be replaced with  
264 the computationally more efficiency resubstitution accuracy.
- 265 3. Permuting features is easier than permuting labels. It allows to preserve  
266 balanced folds after a permutation without refolding, thus reducing  
267 computational complexity.

- 268 4. There is no gain in z-scoring the accuracy scores.
- 269 5. Cross validated accuracy with balanced folds has more power than un-  
270 balanced folds. We currently have no intuition to offer for this phe-  
271 nomenon.
- 272 6. It is unclear what is the effect of the number of folds. More folds in-  
273 crease power by reducing the number of holdout samples. On the other  
274 hand, it increases the concentration of the accuracy statistic. Com-  
275 pounded with the discreteness of the accuracy statistic, this decreases  
276 power.
- 277 7. The value of the tuning parameters of a classifier have little to no  
278 effect.

### 279 6.3 Related Literature

280 Olivetti et al. [2012] and Olivetti et al. [2014] also looked into a similar  
281 problem as we do, namely, what is the preferred accuracy test? They propose  
282 a new test they call an *independence test*, and demonstrate by simulation that  
283 it has more power than other accuracy tests, and can deal with non-balanced  
284 data sets. We did not include this test in the battery we compared, but we  
285 note the following: (a) The independence test of Olivetti et al. [2012] relies on  
286 a discrete test statistic. This means that in the cases that the accuracy test is  
287 called upon for discriminating populations, it will probably be underpowered  
288 compared to location tests. (b) In contrast with the underlying motivation  
289 of Olivetti et al. [2012]’s independence test, we did not find that balancing  
290 the data folds is crucial for an accuracy test.

### 291 6.4 Non-linear predictors

292 It may be argued that accuracy tests permits the separation between classes  
293 in high dimensions, such as in *reproducing kernel Hilbert spaces* (RKHS) by  
294 using non-linear predictors. This is immaterial since group tests can also be  
295 performed in higher dimensions (e.g. Gretton et al. [2012], or Heller et al.  
296 [2012]).

### 297 6.5 Ease of implementation

298 A very important point is the ease of implementation. The need for cross  
299 validation of the accuracy test greatly increases its computational complexity.  
300 Moreover, anyone who has actually implemented tests with discrete statistics,

will attest they are considerably harder to implement. This is because their unforgiveness to the type of inequality. Indeed, mistakenly replacing a weak inequality with a strong inequality in one’s program may considerably change the results. This is not the case for continuous test statistics.

## 6.6 Reservations

Some reservations to the generality of our findings are in order. Firstly, not all accuracy tests are concerned with signal detection. Indeed, it is possible that the purpose of the test is not to detect a difference between classes, but to actually test the performance of a particular classifier. Examples include brain decoding for machine interfaces, and clinical diagnosis, where the presence of a medical condition is “predicted” from imaging data. [e.g. Olivetti et al., 2012, Wager et al., 2013]

Secondly, not all signals are manifested in a shift of the null distribution. Our focus on location tests is misleading. Perhaps Simon et al. [2003]’s *class comparison* is a more appropriate name, in that it does not only imply a shift alternative. Indeed, one may consider signal, i.e. effects, as a change in scale, such as the *spiked covariance* model. In this case, other-than-Hotelling type tests are appropriate [e.g. Nadler, 2008]. Tests have been proposed even when the nature of the difference between populations is left unspecified [e.g. Gretton et al., 2012]. The fact that in our neuroimaging example (Section 5) some brain regions were detected with the accuracy test, and not the location test, is consistent with this observation.

The reservation to the reservation is that the far greater power of the location test, certainly in our example, does serve as an empirical evidence that changes in location are a prevalent phenomenon.

## 6.7 Epilogue

Given all the above, we find the popularity of accuracy tests quite puzzling. We believe this is due to a reversal of the inference cascade. Researchers first fit a classifier, and then ask if the classes are any different. Were they to start by asking if classes are any different, and only then try to classify, then location tests would naturally arise as the preferred method. As put by Ramdas et al. [2016]:

The recent popularity of machine learning has resulted in the extensive teaching and use of prediction in theoretical and applied communities and the relative lack of awareness or popularity of

336 the topic of Neyman-Pearson style hypothesis testing in the com-  
337 puter science and related “data science” communities.

338 And more simply by Frank Harrell in the **CrossValidated** Q&A site<sup>3</sup>:

339 ... your use of proportion classified correctly as your accuracy  
340 score. This is a discontinuous improper scoring rule that can be  
341 easily manipulated because it is arbitrary and insensitive.

---

<sup>3</sup>[http://stats.stackexchange.com/questions/17408/  
how-to-assess-statistical-significance-of-the-accuracy-of-a-classifier](http://stats.stackexchange.com/questions/17408/how-to-assess-statistical-significance-of-the-accuracy-of-a-classifier).

## References

- T. W. Anderson. *An Introduction to Multivariate Statistical Analysis*. Wiley-Interscience, Hoboken, NJ, 3 edition edition, July 2003. ISBN 978-0-471-36091-9.
- Y. Benjamini and Y. Hochberg. Controlling the false discovery rate: a practical and powerful approach to multiple testing. *JOURNAL-ROYAL STATISTICAL SOCIETY SERIES B*, 57:289–289, 1995.
- R. Gilron, J. Rosenblatt, O. Koyejo, R. A. Poldrack, and R. Mukamel. Quantifying spatial pattern similarity in multivariate analysis using functional anisotropy. *arXiv:1605.03482 [q-bio]*, May 2016.
- P. Golland and B. Fischl. Permutation tests for classification: towards statistical significance in image-based studies. In *IPMI*, volume 3, pages 330–341. Springer, 2003.
- T. R. Golub, D. K. Slonim, P. Tamayo, C. Huard, M. Gaasenbeek, J. P. Mesirov, H. Coller, M. L. Loh, J. R. Downing, M. A. Caligiuri, C. D. Bloomfield, and E. S. Lander. Molecular Classification of Cancer: Class Discovery and Class Prediction by Gene Expression Monitoring. *Science*, 286(5439):531–537, Oct. 1999. ISSN 0036-8075, 1095-9203. doi: 10.1126/science.286.5439.531.
- A. Gretton, K. M. Borgwardt, M. J. Rasch, B. Schölkopf, and A. Smola. A Kernel Two-sample Test. *J. Mach. Learn. Res.*, 13:723–773, Mar. 2012. ISSN 1532-4435.
- R. Heller, Y. Heller, and M. Gorfine. A consistent multivariate test of association based on ranks of distances. *Biometrika*, page ass070, Dec. 2012. ISSN 0006-3444, 1464-3510. doi: 10.1093/biomet/ass070.
- J. Hemerik and J. Goeman. Exact testing with random permutations. *arXiv:1411.7565 [math, stat]*, Nov. 2014.
- H. Hotelling. The Generalization of Student’s Ratio. *The Annals of Mathematical Statistics*, 2(3):360–378, Aug. 1931. ISSN 0003-4851, 2168-8990. doi: 10.1214/aoms/1177732979.
- W. Jiang, S. Varma, and R. Simon. Calculating confidence intervals for prediction error in microarray classification using resampling. *Statistical Applications in Genetics and Molecular Biology*, 7(1), 2008.

- 375 L. Juan and H. Iba. Prediction of tumor outcome based on gene expression  
376 data. *Wuhan University Journal of Natural Sciences*, 9(2):177–182, Mar.  
377 2004. ISSN 1007-1202, 1993-4998. doi: 10.1007/BF02830598.
- 378 N. Kriegeskorte, R. Goebel, and P. Bandettini. Information-based functional  
379 brain mapping. *Proceedings of the National Academy of Sciences of the*  
380 *United States of America*, 103(10):3863–3868, July 2006. ISSN 0027-8424,  
381 1091-6490. doi: 10.1073/pnas.0600244103.
- 382 E. L. Lehmann. Parametric versus nonparametrics: two alternative method-  
383 ologies. *Journal of Nonparametric Statistics*, 21(4):397–405, 2009. ISSN  
384 1048-5252. doi: 10.1080/10485250902842727.
- 385 G. J. McLachlan. The bias of the apparent error rate in discriminant analysis.  
386 *Biometrika*, 63(2):239–244, Jan. 1976. ISSN 0006-3444, 1464-3510. doi:  
387 10.1093/biomet/63.2.239.
- 388 S. Mukherjee, P. Tamayo, S. Rogers, R. Rifkin, A. Engle, C. Campbell,  
389 T. R. Golub, and J. P. Mesirov. Estimating dataset size requirements  
390 for classifying DNA microarray data. *Journal of Computational Biology:*  
391 *A Journal of Computational Molecular Cell Biology*, 10(2):119–142, 2003.  
392 ISSN 1066-5277. doi: 10.1089/106652703321825928.
- 393 B. Nadler. Finite sample approximation results for principal component  
394 analysis: A matrix perturbation approach. *The Annals of Statistics*, 36  
395 (6):2791–2817, Dec. 2008. ISSN 0090-5364, 2168-8966. doi: 10.1214/  
396 08-AOS618.
- 397 E. Olivetti, S. Greiner, and P. Avesani. Induction in Neuroscience with  
398 Classification: Issues and Solutions. In G. Langs, I. Rish, M. Grosse-  
399 Wentrup, and B. Murphy, editors, *Machine Learning and Interpretation*  
400 *in Neuroimaging*, number 7263 in Lecture Notes in Computer Science,  
401 pages 42–50. Springer Berlin Heidelberg, 2012. ISBN 978-3-642-34712-2  
402 978-3-642-34713-9. doi: 10.1007/978-3-642-34713-9\_6.
- 403 E. Olivetti, S. Greiner, and P. Avesani. Statistical independence for the  
404 evaluation of classifier-based diagnosis. *Brain Informatics*, 2(1):13–19, Dec.  
405 2014. ISSN 2198-4018, 2198-4026. doi: 10.1007/s40708-014-0007-6.
- 406 F. Pereira, T. Mitchell, and M. Botvinick. Machine learning classifiers and  
407 fMRI: A tutorial overview. *NeuroImage*, 45(1, Supplement 1):S199–S209,  
408 Mar. 2009. ISSN 1053-8119. doi: 10.1016/j.neuroimage.2008.11.007.

- 409 C. R. Pernet, P. McAleer, M. Latinus, K. J. Gorgolewski, I. Charest, P. E. G.  
410 Bestelmeyer, R. H. Watson, D. Fleming, F. Crabbe, M. Valdes-Sosa, and  
411 P. Belin. The human voice areas: Spatial organization and inter-individual  
412 variability in temporal and extra-temporal cortices. *NeuroImage*, 119:164–  
413 174, Oct. 2015. ISSN 1053-8119. doi: 10.1016/j.neuroimage.2015.06.050.
- 414 M. D. Radmacher, L. M. McShane, and R. Simon. A Paradigm for  
415 Class Prediction Using Gene Expression Profiles. *Journal of Computa-*  
416 *tional Biology*, 9(3):505–511, June 2002. ISSN 1066-5277. doi: 10.1089/  
417 106652702760138592.
- 418 A. Ramdas, A. Singh, and L. Wasserman. Classification Accuracy as a Proxy  
419 for Two Sample Testing. *arXiv:1602.02210 [cs, math, stat]*, Feb. 2016.
- 420 J. Schäfer and K. Strimmer. A Shrinkage Approach to Large-Scale Covariance  
421 Matrix Estimation and Implications for Functional Genomics. *Statistical*  
422 *Applications in Genetics and Molecular Biology*, 4(1), Jan. 2005. ISSN  
423 1544-6115. doi: 10.2202/1544-6115.1175.
- 424 R. Simon, M. D. Radmacher, K. Dobbin, and L. M. McShane. Pitfalls in the  
425 Use of DNA Microarray Data for Diagnostic and Prognostic Classification.  
426 *Journal of the National Cancer Institute*, 95(1):14–18, Jan. 2003. ISSN  
427 0027-8874, 1460-2105. doi: 10.1093/jnci/95.1.14.
- 428 D. K. Slonim, P. Tamayo, J. P. Mesirov, T. R. Golub, and E. S. Lander. Class  
429 Prediction and Discovery Using Gene Expression Data. In *Proceedings of*  
430 *the Fourth Annual International Conference on Computational Molecular*  
431 *Biology*, RECOMB ’00, pages 263–272, New York, NY, USA, 2000. ACM.  
432 ISBN 978-1-58113-186-4. doi: 10.1145/332306.332564.
- 433 M. S. Srivastava. On testing the equality of mean vectors in high dimension.  
434 *Acta et Commentationes Universitatis Tartuensis de Mathematica*, 17(1):  
435 31–56, June 2013. ISSN 2228-4699. doi: 10.12697/ACUTM.2013.17.03.
- 436 M. S. Srivastava, S. Katayama, and Y. Kano. A two sample test in high  
437 dimensional data. *Journal of Multivariate Analysis*, 114:349–358, Feb.  
438 2013. ISSN 0047-259X. doi: 10.1016/j.jmva.2012.08.014.
- 439 J. Stelzer, Y. Chen, and R. Turner. Statistical inference and multiple test-  
440 ing correction in classification-based multi-voxel pattern analysis (MVPA):  
441 Random permutations and cluster size control. *NeuroImage*, 65:69–82, Jan.  
442 2013. ISSN 1053-8119. doi: 10.1016/j.neuroimage.2012.09.063.



- 443 A. W. van der Vaart. *Asymptotic Statistics*. Cambridge University Press,  
444 Cambridge, UK ; New York, NY, USA, Oct. 1998. ISBN 978-0-521-49603-  
445 2.
- 446 G. Varoquaux, P. R. Raamana, D. Engemann, A. Hoyos-Idrobo, Y. Schwartz,  
447 and B. Thirion. Assessing and tuning brain decoders: cross-validation,  
448 caveats, and guidelines. working paper or preprint, June 2016.
- 449 T. D. Wager, L. Y. Atlas, M. A. Lindquist, M. Roy, C.-W. Woo, and E. Kross.  
450 An fMRI-Based Neurologic Signature of Physical Pain. *New England Jour-*  
451 *nal of Medicine*, 368(15):1388–1397, Apr. 2013. ISSN 0028-4793. doi:  
452 10.1056/NEJMoa1204471.

## 453 A Analysis pipeline

454 Here is the analysis pipeline of Stelzer et al. [2013] we for the auditory data in  
 455 Gilron et al. [2016]. Denoting by  $i = 1, \dots, I$  the subject index,  $v = 1, \dots, V$   
 456 the voxel index, and  $s = 1, \dots, S$  the permutation index. Since regions<sup>4</sup> are  
 457 centered around a unique voxel, the voxel index  $v$  also serves as a unique  
 458 region index. Algorithm 1 computes a region-wise test statistic, which is  
 459 compared to its permutation null distribution computed by Algorithm 2.

**Algorithm 1:** Compute a group parametric map.

**Data:** fMRI scans, and experimental design.  
**Result:** Brain map of group statistics:  $\{\bar{T}_v\}_{v=1}^V$

```

1 for  $v \in 1, \dots, V$  do
2   for  $i \in 1, \dots, I$  do
3      $T_{i,v} \leftarrow$  test statistic for subject  $i$  in a region centered at  $v$ .
4    $\bar{T}_v \leftarrow \frac{1}{I} \sum_{i=1}^I T_{i,v}$ .
```

**Algorithm 2:** Compute a permutation p-value map.

**Data:** fMRI scans of 20 subjects, experimental design.  
**Result:** Brain map of permutation p-values:  $\{p_v\}_{v=1}^V$

```

1 for  $s \in 1, \dots, S$  do
2   permute labels;
3    $\bar{T}_v^s \leftarrow$  parametric map
```

---

<sup>4</sup>*searchlight* or *sphere* in the MVPA parlance

## 462 B Simulation Details


463 The following details are common to all the reported simulations, unless stated  
464 otherwise in a figure’s caption. The R code for the simulations can be found  
465 in [TODO].

466 Each simulation is based on 4,000 replications. In each replication, we  
467 generate  $n$  i.i.d. samples from a shift model  $\mathbf{x}_i = \mu \mathbf{y}_i^* + \eta_i$ . Where  $y_i^* = \{0, 1\}$   
468 is the class of subject  $i$  in dummy coding. Recalling that  $y_i = \{-1, 1\}$  is the  
469 class in effect coding, then clearly  $y_i = 2y_i^* - 1$ . The noise is distributed as  
470  $\eta_i \sim \mathcal{N}_p(0, \Sigma)$ . The sample size  $n = 40$ . The dimension of the data is  $p = 23$ .  
471 The covariance  $\Sigma = I$ . Effects, i.e. shifts  $\mu$ , are equal coordinate  $p$ -vectors  
472 with coordinates that vary over  $\mu \in \{0, 1/4, 1/2\}$ .


473 Having generated the data, we compute each of the test statistics in Ta-  
474 ble 1. For test statistics that require data folding, we used 8 folds. We then  
475 compute a permutation p-value by permuting the class labels, and recomput-  
476 ing each test statistic. We perform 400 such permutations. We then reject  
477 the  $\mu_i = 0$  null hypothesis if the permutation p-value is smaller than 0.05.  
478 The reported power is the proportion of replication where the permutation  
479 p-value falls below 0.05.

## C Simulation Results

Figure 3: Simulation details in Appendix B except the changes in the sub-captions.

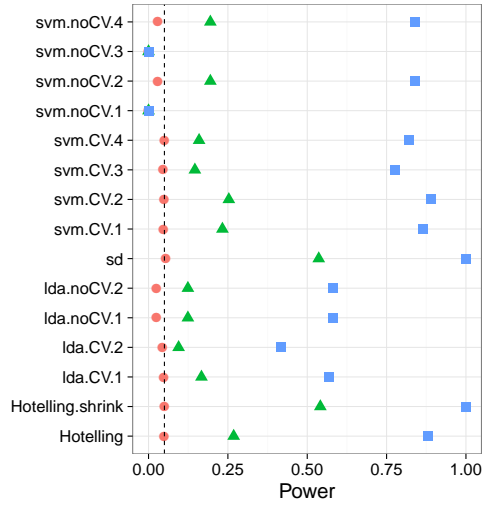


(a) 2-fold cross validation.  
Balanced folding.

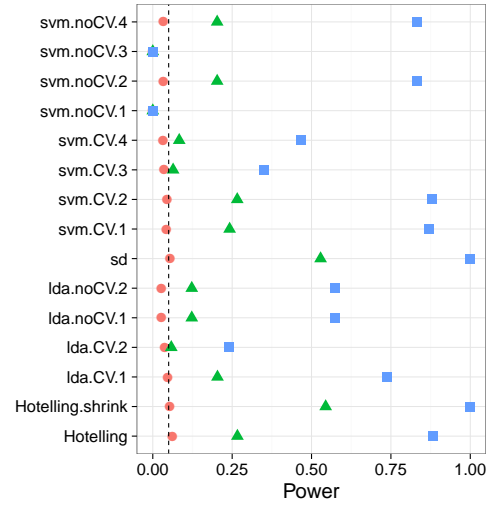


(b) 20-fold cross validation.  
Balanced folding

Figure 4: *Simulation details in Appendix B except the changes in the sub-captions.*

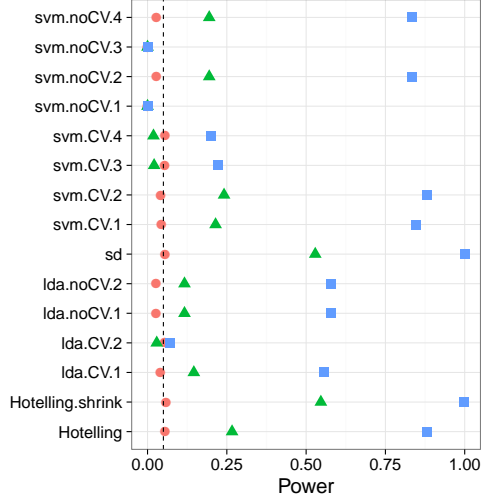


(a) **2-fold** cross validation.  
Unbalanced folding.

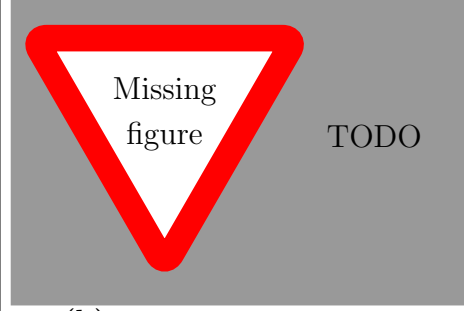


(b) **20-fold** cross validation.  
Unbalanced folding.

Figure 5: *Simulation details in Appendix B except the changes in the sub-captions.*

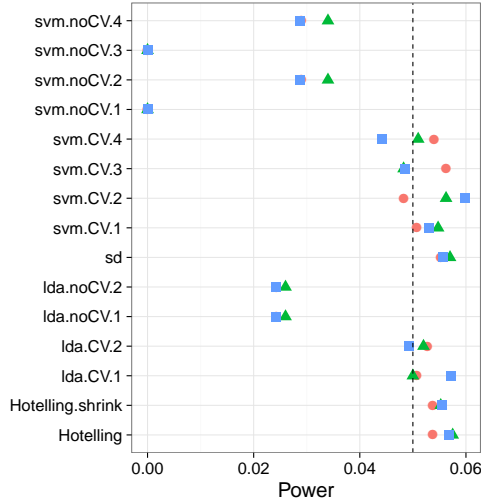


(a) **Scale Change:**  $\mathbf{x}_i = \eta_i * \mu^{\mathbf{y}_i^*}$   
so that the effect are a scale  
change.

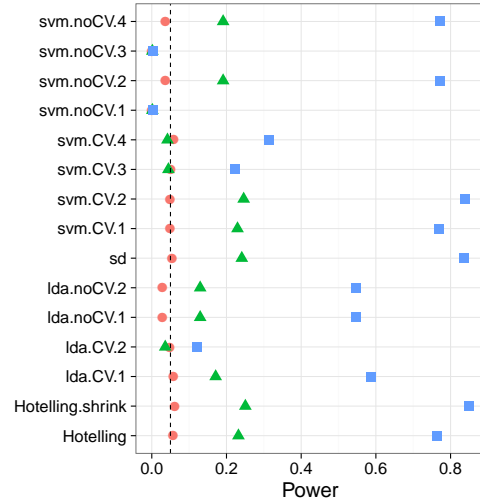


(b) **Heavytailed:**  $\eta_i$  is not  
 $p$ -variate Gaussian, but rather  
 $p$ -variate  $t$ , with  $df = 3$ .

Figure 6: *Simulation details in Appendix B except the changes in the sub-captions.*

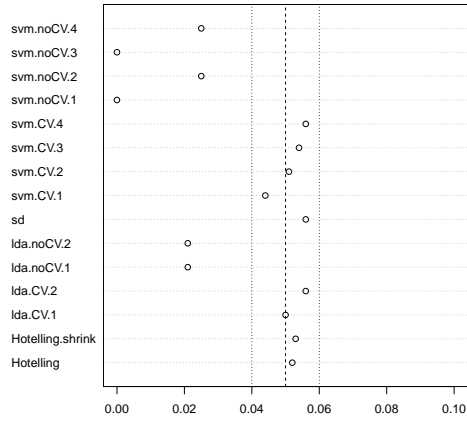

(a) **Low-Dimension:** False positive rates for  $n = 40$ .

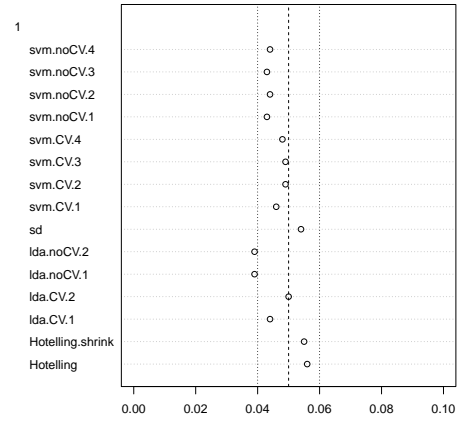


(b) **High-Dimension:** False positive rates for  $n = 400$ .

*Figure 7: Simulation details in Appendix B except the changes in the sub-captions.*



(a) **High-Dimension, local alternative:**  $n = 400$ ,  
 $\mu \in \frac{\sqrt{40}}{\sqrt{400}} \times \{0, 1/4, 1/2\}$ .

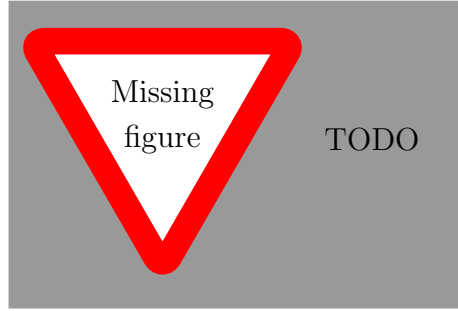

(b) **AR(1) dependence:**  
 $\Sigma_{k,l} = \rho^{|k-l|}; \rho = 0.8$ .