Postman Basics

GET Requests

A GET request is a fundamental API method used to **retrieve data** from a specified resource on a server. It is arguably the most common HTTP method.

Basic Contexts for Using GET

Context	Purpose	Example Endpoint
Fetching a List of Resources	To get a collection of items (e.g., all users, all products, all blog posts).	`/users`
Retrieving a Single Resource	To get the details for a specific item, usually identified by an ID.	`/products/42`
Querying/Filtering Data	To fetch a subset of data based on specific criteria, passed as query parameters.	`/posts?category=tech&limit=10`
Checking Status	To check the operational status or version of an API.	`/status`

https://api.restful-api.dev/objects

Save | Share

GET https://api.restful-api.dev/objects Send

Docs | Params | Authorization | Headers (11) | Body | Scripts | Settings | Cookies

Query Params

Key	Value	Description	Bulk Edit
Key	Value	Description	

Body | Cookies | Headers (20) | Test Results

200 OK • 121 ms • 1.3 KB

JSON | Preview | Visualize


```
[
    {
        "id": "1",
        "name": "Google Pixel 6 Pro",
        "data": {
            "color": "Cloudy White",
            "capacity": "128 GB"
        }
    },
    {
        "id": "2",
        "name": "Apple iPhone 12 Mini, 256GB, Blue",
        "data": null
    },
    {
        "id": "3",
        "name": "Apple iPhone 12 Pro Max",
        "data": {
            "color": "Cloudy White",
            "capacity GB": 512
        }
    },
    {
        "id": "4",
        "name": "Apple iPhone 11, 64GB",
        "data": {
            "price": 389.99,
            "color": "Purple"
        }
    },
    {
```

Overview | GET https://api.restful-api.d | POST http://localhost:8070/

No environment

https://api.restful-api.dev/objects

Save | Share

GET https://api.restful-api.dev/objects?id=7 Send

Docs | Params | Authorization | Headers (9) | Body | Scripts | Settings | Cookies

none | form-data | x-www-form-urlencoded | raw | binary | GraphQL

This request does not have a body

Body | Cookies | Headers (20) | Test Results

200 OK · 1.31 s · 958 B

JSON | Preview | Visualize


```
[
    {
        "id": "7",
        "name": "Apple MacBook Pro 16",
        "data": {
            "year": 2019,
            "price": 1849.99,
            "CPU model": "Intel Core i9",
            "Hard disk size": "1 TB"
        }
    }
]
```

POST Request

POST Request

A POST request is used to **submit data** to a specified resource, typically resulting in the creation of a new resource or initiating an action. It requires a request body containing the data to be sent.

Basic Contexts for Using POST

Context	Purpose	Example Endpoint
Creating a Resource	To send data to the server to create a new entry (e.g., a new user, a new order, a new product).	/users
Submitting Forms	To send user-inputted data from a web form to the server for processing.	/contact
Uploading Files	To send file data to the server.	/upload

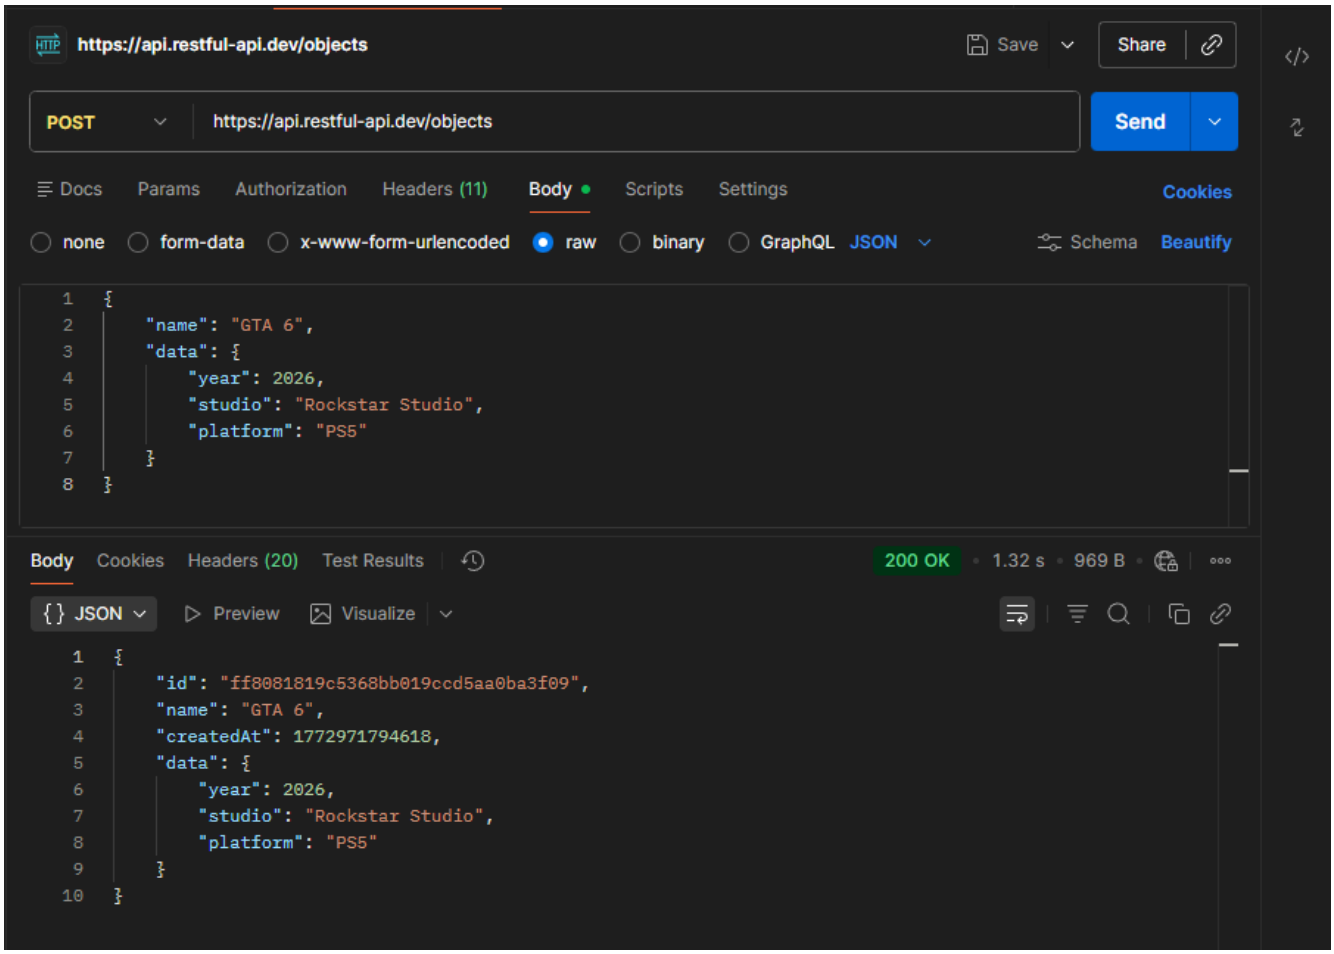

PUT Request

PUT Request

A PUT request is used to **update** a specified resource with new data. Unlike POST, PUT is typically used when you want to replace *all* current representations of the target resource with the uploaded content.

Basic Contexts for Using PUT

Context	Purpose	Example Endpoint
Updating a Full Resource	To replace an existing resource entirely with the provided data.	/products/42
Creating/Upserting a Resource	To create a resource at a specified URI if it does not exist, or update it if it does (Idempotent).	/users/john.doe

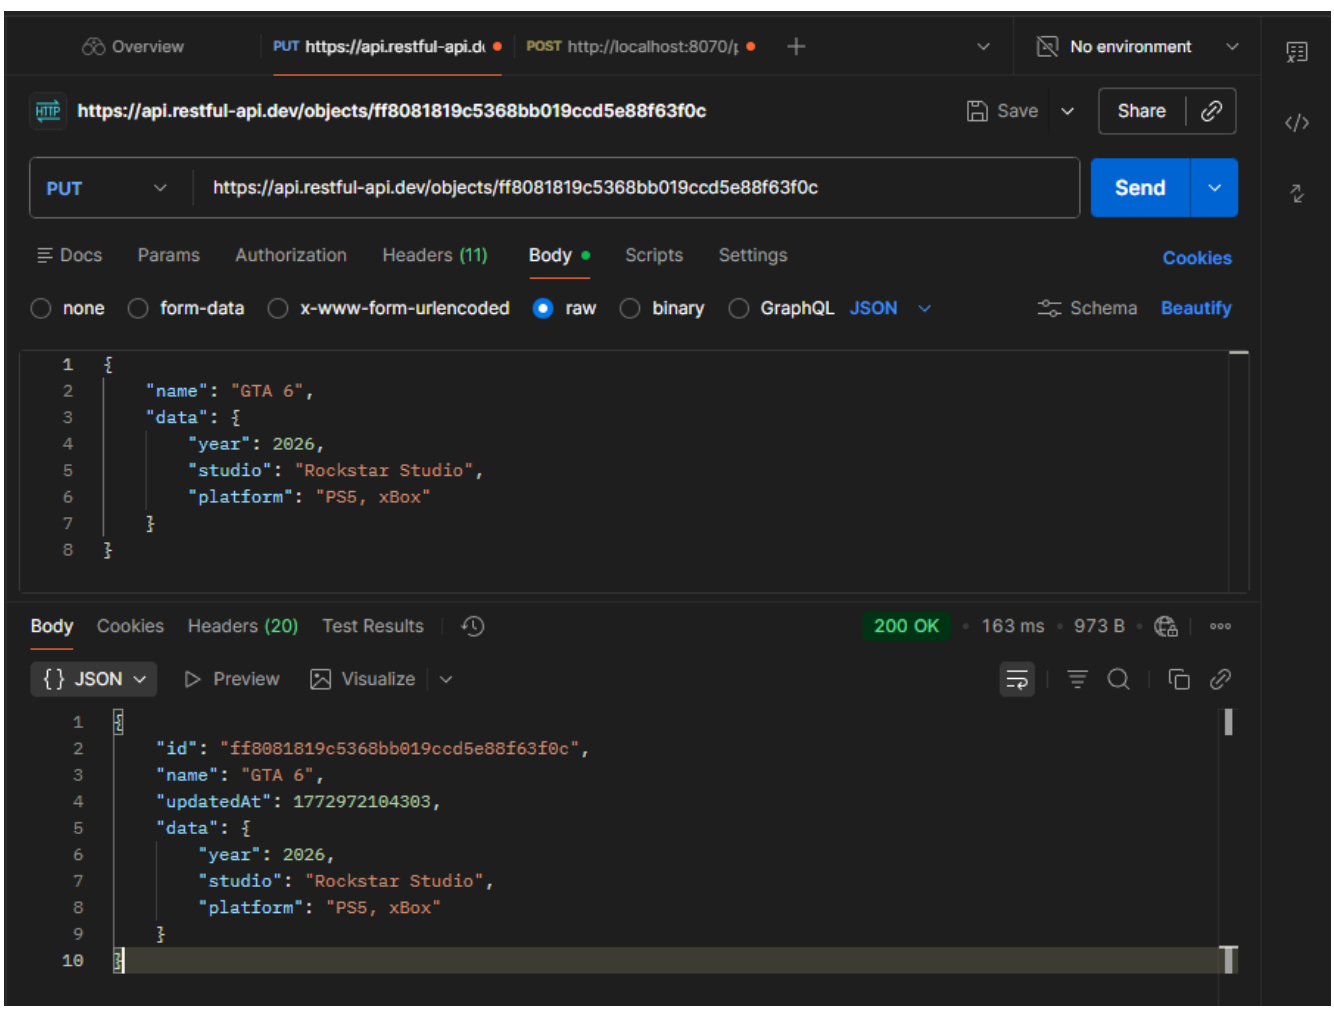

DELETE Request

DELETE Request

A DELETE request is used to **remove** a specified resource from the server. It is a straightforward method used for resource deletion.

Basic Contexts for Using DELETE
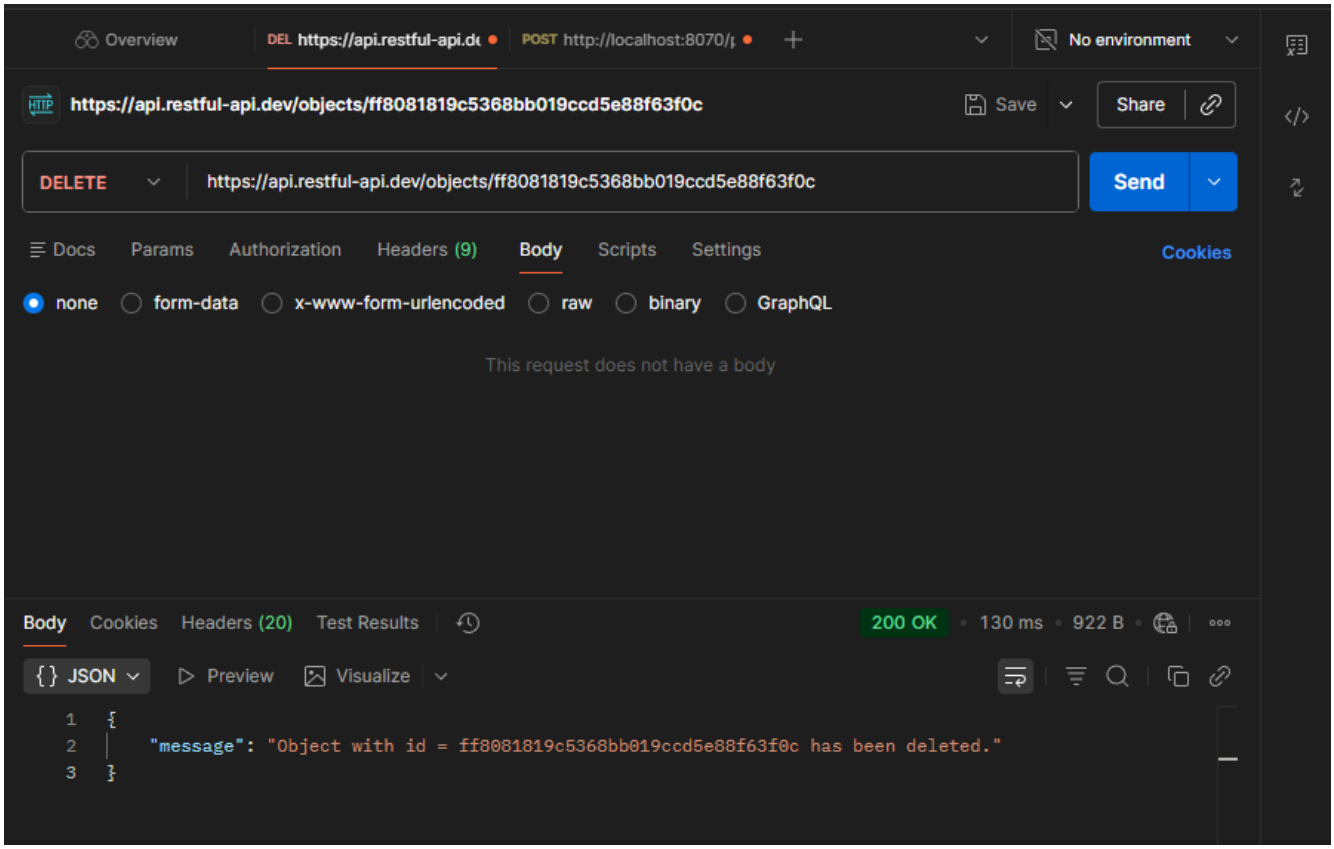
Context	Purpose	Example Endpoint
Deleting a Single Resource	To permanently remove a specific item, identified by its ID or URI.	/products/42
Deleting a Collection	To remove an entire collection of resources (use with caution).	/users