Cold compile time vs batch size · A1 · fp32 · L40S

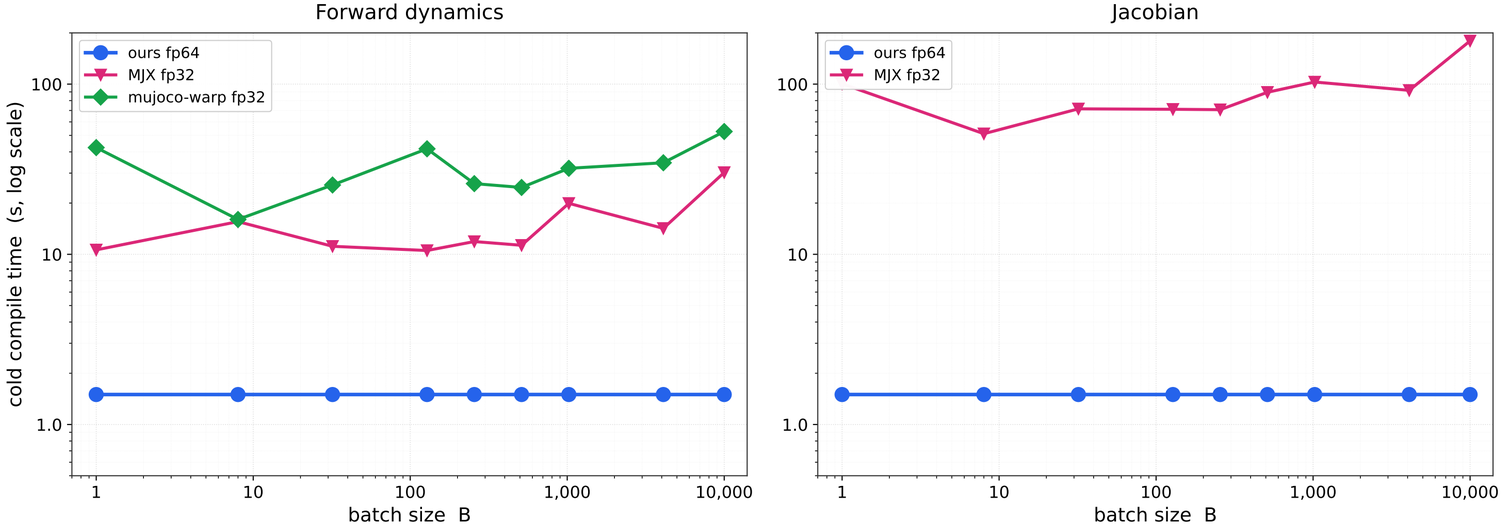

Each point = one cold-cache fresh-subprocess measurement. ours = NVCC compile of the data-driven LP kernel (1.5 s, batch-independent). MJX = XLA JIT through mjx.forward (or jacfwd thereof), retraced per shape. mujoco-warp = Warp module compile, batch-independent within a process. Contacts disabled in MJX/warp so the comparison is on smooth dynamics only.