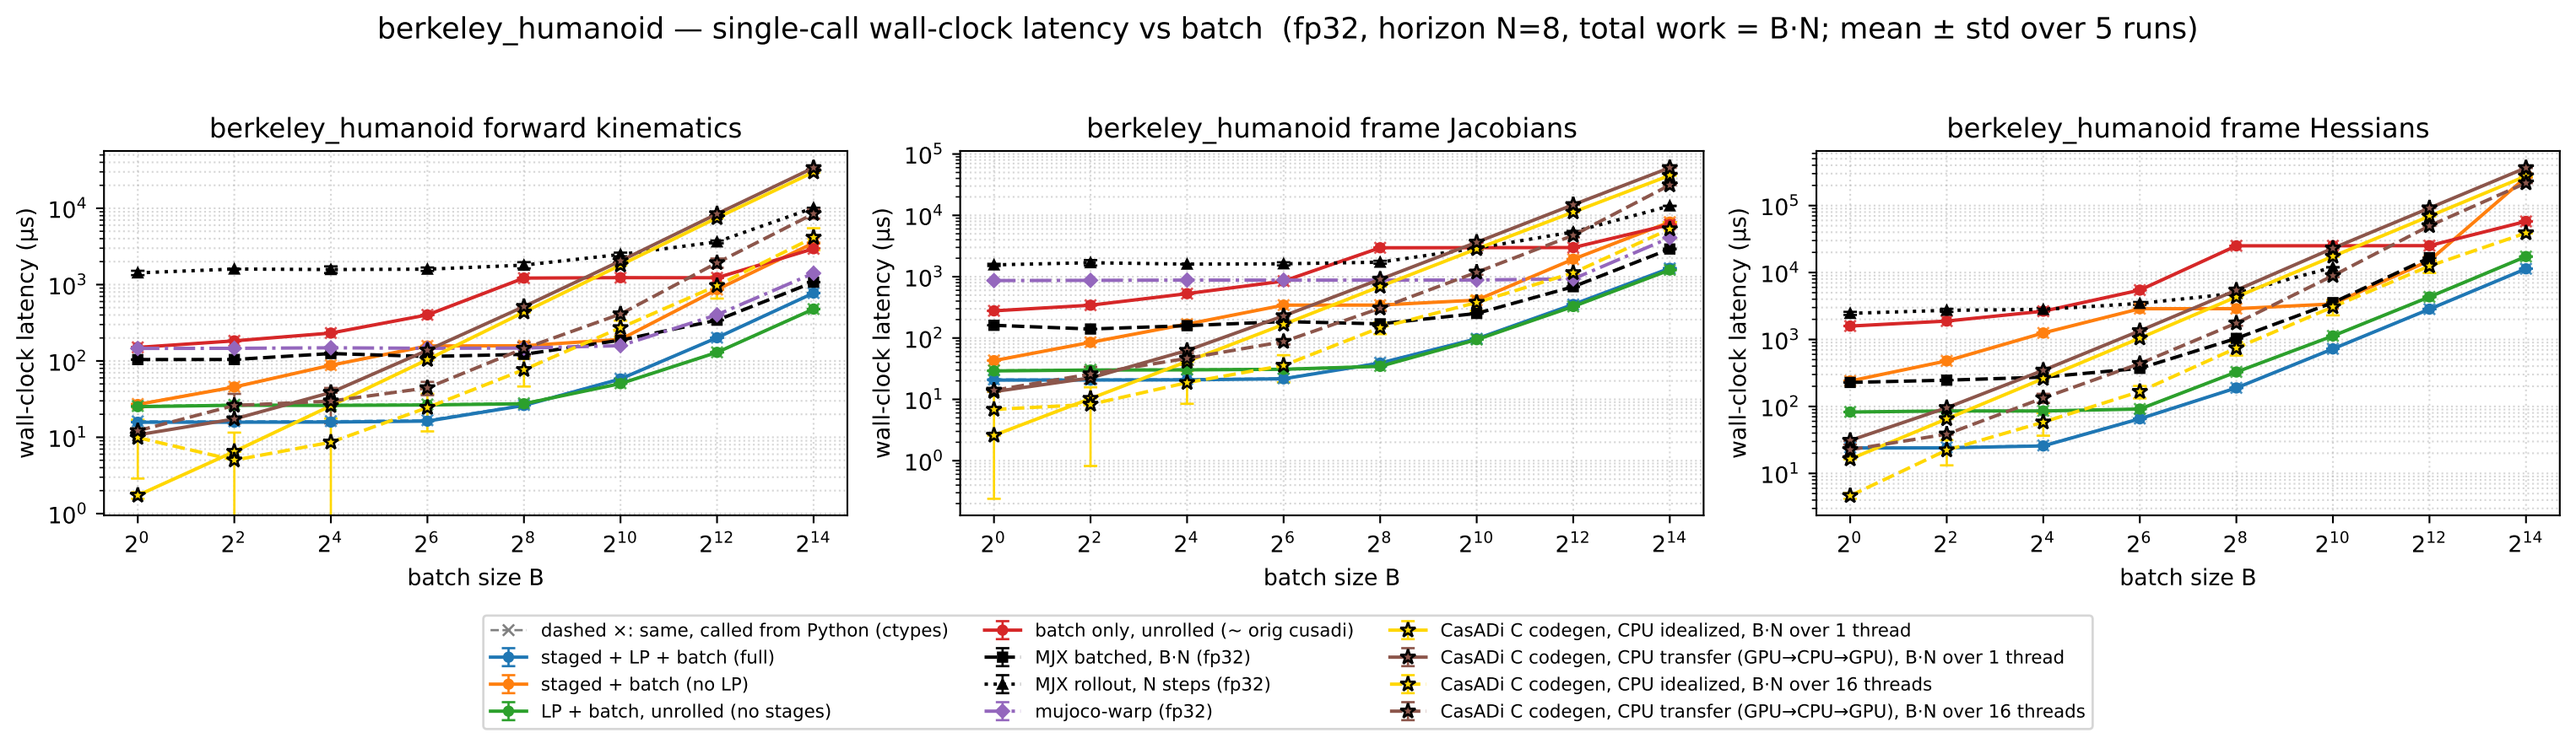

berkeley_humanoid — single-call wall-clock latency vs batch (fp32, horizon N=8, total work = B·N; mean ± std over 5 runs)
berkeley_humanoid forward kinematics
berkeley_humanoid frame Jacobians
berkeley_humanoid frame Hessians
wall-clock latency (µs)
batch size B
dashed ×: same, called from Python (ctypes)
staged + LP + batch (full)
staged + batch (no LP)
LP + batch, unrolled (no stages)
batch only, unrolled (~ orig cusadi)
MJX batched, B·N (fp32)
MJX rollout, N steps (fp32)
mujoco-warp (fp32)
CasADi C codegen, CPU idealized, B·N over 1 thread
CasADi C codegen, CPU transfer (GPU→CPU→GPU), B·N over 1 thread
CasADi C codegen, CPU idealized, B·N over 16 threads
CasADi C codegen, CPU transfer (GPU→CPU→GPU), B·N over 16 threads