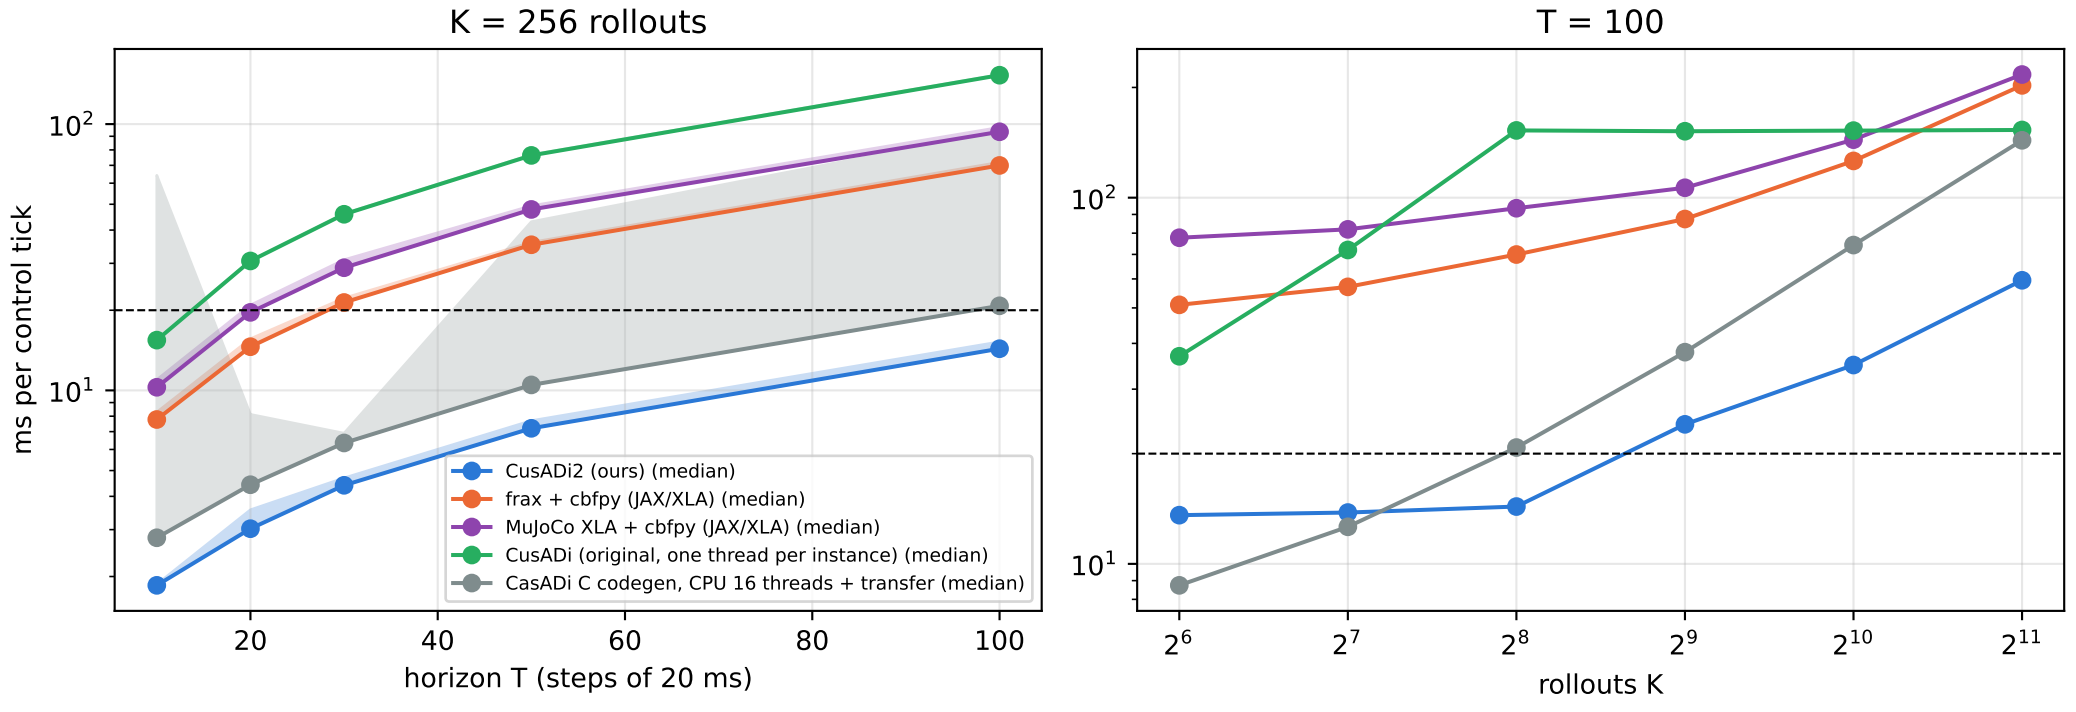
Safe MPPI tick time, one Panda, fp32, identical driver, five model evaluators (dashed: 20 ms budget)
K = 256 rollouts
T = 100
ms per control tick
horizon T (steps of 20 ms)
rollouts K
CusADi2 (ours) (median)
frax + cbfpy (JAX/XLA) (median)
MuJoCo XLA + cbfpy (JAX/XLA) (median)
CusADi (original, one thread per instance) (median)
CasADi C codegen, CPU 16 threads + transfer (median)