GPU-batched ABA Jacobian throughput · L40S · ours (LP fp64) vs MJX (fp32 / fp64) vs sequential cusadi

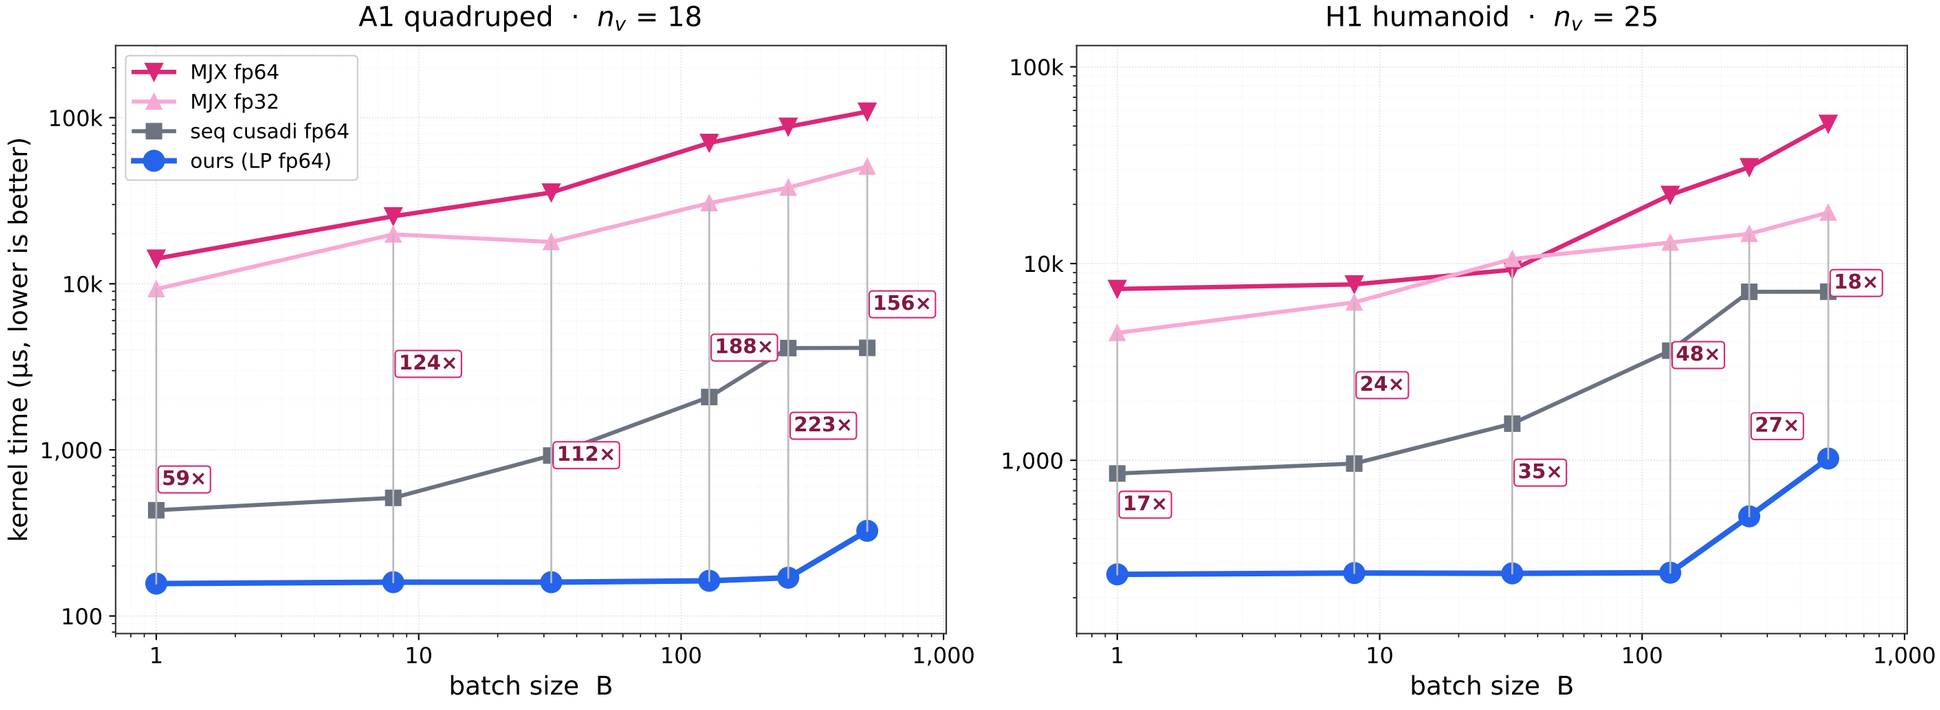

MJX = jax.jacfwd(mjx.forward), vmap'd, jit'd. LP = pinocchio.casadi analytical Carpentier derivatives, compiled through level-parallel CUDA kernel. Both: contacts disabled, same URDF, 10 warmup + 100 timed. MJX JIT compile time (30–160 s per shape) excluded from medians.