## 6520 Project

#### Minjia Jia and Joia Zhang

Fall 2023

TODO: Run with smaller learning rate Run with different beta\_0 Put graphs in final report

### Set up

```
rm(list=ls())
set.seed(6520)
library(ggplot2)
library(devtools)
```

## Loading required package: usethis

```
library(roxygen2)

# load our package onlinegrad from Github

# install_github("joiazhang/6520project", subdir="onlinegrad") # only need to run once for installation
library(onlinegrad)

# data dimensions
n = 1000 # sample size
p = 2000 # number of predictors

# hyperparamters
lr = 1e-4 # learning rate
beta_0 = rep(0, p) # weight initialization
# beta_0 = runif(p)
```

## **Plotting**

```
# plot prediction or estimation error
# X: nxp matrix where rows are observations, columns are predictors
# Y: nx1 vector response variable
# betahats: n x p matrix where each ith row is the coefficients for the ith iteration and the columns a
# beta: px1 vector of true beta coefficient
# title: string for the title of the plot
# type: string that is "prediction" or "estimation" for prediction error or estimation error
```

```
p = ncol(X)
  if ((type!="prediction") && (type!="estimation")) {
    stop("type parameter must be 'prediction' or 'estimation'")
  if (type=="prediction") {
   if (regression) {
      # prediction error
      err = colSums((X%*%t(betahats) - matrix(rep(Y, n), nrow=n, ncol=n, byrow=F))^2) # row of the insi
      ylab = "Prediction error"
    } else {
      # classification
      # predict y
      Z = as.matrix(rowSums(betahats*X))+bs
      Y_{pred} = 1/(1+1/exp(Z))
      Yhat = rep(NA, n)
      Yhat[Y_pred < 0.5] = 0
     Yhat[Y_pred >= 0.5] = 1
      # misclassification rate
      err = cumsum(Yhat!=Y)/(1:n)
     ylab = "Misclassification rate"
   }
  } else {
    # estimation error
   beta = t(beta)
   beta = matrix(rep(beta, n), nrow=n, byrow=T) # row combine n number of t(beta)'s
   err = sqrt(rowSums((betahats - beta)^2))
   ylab = "Estimation error"
  err = as.matrix(err)
  plot(err, xlab="Iteration", ylab=ylab, main=title)
 return(err)
# plot last iteration of betahat for nonzero vs zero indexes, true beta overlaid
# betahats: n x p matrix where each ith row is the coefficients for the ith iteration and the columns a
# beta: px1 vector of true beta coefficient
# nonzero_indexes: kx1 vector of indexes where the k-sparse vector true beta has nonzero values
# nonzero: boolean, if true plot only nonzero indexes (k indexes of the true k-sparse beta), otherwise
plot_betas = function(betahats, beta, nonzero_indexes, nonzero=T) {
 n = nrow(betahats)
  p = ncol(betahats)
 dat = data.frame("p"=1:p, "bethat_n"=betahats[n, ], "beta"=beta)
  if (nonzero) {
   dat = dat[nonzero_indexes, ]
   title = "Last iteration of bethat (orange) and true beta (black) at nonzero indexes"
  } else {
```

plot\_prediction\_error = function(betahats, beta, X, Y, title, type, regression=T, bs) {

# bs: vector of initial intercepts

n = nrow(X)

```
dat = dat[-nonzero_indexes, ]
  title = "Last iteration of bethat (orange) and true beta (black) at zero indexes"
}

ggplot(dat) + geom_point(aes(x=p, y=bethat_n), color="orange") +
  geom_point(aes(x=p, y=beta), color="black", shape=4) +
   xlab("p") +
   ylab("") +
  ggtitle(title)
}
```

## Regression

#### Generate data for linear regression

```
# simulate data: regression
# beta
k = round(0.05*p, 0) # number of nonzero coefficients
sd_beta = 0.01
nonzero_indexes = sample.int(n=p, size=k)
beta = rep(0, p)
beta[nonzero_indexes] = rnorm(n=k, mean=100, sd=sd_beta)
sum(which(beta !=0) != sort(nonzero_indexes)) # test that we made the right indexes nonzero
## [1] 0
beta = as.matrix(beta)
# x
X = matrix(rnorm(n=n*p, mean=0, sd=5), nrow=n)
# epsilon
E = matrix(rnorm(n=n, mean=0, sd=1), nrow=n)
# y
Y = X%*\%beta + E
# note that in the online setting, each t^th row of X and Y is for time t
```


#### **OGD**: regression

```
runtime_df = data.frame("n"=1:n)
pred_df = data.frame("n"=1:n) # prediction error
est_df = data.frame("n"=1:n) # estimation error
```

```
temp = my_OGD(X=X, Y=Y, lr=lr, beta_0=rep(0, p))
betahats = temp[[1]]
runtimes = temp[[2]]
runtime_df$ogd = runtimes


pred_df$ogd = plot_prediction_error(betahats, beta, X, Y, title="Online gradient descent (OGD)", type=""
```

# Online gradient descent (OGD)

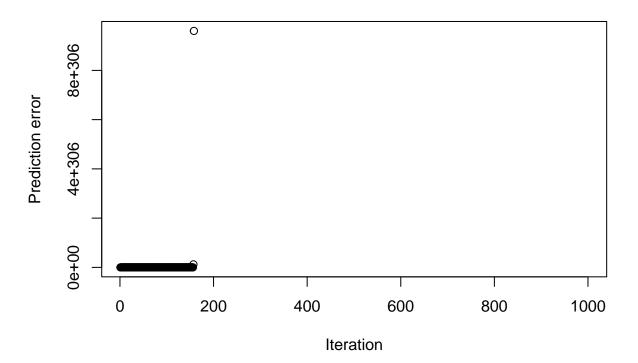

est\_df\$ogd = plot\_prediction\_error(betahats, beta, X, Y, title="Online gradient descent (OGD)", type="e


# Online gradient descent (OGD)

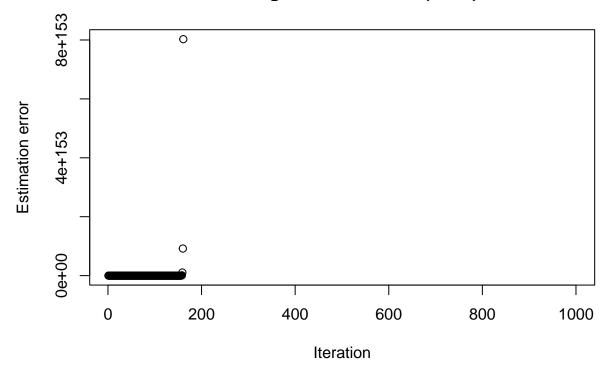

plot\_betas(betahats, beta, nonzero\_indexes, nonzero=T) # nonzero indexes

## Warning: Removed 100 rows containing missing values ('geom\_point()').


## Last iteration of bethat (orange) and true beta (black) at nonzero indexes

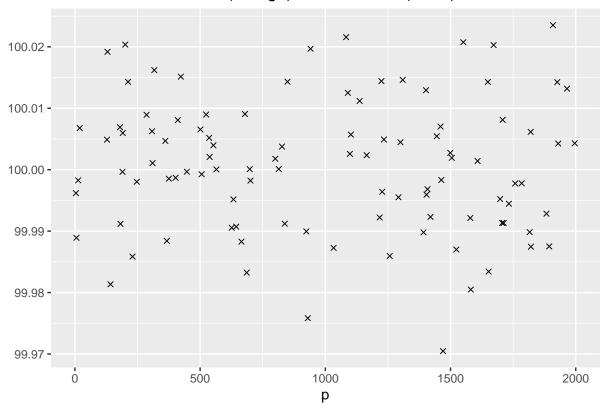

plot\_betas(betahats, beta, nonzero\_indexes, nonzero=F) # zero indexes

## Warning: Removed 1900 rows containing missing values ('geom\_point()').



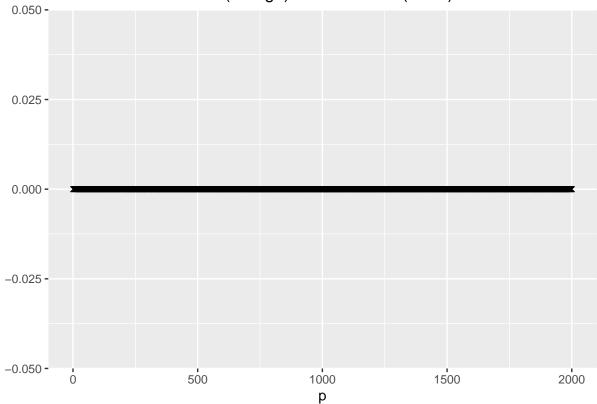


### Adagrad: regression

```
# Adagrad
temp = my_adagrad(X=X, Y=Y, lr=lr, beta_0=rep(0, p))
betahats = temp[[1]]
runtimes = temp[[2]]
runtime_df$adagrad = runtimes


pred_df$adagrad = plot_prediction_error(betahats, beta, X, Y, title="Adaptive gradient descent (Adagrad)
```

# **Adaptive gradient descent (Adagrad)**

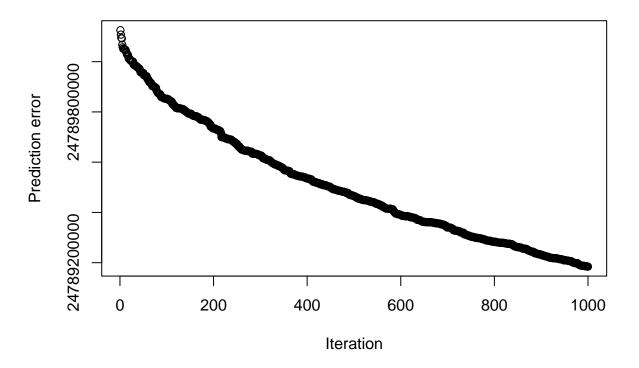


est\_df\$adagrad = plot\_prediction\_error(betahats, beta, X, Y, title="Adaptive gradient descent (Adagrad)

# **Adaptive gradient descent (Adagrad)**

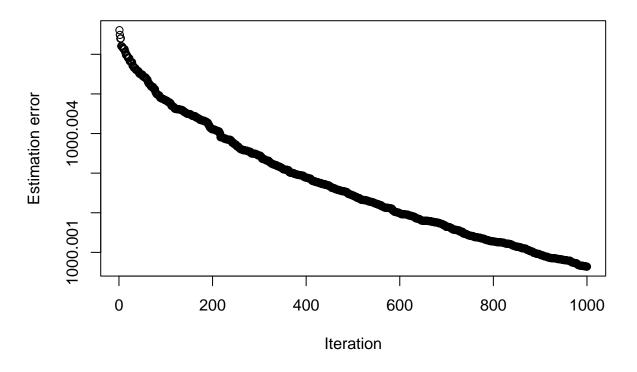


plot\_betas(betahats, beta, nonzero\_indexes, nonzero=T)

## Last iteration of bethat (orange) and true beta (black) at nonzero indexes

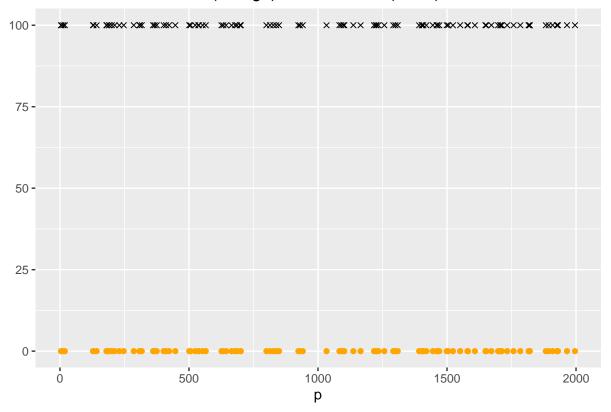

plot\_betas(betahats, beta, nonzero\_indexes, nonzero=F)

# Last iteration of bethat (orange) and true beta (black) at zero indexes

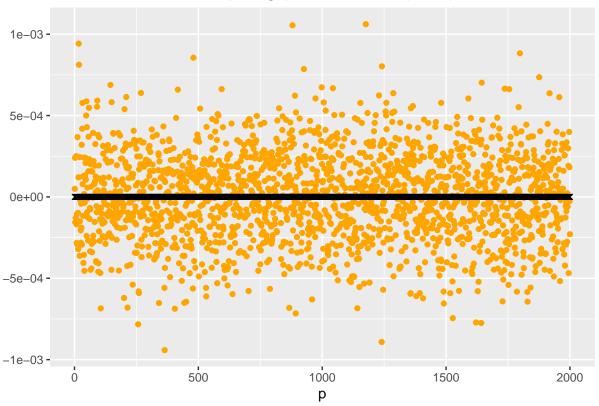


### Adam: regression

```
# Adam
temp = my_adam(X=X, Y=Y, lr=lr, beta_0=rep(0, p), rho_1=0.9, rho_2=0.999, epsilon=1e-8)
betahats = temp[[1]]
runtimes = temp[[2]]
runtime_df$adam = runtimes


pred_df$adam = plot_prediction_error(betahats, beta, X, Y, title="Adaptive moment estimation (Adam)", t
```

# Adaptive moment estimation (Adam)

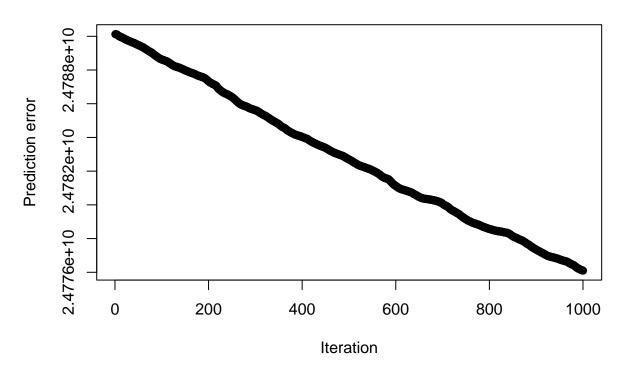


est\_df\$adam = plot\_prediction\_error(betahats, beta, X, Y, title="Adaptive moment estimation (Adam)", ty

# **Adaptive moment estimation (Adam)**

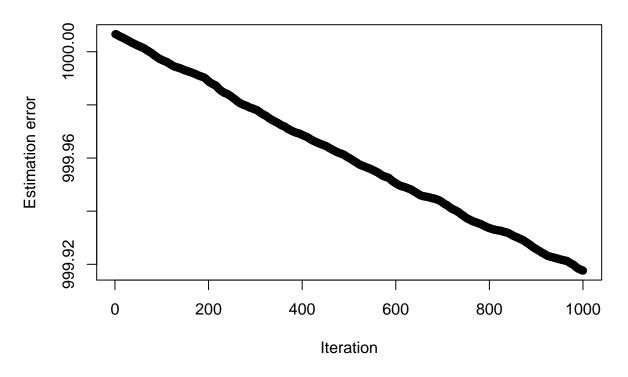


plot\_betas(betahats, beta, nonzero\_indexes, nonzero=T)

## Last iteration of bethat (orange) and true beta (black) at nonzero indexes

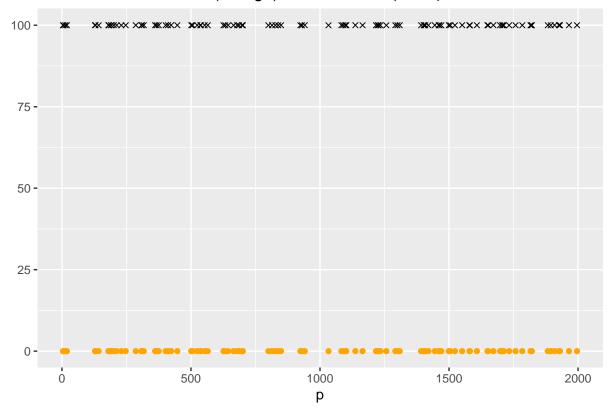

plot\_betas(betahats, beta, nonzero\_indexes, nonzero=F)

## Last iteration of bethat (orange) and true beta (black) at zero indexes

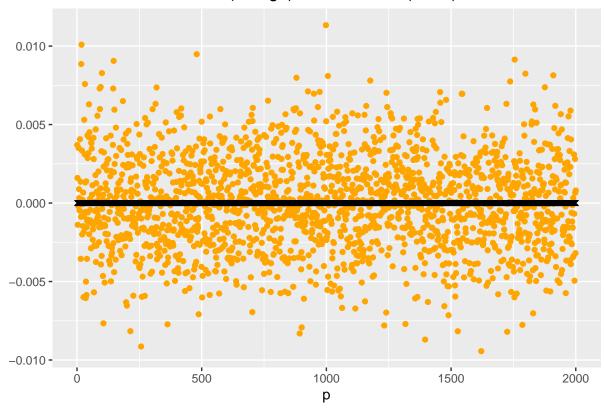


#### Performance comparison: regression

```
# plot prediction error for ogd, adagrad, adam
ggplot(pred_df, aes(x=n)) +
  geom_line(aes(y=ogd), color="red") +
  geom_line(aes(y=adagrad), color="blue") +
  geom_line(aes(y=adam), linetype="dashed") +
  xlab("Iteration") +
  ylab("") +
  ggtitle("Prediction error for OGD (red), Adagrad (blue), Adam (black)")
```

## Warning: Removed 681 rows containing missing values ('geom\_line()').

### Prediction error for OGD (red), Adagrad (blue), Adam (black)

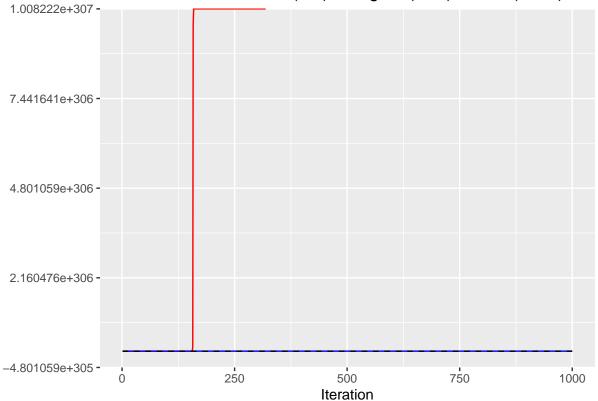

ggsave(filename="regression\_pred\_err.png", path="/Users/jwz34/Desktop/STSCI\_6520/Project/Plots/lr\_1e-4\_


```
## Saving 6.5 \times 4.5 in image
```

## Warning: Removed 681 rows containing missing values ('geom\_line()').

```
# plot estimation error for ogd, adagrad, adam
ggplot(est_df, aes(x=n)) +
  geom_line(aes(y=ogd), color="red") +
  geom_line(aes(y=adagrad), color="blue") +
  geom_line(aes(y=adam), linetype="dashed") +
  xlab("Iteration") +
  ylab("") +
  ggtitle("Estimation error for OGD (red), Adagrad (blue), Adam (black)")
```

## Warning: Removed 680 rows containing missing values ('geom\_line()').

### Estimation error for OGD (red), Adagrad (blue), Adam (black)

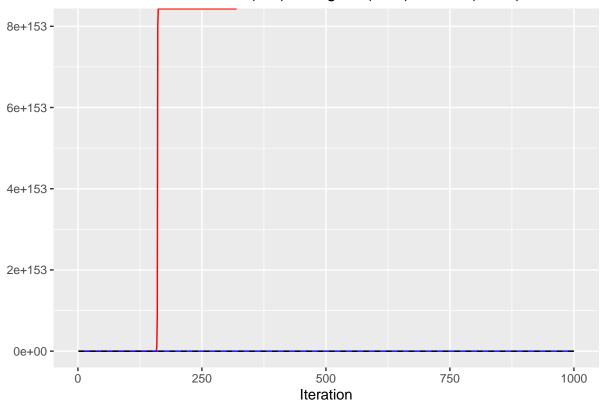


ggsave(filename="regression\_est\_err.png", path="/Users/jwz34/Desktop/STSCI\_6520/Project/Plots/lr\_1e-4\_z

```
## Saving 6.5 \times 4.5 in image
```

## Warning: Removed 680 rows containing missing values ('geom\_line()').

```
# plot runtime for ogd, adagrad, adam
ggplot(runtime_df, aes(x=n)) +
  geom_line(aes(y=ogd), color="red") +
  geom_line(aes(y=adagrad), color="blue") +
  geom_line(aes(y=adam), linetype="dashed") +
  xlab("Iteration") +
  ylab("") +
  ggtitle("Runtime for OGD (red), Adagrad (blue), Adam (black)")
```

## Runtime for OGD (red), Adagrad (blue), Adam (black)

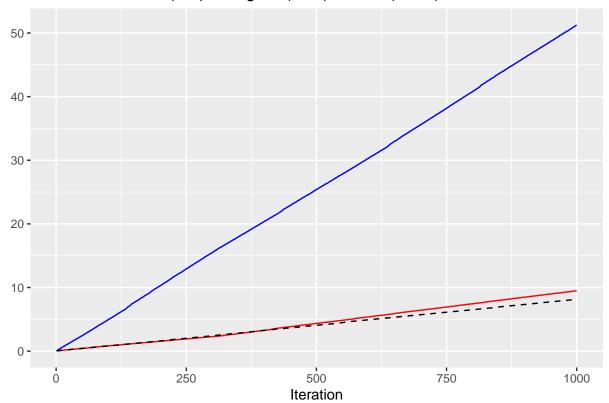


ggsave(filename="regression\_runtime.png", path="/Users/jwz34/Desktop/STSCI\_6520/Project/Plots/lr\_1e-4\_z

#### ## Saving 6.5 x 4.5 in image

```
conv_df = data.frame("n"=1:n) # plot convergence
conv_df\u00e9err_ogd = pred_df\u00e9ogd
conv_df\u00e9err_adagrad = pred_df\u00e9adagrad
conv_df\u00e9err_adam = pred_df\u00e9adam
conv_df\u00e9time_ogd = runtime_df\u00e9ogd
conv_df\u00e9time_adagrad = runtime_df\u00e9adagrad
conv_df\u00e9time_adam = runtime_df\u00e9adagrad
conv_df\u00e9time_adam = runtime_df\u00e9adam
# plot convergence for ogd, adagrad, adam
ggplot(conv_df) +
    geom_line(aes(x=time_ogd, y=err_ogd), color="red") +
    geom_line(aes(x=time_adagrad, y=err_adagrad), color="blue") +
    geom_line(aes(x=time_adam, y=err_adam), linetype="dashed") +
    xlab("Runtime") +
    ylab("Prediction error") +
    ggtitle("Convergence for OGD (red), Adagrad (blue), Adam (black)")
```

## Warning: Removed 681 rows containing missing values ('geom\_line()').

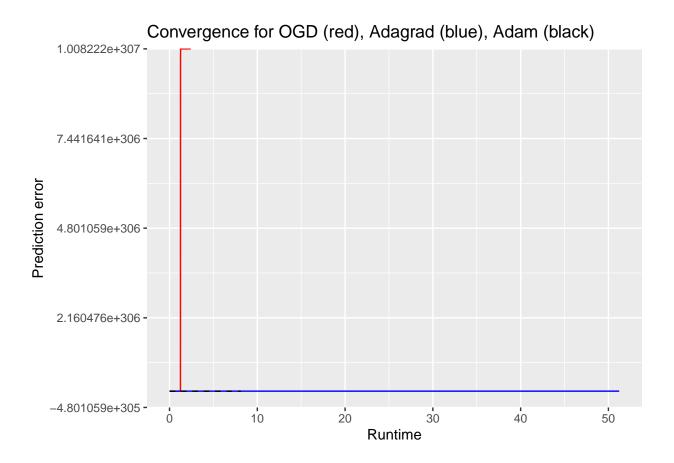

ggsave(filename="regression\_convergence.png", path="/Users/jwz34/Desktop/STSCI\_6520/Project/Plots/lr\_1e

```
## Saving 6.5 \times 4.5 in image
```

## Warning: Removed 681 rows containing missing values ('geom\_line()').

#### Classification

#### Generate data for logistic regression

```
# simulate data: classification
# X, beta same as above
probs = 1/(1+exp(-X%*%beta))
Y = rbinom(n=n, size=1, prob = probs) # Bernoulli
```


#### **OGD**: classification

```
runtime_df = data.frame("n"=1:n)
pred_df = data.frame("n"=1:n) # prediction error
est_df = data.frame("n"=1:n) # estimation error
```

```
# OGD
temp = my_OGD(X=X, Y=Y, lr=lr, beta_0=rep(0, p), regression=F)
betahats = temp[[1]]
runtimes = temp[[2]]
bs = temp[[3]]
runtime_df$ogd = runtimes


pred_df$ogd = plot_prediction_error(betahats, beta, X, Y, title="Online gradient descent (OGD)", type=""
```

## Online gradient descent (OGD)

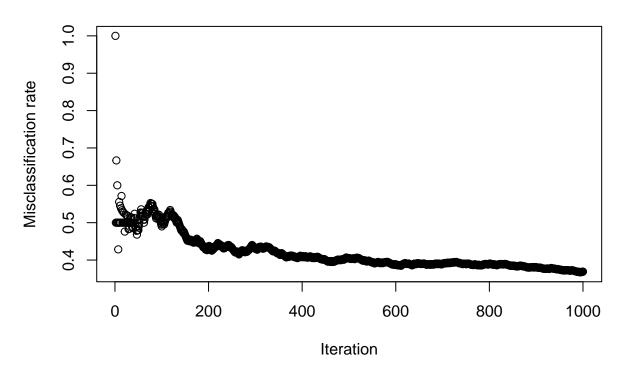


est\_df\$ogd = plot\_prediction\_error(betahats, beta, X, Y, title="Online gradient descent (OGD)", type="e

# Online gradient descent (OGD)

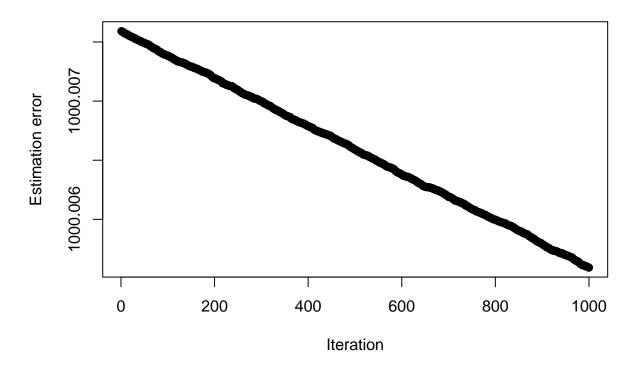


plot\_betas(betahats, beta, nonzero\_indexes, nonzero=T) # nonzero indexes

## Last iteration of bethat (orange) and true beta (black) at nonzero indexes

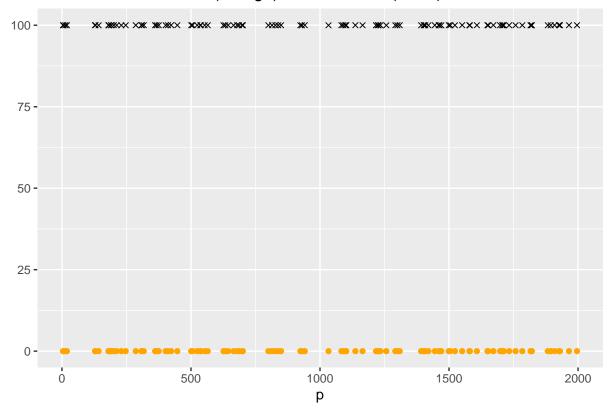

plot\_betas(betahats, beta, nonzero\_indexes, nonzero=F) # zero indexes


## Last iteration of bethat (orange) and true beta (black) at zero indexes

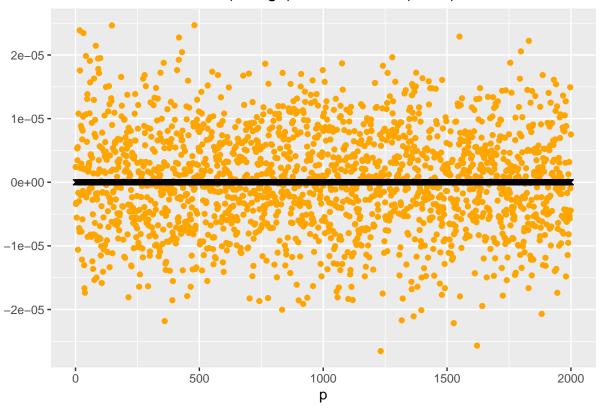

## Adagrad: classification


```
# Adagrad
temp = my_adagrad(X=X, Y=Y, lr=lr, beta_0=rep(0, p), regression=F)
betahats = temp[[1]]
runtimes = temp[[2]]
runtime_df$adagrad = runtimes
pred_df$adagrad = plot_prediction_error(betahats, beta, X, Y, title="Adaptive gradient descent (Adagrad)
```

# **Adaptive gradient descent (Adagrad)**

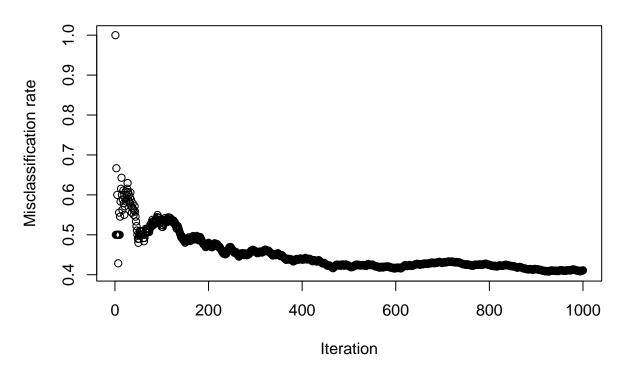


est\_df\$adagrad = plot\_prediction\_error(betahats, beta, X, Y, title="Adaptive gradient descent (Adagrad)

# **Adaptive gradient descent (Adagrad)**

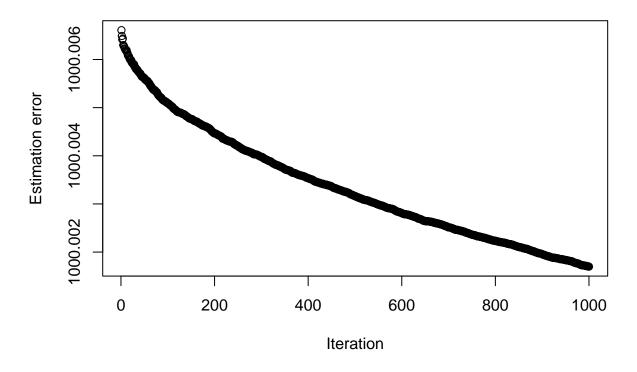


plot\_betas(betahats, beta, nonzero\_indexes, nonzero=T)

## Last iteration of bethat (orange) and true beta (black) at nonzero indexes

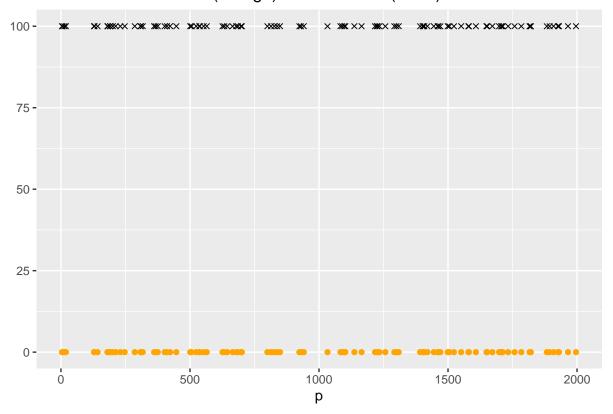

plot\_betas(betahats, beta, nonzero\_indexes, nonzero=F)

## Last iteration of bethat (orange) and true beta (black) at zero indexes

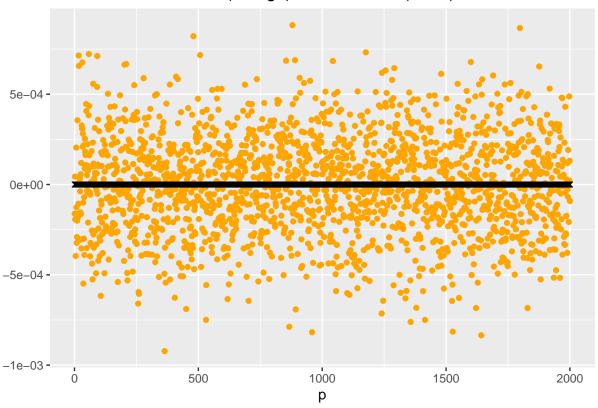


### Adam: classification

```
# Adam
temp = my_adam(X=X, Y=Y, lr=lr, beta_0=rep(0, p), rho_1=0.9, rho_2=0.999, epsilon=1e-8, regression=F)
betahats = temp[[1]]
runtimes = temp[[2]]
runtime_df$adam = runtimes


pred_df$adam = plot_prediction_error(betahats, beta, X, Y, title="Adaptive moment estimation (Adam)", total title to the prediction of the prediction of
```

# Adaptive moment estimation (Adam)

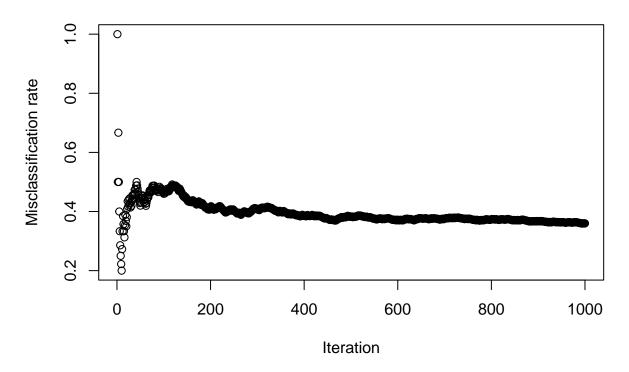


est\_df\$adam = plot\_prediction\_error(betahats, beta, X, Y, title="Adaptive moment estimation (Adam)", ty

# **Adaptive moment estimation (Adam)**

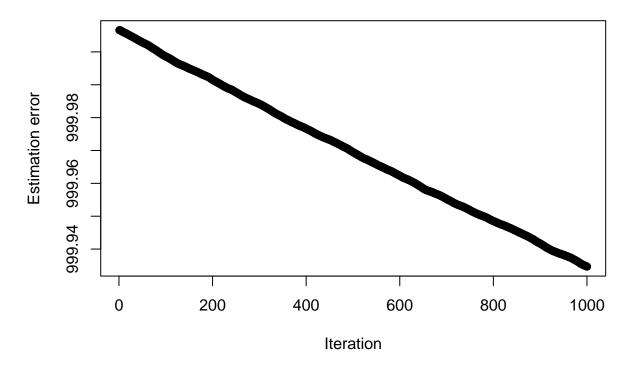


plot\_betas(betahats, beta, nonzero\_indexes, nonzero=T)

## Last iteration of bethat (orange) and true beta (black) at nonzero indexes

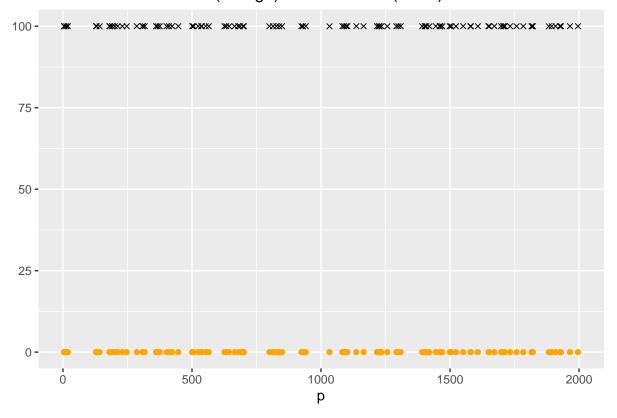

plot\_betas(betahats, beta, nonzero\_indexes, nonzero=F)


## Last iteration of bethat (orange) and true beta (black) at zero indexes

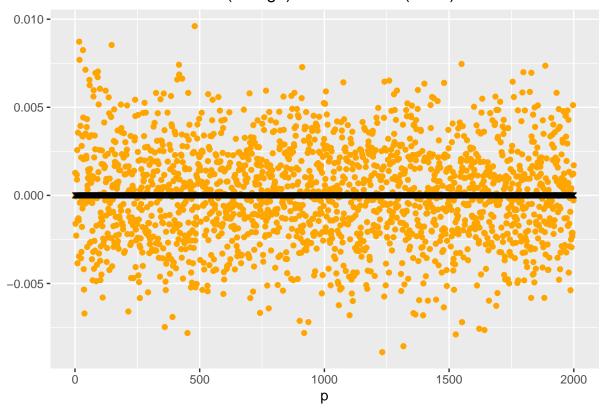

#### Performance comparison: classification

```
# plot prediction error for ogd, adagrad, adam
ggplot(pred_df, aes(x=n)) +
  geom_line(aes(y=ogd), color="red") +
  geom_line(aes(y=adagrad), color="blue") +
  geom_line(aes(y=adam), linetype="dashed") +
  xlab("Iteration") +
  ylab("") +
  ggtitle("Prediction error for OGD (red), Adagrad (blue), Adam (black)")
```


## Prediction error for OGD (red), Adagrad (blue), Adam (black)

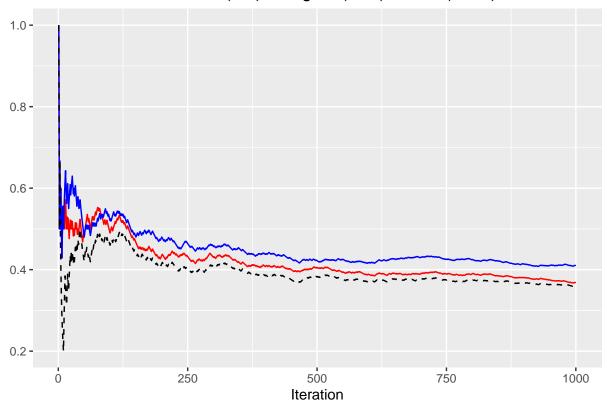

ggsave(filename="classification\_pred\_err.png", path="/Users/jwz34/Desktop/STSCI\_6520/Project/Plots/lr\_1

```
# plot estimation error for ogd, adagrad, adam
ggplot(est_df, aes(x=n)) +
  geom_line(aes(y=ogd), color="red") +
  geom_line(aes(y=adagrad), color="blue") +
  geom_line(aes(y=adam), linetype="dashed") +
  xlab("Iteration") +
  ylab("") +
  ggtitle("Estimation error for OGD (red), Adagrad (blue), Adam (black)")
```


### Estimation error for OGD (red), Adagrad (blue), Adam (black)

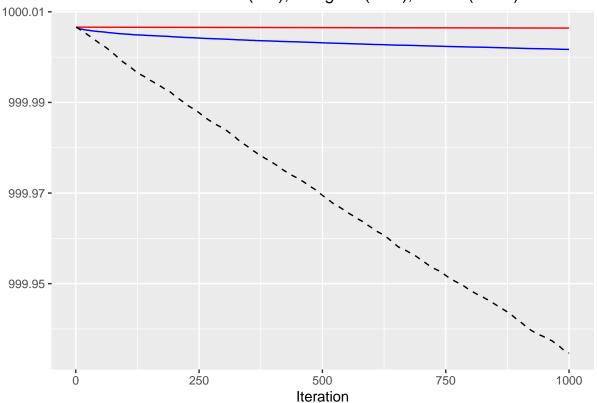

ggsave(filename="classification\_est\_err.png", path="/Users/jwz34/Desktop/STSCI\_6520/Project/Plots/lr\_1e

```
# plot runtime for ogd, adagrad, adam
ggplot(runtime_df, aes(x=n)) +
  geom_line(aes(y=ogd), color="red") +
  geom_line(aes(y=adagrad), color="blue") +
  geom_line(aes(y=adam), linetype="dashed") +
  xlab("Iteration") +
  ylab("(s)") +
  ggtitle("Runtime for OGD (red), Adagrad (blue), Adam (black)")
```


### Runtime for OGD (red), Adagrad (blue), Adam (black)

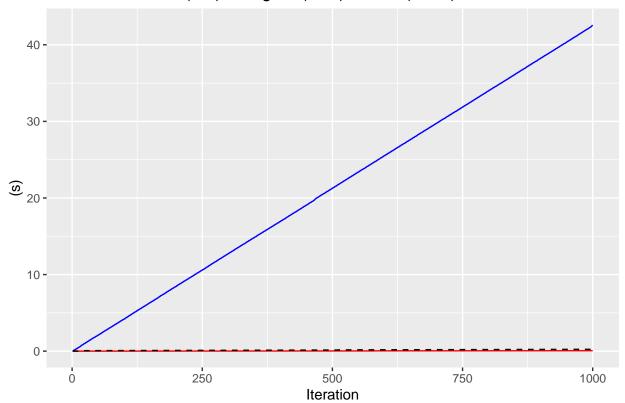

 ${\tt ggsave(filename="classification\_runtime.png", path="/Users/jwz34/Desktop/STSCI\_6520/Project/Plots/lr\_1eslines.png", path="/Users/jwz34/Desktop/STSCI\_65$ 

```
conv_df = data.frame("n"=1:n) # plot convergence
conv_df$err_ogd = pred_df$ogd
conv_df$err_adagrad = pred_df$adagrad
conv_df$err_adam = pred_df$adam
conv_df$time_ogd = runtime_df$ogd
conv_df$time_adagrad = runtime_df$adagrad
conv_df$time_adam = runtime_df$adam

# plot convergence for ogd, adagrad, adam
ggplot(conv_df) +
    geom_line(aes(x=time_ogd, y=err_ogd), color="red") +
    geom_line(aes(x=time_adagrad, y=err_adagrad), color="blue") +
    geom_line(aes(x=time_adam, y=err_adam), linetype="dashed") +
    xlab("Runtime (s)") +
    ylab("Prediction error") +
    ggtitle("Convergence for OGD (red), Adagrad (blue), Adam (black)")
```

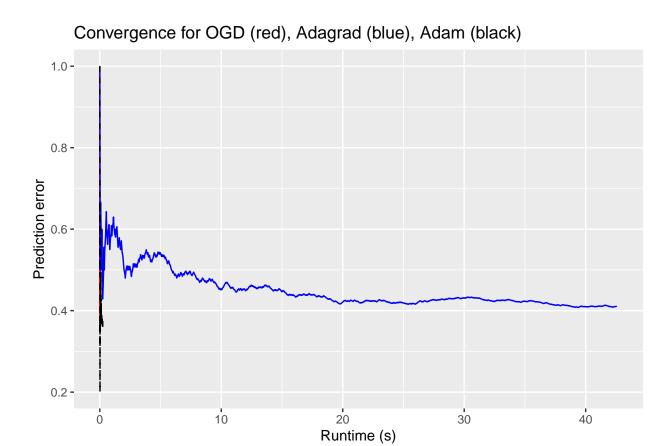

ggsave(filename="classification\_convergence.png", path="/Users/jwz34/Desktop/STSCI\_6520/Project/Plots/leading.