Business Requirements Document – TFA Settings

TaskFlow – Intelligent Task Allocation & Tracking System

Document: Business Requirements Document · **Version:** 1.0 · **Status:** Approved
Project type: Personal Project (Skill Development) · **Date:** 31-Oct-2026
Author: Jojo George (jojogeorge3344@gmail.com)
Module: Settings · **Sub-module:** 06.3 TFA Settings · **Code:** TFAS
© 2026 Jojo George. All rights reserved.

Document Control

Revision History

Version	Date	Author	Summary of changes
1.0	31-Oct-2026	Jojo George	Initial version
1.0	31-Oct-2026	Jojo George	Approved and signed off; baselined as the agreed business requirements.

Approvals / Sign-off

Role	Name	Decision	Date
Product owner	Jojo George	Approved	31-Oct-2026
Reviewer	Jojo George	Approved	31-Oct-2026

Related Documents

Document	Location
Overall BRD (roles, global rules, global NFRs)	`../../00-Overall/BRD-TaskFlow-Overall.md`
TFA Assistant BRD (uses this configuration)	`../../08-TFA-Assistant/08.1-Assistant/BRD-Assistant.md`
Development Plan (screen-wise)	*Not applicable – not in the original 20-screen plan.*
FRD	`../../../FRD/06-Settings/06.3-TFA-Settings/FRD-TFA-Settings.md`
HLD / LLD	`../../../HLD/06-Settings/06.3-TFA-Settings/HLD-TFA-Settings.md`, `../../../LLD/06-Settings/06.3-TFA-Settings/LLD-TFA-Settings.md`

Index

1. Project Overview
2. Stakeholders & User Roles
3. Scope
4. Business Process / Workflows
5. Screen-by-Screen Requirements
6. Business Rules
7. Non-Functional Requirements
8. Data Requirements
9. Integrations & External Dependencies
10. Reporting Requirements
11. Recommended Technology Stack (optional)
12. Assumptions, Constraints & Dependencies
13. Risks
14. Acceptance Criteria
15. Requirements Traceability Matrix
16. Project Deliverables
17. Glossary
18. Project Summary

1. Project Overview

1.1 Introduction

TFA Settings is the screen where an authorized user chooses the AI model and server behind TFA, the TaskFlow Assistant. It supports a free local server (Ollama) and two cloud services (Google Gemini and OpenAI GPT), lets the user add and remove models, stores API keys protected, and runs a connection test before users rely on the assistant.

1.2 Business Problem / Current Situation

An AI assistant is only useful when it is connected to a working model. Without a settings screen the provider, model and API key would have to be written into configuration files by a developer, keys could leak to the browser or the logs, and nobody could check whether the connection works until a user's question failed.

1.3 Project Objectives

ID	Objective	Success measure
OBJ-TFAS-01	Let the organization choose which AI provider and model TFA uses	Provider and model are chosen and saved from the screen; TFA offers only that configuration
OBJ-TFAS-02	Keep API keys safe	Keys are stored protected and never shown again; only "key set" and the last four characters are visible
OBJ-TFAS-03	Confirm the connection works before users depend on it	One click runs a test and shows a plain-language result

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

1.4 Expected Benefits

- The organization can run TFA free on its own server, or use a cloud service when it prefers.
- API keys cannot be read back by anyone, including Administrators.
- Problems (wrong key, server not running, rate limit) are found and explained before users meet them.
- Everyone uses the one model the Administrator chose.

---

2. Stakeholders & User Roles

2.1 Stakeholders

Stakeholder	Interest / responsibility
Project owner (Jojo George)	Defines priorities, approves this BRD
Administrator	Chooses and maintains the AI configuration and keys
TFA users (all roles allowed to chat)	Depend on a working, configured model
AI provider (Ollama, Google, OpenAI)	Answers TFA's requests

2.2 User Roles

Role	Description	Main responsibilities	Access level
Administrator	Manages the whole system	View, edit, test and remove models	Organization (full screen)
Manager	Assigns and monitors tasks	None on this screen	None by default
Employee	Works on assigned tasks	None on this screen	None by default
Custom role	Role defined on Role Configuration	As granted	`settings.ai.view` opens the screen; `settings.ai.edit`, `settings.ai.test` and `settings.ai.model.remove` allow the actions

---

3. Scope

3.1 In Scope

- Viewing the three providers, their status and whether a key is saved.
- Choosing the model and server TFA uses, with linked Model and Server lists.
- Adding a new model name and removing an added model.
- Setting the Ollama server address.
- Entering, keeping or removing a Gemini or OpenAI API key.
- Testing the connection to a provider.

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

3.2 Out of Scope (this release)

- The TFA chat window itself – TFA Assistant BRD.
- AI providers other than Ollama, Google Gemini and OpenAI GPT.
- Usage or cost tracking of cloud providers.
- Installing models on the Ollama server (done outside TaskFlow).

3.3 Modules Overview

#	Module	Purpose	Screens
1	Settings → TFA Settings	Configuration of the AI model and server behind TFA	TFA Settings

Change from original BRD

Original BRD item	Current requirement
Not in original BRD	TFA Settings is a new screen, added with the TFA Assistant.
Original NFR 5.2 "Secure handling of email credentials"	The same principle applies to AI API keys: stored protected, never shown, never sent back to the browser.


4. Business Process / Workflows

4.1 Choose the Model and Save

Trigger: The Administrator sets up or changes TFA's model · **Actors:** Administrator, Custom role, System

Step	Actor / System	Action	Result
1	Administrator	Opens **Settings → TFA Settings**	Providers shown; the one in use is marked
2	Administrator	Picks a model (the server follows) or a server (the model follows); or **Add new model…** and types a name	Selection shown with "After you save, TFA will use …"
3	Administrator	Checks the Ollama server address, or pastes the cloud API key (empty keeps the saved key)	Form ready
4	Administrator	Clicks **Save TFA settings**	Values checked
5	System	Saves; switches the chosen server on and the others off, keeping their keys and models	Toast "TFA settings saved"
6	System	Offers only this configuration in the TFA window	Users chat with the chosen model

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

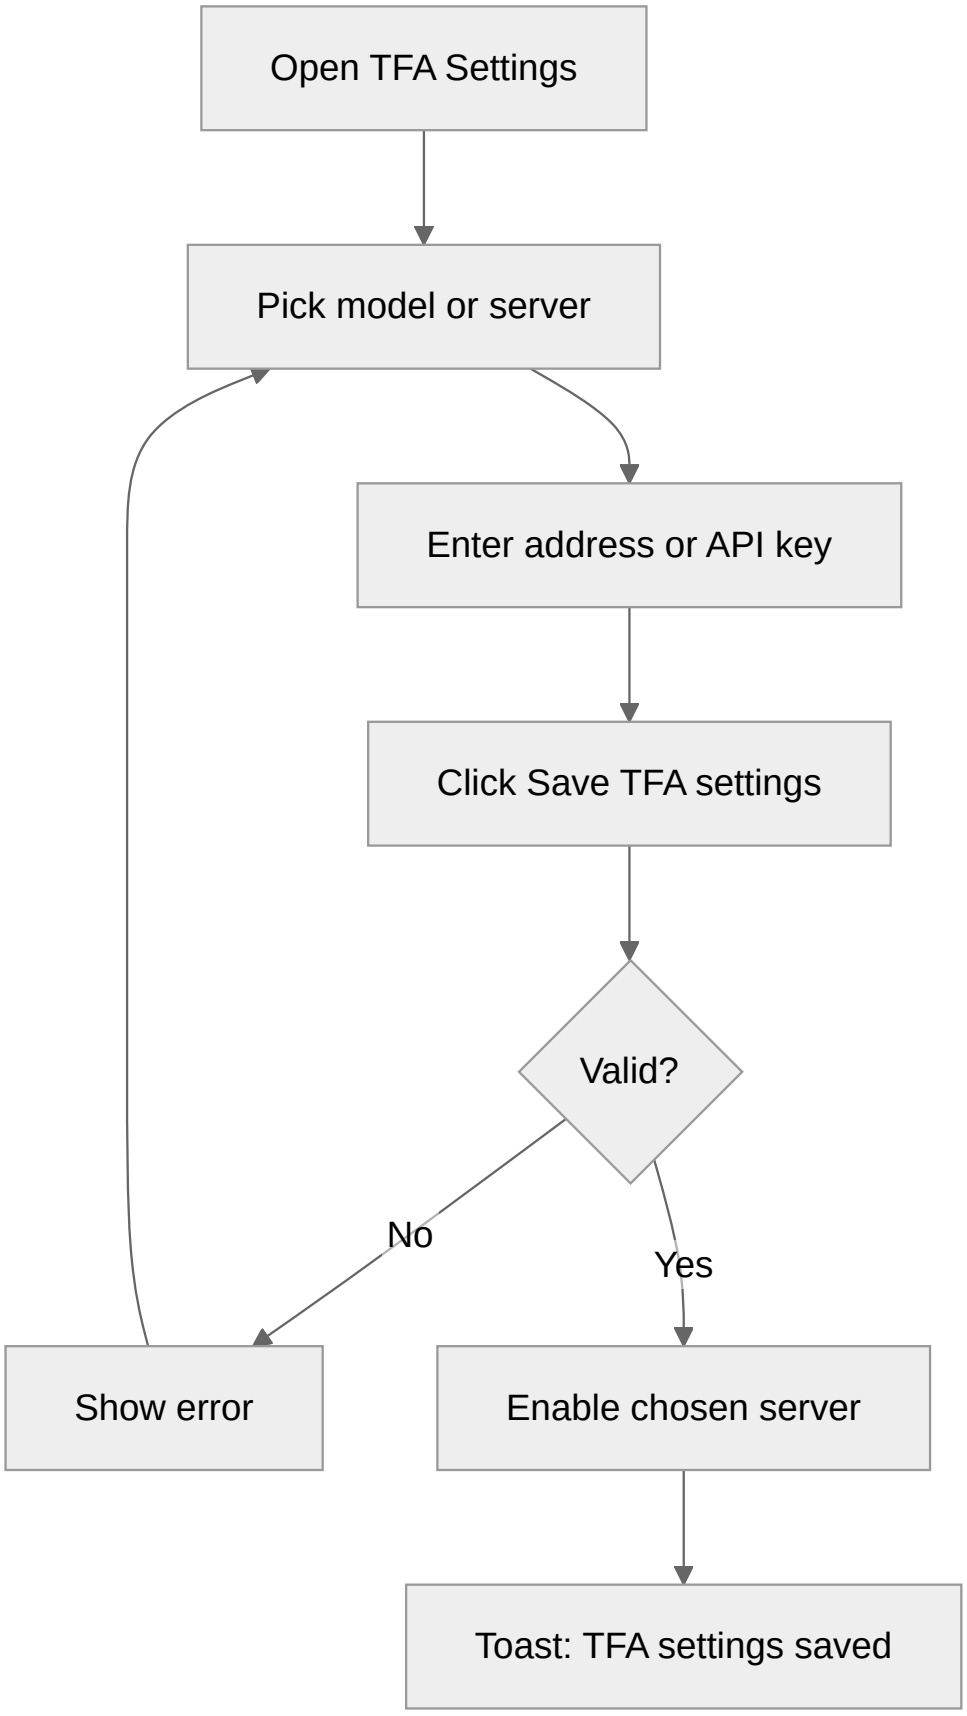

Example: The Administrator chooses `gemini-2.0-flash` (the Server list switches to "Google Gemini · generativelanguage.googleapis.com"), pastes a key ending in 1234 and saves. The card then shows "A key is saved (ends ...1234). Leave the box empty to keep it." and Ollama is switched off, but its address and models stay stored.

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

Exceptions / alternate flows:


- Address invalid: "The server address must be a valid http or https URL, and not a link-local or cloud metadata address."
- Key with spaces: "The API key cannot contain spaces."
- New key and **Remove the key** together: "Provide a new key or clear the key, not both."

4.2 Test the Connection

Trigger: The Administrator wants to check that a provider works · **Actors:** Administrator, Custom role, System, AI provider

Step	Actor / System	Action	Result
1	Administrator	Clicks **Test connection** on the provider card	Test starts
2	System	Saves unsaved changes first, if any	Configuration up to date
3	System	Sends one short request ("Reply with OK.") to the provider	Provider answers or fails
4	System	Shows "The connection works." or a plain message explaining the problem	Administrator knows what to fix

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

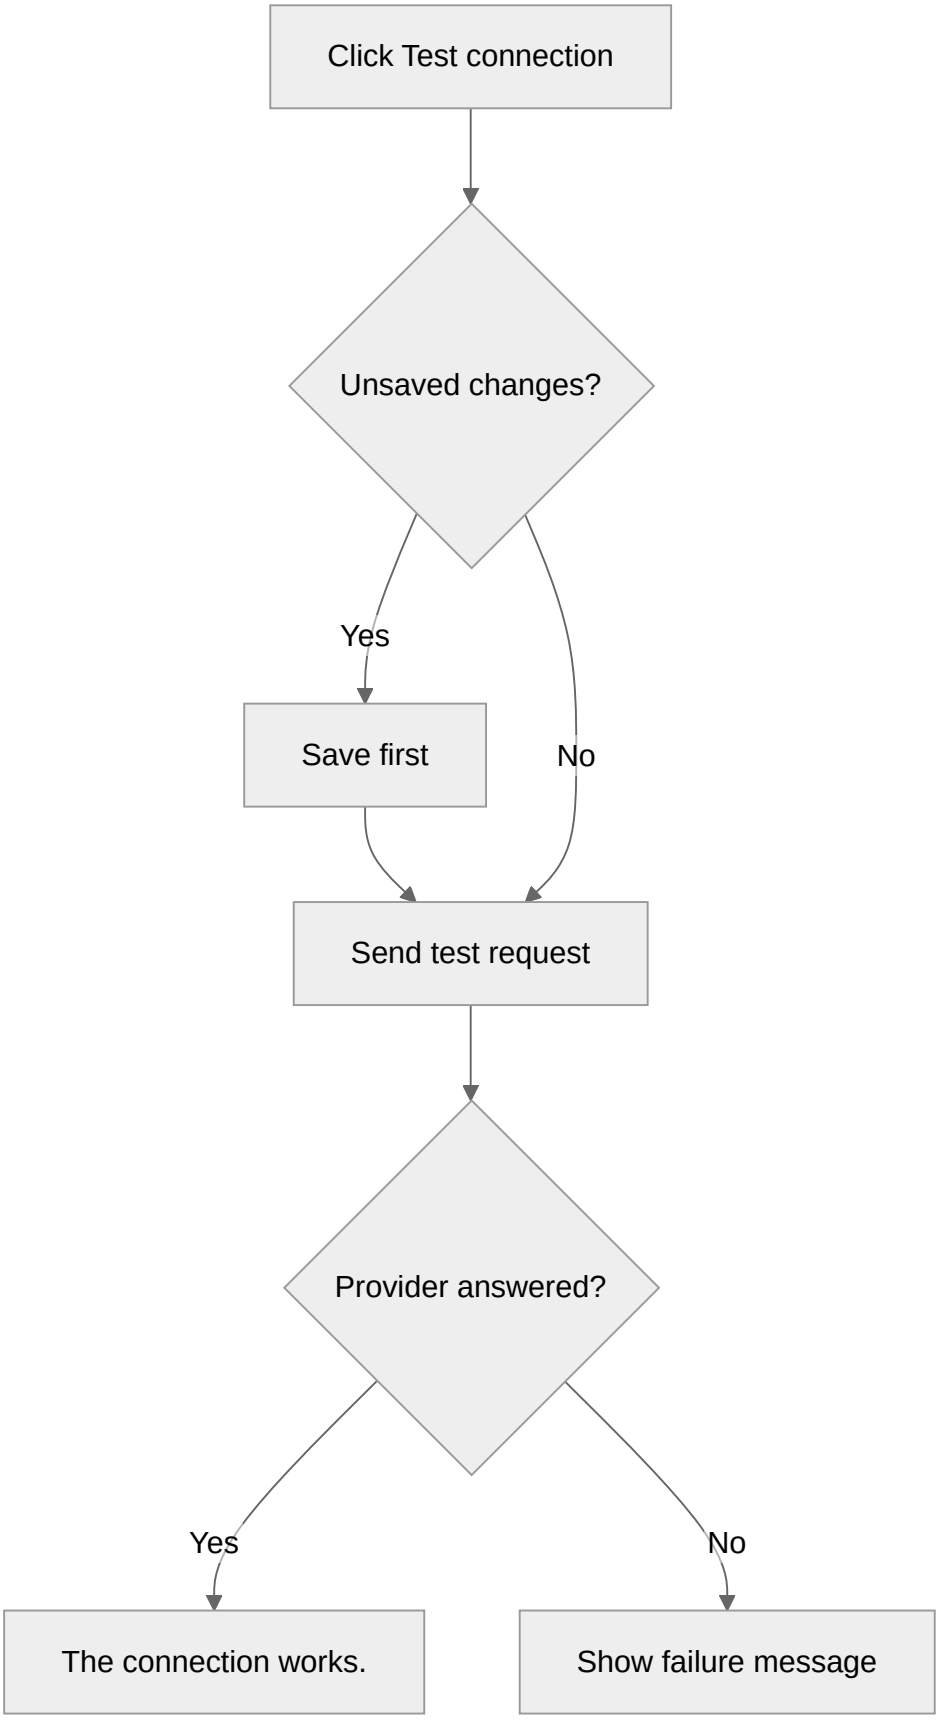

Example: Ollama is selected but not started on the server. The test shows "Ollama is not running or cannot be reached. Ask an administrator to start it, or choose another model."

Exceptions / alternate flows:


© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

- Key refused, rate limit reached, timeout or model missing: each has its own message (see SCREEN 1).

4.3 Remove an Added Model

Trigger: A model added earlier is no longer wanted · **Actors:** Administrator, Custom role, System

Step	Actor / System	Action	Result
1	Administrator	Selects an added model that is not the saved one	**Remove this model from the list** button shown
2	Administrator	Clicks the button	Request sent
3	System	Refuses built-in and saved models; otherwise removes the model and reloads the screen	Toast "Removed `model` from the list"

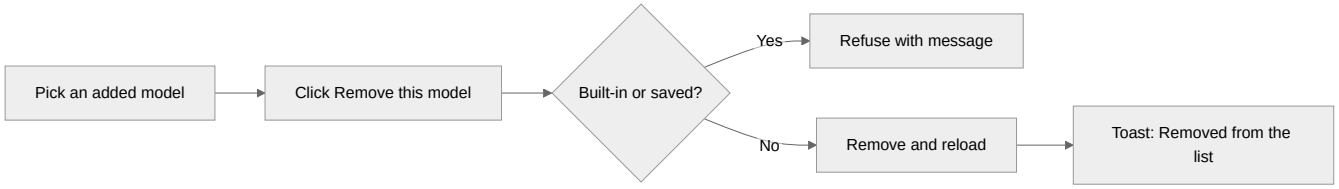

Example: The Administrator added `phi3:mini` for Ollama last week, then saved `llama3.2:3b`. Removing `phi3:mini` succeeds; removing `llama3.2:3b` is refused because it is built-in.

Exceptions / alternate flows:

- Unsaved edits on the screen are dropped when the screen reloads after removal.

---

5. Screen-by-Screen Requirements

SCREEN 1: TFA Settings

Field	Value
Screen name	TFA Settings
Module	Settings
Access	Administrator; Custom role with `settings.ai.view` (actions need `settings.ai.edit`, `settings.ai.test`, `settings.ai.model.remove`). Manager and Employee: no access by default
Priority	Must

Purpose Choose the AI model and server behind TFA, manage models and API keys, and test the connection.

Screen Elements

- Page title **TFA settings** and a **Model and server** section explaining the choices: Ollama runs on your own server and is free; Google Gemini has a free tier with limits; OpenAI GPT has no free

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

tier; with the cloud services a user's question and related task details are sent to the provider.
- **Model** list grouped by provider, with **Add new model…** in each group; **New model name** box.
- **Server** list: "Ollama · http://localhost:11434", "Google Gemini · generativelanguage.googleapis.com", "OpenAI GPT · api.openai.com".
- **Remove this model from the list** button.
- A line such as "TFA uses **llama3.2:3b** on **Ollama**."
- Provider card: name, **Local** / **Cloud** tag, status (**In use**, **Ready to use**, **Needs an API key**, **Not configured**); **Server address** (Ollama) or **API key** with key status and **Remove the key** / **Keep the key**.
- **Test connection** button and result; **Save TFA settings** button.

Functional Requirements

ID	Requirement	Priority
REQ-TFAS-01	The system shall support three AI providers: Ollama (local, no key), Google Gemini and OpenAI GPT (cloud, key needed).	Must
REQ-TFAS-02	The system shall show each provider with a Local or Cloud tag and its status: In use, Ready to use, Needs an API key or Not configured.	Must
REQ-TFAS-03	The system shall offer the built-in models Ollama `llama3.2:3b`, `llama3.2:1b`, `llama3.1:8b`, `qwen2.5:7b`, `mistral:7b`; Gemini `gemini-2.0-flash`, `gemini-2.5-flash`, `gemini-2.5-pro`; OpenAI `gpt-4o-mini`, `gpt-4o`, `gpt-4.1-mini`, the first of each being the provider's default.	Must
REQ-TFAS-04	The system shall select the matching server when a model is chosen, and the matching model when a server is chosen.	Should
REQ-TFAS-05	The system shall let the user add a new model name of 1–100 characters, and keep offering it afterwards.	Should
REQ-TFAS-06	The system shall let the user set the Ollama server address.	Must
REQ-TFAS-07	The system shall accept only a valid http or https server address of at most 300 characters, and refuse link-local and cloud metadata addresses, while allowing local and private addresses.	Must
REQ-TFAS-08	The system shall let the user enter an API key for Gemini or OpenAI of at most 500 characters without spaces.	Must
REQ-TFAS-09	The system shall refuse an API key for Ollama.	Must
REQ-TFAS-10	The system shall store API keys protected and never display or return a saved key.	Must
REQ-TFAS-11	The system shall show only that a key is saved and its last four characters.	Must
REQ-TFAS-12	The system shall keep the saved key when the key box is left empty.	Must

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

ID	Requirement	Priority
REQ-TFAS-13	The system shall let the user remove a saved key, and refuse a new key and removal in the same save.	Must
REQ-TFAS-14	The system shall switch the chosen server on and the other servers off when saving, keeping their keys and models.	Must
REQ-TFAS-15	The system shall offer in the TFA window only providers that are configured (switched on, with a model and an address or a readable key).	Must
REQ-TFAS-16	The system shall let the user test a provider's connection with one short request and show "The connection works." or a plain failure message.	Must
REQ-TFAS-17	The system shall save unsaved changes before running a connection test.	Should
REQ-TFAS-18	The system shall let the user remove a model that an administrator added.	Should
REQ-TFAS-19	The system shall refuse to remove a built-in model or the model saved for its server.	Must
REQ-TFAS-20	The system shall tell the user "The saved key can no longer be read. Enter it again." when a saved key cannot be read.	Should
REQ-TFAS-21	The system shall explain on the screen that cloud providers receive the user's question and related task details.	Should
REQ-TFAS-22	The system shall switch Ollama on at `http://localhost:11434` with the cloud providers off on a brand-new installation, and leave TFA off on an upgraded installation until an administrator turns it on.	Should
REQ-TFAS-23	The system shall control viewing, editing, testing and model removal by four separate permissions and hide the buttons for actions the user may not do.	Must
REQ-TFAS-24	The system shall hide the menu item from, and redirect to their dashboard, users without `settings.ai.view`.	Must
REQ-TFAS-25	The system shall confirm actions with "TFA settings saved" and "Removed `model` from the list".	Should

Validations & Messages

Situation	Rule / message
Model name blank	"Model name cannot be blank." / on screen "Type the model name (100 characters at most)."
Bad server address	"The server address must be a valid http or https URL, and not a link-local or cloud metadata address." / on screen "Enter a valid http or https address."
Key with spaces	"The API key cannot contain spaces."
New key and clear together	"Provide a new key or clear the key, not both."
Key on Ollama	"Ollama does not use an API key."
Remove built-in model	"A built-in model cannot be removed."

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

Situation	Rule / message
Remove saved model	"That model is the one saved for its server. Choose another model and save before removing it."
Model not found	"That model is not in the list."
Test OK	"The connection works."
Test – not configured	"`Provider` is not configured. Choose another model, or ask an administrator to set it up."
Test – key refused	"`Provider` did not accept the API key. Ask an administrator to check the key in TFA Settings, or choose another model."
Test – rate limit	"`Provider`'s free limit or rate limit has been reached. Try again in about a minute, or choose another model."
Test – timeout	"`Provider` took too long to answer. You can retry, or choose another model."
Test – Ollama not reachable	"Ollama is not running or cannot be reached. Ask an administrator to start it, or choose another model."
Test – model missing on Ollama	"The configured model is not available on Ollama. Ask an administrator to install it, or choose another model."
Load / save / remove failed	"Could not load the TFA settings." / "Could not save the TFA settings." / "Could not remove the model."
No permission	Menu item hidden; address returns to dashboard; buttons for forbidden actions hidden

> ⚠️ To be confirmed: without `settings.ai.edit` the inputs on the screen stay editable and only **Save** is hidden; whether the screen should be fully read-only for view-only users. ⚠️ To be confirmed: a user with `settings.ai.test` but without `settings.ai.edit` cannot test while there are unsaved changes (the automatic save is refused); whether such users should test the saved configuration instead. ⚠️ To be confirmed: only the screen ensures that one server is active; whether more than one active provider should also be refused when saving.

Expected Result The Administrator chooses and tests the AI model behind TFA and stores API keys safely, without exposing them to anyone. TFA users are offered only the configured model.

6. Business Rules

ID	Rule	Applies to
BR-TFAS-01	API keys are write-only: once saved they are never shown or returned, only "key set" and the last four characters.	SCREEN 1
BR-TFAS-02	Only one server is active after a save from the screen; switched-off servers keep their keys and models.	SCREEN 1, TFA
BR-TFAS-03	A provider is configured only when it is switched on, has a model, and has an address (Ollama) or a readable key (cloud).	SCREEN 1, TFA
BR-TFAS-04	Built-in models cannot be removed; the saved model cannot be removed until another is saved.	SCREEN 1
BR-TFAS-05	Each provider appears only once in a save.	SCREEN 1

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

ID	Rule	Applies to
BR-TFAS-06	Server addresses pointing at link-local or cloud metadata addresses are refused.	SCREEN 1
BR-TFAS-07	`settings.ai.edit`, `settings.ai.test` and `settings.ai.model.remove` each need `settings.ai.view`.	SCREEN 1, Role Configuration

Global rules and requirements that apply (see overall BRD section 6 and section 7): the global security NFRs – role-based access control, server-side input validation and secure handling of credentials (original BRD NFR 5.2). No original BRD business rule is specific to this screen.

7. Non-Functional Requirements

ID	Category	Requirement	Measure / target
NFR-TFAS-01	Security	API keys are protected when stored and never leave the server towards the browser	No response or screen contains a saved key
NFR-TFAS-02	Security	Server addresses cannot be used to reach link-local or cloud metadata addresses	Such addresses refused when saving
NFR-TFAS-03	Security	Every action is checked by permission on the server	Requests without the matching `settings.ai.*` permission are refused
NFR-TFAS-04	Reliability	A test never breaks the screen; failures are reported as messages	The test always returns a result message
NFR-TFAS-05	Reliability	A key that can no longer be read is detected and reported	Provider shown as needing a key; message asks to enter it again
NFR-TFAS-06	Usability	Failure messages are plain language and say what to do next	Every failure kind has its own message
NFR-TFAS-07	Privacy	Users are told which providers are cloud services	Cloud tag and explanation on the screen
NFR-TFAS-08	Compatibility	Works in current desktop browsers, responsive layout	As the global compatibility NFR

8. Data Requirements

Entity / data set	Purpose	Key fields	Retention / rules
AI provider configuration	One record per provider	Provider, switched on, model, server address (Ollama only), protected key, last four characters, last changed by and at	One record per provider; a key is replaced or removed, never shown
AI model list	Models offered per provider	Provider, model name, built-in flag	Provider + name unique; built-in models cannot be removed

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

9. Integrations & External Dependencies

System / service	Purpose	Required?	Notes
Ollama (local server)	Free local AI model	Optional	Not reachable: test reports "Ollama is not running or cannot be reached ..."
Google Gemini	Cloud AI model, free tier with limits	Optional	Needs an API key; question and task details are sent to Google
OpenAI GPT	Cloud AI model, no free tier	Optional	Needs an API key; question and task details are sent to OpenAI
TFA Assistant	Uses the saved configuration	Required	Offers only configured providers
Server key protection	Protects stored API keys	Required	When it is lost, saved keys must be entered again

10. Reporting Requirements

Not applicable for this sub-module.

11. Recommended Technology Stack (optional)

Not applicable for this sub-module. The technology stack is given in the overall BRD.

12. Assumptions, Constraints & Dependencies

Type	Description
Assumption	The organization obtains its own Gemini or OpenAI key, or runs Ollama on its own server.
Assumption	Models used with Ollama are installed on the Ollama server outside TaskFlow.
Constraint	Only Ollama, Google Gemini and OpenAI GPT are supported.
Dependency	TFA Assistant reads this configuration.
Dependency	Role Configuration grants the four `settings.ai.*` permissions.

13. Risks

ID	Risk	Impact	Likelihood	Mitigation
R-TFAS-01	API key leaked	High	Low	Keys stored protected, write-only, never returned
R-TFAS-02	Task data sent to a cloud provider without awareness	Medium	Medium	Cloud tag and explanation on the screen; Ollama is the default

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

ID	Risk	Impact	Likelihood	Mitigation
R-TFAS-03	Cloud free limit reached, TFA unavailable	Medium	Medium	Rate-limit message; switch to another model
R-TFAS-04	Server key protection lost, keys unreadable	Medium	Low	Detected and reported; enter key again
R-TFAS-05	Server address abused to reach internal metadata services	High	Low	Link-local and metadata addresses refused

14. Acceptance Criteria

ID	Criterion	Verified by
AC-TFAS-01	The Administrator sees Ollama, Google Gemini and OpenAI GPT with tag and status.	SCREEN 1, REQ-TFAS-01, REQ-TFAS-02
AC-TFAS-02	The Model list contains the built-in models; choosing `gpt-4o` selects the OpenAI server.	REQ-TFAS-03, REQ-TFAS-04
AC-TFAS-03	A new model `phi3:mini` is saved and offered afterwards.	REQ-TFAS-05
AC-TFAS-04	An Ollama address `http://169.254.169.254` is refused; `http://192.168.1.20:11434` is accepted.	REQ-TFAS-06, REQ-TFAS-07
AC-TFAS-05	A key with a space, or a key for Ollama, is refused.	REQ-TFAS-08, REQ-TFAS-09
AC-TFAS-06	After saving a key, only "ends …1234" is shown; the key never appears in any screen or response.	REQ-TFAS-10, REQ-TFAS-11
AC-TFAS-07	Saving with an empty key box keeps the key; **Remove the key** clears it; both together are refused.	REQ-TFAS-12, REQ-TFAS-13
AC-TFAS-08	After saving Gemini, Ollama is off but keeps its address; TFA offers only Gemini.	REQ-TFAS-14, REQ-TFAS-15
AC-TFAS-09	Test with a working provider shows "The connection works."; with Ollama stopped shows the Ollama message.	REQ-TFAS-16
AC-TFAS-10	Test with unsaved changes saves them first.	REQ-TFAS-17
AC-TFAS-11	An added model is removed; a built-in or saved model is refused with its message.	REQ-TFAS-18, REQ-TFAS-19, REQ-TFAS-25
AC-TFAS-12	When a saved key can no longer be read, the screen asks to enter it again.	REQ-TFAS-20
AC-TFAS-13	The screen explains that cloud providers receive the question and task details.	REQ-TFAS-21
AC-TFAS-14	A brand-new installation has Ollama on at `http://localhost:11434` and both cloud providers off.	REQ-TFAS-22
AC-TFAS-15	A custom role with only `settings.ai.view` sees the screen without Save, Test or Remove; a Manager has no menu item and is redirected.	REQ-TFAS-23, REQ-TFAS-24

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

ID	Criterion	Verified by
AC-TFAS-16	A successful save shows "TFA settings saved".	REQ-TFAS-25

15. Requirements Traceability Matrix

Objective	Business rule(s)	Screen(s)	Functional requirement(s)	Acceptance criterion
OBJ-TFAS-01	BR-TFAS-02, BR-TFAS-03, BR-TFAS-04, BR-TFAS-05	SCREEN 1	REQ-TFAS-01, REQ-TFAS-02, REQ-TFAS-03, REQ-TFAS-04, REQ-TFAS-05, REQ-TFAS-06, REQ-TFAS-14, REQ-TFAS-15, REQ-TFAS-18, REQ-TFAS-19, REQ-TFAS-22, REQ-TFAS-25	AC-TFAS-01, AC-TFAS-02, AC-TFAS-03, AC-TFAS-08, AC-TFAS-11, AC-TFAS-14, AC-TFAS-16
OBJ-TFAS-02	BR-TFAS-01, BR-TFAS-06, BR-TFAS-07	SCREEN 1	REQ-TFAS-07, REQ-TFAS-08, REQ-TFAS-09, REQ-TFAS-10, REQ-TFAS-11, REQ-TFAS-12, REQ-TFAS-13, REQ-TFAS-20, REQ-TFAS-21, REQ-TFAS-23, REQ-TFAS-24	AC-TFAS-04, AC-TFAS-05, AC-TFAS-06, AC-TFAS-07, AC-TFAS-12, AC-TFAS-13, AC-TFAS-15
OBJ-TFAS-03	BR-TFAS-03	SCREEN 1	REQ-TFAS-16, REQ-TFAS-17	AC-TFAS-09, AC-TFAS-10

16. Project Deliverables

#	Deliverable	Format
1	TFA Settings screen, saving, model removal and connection test	Source code in the repository
2	Initial provider records and built-in model list	Initialization at application start
3	BRD, FRD, HLD and LLD for TFA Settings	Markdown
4	Tests for provider configuration, key protection and connection test	Automated tests

17. Glossary

Term	Meaning
TFA	TaskFlow Assistant, the AI chat assistant inside TaskFlow
Provider / server	The service that runs the AI model: Ollama, Google Gemini or OpenAI GPT
Model	The AI model name used on a provider, for example `llama3.2:3b`
Built-in model	A model that ships with TaskFlow and cannot be removed
API key	Secret credential for a cloud provider
Ollama	Free AI model server that runs on the organization's own machine
Configured provider	A provider that is switched on, has a model and an address or a readable key
Connection test	One short request that checks whether the provider answers

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

18. Project Summary

TFA Settings lets the Administrator choose the AI provider and model behind the TaskFlow Assistant – a free local Ollama server or a cloud service – add and remove models, store API keys that can never be read back, and test the connection with one click. Only the configured model is offered to TFA users, and every action is controlled by its own permission.

© 2026 Jojo George. All rights reserved. Unauthorized copying or distribution of this document is prohibited.