Functional Requirements Document – TFA Settings

TaskFlow – Intelligent Task Allocation & Tracking System

> **Document:** Functional Requirements Document · **Version:** 1.0 · **Status:** Draft
> **Project type:** Personal Project (Skill Development) · **Date:** 31-Oct-2026
> **Author:** Jojo George (jojogeorge3344@gmail.com)
> **Based on:** BRD-TFA-Settings.md v1.0
> **Module:** Settings · **Sub-module:** 06.3 TFA Settings · **Code:** TFAS
> © 2026 Jojo George. All rights reserved.

Document Control

Revision History

Version	Date	Author	Summary of changes
1.0	31-Oct-2026	Jojo George	Initial version

Related Documents

Document	Purpose	Location
BRD – TFA Settings	Business needs this FRD details (REQ-TFAS-nn, BR-TFAS-nn, AC-TFAS-nn)	`../../../BRD/06-Settings/06.3-TFA-Settings/BRD-TFA-Settings.md`
Overall FRD	Roles, global rules, Authentication, cross-cutting behaviour	`../../00-Overall/FRD-TaskFlow-Overall.md`
FRD – TFA Assistant	Chat window that uses this configuration	`../../08-TFA-Assistant/08.1-Assistant/FRD-Assistant.md`
FRD – Role Configuration	Grants the four `settings.ai.*` permissions	`../06.4-Role-Configuration/FRD-Role-Configuration.md`
Development Plan	Screen-wise build plan	*Not applicable – not in the original 20-screen plan.*
HLD / LLD	Technical design	`../../../HLD/06-Settings/06.3-TFA-Settings/HLD-TFA-Settings.md`, `../../../LLD/06-Settings/06.3-TFA-Settings/LLD-TFA-Settings.md`

1. Introduction

1.1 Purpose

This FRD specifies the detailed, testable behaviour of the TFA Settings screen, where an authorized user chooses the AI provider and model behind TFA (the TaskFlow Assistant), adds and removes models, sets the Ollama server address, manages cloud API keys and tests the connection.

1.2 Scope

In scope: viewing the three providers with tag, status and key status; the linked Model and Server lists; adding and removing models; the Ollama server address; entering, keeping and removing Gemini and OpenAI keys; saving (one active server); the connection test; initial configuration; permission control of each action.

Out of scope (BRD §3.2): the TFA chat window (TFA Assistant FRD); providers other than Ollama, Google Gemini and OpenAI GPT; usage or cost tracking; installing models on the Ollama server.

1.3 Audience

Developer, tester, reviewer and product owner of TaskFlow.

1.4 Conventions

- Requirement IDs: `FR-TFAS-nn`. Use cases: `UC-TFAS-nn`. Business rules: `BR-TFAS-nn` (sub-module BRD) and `BR-nn` (overall BRD).
- Priority: **Must / Should / Could** (MoSCoW).
- "The system shall ..." = mandatory behaviour; "should" = recommended.
- In messages, `Provider` stands for the provider's display name and `model` for the model name.

1.5 Definitions & Abbreviations

Term	Meaning
TFA	TaskFlow Assistant, the AI chat assistant inside TaskFlow
Provider / server	Ollama (local), Google Gemini or OpenAI GPT (cloud)
Model	AI model name on a provider, for example `llama3.2:3b`
Built-in model	A model that ships with TaskFlow and cannot be removed
Added model	A model name an administrator typed with **Add new model...**
Saved model	The model stored for a provider at the last save
Configured provider	Switched on, has a model, and has an address (Ollama) or a readable key (cloud)
Connection test	One short request ("Reply with OK.") to check that the provider answers


© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

2. System Overview

2.1 Module Map

Code	Module	Child modules	Primary roles
TFAS	Settings → TFA Settings	TFA Settings (one screen)	Administrator, Custom role with `settings.ai.view`
TFA	TFA Assistant (related)	Chat window	Users with `assistant.chat`
ROLE	Settings → Role Configuration (related)	Grants `settings.ai.*`	Administrator

2.2 Context Diagram

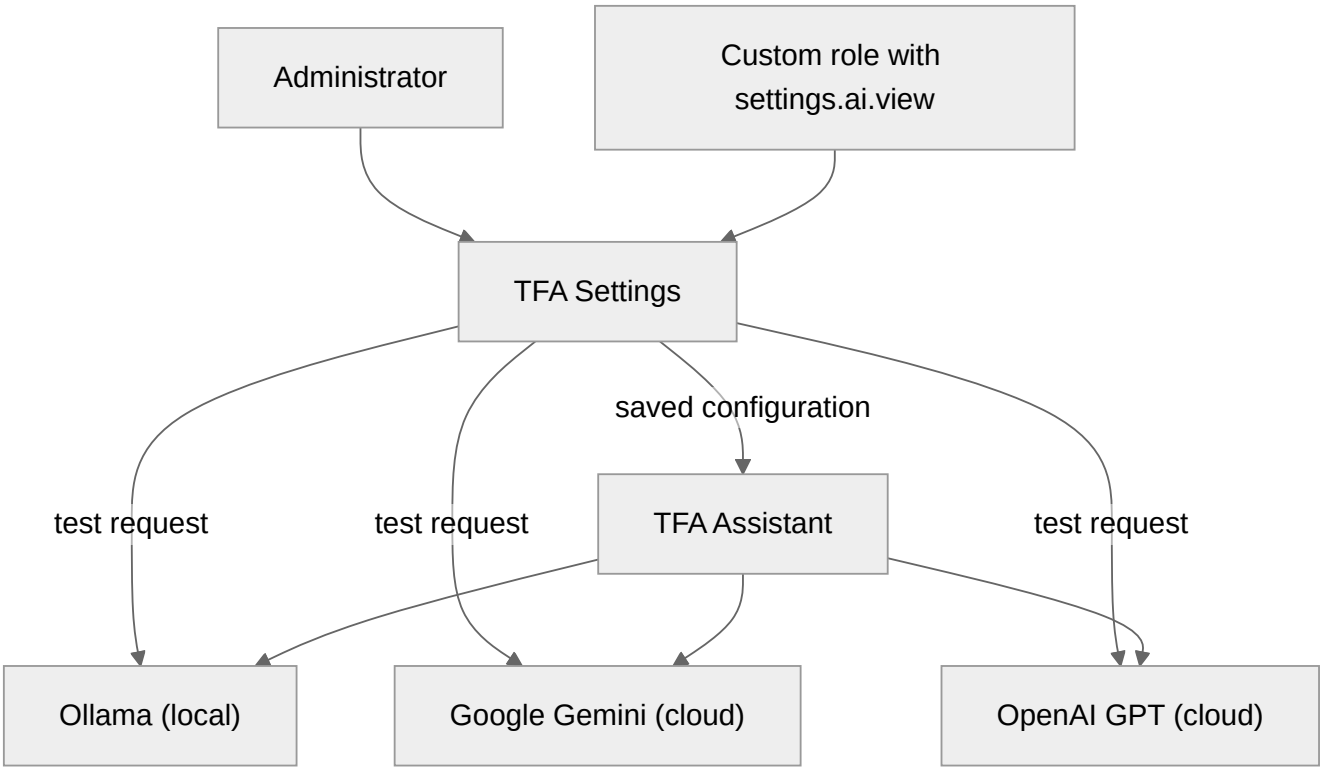

3. User Roles & Permissions

3.1 Roles

Role	Description	Data scope
Administrator	Views, edits, tests and removes models	Organization
Manager	No access to the screen by default	–
Employee	No access to the screen by default	–
Custom role	`settings.ai.view` opens the screen; `settings.ai.edit`, `settings.ai.test`, `settings.ai.model.remove` allow the actions	Organization

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

3.2 Permission Matrix (functional view)

Module › Function	Permission key	Administrator	Manager	Employee	Custom role
Settings › TFA Settings › View providers, models and key status	`settings.ai.view`	Granted	Denied	Denied	Configurable
Settings › TFA Settings › Choose model/server, add model, address, key, save	`settings.ai.edit` (needs `settings.ai.view`)	Granted	Denied	Denied	Configurable
Settings › TFA Settings › Test connection	`settings.ai.test` (needs `settings.ai.view`)	Granted	Denied	Denied	Configurable
Settings › TFA Settings › Remove a model from the list	`settings.ai.model.remove` (needs `settings.ai.view`)	Granted	Denied	Denied	Configurable

> Manager and Employee values are the defaults given when the permission is first created. The Administrator role is given every permission again each time the application starts.

---

4. Functional Requirements by Module

4.1 Module: TFA Settings (TFAS)

Purpose: Choose the AI model and server behind TFA, manage models and API keys, and test the connection. · **BRD reference:** BRD-TFA-Settings SCREEN 1, BR-TFAS-01…BR-TFAS-07

4.1.1 Screen: TFA Settings

Field	Value
Route / location	`/settings/tfa` (menu **Settings → TFA Settings**)
Access	Administrator; Custom role with `settings.ai.view` (actions: `settings.ai.edit`, `settings.ai.test`, `settings.ai.model.remove`)
Entry points	Sidebar menu item **TFA Settings**

Screen elements

Element	Type	Description	Mandatory	Visible to
TFA settings	Page title	–	–	`settings.ai.view`

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

Element	Type	Description	Mandatory	Visible to
Model and server	Explanation	Ollama runs on your own server and is free; Google Gemini has a free tier with limits; OpenAI GPT has no free tier; Gemini and OpenAI are cloud services, so a user's question and related task details are sent to them	–	`settings.ai.view`
Model	Drop-down grouped by provider	Built-in and added models; **Add new model…** in each group	Yes	`settings.ai.view`
New model name	Text input	Shown after **Add new model…**; placeholder "For example phi3:mini"	Yes, when adding	`settings.ai.view`
Server	Drop-down	"Ollama · http://localhost:11434", "Google Gemini · generativelanguage.googleapis.com", "OpenAI GPT · api.openai.com"	Yes	`settings.ai.view`
Remove this model from the list	Button	Only for an added model that is not the saved one	–	`settings.ai.model.remove`
Usage line	Text	"TFA uses **`model`** on **`Provider`**." or "After you save, TFA will use …"	–	`settings.ai.view`
Provider card	Card	Name, **Local** / **Cloud** tag, status **In use**, **Ready to use**, **Needs an API key** or **Not configured**	–	`settings.ai.view`
Server address	Text input (Ollama card)	Address of the Ollama server	Yes (Ollama)	`settings.ai.view`
API key	Password input (cloud cards)	Key status, for example "A key is saved (ends …1234). Leave the box empty to keep it."	No (empty keeps the key)	`settings.ai.view`
Remove the key / **Keep the key**	Buttons (cloud cards)	Mark the saved key for removal / undo that mark	–	`settings.ai.view`
Test connection	Button + result text	Runs the connection test	–	`settings.ai.test`
Save TFA settings	Button	Saves the configuration	–	`settings.ai.edit`

Functional requirements

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

ID	Requirement	Priority	Permission	BRD trace
FR-TFAS-01	The system shall support exactly three providers: Ollama (local, no API key), Google Gemini and OpenAI GPT (cloud, API key needed).	Must	`settings.ai.view`	REQ-TFAS-01
FR-TFAS-02	The system shall show a card for the selected provider with its name, a **Local** or **Cloud** tag and its status **In use**, **Ready to use**, **Needs an API key** or **Not configured**, and shall mark the provider TFA uses now.	Must	`settings.ai.view`	REQ-TFAS-02
FR-TFAS-03	The system shall offer the built-in models Ollama `llama3.2:3b`, `llama3.2:1b`, `llama3.1:8b`, `qwen2.5:7b`, `mistral:7b`; Gemini `gemini-2.0-flash`, `gemini-2.5-flash`, `gemini-2.5-pro`; OpenAI `gpt-4o-mini`, `gpt-4o`, `gpt-4.1-mini`, grouped by provider, the first of each group being that provider's default.	Must	`settings.ai.view`	REQ-TFAS-03
FR-TFAS-04	The system shall select the matching server when a model is chosen, and the provider's model when a server is chosen, and update the usage line accordingly.	Should	`settings.ai.view`	REQ-TFAS-04
FR-TFAS-05	The system shall let the user choose **Add new model…**, type a model name of 1–100 characters and, after saving, keep offering that model in the provider's group.	Should	`settings.ai.edit`	REQ-TFAS-05
FR-TFAS-06	The system shall let the user enter the Ollama **Server address**.	Must	`settings.ai.edit`	REQ-TFAS-06
FR-TFAS-07	The system shall accept only a valid http or https server address of at most 300 characters; it shall refuse link-local and cloud metadata addresses (for example 169.254.x.x, `metadata.google.internal`) and allow `localhost` and private addresses.	Must	`settings.ai.edit`	REQ-TFAS-07, BR-TFAS-06
FR-TFAS-08	The system shall let the user enter an API key for Gemini or OpenAI of at most 500 characters without spaces.	Must	`settings.ai.edit`	REQ-TFAS-08
FR-TFAS-09	The system shall refuse an API key sent for Ollama with "Ollama does not use an API key."	Must	`settings.ai.edit`	REQ-TFAS-09
FR-TFAS-10	The system shall store API keys protected and shall never display a saved key on any screen or return it in any response.	Must	`settings.ai.view`	REQ-TFAS-10, BR-TFAS-01
FR-TFAS-11	The system shall show for a saved key only that a key is saved and its last four characters, as "A key is saved (ends …1234). Leave the box empty to keep it."	Must	`settings.ai.view`	REQ-TFAS-11, BR-TFAS-01
FR-TFAS-12	The system shall keep the saved key unchanged when the **API key** box is left empty on save.	Must	`settings.ai.edit`	REQ-TFAS-12

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

ID	Requirement	Priority	Permission	BRD trace
FR-TFAS-13	The system shall remove the saved key when **Remove the key** is chosen and saved, let **Keep the key** undo that choice before saving, and refuse a save that sends a new key and removal together with "Provide a new key or clear the key, not both."	Must	`settings.ai.edit`	REQ-TFAS-13
FR-TFAS-14	The system shall, when saving from the screen, switch the chosen server on and the other servers off, keeping their keys, addresses and models stored, and show "TFA settings saved".	Must	`settings.ai.edit`	REQ-TFAS-14, BR-TFAS-02
FR-TFAS-15	The system shall refuse a save in which the same provider appears more than once.	Must	`settings.ai.edit`	BR-TFAS-05
FR-TFAS-16	The system shall offer in the TFA window only providers that are configured: switched on, with a model, and with an address (Ollama) or a readable key (cloud).	Must	– (TFA)	REQ-TFAS-15, BR-TFAS-03
FR-TFAS-17	The system shall, on **Test connection**, send one short request ("Reply with OK.") to the provider and show next to the button "The connection works." or the plain failure message for the failure kind (not configured, key refused, rate limit, timeout, Ollama not reachable, model missing on Ollama).	Must	`settings.ai.test`	REQ-TFAS-16
FR-TFAS-18	The system shall always report a test result as a message and never as a screen error.	Must	`settings.ai.test`	REQ-TFAS-16
FR-TFAS-19	The system shall save unsaved changes before running a connection test.	Should	`settings.ai.test` + `settings.ai.edit`	REQ-TFAS-17
FR-TFAS-20	The system shall let the user remove a model an administrator added, reload the screen from the saved state (dropping other unsaved edits) and show "Removed `model` from the list".	Should	`settings.ai.model.remove`	REQ-TFAS-18
FR-TFAS-21	The system shall refuse to remove a built-in model ("A built-in model cannot be removed."), the model saved for its server ("That model is the one saved for its server. Choose another model and save before removing it.") or an unknown model ("That model is not in the list.").	Must	`settings.ai.model.remove`	REQ-TFAS-19, BR-TFAS-04
FR-TFAS-22	The system shall show "The saved key can no longer be read. Enter it again." and treat the cloud provider as not configured when a saved key can no longer be read.	Should	`settings.ai.view`	REQ-TFAS-20
FR-TFAS-23	The system shall explain on the screen that Gemini and OpenAI are cloud services that receive the user's question and related task details.	Should	`settings.ai.view`	REQ-TFAS-21
FR-TFAS-24	The system shall, on a brand-new installation, switch Ollama on at `http://localhost:11434` and leave both cloud providers off without a key; on an upgraded installation it shall leave TFA off until an administrator turns a provider on.	Should	– (system)	REQ-TFAS-22


© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

ID	Requirement	Priority	Permission	BRD trace
FR-TFAS-25	The system shall control viewing, editing/saving, testing and model removal by `settings.ai.view`, `settings.ai.edit`, `settings.ai.test` and `settings.ai.model.remove`, refuse each action on the server without its permission, and hide **Save TFA settings**, **Test connection** and **Remove this model from the list** from users without the matching permission.	Must	`settings.ai.*`	REQ-TFAS-23, BR-TFAS-07
FR-TFAS-26	The system shall allow `settings.ai.edit`, `settings.ai.test` and `settings.ai.model.remove` to be held only together with `settings.ai.view`.	Must	– (Role Configuration)	BR-TFAS-07
FR-TFAS-27	The system shall hide the **TFA Settings** menu item from users without `settings.ai.view` and return them to their dashboard when they open `/settings/tfa`.	Must	`settings.ai.view`	REQ-TFAS-24
FR-TFAS-28	The system shall confirm a save with the toast "TFA settings saved" and a removal with "Removed `model` from the list", and show "Could not load the TFA settings.", "Could not save the TFA settings." or "Could not remove the model." when these fail.	Should	`settings.ai.*`	REQ-TFAS-25

Use case: UC-TFAS-01 – Choose the model and save

Item	Detail
Actor	Administrator or Custom role user
Preconditions	Signed in; holds `settings.ai.view` and `settings.ai.edit`
Trigger	Opens **Settings → TFA Settings** to set up or change TFA's model
Main flow	1. System shows the providers and marks the one in use (FR-TFAS-02). 2. User picks a model (server follows) or a server (model follows) (FR-TFAS-04). 3. For Ollama, user checks **Server address**; for Gemini/OpenAI, user pastes the **API key** or leaves it empty to keep the saved key. 4. User clicks **Save TFA settings**. 5. System checks model name, address and key (FR-TFAS-05, FR-TFAS-07, FR-TFAS-08). 6. System saves; only the chosen server is on (FR-TFAS-14). 7. Toast "TFA settings saved". 8. TFA offers only this configuration (FR-TFAS-16).
Alternate flows	A1: **Add new model…** → user types a name (1–100 characters) → saved and offered from then on (FR-TFAS-05). A2: **Remove the key** → key cleared on save (FR-TFAS-13); **Keep the key** undoes it.
Exceptions	E1: Bad address → "The server address must be a valid http or https URL, and not a link-local or cloud metadata address." (screen: "Enter a valid http or https address."). E2: Key with spaces → "The API key cannot contain spaces." E3: New key and removal together → "Provide a new key or clear the key, not both." E4: Key for Ollama → "Ollama does not use an API key." E5: Model name blank → "Model name cannot be blank." E6: Save fails → "Could not save the TFA settings."
Postconditions	Chosen provider on, others off with keys and models kept; key never shown again (FR-TFAS-10, FR-TFAS-11).

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

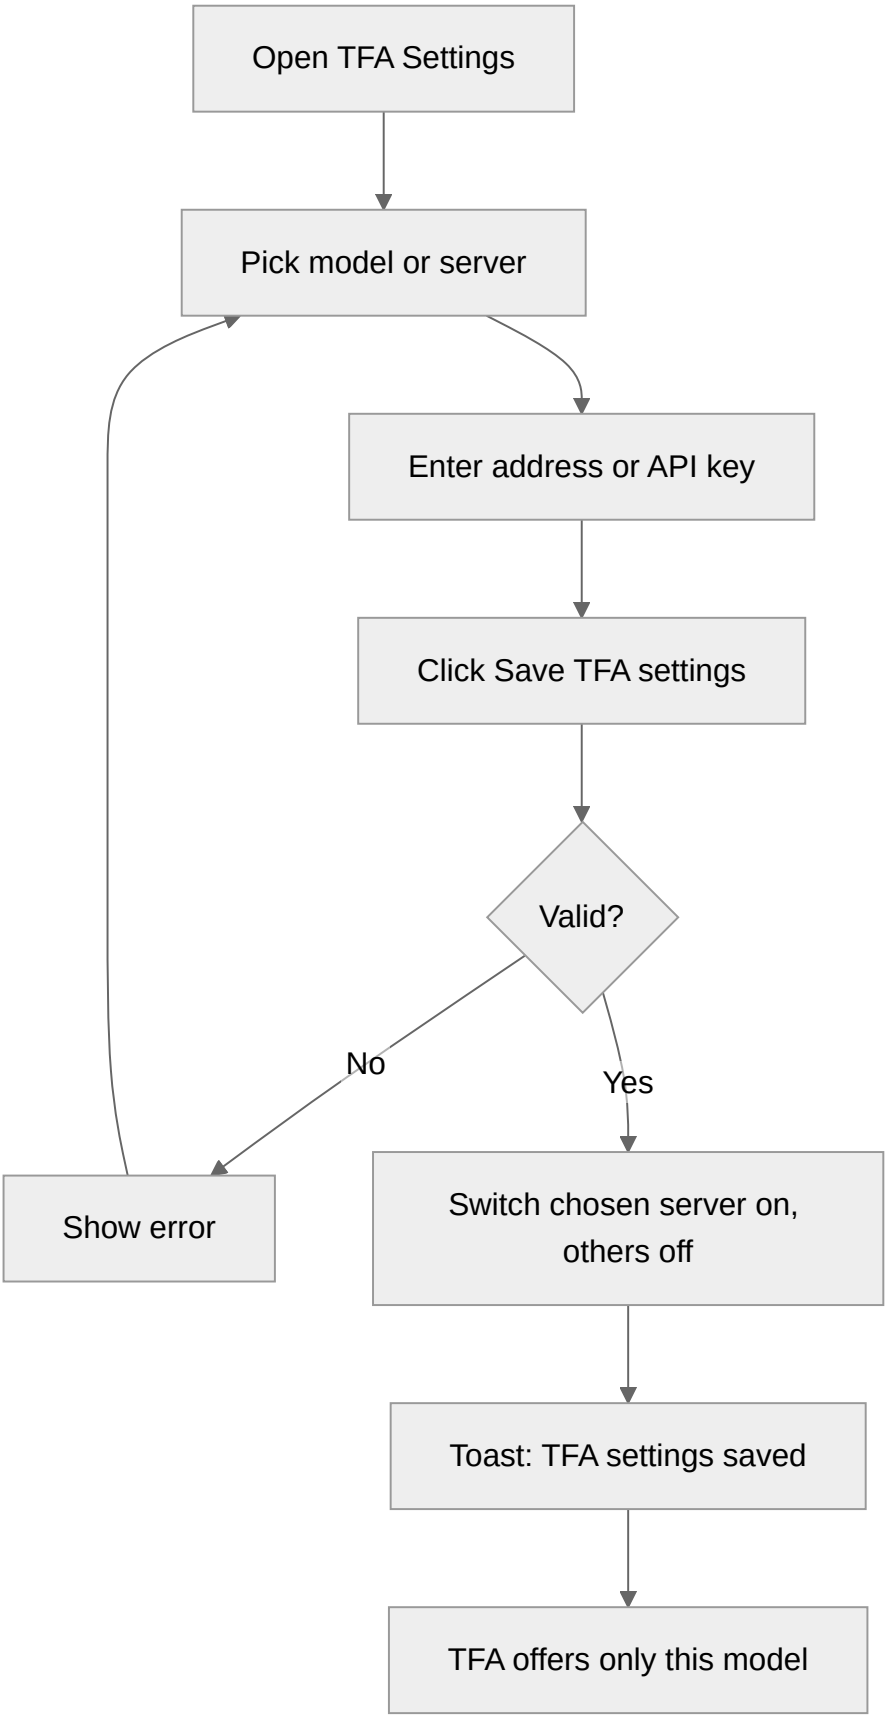


Use case: UC-TFAS-02 – Test the connection

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

Item	Detail
Actor	Administrator or Custom role user; AI provider
Preconditions	Signed in; holds `settings.ai.view` and `settings.ai.test`
Trigger	Clicks **Test connection** on the provider card
Main flow	1. If there are unsaved changes, system saves them first (FR-TFAS-19). 2. System sends "Reply with OK." to the provider (FR-TFAS-17). 3. Provider answers. 4. System shows "The connection works."
Alternate flows	A1: No unsaved changes → test runs on the saved configuration.
Exceptions	E1: Not configured → "`Provider` is not configured. Choose another model, or ask an administrator to set it up." E2: Key refused → "`Provider` did not accept the API key. ..." E3: Rate limit → "`Provider`'s free limit or rate limit has been reached. Try again in about a minute, or choose another model." E4: Timeout → "`Provider` took too long to answer. You can retry, or choose another model." E5: Ollama not reachable → "Ollama is not running or cannot be reached. Ask an administrator to start it, or choose another model." E6: Model missing on Ollama → "The configured model is not available on Ollama. ..." E7: Automatic save refused (for example user lacks `settings.ai.edit`) → test not run; see §10.
Postconditions	Result message shown; configuration unchanged by the test itself.

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

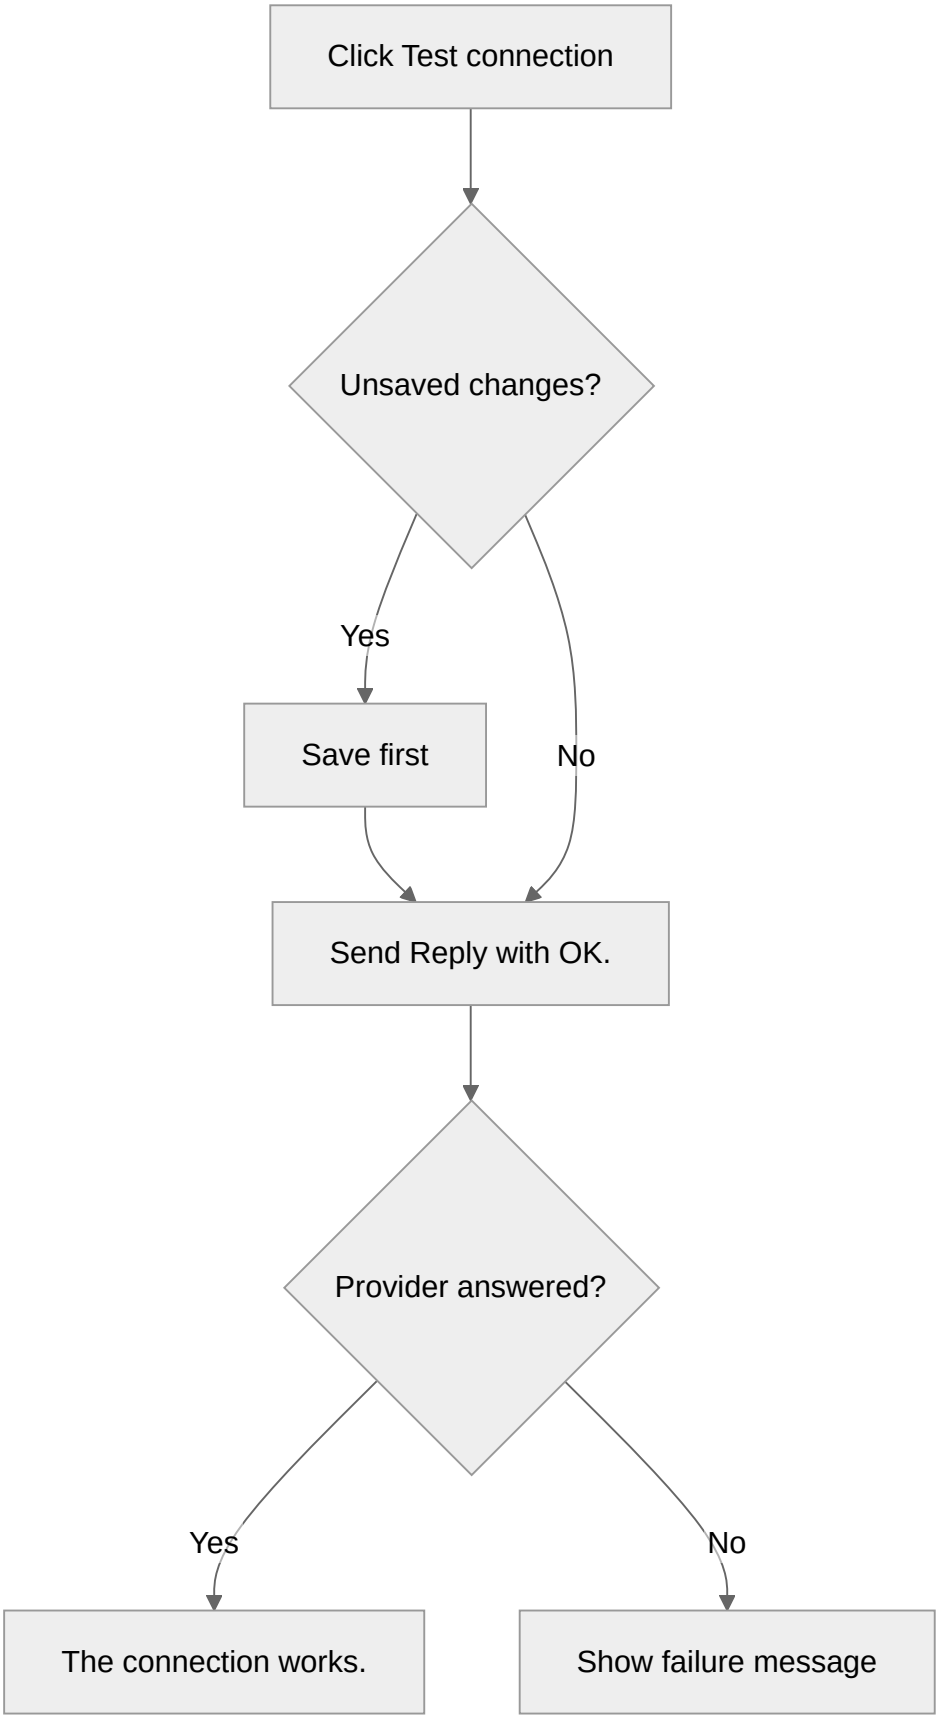

Use case: UC-TFAS-03 – Remove an added model

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

Item	Detail
Actor	Administrator or Custom role user
Preconditions	Signed in; holds `settings.ai.view` and `settings.ai.model.remove`; an added model exists that is not the saved one
Trigger	Selects the added model and clicks **Remove this model from the list**
Main flow	1. System checks the model is not built-in and not saved (FR-TFAS-21). 2. System removes it. 3. Screen reloads from the saved state; toast "Removed `model` from the list" (FR-TFAS-20).
Alternate flows	–
Exceptions	E1: Built-in → "A built-in model cannot be removed." E2: Saved model → "That model is the one saved for its server. ..." E3: Not found → "That model is not in the list." E4: Failure → "Could not remove the model."
Postconditions	Model no longer offered; other unsaved edits dropped.

Field validations

Field	Rule	Error message
New model name	Required when adding; 1–100 characters	Server: "Model name cannot be blank." Screen: "Type the model name (100 characters at most)."
Server address (Ollama)	Valid http/https URL; at most 300 characters; not link-local or cloud metadata	Server: "The server address must be a valid http or https URL, and not a link-local or cloud metadata address." Screen: "Enter a valid http or https address."
API key (cloud)	Optional; at most 500 characters; no spaces; empty keeps the saved key	"The API key cannot contain spaces." / screen "The key cannot contain spaces."
API key (Ollama)	Not allowed	"Ollama does not use an API key."
New key + Remove the key	Not both in one save	"Provide a new key or clear the key, not both."
Providers in one save	Each provider at most once	Save refused

Business rules applied: BR-TFAS-01 ... BR-TFAS-07; global security NFRs of the overall BRD (role-based access control, server-side validation, secure handling of credentials – original BRD NFR 5.2).

Notifications / side effects

Event	Who is notified	Channel
Settings saved	Saving user	Toast "TFA settings saved"
Model removed	Removing user	Toast "Removed `model` from the list"
Test run	Testing user	Result text next to **Test connection**
Provider switched	TFA users	TFA window offers only the configured provider

Messages

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com


Situation	Message
Saved	"TFA settings saved"
Model removed	"Removed `model` from the list"
Test OK	"The connection works."
Test failures	See UC-TFAS-02 E1–E6 and §7
Saved key unreadable	"The saved key can no longer be read. Enter it again."
Load / save / remove failed	"Could not load the TFA settings." / "Could not save the TFA settings." / "Could not remove the model."
No permission	Menu item hidden; opening `/settings/tfa` returns the user to their dashboard; buttons for forbidden actions hidden

5. Cross-Module Workflows

5.1 Switch TFA to a cloud provider

Step	Module	Actor / System	Action	FR reference
1	TFAS	Administrator	Chooses `gemini-2.0-flash`, pastes a key ending 1234, saves	FR-TFAS-04, FR-TFAS-08, FR-TFAS-14
2	TFAS	System	Shows "A key is saved (ends …1234)…"; Ollama off, address and models kept	FR-TFAS-11, FR-TFAS-14
3	TFAS	Administrator	Clicks **Test connection**; "The connection works."	FR-TFAS-17
4	TFA	Employee	Opens TFA; only Google Gemini is offered	FR-TFAS-16

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

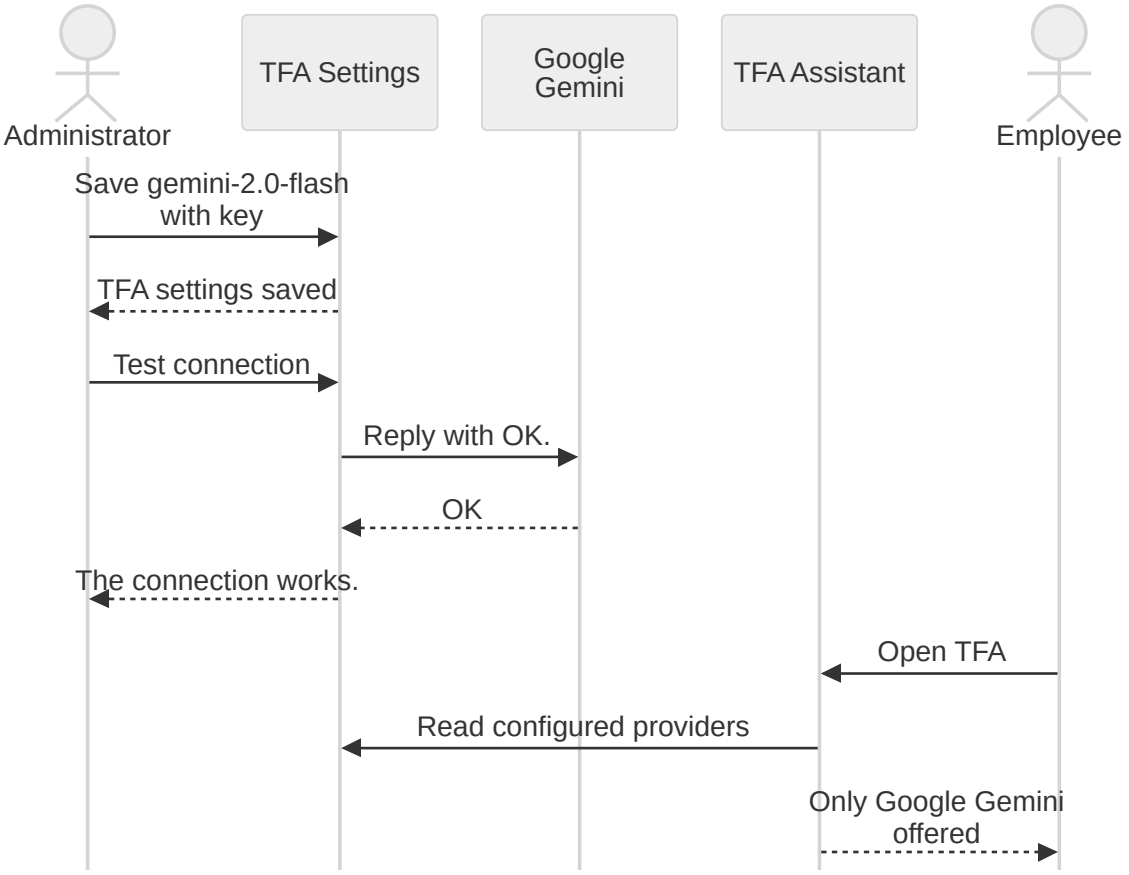

5.2 Granting TFA Settings to a custom role

Step	Module	Actor / System	Action	FR reference
1	ROLE	Administrator	Ticks `settings.ai.test` on a custom role; `settings.ai.view` is ticked automatically	FR-TFAS-26, Role Configuration FRD
2	TFAS	Custom role user	Opens TFA Settings; sees **Test connection**, no **Save TFA settings**	FR-TFAS-25

6. Reports & Exports

Not applicable for this sub-module.

7. Notifications & Messages Catalogue

Code	Trigger	Recipients	Channel	Text
N-TFAS-01	Save succeeded	Saving user	Toast	"TFA settings saved"
N-TFAS-02	Model removed	Removing user	Toast	"Removed `model` from the list"

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

Code	Trigger	Recipients	Channel	Text
N-TFAS-03	Test OK	Testing user	Inline	"The connection works."
N-TFAS-04	Test – not configured	Testing user	Inline	"`Provider` is not configured. Choose another model, or ask an administrator to set it up."
N-TFAS-05	Test – key refused	Testing user	Inline	"`Provider` did not accept the API key. Ask an administrator to check the key in TFA Settings, or choose another model."
N-TFAS-06	Test – rate limit	Testing user	Inline	"`Provider`'s free limit or rate limit has been reached. Try again in about a minute, or choose another model."
N-TFAS-07	Test – timeout	Testing user	Inline	"`Provider` took too long to answer. You can retry, or choose another model."
N-TFAS-08	Test – Ollama not reachable	Testing user	Inline	"Ollama is not running or cannot be reached. Ask an administrator to start it, or choose another model."
N-TFAS-09	Test – model missing on Ollama	Testing user	Inline	"The configured model is not available on Ollama. Ask an administrator to install it, or choose another model."
N-TFAS-10	Saved key unreadable	Current user	Card	"The saved key can no longer be read. Enter it again."
N-TFAS-11	Load / save / remove failed	Current user	Toast / card	"Could not load the TFA settings." / "Could not save the TFA settings." / "Could not remove the model."

8. Data Requirements (functional view)

Data item	Description	Created by	Rules
Provider configuration	One record per provider: switched on, model, server address (Ollama), protected key, last four characters, last changed by and at	System at start-up; changed by user	One record per provider; key replaced or removed, never shown
Model list	Models offered per provider, with built-in flag	System (built-in) and user (added)	Provider + name unique; built-in models cannot be removed

9. Non-Functional Requirements (functional impact)

ID	Requirement	Affects
NFR-TFAS-01	API keys protected when stored and never sent to the browser	FR-TFAS-10, FR-TFAS-11
NFR-TFAS-02	Server addresses cannot reach link-local or cloud metadata addresses	FR-TFAS-07

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

ID	Requirement	Affects
NFR-TFAS-03	Every action checked by permission on the server	FR-TFAS-25
NFR-TFAS-04	A test never breaks the screen; failures are messages	FR-TFAS-17, FR-TFAS-18
NFR-TFAS-05	An unreadable key is detected and reported	FR-TFAS-22
NFR-TFAS-06	Failure messages are plain and say what to do next	§7
NFR-TFAS-07	Users are told which providers are cloud services	FR-TFAS-02, FR-TFAS-23
NFR-TFAS-08	Works in current desktop browsers, responsive layout	TFA Settings

10. Assumptions & Open Issues

Type	Description	Owner
Assumption	The organization obtains its own Gemini or OpenAI key, or runs Ollama on its own server.	Jojo George
Assumption	Models used with Ollama are installed on the Ollama server outside TaskFlow.	Jojo George
Open issue	⚠️ To be confirmed: without `settings.ai.edit` the inputs stay editable and only **Save** is hidden; whether the screen should be fully read-only for view-only users.	Jojo George
Open issue	⚠️ To be confirmed: a user with `settings.ai.test` but without `settings.ai.edit` cannot test while there are unsaved changes (the automatic save is refused); whether such users should test the saved configuration instead.	Jojo George
Open issue	⚠️ To be confirmed: only the screen ensures that one server is active; whether more than one active provider should also be refused when saving.	Jojo George
Open issue	⚠️ To be confirmed: the exact conditions that show **Ready to use** versus **In use** on the provider card.	Jojo George

Change from original BRD

Original BRD item	Current requirement
Not in original BRD	TFA Settings is a new screen added with the TFA Assistant.
Original NFR 5.2 "Secure handling of email credentials"	Applied to AI API keys: stored protected, write-only, never returned (FR-TFAS-10, FR-TFAS-11).

11. Requirements Traceability Matrix

BRD item	FRD requirement(s)	Screen	Use case	Test case
REQ-TFAS-01	FR-TFAS-01	TFA Settings	UC-TFAS-01	AC-TFAS-01
REQ-TFAS-02	FR-TFAS-02	TFA Settings	UC-TFAS-01	AC-TFAS-01
REQ-TFAS-03	FR-TFAS-03	TFA Settings	UC-TFAS-01	AC-TFAS-02

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

BRD item	FRD requirement(s)	Screen	Use case	Test case
REQ-TFAS-04	FR-TFAS-04	TFA Settings	UC-TFAS-01	AC-TFAS-02
REQ-TFAS-05	FR-TFAS-05	TFA Settings	UC-TFAS-01	AC-TFAS-03
REQ-TFAS-06	FR-TFAS-06	TFA Settings	UC-TFAS-01	AC-TFAS-04
REQ-TFAS-07	FR-TFAS-07	TFA Settings	UC-TFAS-01	AC-TFAS-04
REQ-TFAS-08	FR-TFAS-08	TFA Settings	UC-TFAS-01	AC-TFAS-05
REQ-TFAS-09	FR-TFAS-09	TFA Settings	UC-TFAS-01	AC-TFAS-05
REQ-TFAS-10	FR-TFAS-10	TFA Settings	UC-TFAS-01	AC-TFAS-06
REQ-TFAS-11	FR-TFAS-11	TFA Settings	UC-TFAS-01	AC-TFAS-06
REQ-TFAS-12	FR-TFAS-12	TFA Settings	UC-TFAS-01	AC-TFAS-07
REQ-TFAS-13	FR-TFAS-13	TFA Settings	UC-TFAS-01	AC-TFAS-07
REQ-TFAS-14	FR-TFAS-14	TFA Settings	UC-TFAS-01	AC-TFAS-08
REQ-TFAS-15	FR-TFAS-16	TFA window	UC-TFAS-01	AC-TFAS-08
REQ-TFAS-16	FR-TFAS-17, FR-TFAS-18	TFA Settings	UC-TFAS-02	AC-TFAS-09
REQ-TFAS-17	FR-TFAS-19	TFA Settings	UC-TFAS-02	AC-TFAS-10
REQ-TFAS-18	FR-TFAS-20	TFA Settings	UC-TFAS-03	AC-TFAS-11
REQ-TFAS-19	FR-TFAS-21	TFA Settings	UC-TFAS-03	AC-TFAS-11
REQ-TFAS-20	FR-TFAS-22	TFA Settings	UC-TFAS-01	AC-TFAS-12
REQ-TFAS-21	FR-TFAS-23	TFA Settings	UC-TFAS-01	AC-TFAS-13
REQ-TFAS-22	FR-TFAS-24	TFA Settings	–	AC-TFAS-14
REQ-TFAS-23	FR-TFAS-25	TFA Settings	UC-TFAS-01, UC-TFAS-02, UC-TFAS-03	AC-TFAS-15
REQ-TFAS-24	FR-TFAS-27	TFA Settings	–	AC-TFAS-15

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

BRD item	FRD requirement(s)	Screen	Use case	Test case
REQ-TFAS-25	FR-TFAS-28	TFA Settings	UC-TFAS-01, UC-TFAS-03	AC-TFAS-11, AC-TFAS-16
BR-TFAS-01	FR-TFAS-10, FR-TFAS-11	TFA Settings	UC-TFAS-01	AC-TFAS-06
BR-TFAS-02	FR-TFAS-14	TFA Settings	UC-TFAS-01	AC-TFAS-08
BR-TFAS-03	FR-TFAS-16, FR-TFAS-22	TFA window	UC-TFAS-01	AC-TFAS-08, AC-TFAS-12
BR-TFAS-04	FR-TFAS-21	TFA Settings	UC-TFAS-03	AC-TFAS-11
BR-TFAS-05	FR-TFAS-15	TFA Settings	UC-TFAS-01	–
BR-TFAS-06	FR-TFAS-07	TFA Settings	UC-TFAS-01	AC-TFAS-04
BR-TFAS-07	FR-TFAS-25, FR-TFAS-26	TFA Settings, Role Configuration	–	AC-TFAS-15

Untraced BRD items: **0**.

12. Approvals

Role	Name	Decision	Date
Product owner	Jojo George	Pending	–
Reviewer	Jojo George	Pending	–

© 2026 Jojo George. All rights reserved. Unauthorized copying or distribution of this document is prohibited.