High-Level Design – Dashboard

TaskFlow – Intelligent Task Allocation & Tracking System

Document: High-Level Design (sub-module 1 – DASH) · **Version:** 1.0 · **Status:** Draft
Project type: Personal Project (Skill Development) · **Date:** 31-Oct-2026
Author: Jojo George (jojogeorge3344@gmail.com)
Based on: BRD – Dashboard v1.0, FRD – Dashboard v1.0 (FR-DASH-01 – FR-DASH-75), TDD v2.0, TaskFlow as built
© 2026 Jojo George. All rights reserved.

Document Control

Version	Date	Author	Summary of changes
1.0	31-Oct-2026	Jojo George	Initial version of the Dashboard HLD (Administrator, Manager and Employee dashboards, analytics, filters, drill-down), written from the Dashboard BRD / FRD and the code as built

Related documents

Document	Location
HLD – Overall (stack, deployment, cross-cutting design)	`../../00-Overall/HLD-TaskFlow-Overall.md`
BRD – Dashboard	`../../../BRD/01-Dashboard/01.1-Dashboard/BRD-Dashboard.md`
FRD – Dashboard	`../../../FRD/01-Dashboard/01.1-Dashboard/FRD-Dashboard.md`
LLD – Dashboard (classes, endpoints, queries, tests)	`../../../LLD/01-Dashboard/01.1-Dashboard/LLD-Dashboard.md`
HLD – Task Management (drill-down target)	`../../02-TaskFlow-Monitoring/02.1-Task-Management/HLD-Task-Management.md`
HLD – Reports (file export of task figures)	`../../05-Reports/05.1-Reports/HLD-Reports.md`
TDD	`TF - Documents/TF - TDD/TDD-TaskFlow.md` (v2.0) – §2.3, §3, §6.6, §7.5, §8.3

1. Introduction

1.1 Purpose

This HLD describes how the Dashboard sub-module is built: where it sits in TaskFlow, its frontend and backend components and their responsibilities, the data it reads, how it interacts with Task Management, Management and Settings, its key flows, its security model and the design decisions behind it. Classes, methods, queries, columns and the full endpoint list are in the LLD.

1.2 Scope

In scope: dashboard landing and routing (`/admin`, `/manager`, `/me`), the three dashboard pages, the analytics backend (organisation, team and own scopes), the filter bar and period chips, and the drill-down hand-off to the Task List. Also in scope: the Overview counter endpoints that exist in the code but are not called by any screen. Out of scope: the Task List and Task Details themselves (Task Management HLD), file export (Reports HLD), and the shared stack, deployment and cross-cutting design (overall HLD).

1.3 Audience

Developer and reviewer (Jojo George), technical reviewers, and anyone maintaining the dashboards or the shared bucket rules.


1.4 Definitions & Abbreviations

Term	Meaning
SPA	Single Page Application (Angular frontend)
Scope	Data visibility level: Own, Team or Organisation
Scope service	Backend component that turns the caller and the filter into the set of tasks to count (`AdminDashboardScope`, `ManagerDashboardScope`, `EmployeeDashboardScope`)
Bucket	Completed, Overdue, In progress or Pending – each counted task is in exactly one (`TaskBucketRules`)
Deadline bucket	Overdue, Due today, Next 7 days, Later for open tasks (`DeadlineBucketRules`)
Drill-down	Opening the Task List with the filter of a clicked chart part
Application timezone	Timezone from Application Settings (fallback `Application:Timezone`, default Asia/Kolkata)
KPI	Key performance indicator – a summary card

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

2. System Context

2.1 Context Diagram

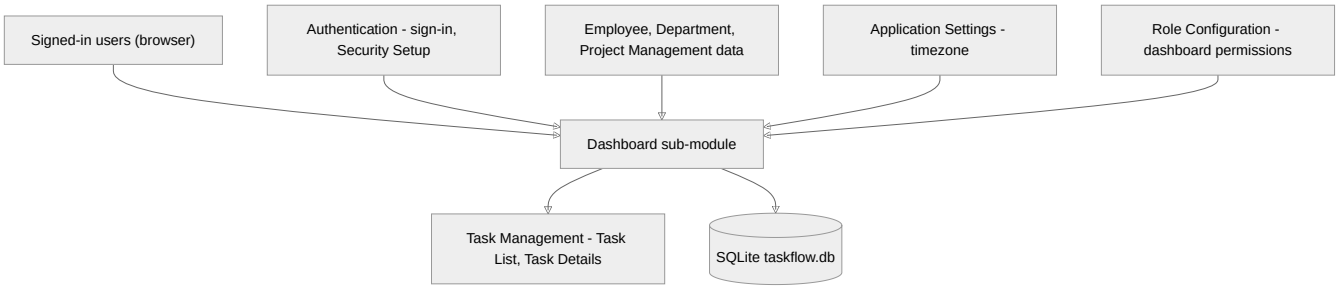

2.2 Actors & External Systems

Actor / system	Interaction	Protocol
Administrator	Opens the Administrator Dashboard (organisation scope); may open the Manager Dashboard by address	HTTPS (SPA → REST JSON)
Manager	Opens the Manager Dashboard (team scope)	HTTPS (SPA → REST JSON)
Employee / any signed-in user	Opens the Employee Dashboard (own scope)	HTTPS (SPA → REST JSON)
Custom role	Lands on the dashboard its view keys allow	HTTPS (SPA → REST JSON)
Authentication (internal)	Sends the user to the dashboard after sign-in and Security Setup	In-app navigation
Task Management (internal)	Receives drill-down navigation; applies the same bucket rules	In-app navigation + REST
Application Settings (internal)	Supplies the application timezone through `IAppClock`	In-process call
Role Configuration (internal)	Grants the five dashboard keys	Database (role permissions)

No external (third-party) system is used by this sub-module.

3. Architecture Goals, Constraints & Principles

3.1 Quality Goals

Goal	How the architecture supports it
Consistency	One bucket definition (`TaskBucketRules`, `DeadlineBucketRules`) is used by every card, chart and the Task List drill-down
Security / privacy	Scope is decided on the server by the endpoint and the scope service, never by a client parameter; the own-scope endpoint accepts no subject id
Correct dates	Day boundaries are computed in the application timezone and converted to UTC before querying

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

Goal	How the architecture supports it
Performance	The server returns aggregated counts, not task lists; lists are capped (5, 10, top 10)
Maintainability	Controller → Service → Scope / Repository layering; one service per audience; shared rules in `Common/Rules`
Read-only safety	No write path exists in the sub-module; it creates no notification, mail or activity entry

3.2 Constraints

- Single SQLite database shared with all modules; no reporting replica, cache or snapshot tables.
- Thresholds are code constants (default range 30 days, maximum range under 3660 days, daily trend up to 31 days, top 10, lists of 5 and 10, 7-day window, High workload at 5 open tasks and 1.5 × average, department minimum 3 active members).
- Permissions come from the fixed catalogue; only five dashboard keys exist (no per-card permission).
- No direct-report relation exists; a manager's team is derived from departments managed and project-manager allocations.

3.3 Architecture Principles

- Server-side scope: every request is narrowed by a scope service before any count runs.
- One rule, many consumers: bucket and deadline rules are shared with Task Management so a drill-down lists exactly the counted tasks.
- Aggregate in the database, shape in the service: repositories return counts; services build the DTOs (trend buckets, flags).
- Read-only module: no unit-of-work commit, no side effects.

---


4. Architecture Overview

4.1 Architecture Style

The Dashboard follows the system-wide style – Angular SPA calling a layered ASP.NET Core REST API over SQLite – described in the overall HLD (`../../00-Overall/HLD-TaskFlow-Overall.md`), which also covers the technology stack, deployment, the request pipeline (JWT, session validation, MFA gate, permission policies) and logging. This section only shows the Dashboard's own slice of that architecture.

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

4.2 Logical Architecture

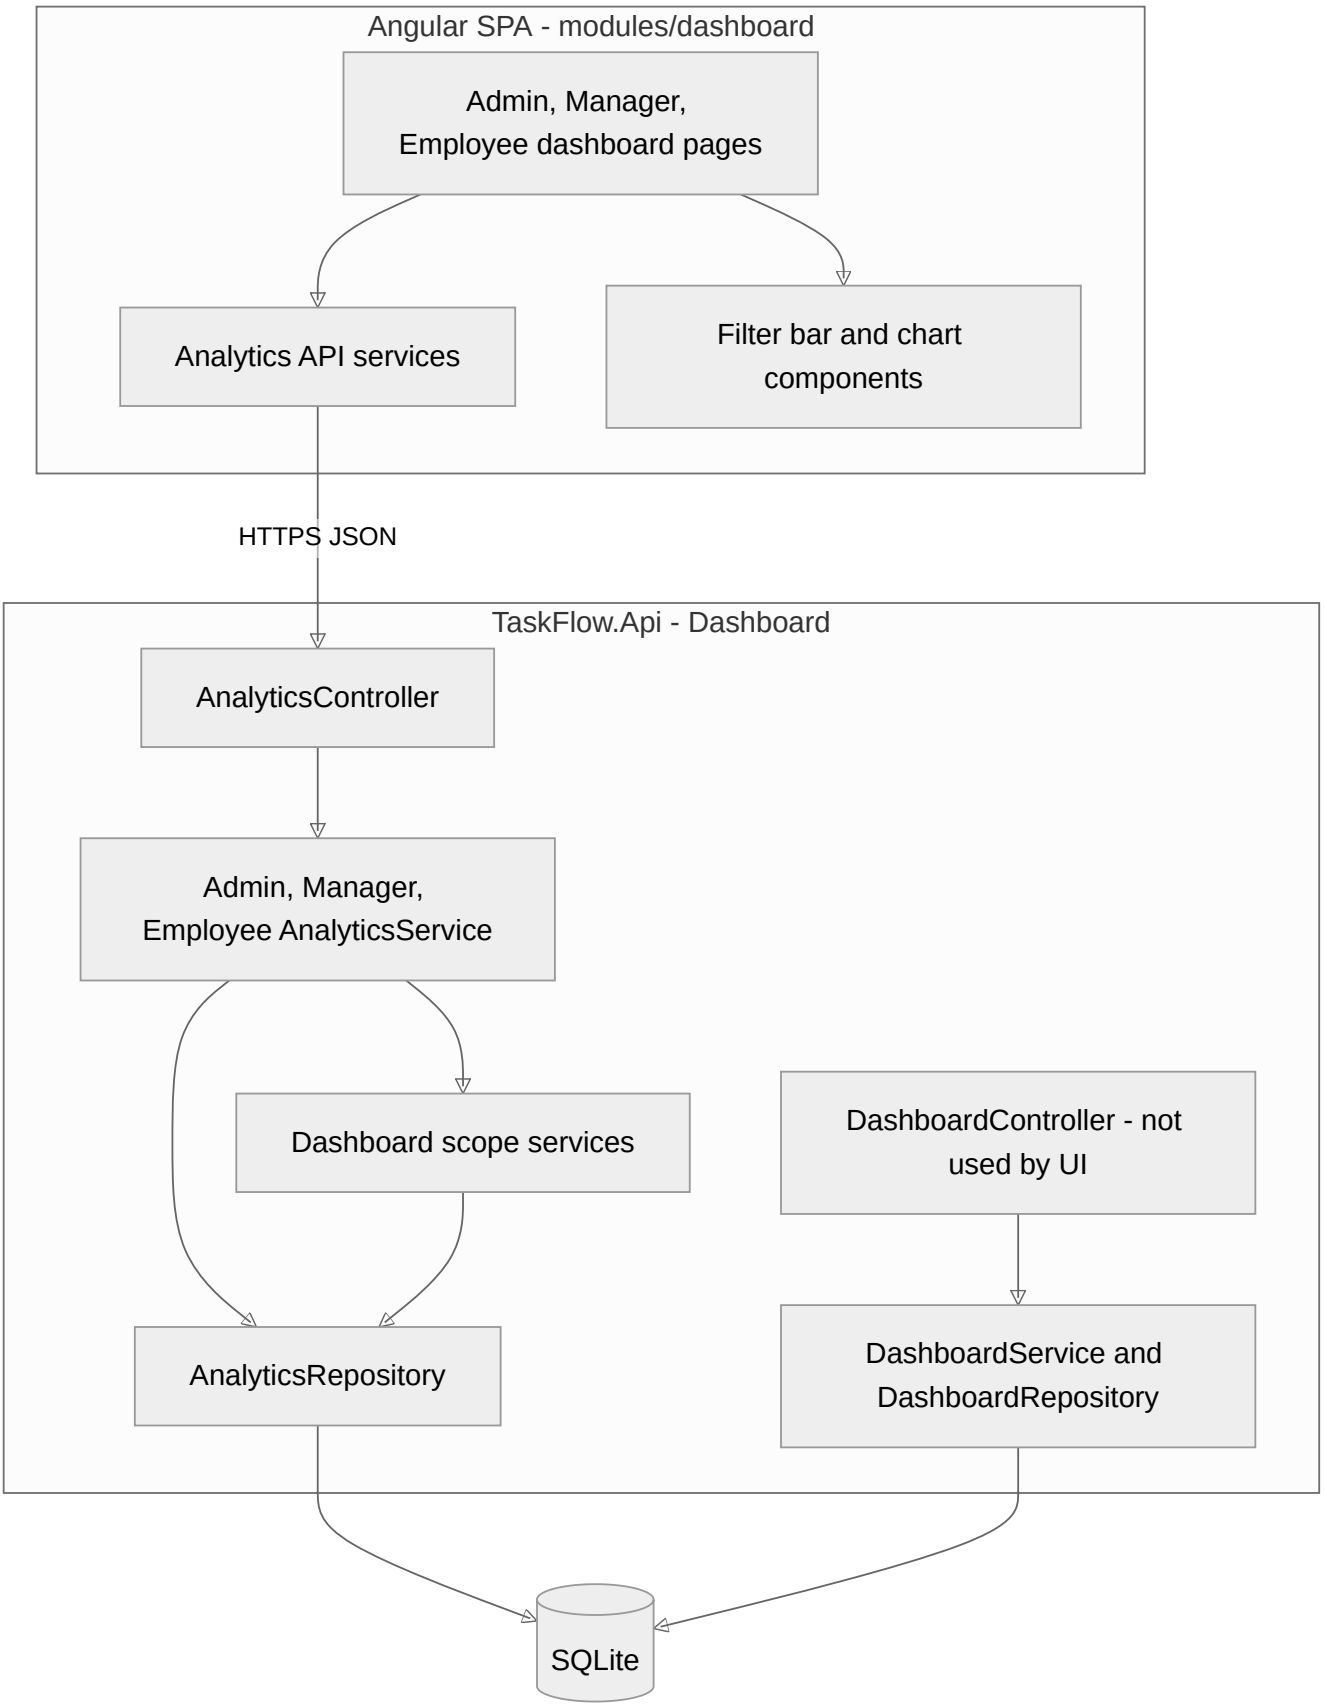

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

4.3 Layers & Responsibilities

Layer	Dashboard responsibility	May call
Presentation	Landing route choice, route guards, three pages, filter bar, charts, drill-down navigation	Dashboard API, Task List route
API / Controllers	Bind the filter, enforce the permission policies, read the caller id from the token	Services
Services	Build each dashboard's DTO: summary, charts, trend, flags, attention lists, department privacy rule	Scope services, repositories, `IAppClock`
Scope services	Resolve and check the filter, produce the task set for Organisation, Team or Own	Analytics repository, Employee repository (team)
Repositories	Read-only aggregate queries over tasks, people, departments and projects	Database
Shared rules	Bucket, deadline-bucket and team-threshold rules	–


5. Component / Module Design

Component	Responsibility	Key components (high level)	Depends on
Dashboard landing (frontend)	Pick the dashboard for a role and permissions; single **Dashboard** menu item; guard `/admin` and `/manager`	`dashboardRouteFor` (role routes), `nav-items`, `dashboard.routes` with `permissionGuard`	Auth session (role, permissions)
Dashboard pages (frontend)	Administrator, Manager and Employee pages; loading placeholders, error banner with **Retry**, empty states	Admin / Manager / Employee dashboard page components	Analytics API services
Analytics UI (frontend)	Filter bar, period chips, KPI cards, donut, stacked-bar, line and progress charts; drill-down query building	`DashboardFilterBarComponent`, chart components, `analytics-filter` and `drill-down` utilities	`chart.js` / `ng2-charts`, Task List route
Analytics API services (frontend)	Call the analytics endpoints, hold page state, drop stale responses, clear state on sign-out	`DashboardAnalyticsService`, `ManagerAnalyticsService`, `EmployeeAnalyticsService`	Analytics API
Analytics API (backend)	Five read-only endpoints: analytics and filter options per scope	`AnalyticsController`	Analytics services, permission policies
Analytics services (backend)	Organisation, team and own figures; trend; workload flags; attention lists; department overview	`AdminAnalyticsService`, `ManagerAnalyticsService`, `EmployeeAnalyticsService`	Scope services, `AnalyticsRepository`, `IAppClock`
Scope services (backend)	Filter resolution (defaults, limits, timezone bounds); team and project scope checks; own scope from the session	`AdminDashboardScope`, `ManagerDashboardScope`, `EmployeeDashboardScope`, `AnalyticsFilterResolver`	`AnalyticsRepository`, `EmployeeRepository` (team)

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

Component	Responsibility	Key components (high level)	Depends on
Analytics data access (backend)	Aggregate counts, lists and option lists	`AnalyticsRepository`	SQLite via EF Core
Shared rules	Bucket, deadline bucket, team thresholds – shared with Task Management	`TaskBucketRules`, `DeadlineBucketRules`, `ManagerTeamThresholds`	–
Overview counters (backend, unused by UI)	Simple counter endpoints for the three audiences	`DashboardController`, `DashboardService`, `DashboardRepository`	`ManagerDashboardScope`, `IAppClock`

5.1 Module Interaction

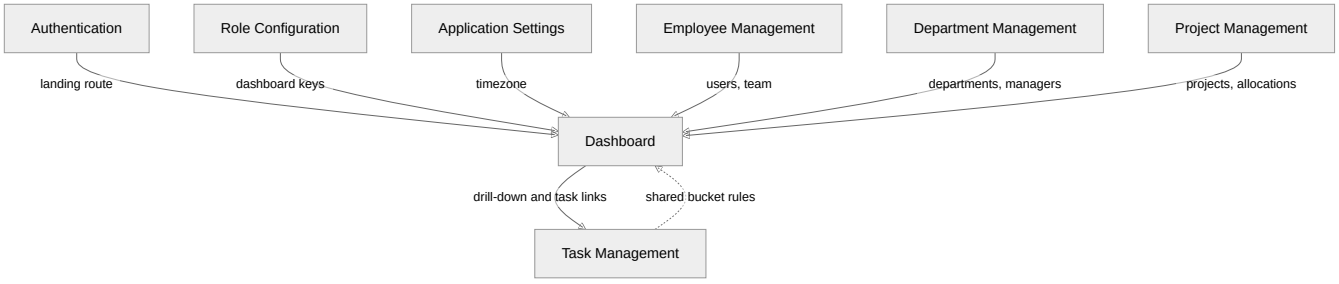

Interacting sub-module	Direction	What is exchanged
Authentication (overall)	In	After sign-in and Security Setup the SPA opens the dashboard chosen by role and permissions
Role Configuration	In	Grants `dashboard.view.team`, `dashboard.view.organization`, `dashboard.analytics.view`, `dashboard.filters.use` (`dashboard.view.own` is always on)
Application Settings	In	Application timezone for "today", presets and deadline windows
Employee / Department / Project Management	In (read)	People, active flags, department membership and managers, projects, manager projects, allocations with the project-manager flag
Task Management	Out / shared	Drill-down to `/tasks` with bucket and filter parameters; task links to `/tasks/:id`; the Task List reuses the dashboard bucket and date-range rules
Reports	Related	Reports offers the file export of task figures; the dashboard is screen-only

6. Data Architecture (high level)


6.1 Data Stores

Store	Technology	Holds (for this sub-module)	Notes
Main database	SQLite (`taskflow.db`, EF Core)	Tasks, recipients, users, departments, projects and their link tables, role permissions, application settings	Read only; the Dashboard owns no table and adds no migration

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

Store	Technology	Holds (for this sub-module)	Notes
Browser memory	Angular signals	Current filter, period and last response per dashboard	Cleared on sign-out; nothing persisted

6.2 Main Data Domains

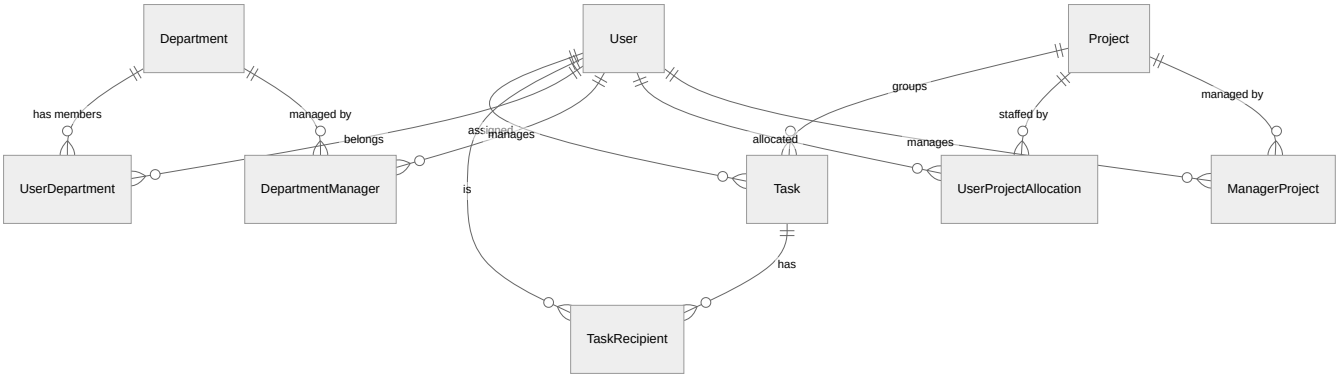

Also read: `RolePermission` (to leave roles holding `tasks.view.all` out of the Employees card) and `ApplicationSetting` (timezone, through `IAppClock`).

Domain	Owner sub-module	Use in the Dashboard
Tasks and recipients	Task Management	Every count, list and trend; a recipient counts as an owner
People	Employee Management	Employees / Managers cards, names, active team members
Departments, members, managers	Department Management	Department-wise figures, manager teams, department overview
Projects, allocations, manager projects	Project Management	Project figures, manager project scope, My projects, team widening by project-manager flag
Roles and permissions	Role Configuration	Employees card rule
Application settings	Application Settings	Timezone

6.3 Data Flow

1. The page sends the filter (range, date basis, optional department / project / employee / manager) or the period.
2. The scope service fills defaults, checks limits and scope, and turns local dates into UTC bounds in the application timezone.
3. The repository counts the scoped, non-deleted, non-cancelled tasks per bucket, priority, deadline window, department, person, manager and project.
4. The service shapes the result (trend per day or week, top 10, flags, attention lists, department privacy rule) and returns one DTO.
5. A click on a chart part sends the same filter plus the clicked part to the Task List, which applies the same rules and the user's task access.

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

7. Integration Design


Integration	Direction	Purpose	Failure behaviour
Task Management – Task List / Task Details	Outbound (SPA navigation)	Drill-down with `bucket`, `deadlineBucket`, `departmentId`, `projectId`, `employeeId`, `managerId`, `from`, `to`, `basis`; task links	Task List validates the parameters and applies the user's access; dates in reverse order are refused there
Application Settings – `IAppClock`	Inbound (in-process)	Application timezone and current time	Unknown timezone id falls back to UTC
Management – team resolution	Inbound (in-process)	`EmployeeRepository` supplies the manager's active team	Empty team → no-team note on the page

API surface of the sub-module (details in the LLD): `/api/v1/dashboard/admin/analytics`, `/api/v1/dashboard/admin/analytics/filters`, `/api/v1/dashboard/manager/analytics`, `/api/v1/dashboard/manager/analytics/filters` and `/api/v1/dashboard/employee/analytics` (used by the pages), plus the Overview counters `/api/v1/dashboard/admin`, `/api/v1/dashboard/manager` and `/api/v1/dashboard/employee` (not used by any screen). All are GET and read-only. No external service is called.

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com


8. Key Flows (high level)

8.1 Sign-in to the right dashboard

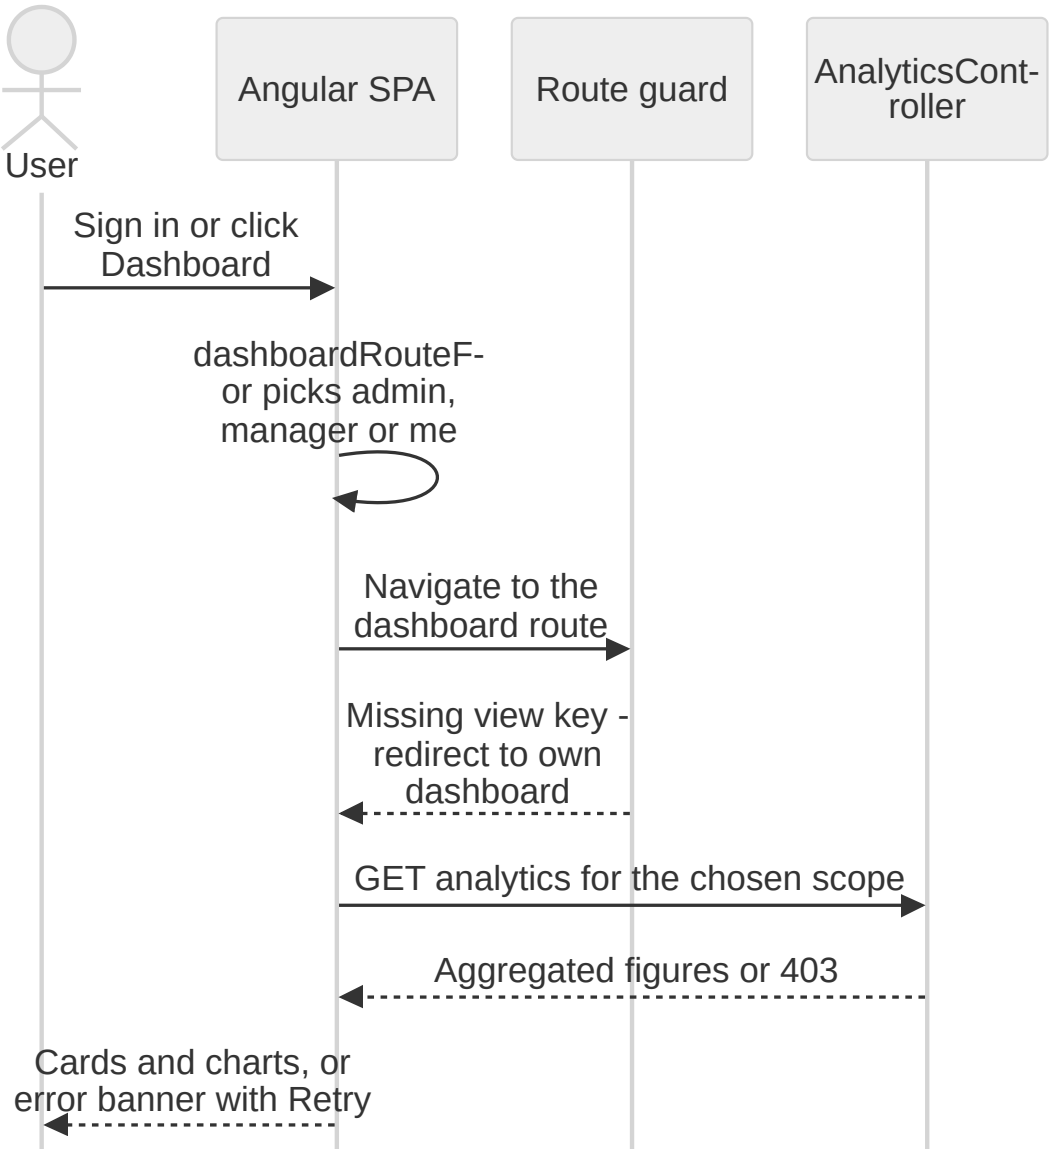


© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

8.2 Filter the Administrator Dashboard (main business flow)

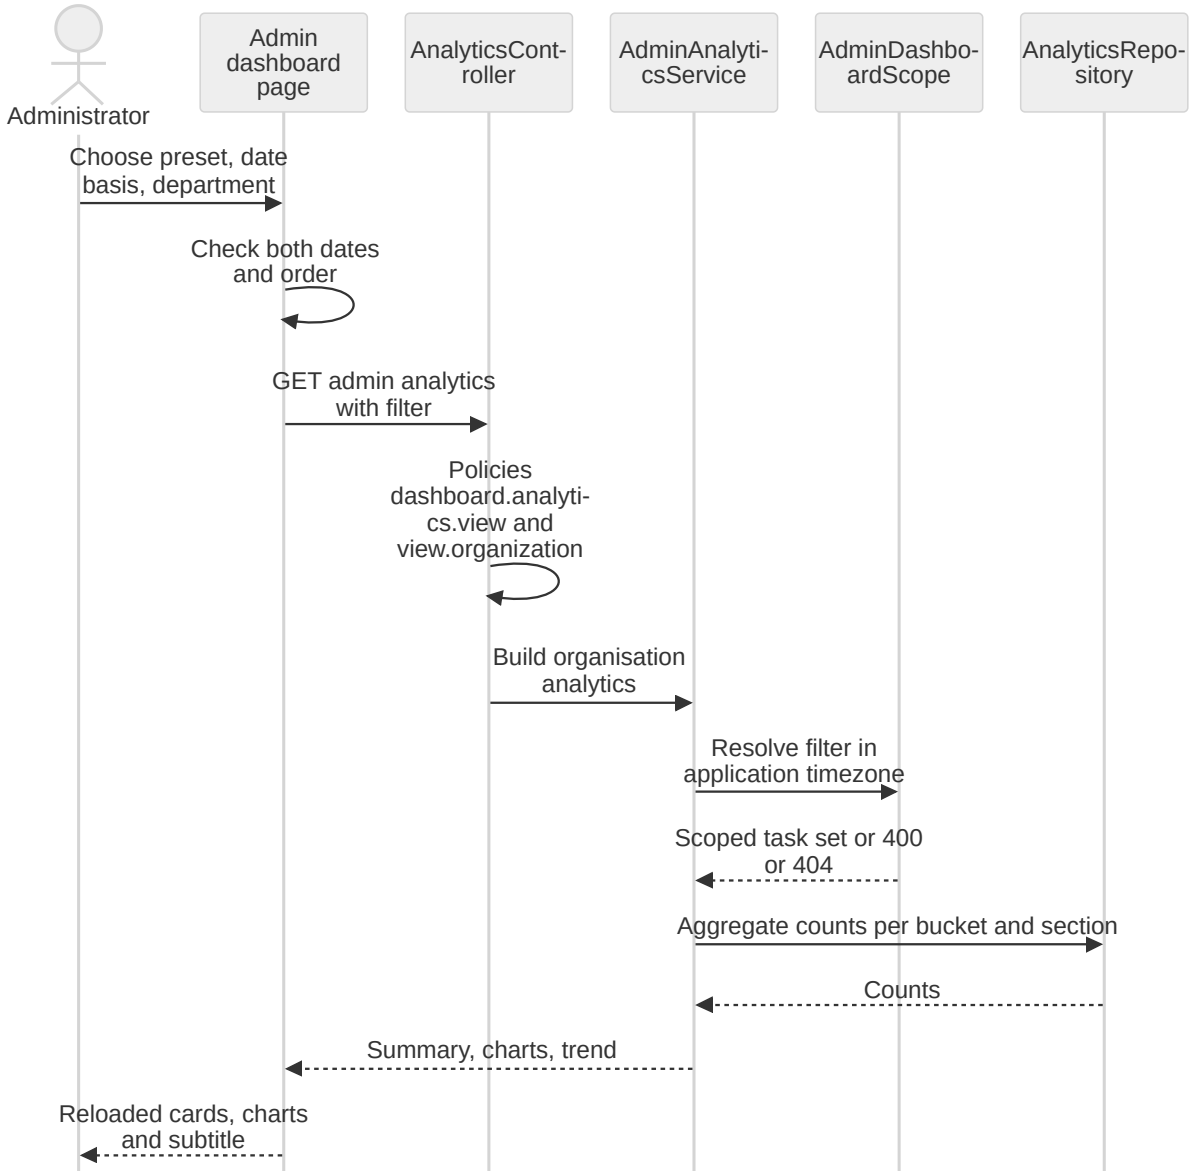


© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

8.3 Manager team scope check

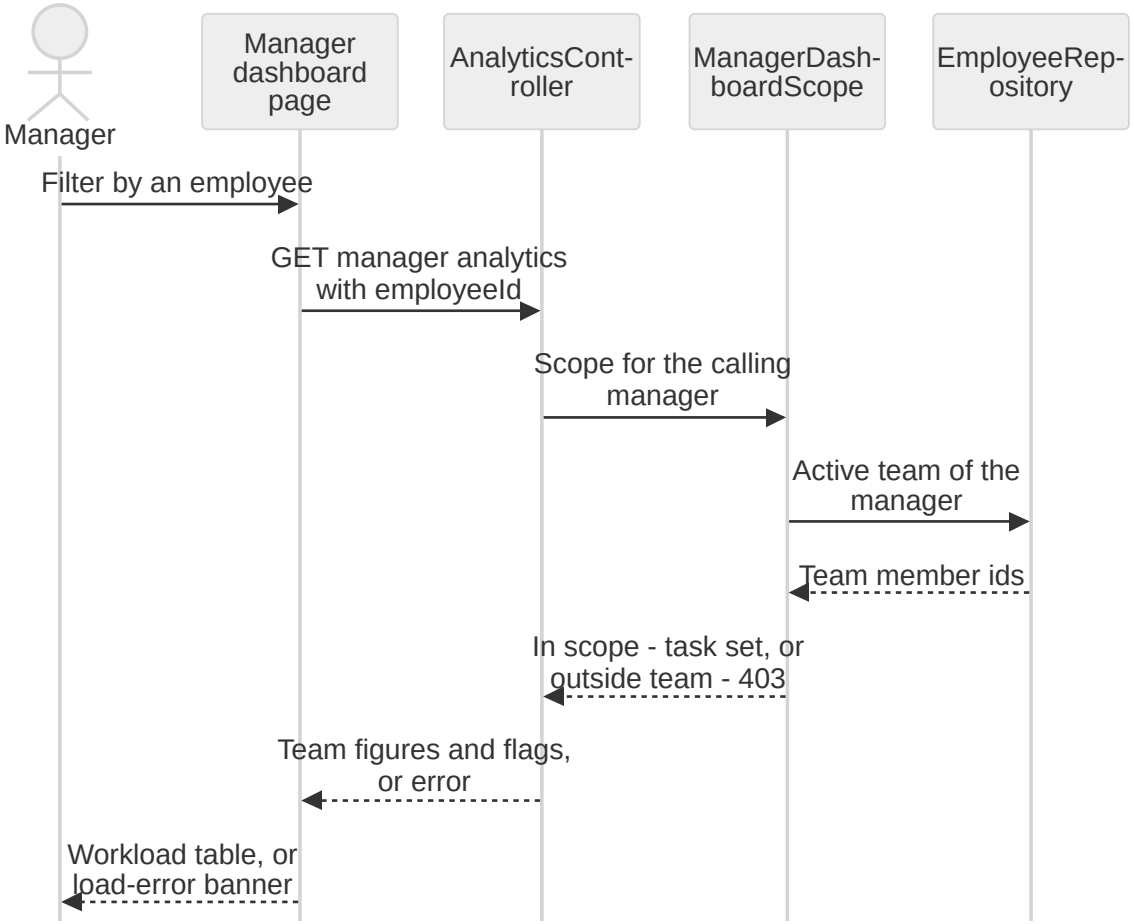

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

8.4 Drill-down to the Task List (integration flow)

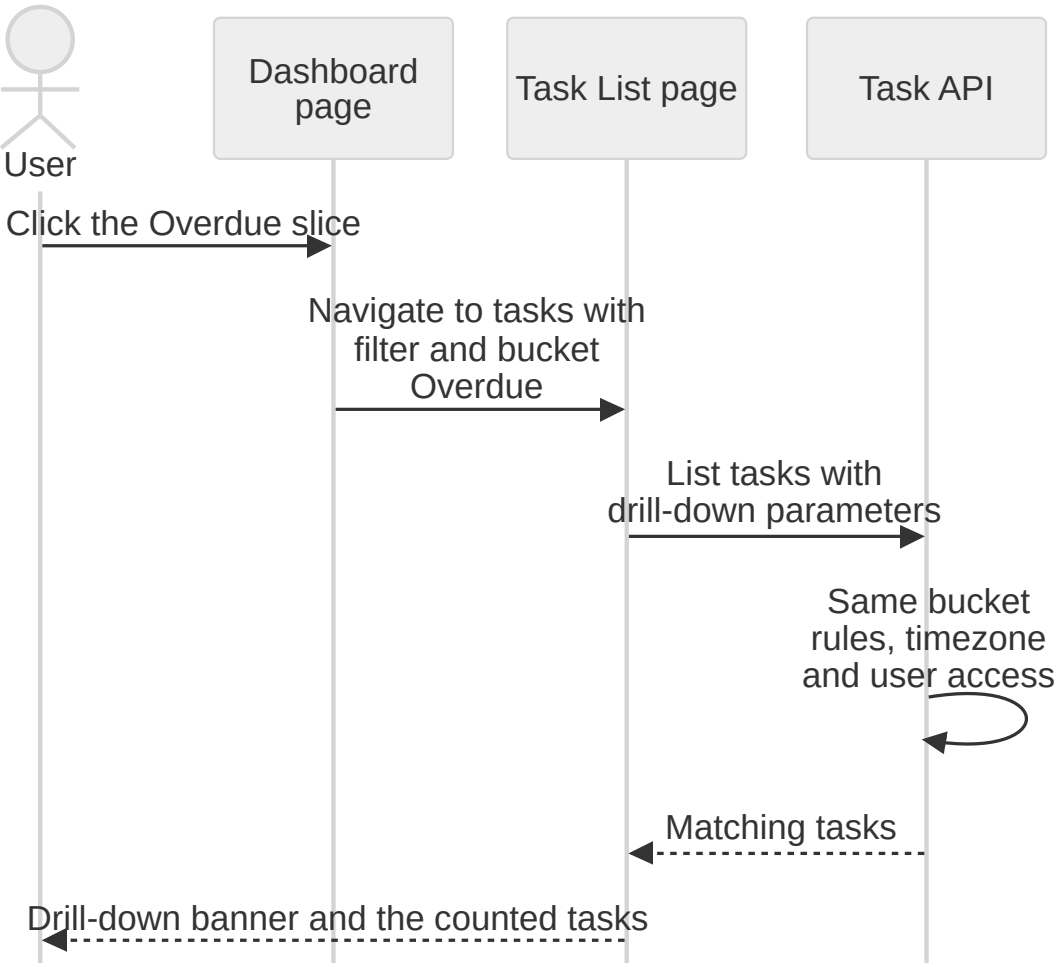

8.5 Background job

Not applicable for this sub-module. The Dashboard computes all figures on request; it has no scheduled job.

---

9. Security Architecture

Concern	Approach
Authentication	Shared JWT bearer token + refresh-token cookie with session revalidation and MFA gate (overall HLD); the caller id comes from the token
Authorization	Permission policies per key. Analytics endpoints need `dashboard.analytics.view` (or `dashboard.filters.use` for filter options) **and** the scope key `dashboard.view.organization` or `dashboard.view.team`; the own analytics endpoint needs only `dashboard.analytics.view` and the own counter endpoint only a signed-in user (`dashboard.view.own` is always on). Scope levels expand: organisation implies team, team implies own; legacy keys `dashboard.admin` / `dashboard.manager` map to the new keys
Data scope	Organisation – `AdminDashboardScope`; Team – `ManagerDashboardScope` (403 for an employee or project outside the team); Own – `EmployeeDashboardScope` (session user only, no subject parameter)

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

Concern	Approach
Privacy	Department overview shows aggregates only and nothing for departments with fewer than 3 active members; Employee Dashboard never returns colleague names
Frontend	`permissionGuard` on `/admin` and `/manager` redirects silently to the user's own dashboard; filter bar hidden without `dashboard.filters.use`. UI hiding is a convenience; the server is the authority
Data protection	No personal data is written; responses hold names and counts only
Auditing	Refused requests (403) are logged by the shared denied-action audit handler; normal reads are covered by request logging

10. Technology Stack

The shared stack (ASP.NET Core / .NET 10, EF Core 10.0.12 with SQLite, Angular 19.2, FluentValidation, JWT) is described in the overall HLD (`../../00-Overall/HLD-TaskFlow-Overall.md`). Sub-module-specific items:

Area	Technology	Version	Reason
Charts	`chart.js` + `ng2-charts`	^4.6.1 / ^8.0.0	Donut, stacked-bar and line charts with click events for drill-down
Frontend state	Angular signals + RxJS `switchMap`	Angular ^19.2.0, RxJS ~7.8.0	Simple page state; stale responses are dropped when filters change quickly
Data access	EF Core LINQ aggregates on SQLite	10.0.12	Counts computed in the database; no extra reporting store

11. Deployment Architecture

Not applicable for this sub-module. The Dashboard runs inside the single `TaskFlow.Api` process and the Angular SPA; it adds no process, port, folder or configuration of its own. Deployment and environments are in the overall HLD (`../../00-Overall/HLD-TaskFlow-Overall.md`). The only configuration it reads is `Application:Timezone` (fallback timezone), `ConnectionStrings:Default` (`<secret>`) and the shared `Jwt:*` lifetimes.

12. Non-Functional Design

Area	Design decision
Performance	Aggregated counts only; capped lists (5 overdue tasks, 5 projects, 10 deadlines, top 10 employees); queries are no-tracking and use the task deadline and assignee indexes; trend counted per quarter hour in SQL and grouped into local days in the service. > ⚠️ To be confirmed: a measured load-time target (NFR-DASH-05)
Scalability	Single API instance on SQLite; bounded ranges (under 3660 days) keep queries bounded (NFR-DASH-06)

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

Area	Design decision
Reliability	Stateless, read-only requests; a failed request leaves nothing to repair; the page offers **Retry**
Availability	Same as the API process (overall HLD)
Consistency	Shared bucket and deadline rules for cards, charts and drill-down (NFR-DASH-03)
Security	Scope enforced on the server (NFR-DASH-01); department privacy threshold (NFR-DASH-02)
Usability	Placeholders, plain-language empty and error messages, **Retry** (NFR-DASH-04)
Maintainability	One service and one scope per audience; rules in `Common/Rules`; structure checked by architecture tests (overall HLD)
Observability	Shared request logging and denied-action audit; no dashboard-specific logging
Backup & Recovery	Nothing owned; covered by the data-folder backup in the overall HLD

13. Design Decisions

ID	Decision	Alternatives considered	Rationale
D-DASH-1	One analytics endpoint per audience (organisation, team, own), each protected by its own scope key	One endpoint with a `scope` parameter; client-side filtering of a full task list	The server, not the client, decides the scope; the own endpoint takes no subject id, so one user cannot ask for another's data
D-DASH-2	Scope services turn caller + filter into one task set used by every count	Each chart builds its own query and checks	One place for filter defaults, limits, timezone bounds and team / project checks; every section agrees
D-DASH-3	One shared bucket definition (`TaskBucketRules`, `DeadlineBucketRules`) reused by the Task List drill-down	Separate rules in Dashboard and Task Management	A drill-down lists exactly the counted tasks (BR-DASH-12); overdue is derived at query time (system decision D5)
D-DASH-4	Aggregate on request in SQLite; no cache or snapshot tables	Materialised daily statistics; in-memory cache	Figures are always current; the data volume of a single-organisation deployment does not need a cache
D-DASH-5	Day boundaries computed in the application timezone and converted to UTC; trend counted per quarter hour then grouped in the service	UTC calendar days; SQLite date functions	"Today" matches deadline reminders and the Task List; quarter-hour slots work for any timezone offset
D-DASH-6	Team = active members of managed departments plus members of projects where the manager is flagged project manager	A direct-report relation; department membership only	Uses existing management data; no new relation to maintain
D-DASH-7	Drill-down hands off to the Task List by query parameters instead of the dashboard listing tasks	Task tables inside the dashboard	Reuses Task List paging, access rules and actions; the dashboard stays aggregate-only
D-DASH-8	Department overview hidden for departments with fewer than 3 active members	Always show; show with names	Prevents inferring one colleague's workload (NFR-DASH-02)

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

ID	Decision	Alternatives considered	Rationale
D-DASH-9	Thresholds are code constants	Settings in Application Settings	Fewer settings to manage; values are stable business rules (BRD §12)
D-DASH-10	Overview counter endpoints kept but not used by the pages	Remove them; switch the pages to them	Kept as simple counters; the pages need the richer analytics DTOs. > ⚠️ To be confirmed: remove or use them (their counting differs, see §14)

14. Risks, Assumptions & Open Issues

Type	Description	Mitigation / owner
Risk	A role without `dashboard.analytics.view` opens a dashboard and sees only the generic load-error banner (R-DASH-01)	Grant the key with the view keys. > ⚠️ To be confirmed: a "no permission" message – Jojo George
Risk	Server filter messages (range too long, employee outside the team, project outside scope) are shown as a connection error (R-DASH-02)	Client checks dates first. > ⚠️ To be confirmed: show the server message – Jojo George
Risk	The Manager Dashboard team differs from the team used by the Administrator's Manager filter and "Manager-wise teams" (department membership only, inactive users included) (R-DASH-03)	> ⚠️ To be confirmed: one team definition – Jojo George
Risk	Administrator trend counts tasks completed in the range even if later reopened; Employee trend counts only tasks still completed (R-DASH-04)	> ⚠️ To be confirmed: one rule – Jojo George
Risk	Unused Overview counters count Cancelled tasks in Total and treat all open tasks as Pending, unlike Analytics	Not shown on any screen. > ⚠️ To be confirmed: remove or align (D-DASH-10) – Jojo George
Risk	The "Managers" card counts only the Manager system role; custom roles holding `dashboard.view.team` are not counted	Documented behaviour (FR-DASH-18)
Assumption	A user may be in zero or more departments; the Department overview uses the first by name	BRD §12
Assumption	Data volume fits on-request aggregation on SQLite	Re-check if task volume grows (NFR-DASH-05)
Open issue	> ⚠️ To be confirmed: measured performance target for dashboard loads (NFR-DASH-05)	Jojo George

15. Traceability (requirements → components)

FRD item(s)	Module / component	Section
FR-DASH-01, FR-DASH-02	Dashboard landing (`dashboardRouteFor` , menu item)	§5, §8.1
FR-DASH-03, FR-DASH-04, FR-DASH-05	Dashboard landing (`dashboard.routes` with `permissionGuard`)	§5, §9

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

FRD item(s)	Module / component	Section
FR-DASH-06, FR-DASH-07	Analytics API (`AnalyticsController` permission policies)	§5, §9
FR-DASH-08, FR-DASH-09	Dashboard pages (placeholders, error banner, **Retry**)	§5
FR-DASH-10, FR-DASH-11, FR-DASH-12	Shared rules (`TaskBucketRules`) via `AnalyticsRepository`	§5, D-DASH-3
FR-DASH-13	Analytics data access (assignee or recipient ownership)	§5, §6.2
FR-DASH-14	Scope services (`AnalyticsFilterResolver`) + `IAppClock`	§6.3, D-DASH-5
FR-DASH-15	Whole sub-module (read-only, no write path)	§3.3
FR-DASH-16, FR-DASH-17, FR-DASH-18, FR-DASH-19	`AdminAnalyticsService` summary and donuts; Analytics UI (KPI and donut charts)	§5
FR-DASH-20, FR-DASH-21, FR-DASH-22	`AdminAnalyticsService` trend; line chart	§5, D-DASH-5
FR-DASH-23	Shared rules (`DeadlineBucketRules`) via `AdminAnalyticsService`	§5
FR-DASH-24, FR-DASH-25, FR-DASH-26, FR-DASH-27, FR-DASH-28	`AdminAnalyticsService` sections; Admin analytics components	§5
FR-DASH-29	Dashboard pages and Admin analytics components (empty states)	§5
FR-DASH-30, FR-DASH-31	`DashboardFilterBarComponent`; filter-options endpoint (`dashboard.filters.use`)	§5, §9
FR-DASH-32, FR-DASH-33, FR-DASH-34, FR-DASH-35	Filter bar + `analytics-filter` utility; `AnalyticsFilterResolver` / `AdminDashboardScope`	§5, §8.2
FR-DASH-36	Filter bar client-side date check	§8.2
FR-DASH-37	`AnalyticsFilterResolver` (range, basis, entity existence)	§8.2
FR-DASH-38, FR-DASH-39	Admin dashboard page + `DashboardAnalyticsService`	§5
FR-DASH-40, FR-DASH-41, FR-DASH-42	`ManagerAnalyticsService` + `ManagerDashboardScope` (team via `EmployeeRepository`)	§5, §8.3, D-DASH-6
FR-DASH-43, FR-DASH-44	Manager dashboard page (no-team notes)	§5
FR-DASH-45, FR-DASH-46, FR-DASH-47, FR-DASH-48	`ManagerAnalyticsService` attention lists; team attention component; Task Management navigation	§5, §8.4
FR-DASH-49, FR-DASH-50	`ManagerAnalyticsService`; team task and team employee components	§5
FR-DASH-51, FR-DASH-52, FR-DASH-53	`ManagerAnalyticsService` + `ManagerTeamThresholds`	§5
FR-DASH-54, FR-DASH-55, FR-DASH-56	`ManagerDashboardScope` (scope checks) + manager filter-options endpoint	§8.3, §9
FR-DASH-57	Manager dashboard page (empty state)	§5
FR-DASH-58	Permission expansion (organisation implies team)	§9

© 2026 Jojo George. All rights reserved. · jojogeorge3344@gmail.com

FRD item(s)	Module / component	Section
FR-DASH-59, FR-DASH-60, FR-DASH-61	`EmployeeAnalyticsService` + `EmployeeDashboardScope` (own scope)	§5, §9, D-DASH-1
FR-DASH-62, FR-DASH-63, FR-DASH-64	`EmployeeAnalyticsService` upcoming deadlines; Employee page; Task Details link	§5
FR-DASH-65, FR-DASH-66, FR-DASH-67	`EmployeeAnalyticsService` period handling and trend; period chips	§5
FR-DASH-68	`EmployeeAnalyticsService` My projects	§5
FR-DASH-69, FR-DASH-70, FR-DASH-71	`EmployeeAnalyticsService` department overview (privacy threshold)	§9, D-DASH-8
FR-DASH-72, FR-DASH-73	Analytics UI (`drill-down` utility) → Task List banner (Task Management)	§7, §8.4, D-DASH-7
FR-DASH-74, FR-DASH-75	Shared rules reused by Task Management; Task List access rules	§8.4, D-DASH-3

All 75 FRs (FR-DASH-01 – FR-DASH-75) are traced to at least one component.

© 2026 Jojo George. All rights reserved. Unauthorized copying or distribution of this document is prohibited.