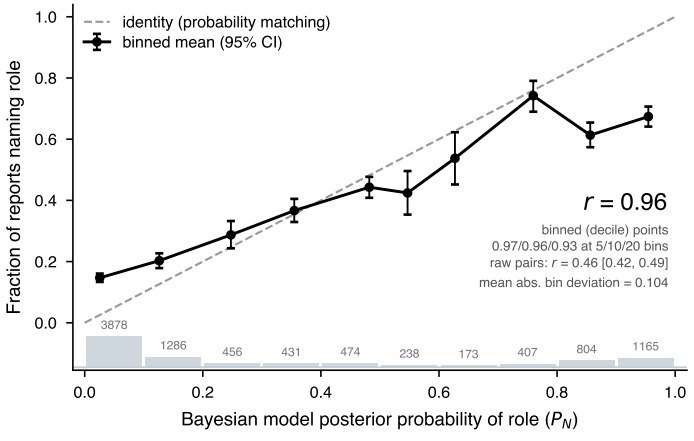
Population (n = 102, 3,104 reports)
identity (probability matching)
binned mean (95% CI)
r = 0.96
binned (decile) points
0.97/0.96/0.93 at 5/10/20 bins
raw pairs: r = 0.46 [0.42, 0.49]
mean abs. bin deviation = 0.104
3878
1286
456
431
474
238
173
407
804
1165
Fraction of reports naming role
Bayesian model posterior probability of role (P_N)

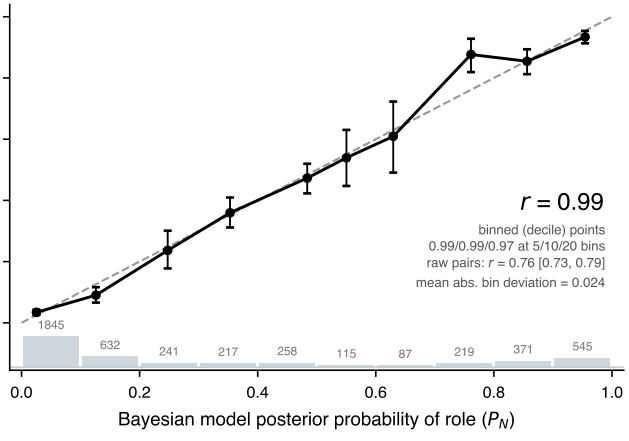
Updaters (n = 50, 1,510 reports)
r = 0.99
binned (decile) points
0.99/0.99/0.97 at 5/10/20 bins
raw pairs: r = 0.76 [0.73, 0.79]
mean abs. bin deviation = 0.024
1845
632
241
217
258
115
87
219
371
545
Bayesian model posterior probability of role (P_N)

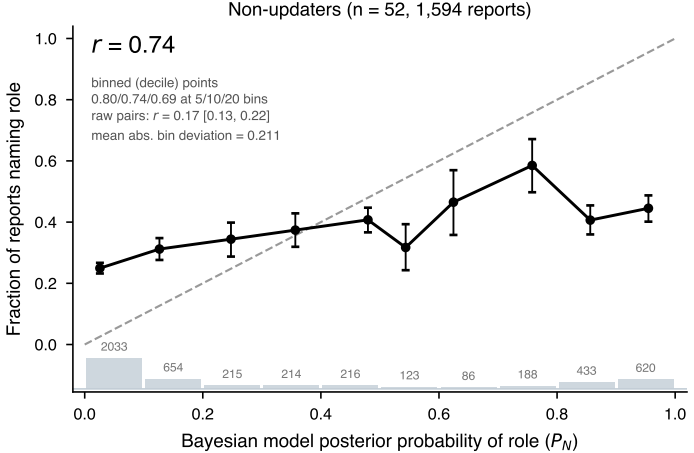
Non-updaters (n = 52, 1,594 reports)
r = 0.74
binned (decile) points
0.80/0.74/0.69 at 5/10/20 bins
raw pairs: r = 0.17 [0.13, 0.22]
mean abs. bin deviation = 0.211
2033
654
215
214
216
123
86
188
433
620
Fraction of reports naming role
Bayesian model posterior probability of role (P_N)

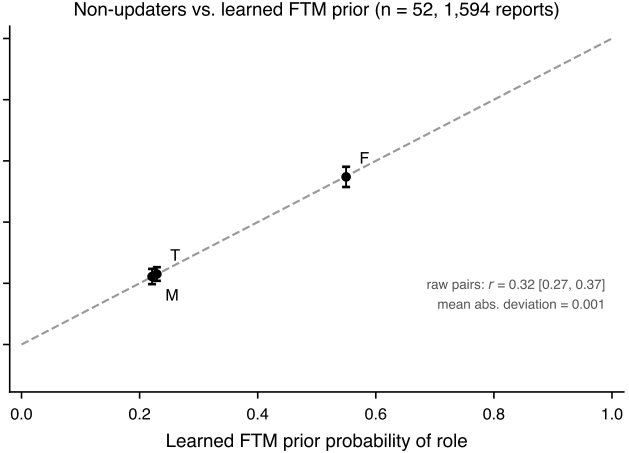
Non-updaters vs. learned FTM prior (n = 52, 1,594 reports)
F
T
M
raw pairs: r = 0.32 [0.27, 0.37]
mean abs. deviation = 0.001
Learned FTM prior probability of role