



M1 · Value-directed change-detection task — vda_excl

t0 · blank




t1 · value/validity cue




t2 · delay




t3 · array onset




t4 · maintenance




t5 · possible change



t6 · response




displayed validity 100%

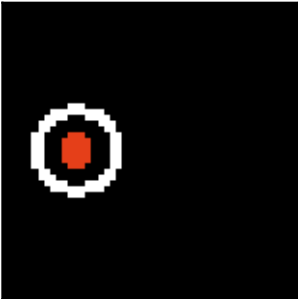


25–75% cue configurations are inapplicable:
the exclusion task is target-valid by construction.

Displayed and realized validity

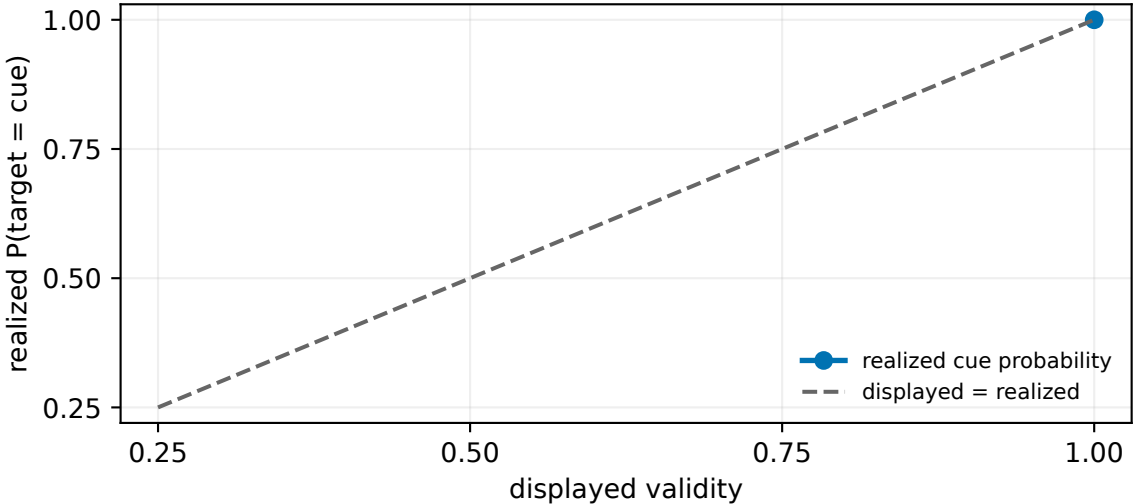

Realized target-location distribution at displayed validity 1.00

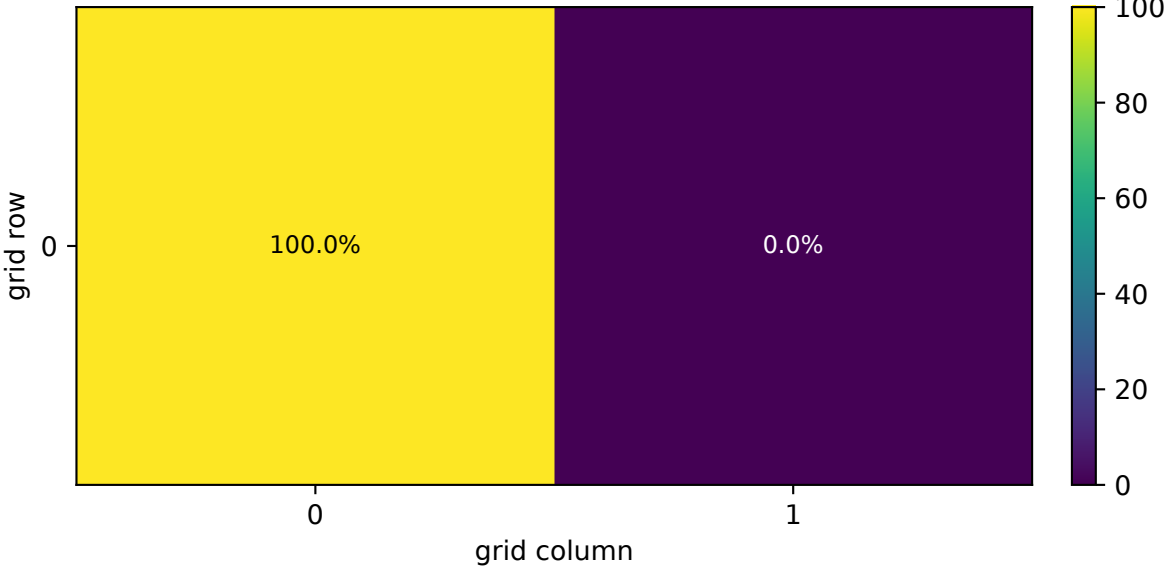

Task semantics

Environment: vda_excl
Lineage: historical
Geometry: 1×2 grid; 50×50 RGB
Model tokens: 2
Active items: 2
Validity rule: exclusion_target_only
Realized P(target = cue): 1.000
Shown branch: distractor present
Paired branch: target alone (distractor blank)

Evidence boundary

Deterministic task-derived schematic.

It documents geometry, timing, active-item count, and target-sampling semantics. It contains no learned-model measurement and does not establish performance, convergence, neural equivalence, or a capacity limit.