



M1 · Value-directed change-detection task — vda4

t0 · blank




t1 · value/validity cue




t2 · delay




t3 · array onset




t4 · maintenance




t5 · possible change




t6 · response




displayed validity 25%

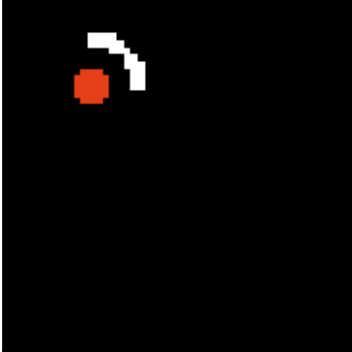



displayed validity 50%

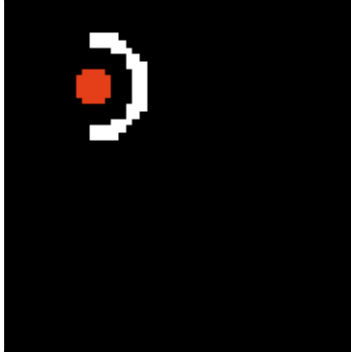


displayed validity 75%

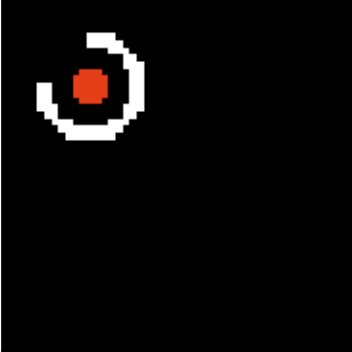

displayed validity 100%

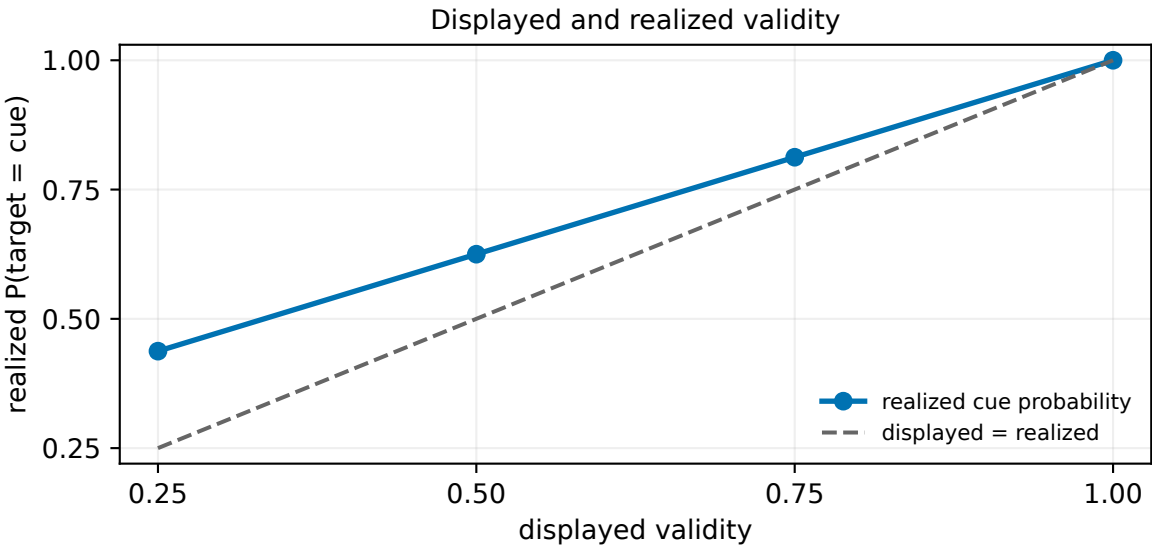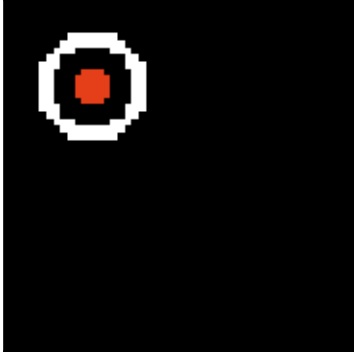

Realized target-location distribution at displayed validity 0.25

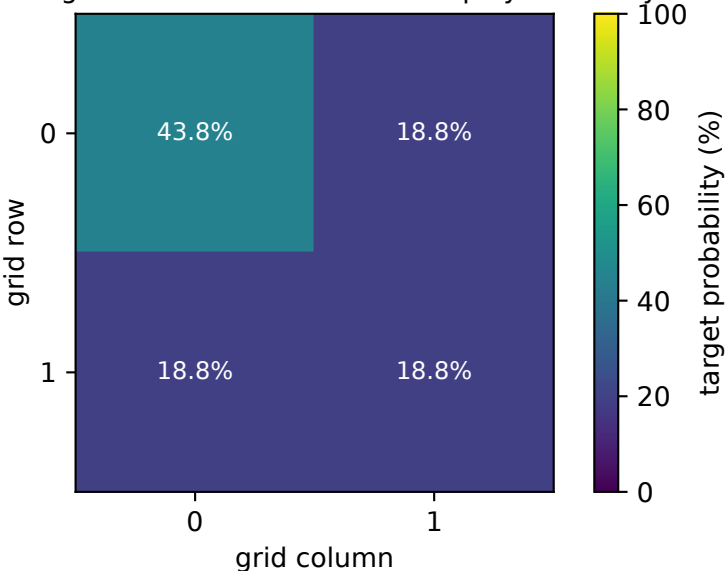

Task semantics

Environment: vda4
Lineage: historical
Geometry: 2×2 grid; 50×50 RGB
Model tokens: 4
Active items: 4
Validity rule: archived_including_cue
Realized $P(\text{target} = \text{cue})$: 0.438

Evidence boundary

Deterministic task-derived schematic.

It documents geometry, timing, active-item count, and target-sampling semantics. It contains no learned-model measurement and does not establish performance, convergence, neural equivalence, or a capacity limit.