


Cross-attention visual and recurrent-memory key maps must be shown separately

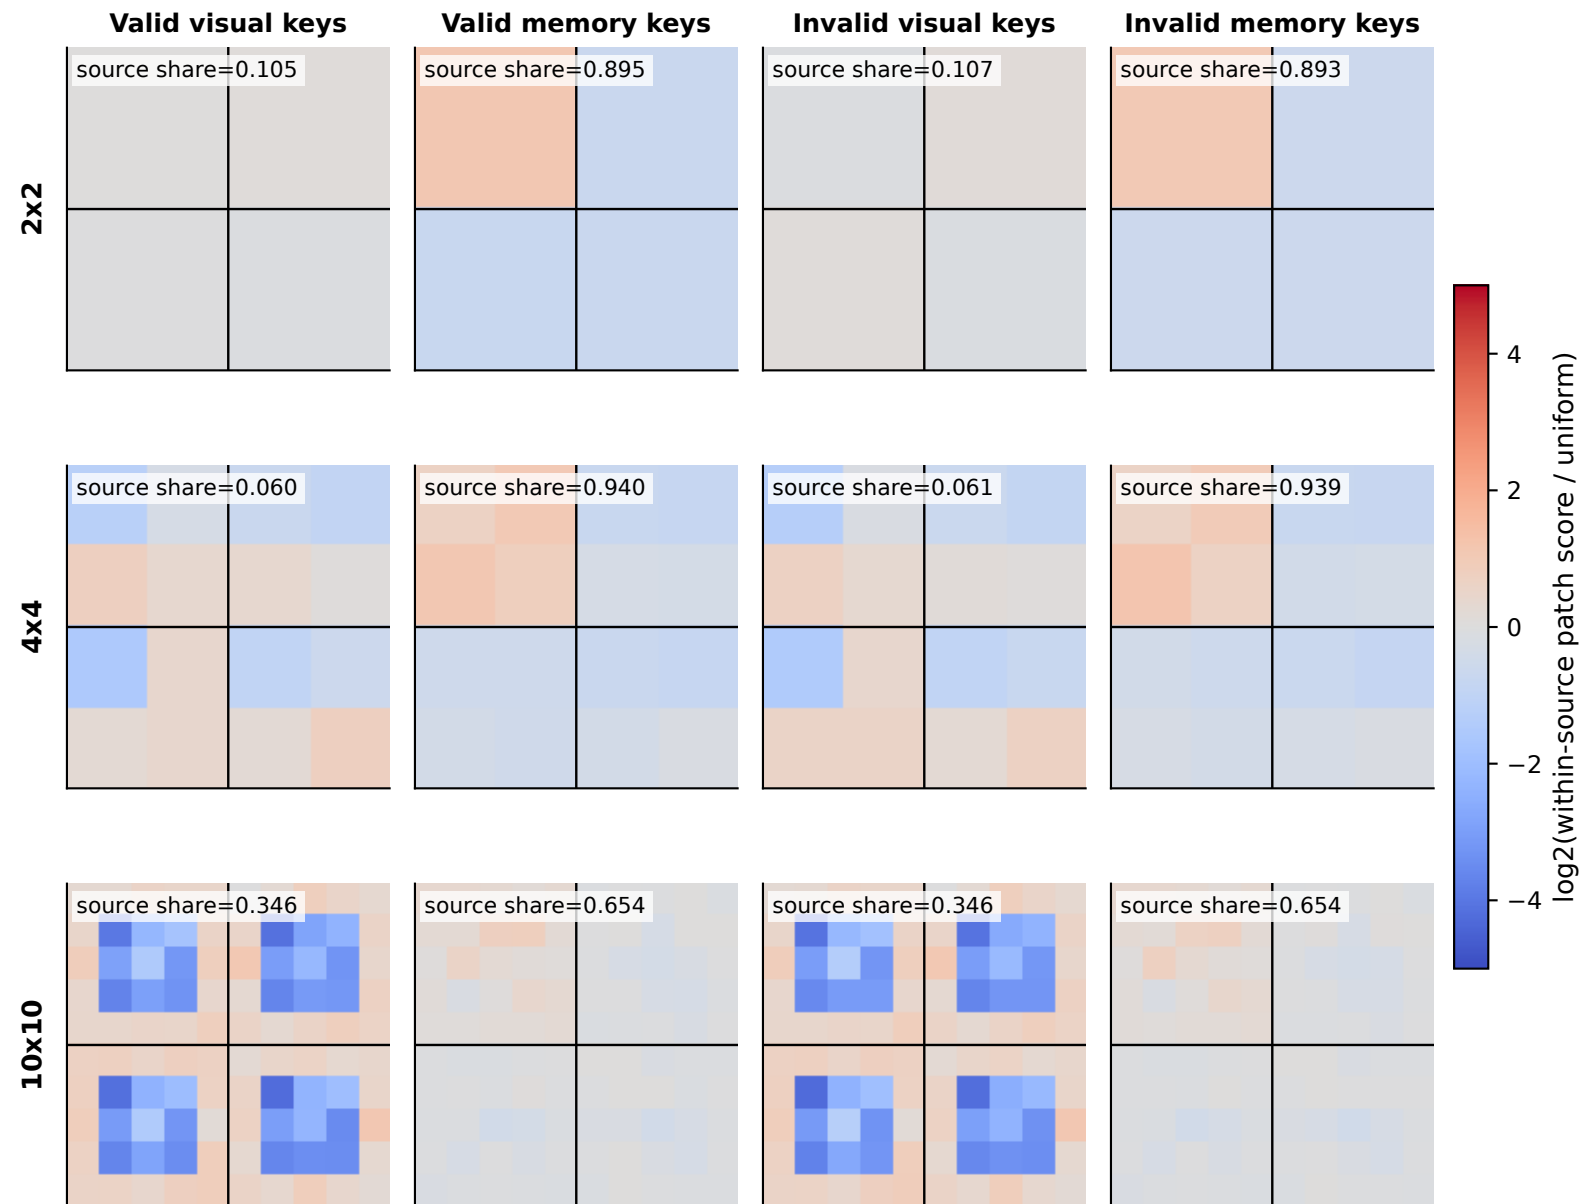

Source maps are reconstructed from trial-averaged raw attention retained in the verified cache, normalized within source. Each panel also states its unconditional source share. These data support mean-map description but not source-specific trial intervals.