


VDA4 paired-location routing depends on the named common-grid measure (held-out seed 0)

- Cross-attention - valid
- Cross-attention - invalid
- Affine EW - valid
- Affine EW - invalid

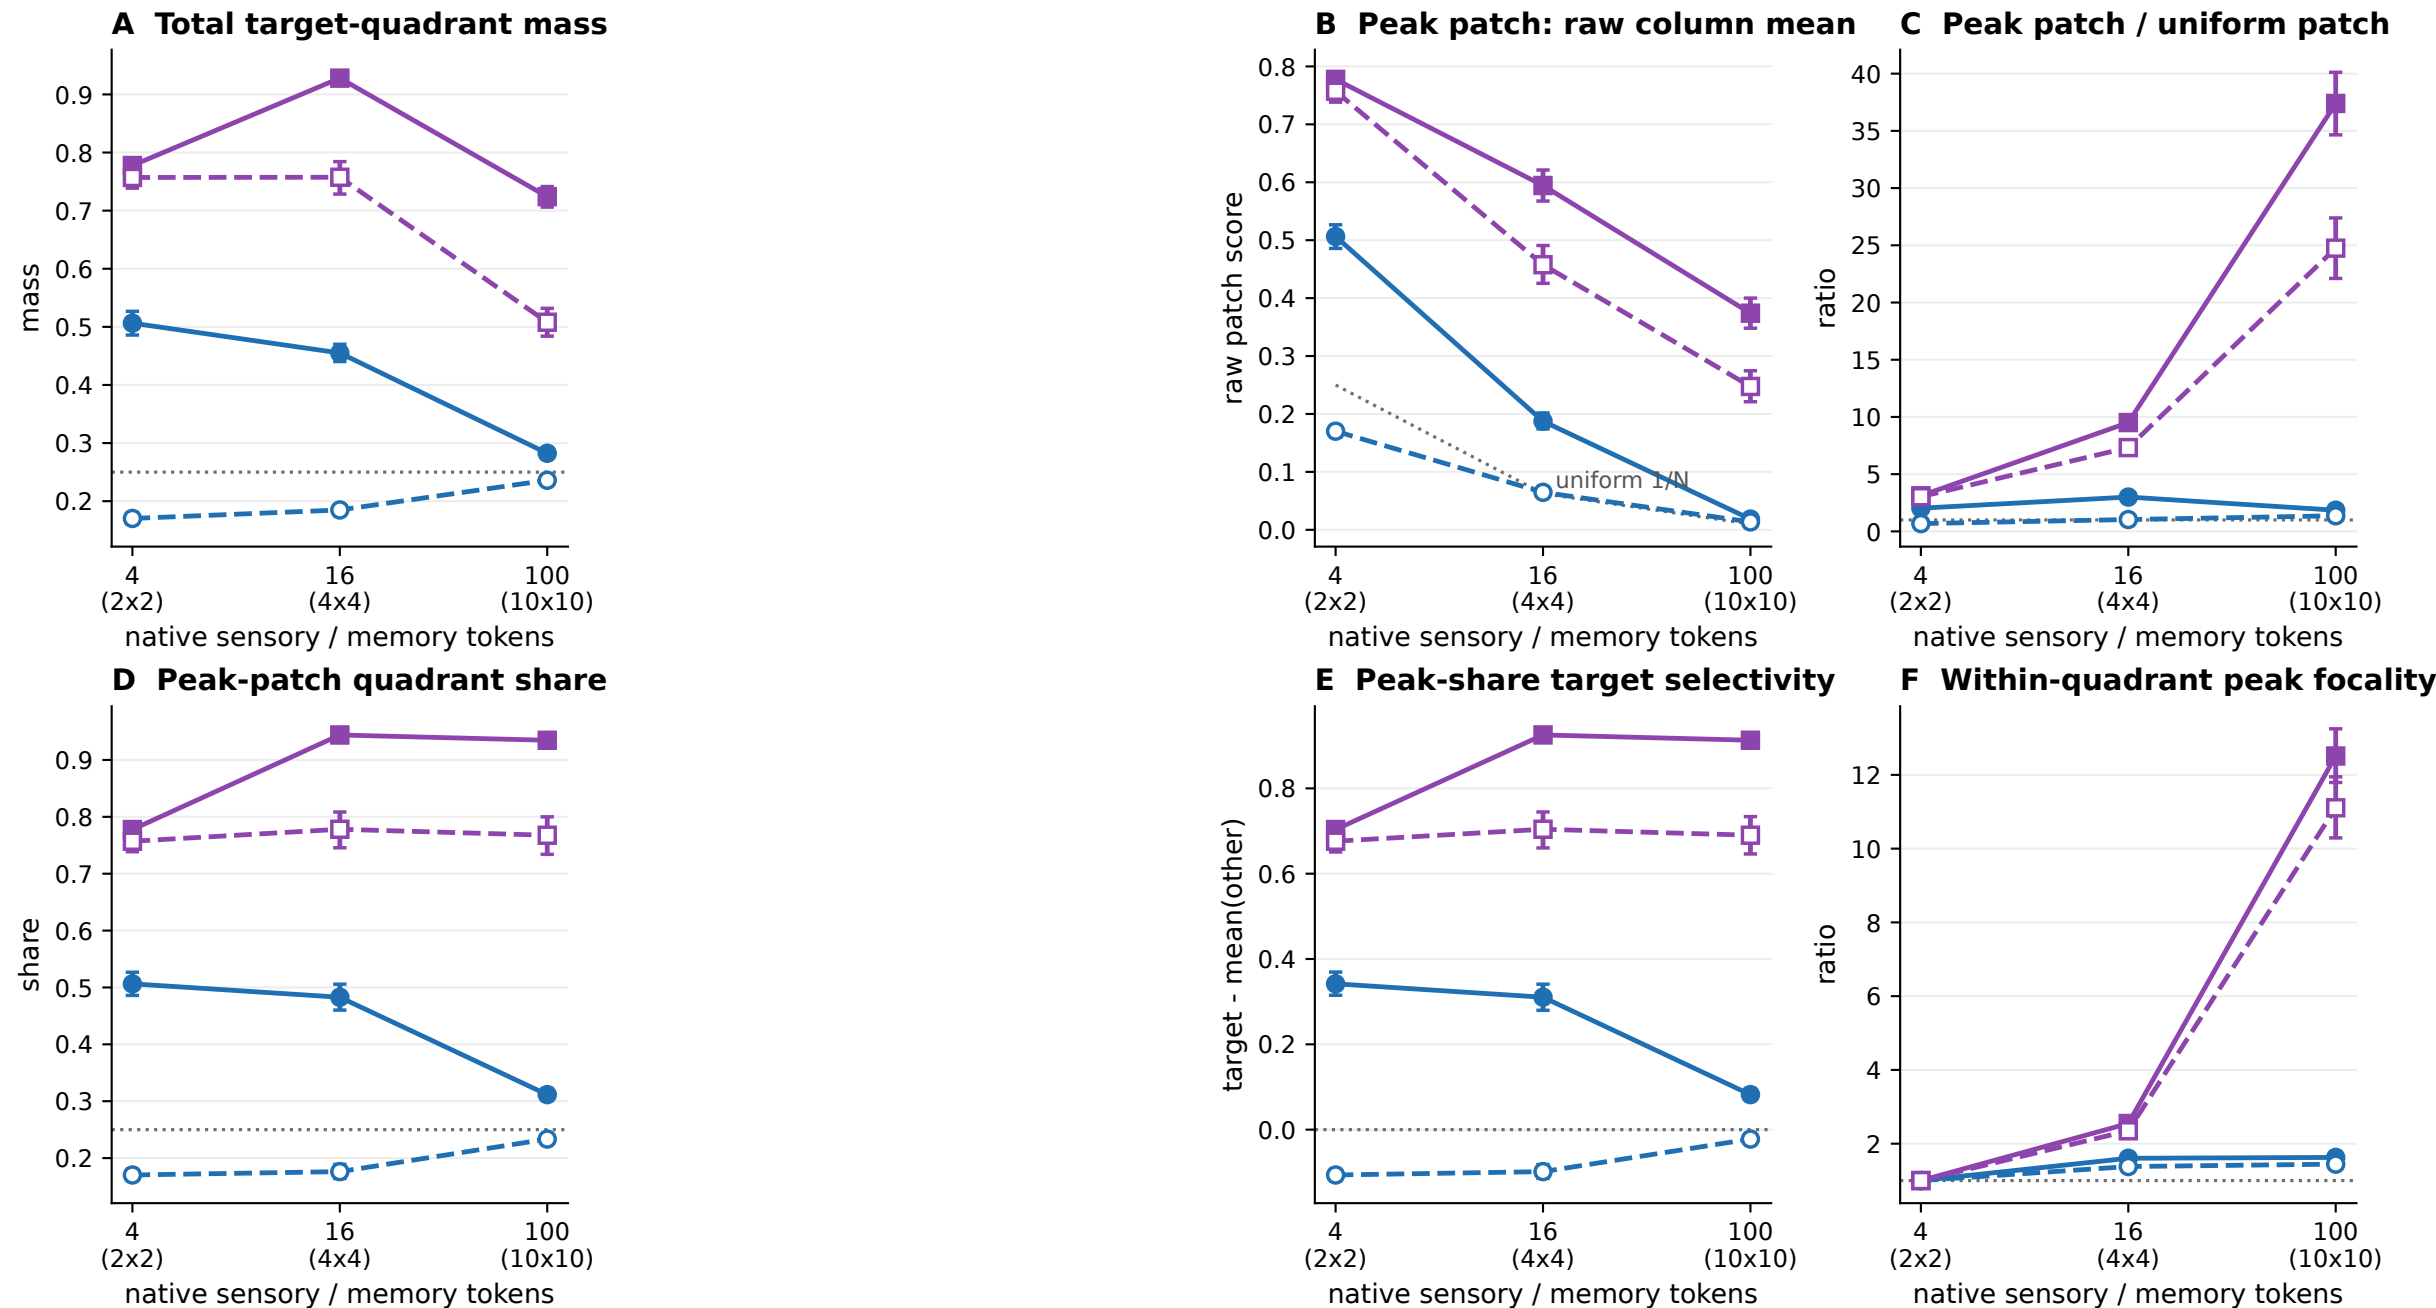

Secondary paired-location diagnostic: cross-attention adds co-located visual+memory columns; it is not either source map or maximum. Points are 128 held-out trials at change-onset frame 5; bars are trial-bootstrap 95% CIs. Frame 6 and the frames 5-6 mean are reported separately in the companion figure and tables.