
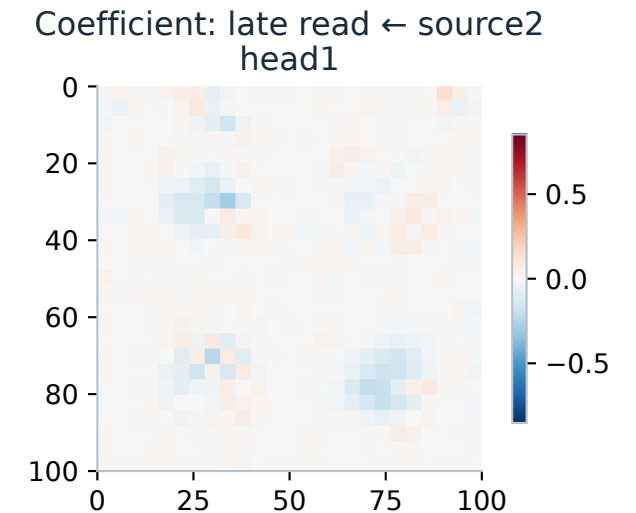
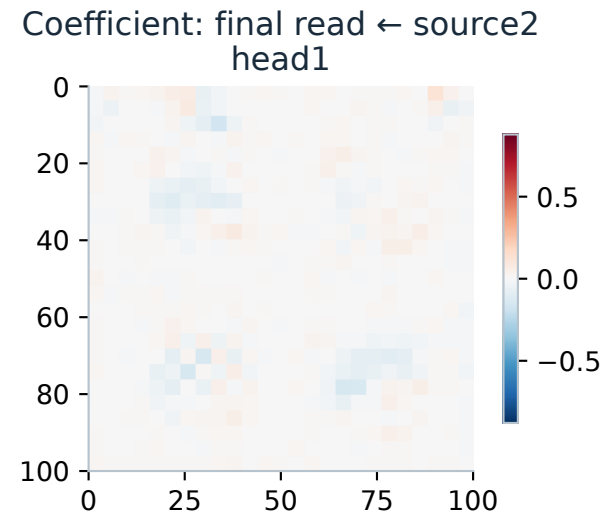
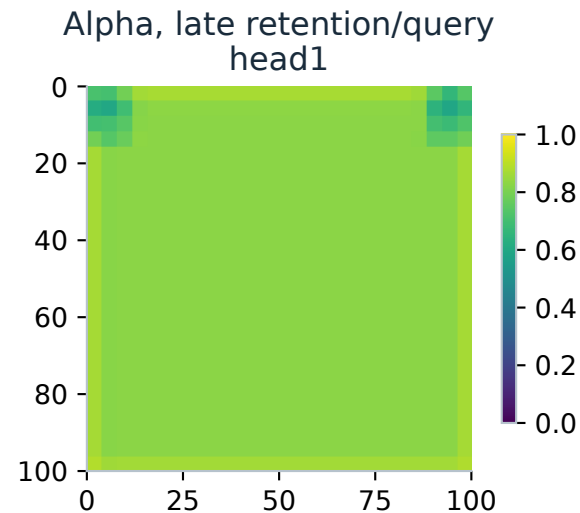
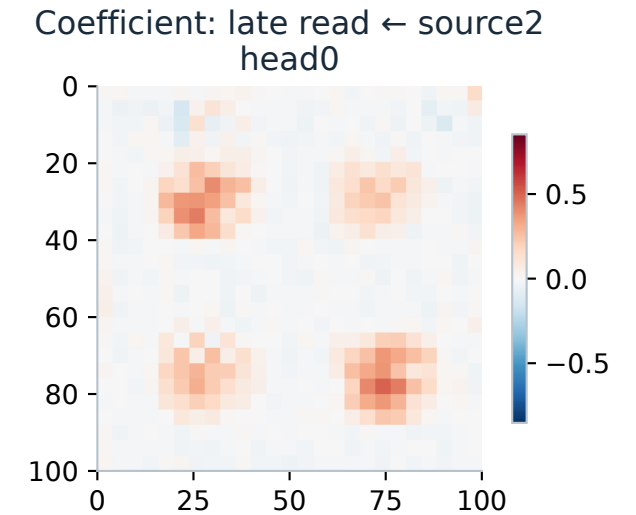
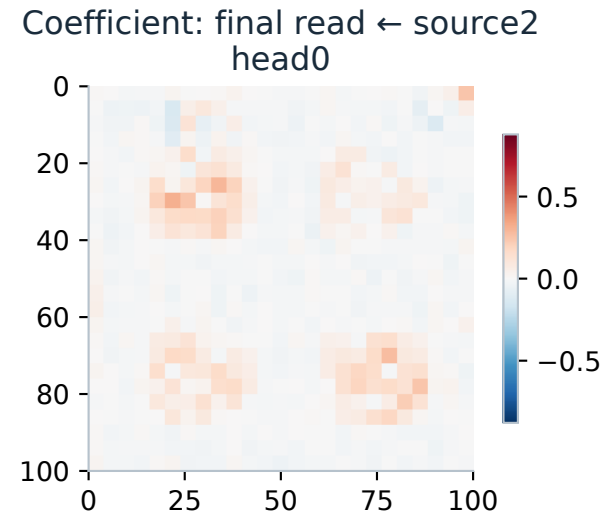


Retention gates and signed local temporal coefficients

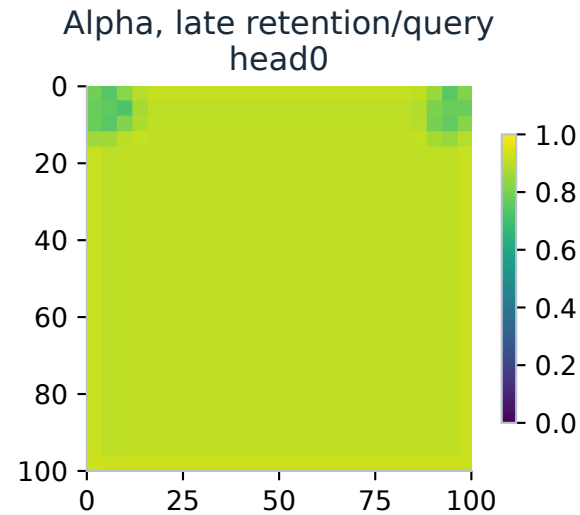

Actual trial0 arrays. Alpha is the mean over 8 retention rows WITHIN each separate head. Signed coefficients can be negative and are neither spatial softmax probabilities nor final-decision attribution. Final-read arrays retain every source frame; fixed-source2 arrays retain every read frame. Stable range per quantity across saved trials/times. Exact weighted-value reconstruction was verified before output convolution.