
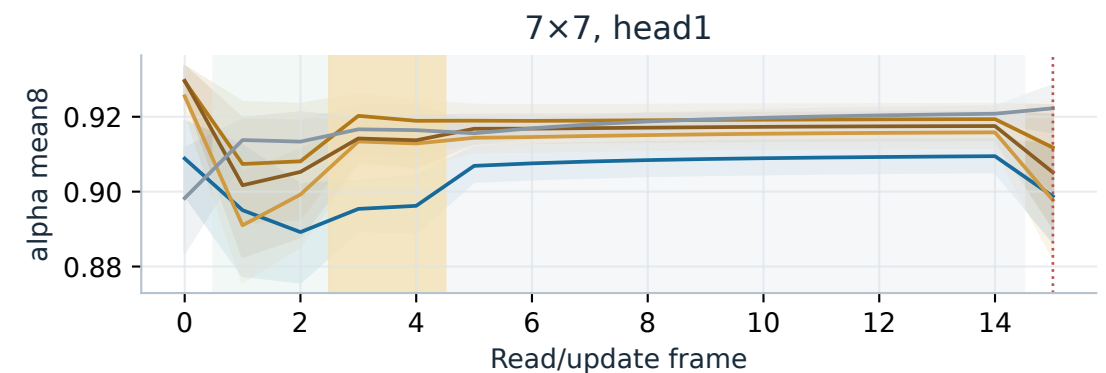
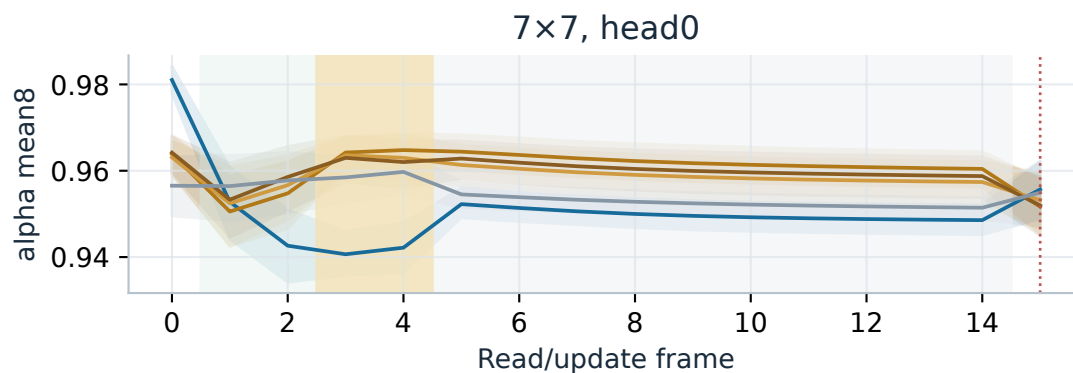
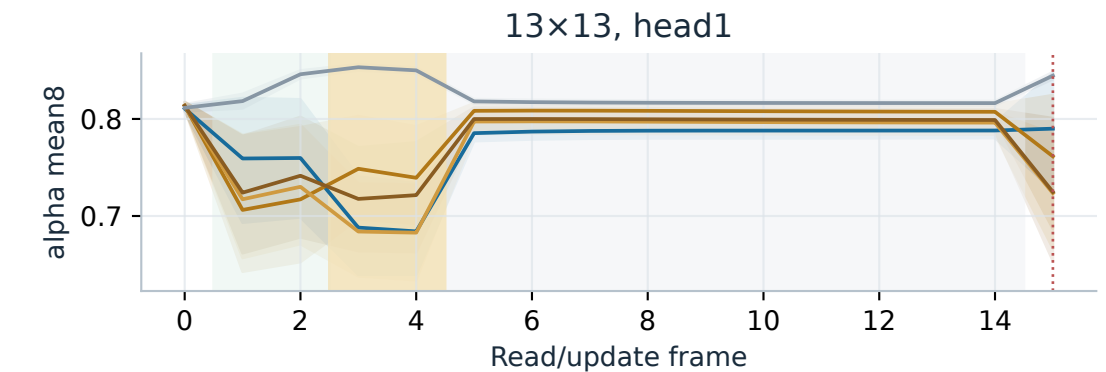
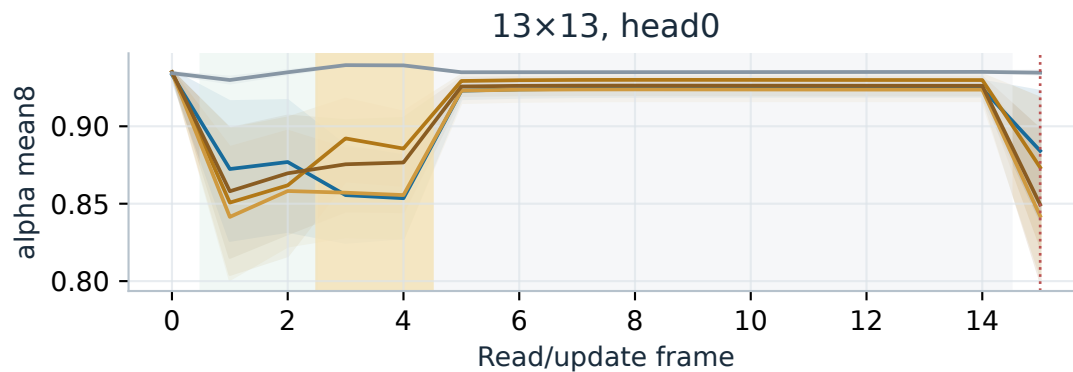
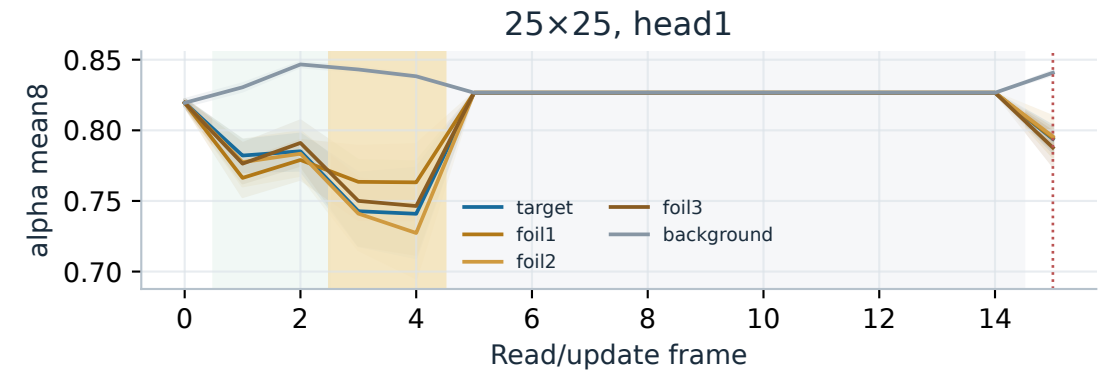


orientation cued — alpha mean8 allocation

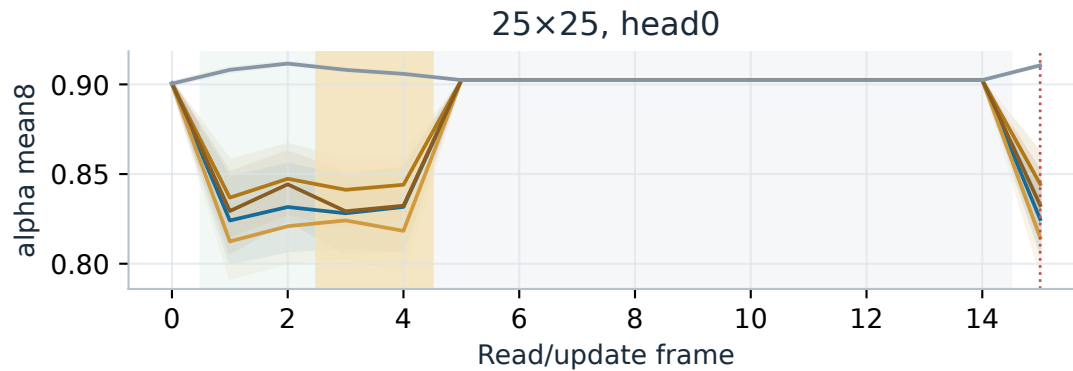

16 independent native D12 trials; each foil separate. Matched translated kernels have equal support/mass at each scale; plotted means are per-mask-mass, not regional totals. Shading is 95% trial-bootstrap uncertainty, never pixels/heads as replicates. Amber phase marks two stack-overlap blanks. For binding, target is only a retrospective eventual-query grouping before the query. Signed coefficient panel preserves sign; separate mean-absolute values are in source CSV.