Recognition of an exact natural-image sample among intervening images

Visual Attention and Working Memory Project
Computational experiment series: previous trained model

18 October 2026

Abstract

We characterized image recognition in a frozen recurrent visual observer using behavioral challenges, spatial-priority interventions, memory perturbations and population decoding. Across 12 native conditions and 1,536 fresh trials, equal-condition accuracy was 94.3% (95% interval [93.1%, 95.4%]). For the representative condition N4_H5, the strongest final answer readout among the tested regions was cls, with held-out macro AUC 0.992. The largest observed impairment in that condition was spatial_gain0_t6, changing accuracy by -52.3 percentage points. The analyses relate task competence to information availability, spatial selection and state dependence, with paired interventions and independent probe trials.

1 Introduction and scientific questions

The observer studies a sequence of natural images and then judges whether the repeated probe raster appeared in that sequence. Study load changes the number of images that must remain available. Probe duration changes the time allowed to evaluate the retrieval signal.

Load and probe hold are analyzed separately. The zero-load condition is an always-novel control; recognition sensitivity requires both seen and novel trials. Neural analyses distinguish readable information about the last study image from readable evidence that the later probe belongs to the study set. These are different targets for a memory decoder.

The biological motivation is developed through [1], [2]. The present experiments use the model as an accessible computational subject: its choices, internal population coordinates and interventions can be measured on exactly matched movies.

1.1 Neuroscientific rationale

Miller and colleagues studied visual working memory using delayed matching in macaque prefrontal cortex. That tradition motivates separating sample-related activity, retention, and a match-dependent response to the probe. In a multi-image study sequence, each new image can displace, transform or coexist with earlier information. Population trajectories track that evolution, and load curves quantify its behavioral consequences. The recognition decision concerns membership of the entire study set, while the continuous decoder asks the narrower question of whether a coarse description of the last study image remains recoverable. Reporting both prevents those two memory questions from being conflated.

1.2 Biological experiments motivating this task

Experimental question. Why does recognition remain good for repeats while novel images become increasingly likely to be accepted?

Miller, Li and Desimone (1993) IT responses carried match-related information during delayed matching. Stimulus-selective delay activity could be disrupted by intervening stimuli, separating visible delay activity from successful later recognition. [5]

Miller, Erickson and Desimone (1996) A delayed matching task with intervening test objects examined prefrontal signals for remembered samples and matching decisions. It provided a comparison with temporal-cortex mechanisms under interference. [6]

Bays, Catalao and Husain (2009) Continuous-report errors reflected both feature and location memory. Accounting for their joint uncertainty supported a shared-resource description in which precision changes with the number of remembered objects. [7]

These experiments motivate the behavioral, spatial-selection and population measurements reported below. The discussion returns to each study to compare its findings with the measured behavior and internal states of this observer.

1.3 Task definition and prediction structure

Is the repeated probe raster an exact member of the preceding study-image set?

Response labels are 0: not in study set; 1: in study set. The native suite contains 12 conditions for this task. A complete condition table follows the main results. Detailed neural and intervention measurements use N4_H5, N24_H5.

1.4 Stimulus sequence and spatial layout

For the representative native condition N4_H5, the sequence has 13 frames, indexed from zero: frame 0: observation; frames 1–4: study; frames 5–7: delay; frames 8–12: probe. The complete condition table specifies the other tested timing and difficulty settings.

The following values are observed in the 128 native trials of this representative condition. Continuous nuisance ranges summarize those draws.

Stimulus property	Observed values
Study images	4
Probe frames	5

A trajectory that changes with each study image may still support recognition if old information is retained in a distributed population. The 8-by-8 content reconstruction is a coarse image descriptor, whereas the behavioral label requires exact membership in the original raster sequence. Attention maps are therefore shown on individual photographs, with separate location-averaged panels.

2 Methods

2.1 Computational subject and experimental units

The experimental subject is the previously trained 19-task model, with the main analysis fixed at update 204,289. This checkpoint was selected by the existing equal-task monitoring criterion before the present analysis. Its SHA-256 identifier is recorded in the reproducibility table. The final saved checkpoint at update 220,637 provides a matched robustness comparison. Model parameters are frozen throughout these experiments. A trial is a freshly generated native movie, its prescribed response, and the model's output. Independent procedural draws provide the sampling unit; resampling intervals quantify uncertainty for this trained subject under the specified stimulus distribution.

The 19-task training stage inherited the 16-task backbone and output heads, added three search-task heads, and continued optimization with Adam at learning rate 3×10^{-4}, moment coefficients $(0.9, 0.999)$, numerical epsilon 10^{-8} and no weight decay. Effective batches contained 32 trials, accumulated in microbatches of four. The objective combined terminal cross-entropy with a 0.05-weighted pixel-prediction loss; VDA terminal cross-entropy additionally used the native reward value divided by three. Active-parameter gradient norm was clipped at 100. The selected checkpoint was saved during two-times static-memory-search sampling; the final checkpoint includes later four-times sampling. Checkpoint indices refer to this continuation stage, which itself inherited earlier learning.

Each native condition receives 128 new test trials. The final-checkpoint comparison replays the first 32 of those movies under the same generator namespace. Probe fitting uses 192 separate validation-split trials per selected condition and evaluation uses 128 test-split trials. Natural-image probe fitting and evaluation retain separate source-image splits. The native four-trial generator calls are preserved even when their tensors are combined into eight-trial GPU forwards. Inference uses float32; dense appearance, fusion and spatial recordings are stored in float16, while global memory, comparison memory and probabilities retain float32. Stimulus metadata defines analyses and interventions; only native pixels and the requested task head enter the observer's ordinary forward computation.

2.2 Architecture and recording sites

At each model frame, a 100 by 100 RGB (red, green and blue) image is represented at 100 sites arranged on a 10 by 10 grid. Each site carries 32 learned appearance channels, local RGB and contrast statistics, and temporal correspondence-derived features. A learned linear fusion maps these to 64 channels. The spatial recurrent state has 64 channels at each grid site; the global recurrent state, denoted c_t and called CLS memory in the code, has 64 channels. CLS denotes the global classification-token pathway. A separate 735-dimensional comparison-memory vector accumulates selected local temporal-comparison evidence. The task head reads a learned 64-dimensional transformation of the concatenated global and comparison memories.

Let $v_{t,s}$ be the fused visual vector at site s, $h_{t-1,s}$ the preceding spatial memory, and c_{t-1} the preceding global memory. The key and query are

$$k_{t,s} = \mathrm{unit}\{W_k[\mathrm{LN}_v(v_{t,s}) + \mathrm{LN}_h(h_{t-1,s})]\}, \tag{1}$$

$$q_t = \mathrm{unit}\{W_q\,\mathrm{LN}_q(c_{t-1} + e_{\mathrm{CLS}})\}, \tag{2}$$

$$\ell_{t,s} = \kappa\, k_{t,s}^{\mathsf{T}} q_t, \qquad \alpha_{t,s} = \frac{\exp \ell_{t,s}}{\sum_{u=1}^{100} \exp \ell_{t,u}}. \tag{3}$$

Here W_k, W_q are learned matrices, e_{CLS} is a learned token vector, LN denotes layer normalization across channels, and unit divides a vector by its Euclidean norm with a numerical floor of 10^{-6}. The expression

$k^\mathsf{T} q$ is the key-query dot product. The scale is $\kappa = 1 + 15\sigma(\rho)$, where ρ is a learned scalar and σ is the sigmoid function. Its value in the selected checkpoint is approximately 7.7525. The distribution α supplies the actual spatial-selection weights. There is one global query, so averaging the attention matrix over queries returns this same vector. The same spatial weights route learned visual values and temporal-comparison channels and influence spatial-memory writes.

Recordings are taken from appearance features, fused visual tokens, the spatial recurrent field, the global recurrent state, comparison memory and the attention distribution. We verify exact final-output and attention parity between the recording implementation and the authoritative model on all 19 tasks. Intermediate readouts are verified against forwards truncated at the corresponding frame. These controls establish that recording preserves the observer's original computation.

2.3 Behavioral and signal-detection measures

The model's response is the largest terminal class probability. Accuracy is the fraction of prescribed responses selected. Balanced accuracy averages recall across response classes. Macro AUC averages one-versus-rest receiver-operating-characteristic areas using continuous probabilities. Each native condition receives equal weight in the task summary. Wilson intervals accompany individual-condition accuracy; task intervals resample stimulus clusters within the fixed condition set. Matched procedural scenes remain together across timing conditions, and repeated photographs are grouped by image identity. A Wilson boundary interval is used when every observed response is correct or incorrect.

For binary judgements with both classes present, let H and F be hit and false-positive rates. With h, f observed positive reports and n_1, n_0 opportunities, the finite-sample rates are $\widetilde{H} = (h + 1/2)/(n_1 + 1)$ and $\widetilde{F} = (f + 1/2)/(n_0 + 1)$. We report

$$d' = \Phi^{-1}(\widetilde{H}) - \Phi^{-1}(\widetilde{F}), \qquad c = -\tfrac{1}{2}[\Phi^{-1}(\widetilde{H}) + \Phi^{-1}(\widetilde{F})]. \tag{4}$$

Φ^{-1} is the inverse standard-normal cumulative distribution. Sensitivity d' measures separation under this signal-detection convention; criterion c summarizes positive-response tendency. This scalar criterion is distinct from the time-indexed global-memory vector c_t. Labels and the meaning of a positive report are specified separately for each task. The Brier score in the condition tables is the trial-averaged sum $\sum_k [p(k) - \mathbf{1}(y = k)]^2$, where y is the prescribed class and $\mathbf{1}(y = k)$ is one for that class and zero otherwise; smaller values indicate better probability predictions. Difficulty challenges use the existing audited renderers. Zero-strength observations retain their scheduled labels as an ambiguity control. The complete native factorial, empirical difficulty points and response probabilities are retained in machine-readable files.

2.4 Threshold-defined chronometry

The unchanged terminal readout is applied to each recorded prefix state. If $p_t(k)$ is its probability for class k, evidence becomes available at frame t_0, and θ is a fixed confidence threshold, then

$$\tau_\theta = \min\{t - t_0 + 1 : t \geq t_0,\ \max_k p_t(k) \geq \theta\}. \tag{5}$$

The chosen class is the argmax at that first crossing. We use thresholds 0.6, 0.7, 0.8 and 0.9, fixed before inspection of outcomes. Trials without a crossing are right-censored at movie end. We report the crossing fraction, median frames among crossings, accuracy of crossing decisions and the fraction already above threshold before task evidence. Time is measured in model frames; two-observation tasks have only one post-evidence frame. This defines a reproducible computational commitment time for the trained readout.

2.5 Spatial priority and causal manipulations

Attention mass in a region S is $A_t(S) = \sum_{s \in S} \alpha_{t,s}$. Spatial concentration is summarized by effective patch count, $N_{\text{eff}} = \exp[-\sum_s \alpha_s \log \alpha_s]$, which equals 100 for a uniform distribution and approaches one for selection of a single patch. Spatial masks use model-site centers at pixel coordinates $4.5 + 10j$, where $j = 0, \ldots, 9$ on either axis. For point arrays, the designated mask surrounds the task-defined target center; the alternative is the next center in the renderer's location ordering, with wraparound. The radius is 16 pixels for search-array centers and 12 pixels for the other point arrays. Thus the alternative mask is a fixed geometric comparison location and need not coincide with the particular foil that changed. For VDA, masks contain the model-site centers mapped into each native cell by the exact nearest-neighbor resize; the alternative is the cell obtained by reversing the row-major cell index. Native VDA9 cues in this implementation occupy the two opposite corners, so these two masks are distinct. Full-field tasks use the top-left and bottom-right image quadrants as designated and alternative regions. Their designated sites are spatial test regions rather than inferred target objects. Off-site controls use a single site outside the two regional masks; the VDA control additionally minimizes Gabor occupancy.

Computational stimulation and inhibition add a signed dose δ to the priority logits at the selected sites and frames:

$$\alpha_{t,s}^{(\delta)} = \text{softmax}_s\{\ell_{t,s} + \delta\, \mathbf{1}[s \in S]\mathbf{1}[t \in E]\}. \tag{6}$$

E identifies encoding, delay or evidence frames. The indicator $\mathbf{1}[\cdot]$ equals one when its condition holds and zero otherwise. Positive doses raise relative priority and negative doses lower it. The dose is measured in logit units. If a selected region has attention mass A before adding a uniform regional dose, its immediate new mass is $A' = e^{\delta}A/(1 - A + e^{\delta}A)$. Thus its odds against the remaining image are multiplied by e^{δ}; a dose of four multiplies these odds by approximately 54.6. Later frames can additionally change through recurrent feedback. Evidence-epoch doses are $\pm 2, \pm 4, \pm 8$ at designated and alternative sites; encoding and delay use ± 4. A missing epoch is explicitly recorded as zero active intervention trials. Off-site and global shifts provide controls. Every arm reuses identical input pixels. Adding the same constant to all logits must leave the softmax unchanged, and this invariance is checked during collection.

Memory manipulations replace one recurrent state by g times that state after processing the middle delay frame, or after the frame immediately before evidence when no blank delay exists. The next frame is then processed from that modified state. Gains $g = 0$ and $g = 1.5$ respectively reset and amplify the global state, spatial state or comparison memory, one component at a time. The movie then continues normally. Paired accuracy differences compare each arm with the same-trial sham. Intervals use 3,000 paired resamples; zero-discordance outcomes use a conservative exact bound on the discordance probability, and all-gain/all-loss boundaries use Wilson intervals; exact discordant-pair binomial tests assess changes in correctness for independent procedural trials. For natural photographs, repeated probe or base-image identities remain grouped in bootstrap resamples, and 9,999 paired source-image sign flips test the accuracy contrast. The saved test-method field distinguishes those Monte Carlo cluster tests from the exact trial-level tests. Holm adjustment is applied within task, and the four designated ± 4 evidence comparisons also enter one family across tasks and selected conditions.

2.6 Independent-trial decoding and population geometry

Each region is transformed using probe-fitting trials only. Representations wider than 256 coordinates undergo a seeded, label-independent random projection to 256 dimensions. A fixed training-derived principal-component basis then retains at most 32 dimensions and is shared across time. Coordinates are standardized from the fitting data. This capacity-matched representation is used for external linear probes; the original agent remains frozen.

For a design matrix X, target matrix Y and fixed ridge penalty $\lambda_{\text{ridge}} = 10$, the fitted mapping minimizes

$$\|Y - XW - \mathbf{1}b^{\mathsf{T}}\|_F^2 + \lambda_{\text{ridge}}\|W\|_F^2. \tag{7}$$

Each row of X represents one trial and each column one retained activation coordinate. Each row of Y contains that trial's desired decoding target. The matrix W contains fitted weights and b contains output intercepts; $\mathbf{1}$ is a column of ones. The squared Frobenius norm $\|\cdot\|_F^2$ sums squared entries of a matrix. The first term therefore measures prediction error, while the second penalizes large fitted weights. Classification targets are one-hot answer labels, the model's eventual choice, and cue or target location where available. Continuous targets include an 8 by 8 RGB descriptor of the last sample/study image and circular orientation or motion variables when provided by the task. Continuous reconstruction is scored against a predictor using the fitting-set mean. The resulting R^2 can be negative when the fitted mapping predicts new trials worse than that baseline.

For the spatial and global recurrent states, a decoder fitted at each time is evaluated at every time on independent test trials. The vertical axis is training time and the horizontal axis is test time. Diagonal performance measures available information at the same phase; off-diagonal performance tests transfer of the fitted linear readout between phases. A final-time label-permutation test uses 199 fitting-label shuffles, with unchanged held-out labels. Population trajectories use the same training-derived axes, and their class means are computed from held-out trials. Participation ratio is $(\sum_j \lambda_j)^2 / \sum_j \lambda_j^2$ for covariance eigenvalues λ_j within the retained subspace. Frame-to-frame root-mean-square (RMS) displacement measures how rapidly the state evolves in those coordinates.

2.7 Full-state controls and unit-level selectivity

As a control for dimensionality reduction, external ridge classifiers are also fitted directly to every recorded coordinate at the final frame and at the memory-test frame (the middle blank-delay frame, or the frame immediately before evidence when no blank delay exists). The ridge penalty is selected from 0.001, 0.01, 0.1, 1 and 10 using a class-stratified 75/25 split inside the probe-fitting set. Standardization is fitted on the inner fitting subset during selection and on the full fitting set for the final held-out evaluation. Each standardized full-coordinate vector is additionally divided by the square root of its coordinate count; these penalty values refer to that normalized feature scale. The full-crop reconstruction and candidate-reconstruction regressions use the same scaling convention. These full-state probes supplement the fixed-capacity temporal analysis. Global-memory unit selectivity is assessed by response-class differences on held-out trials, with Holm correction across the 64 units. Cross-validated class-centroid distances multiply independently estimated fitting and test centroid differences, standardized by fitting-set channel dispersion; negative estimates are retained.

For native factorial summaries, bootstrap clusters retain the same procedural scene across matched timing conditions. Photo repeats are grouped by probe or base image identity within condition. This preserves the dependence generated by reusing stimuli. The saved condition-level results allow every marginal to be reconstructed and interactions to be examined directly.

3 Results

3.1 Native behavior, difficulty and checkpoint robustness

Native equal-condition accuracy was 94.3%, with macro AUC 0.963. The matched final checkpoint changed accuracy by -0.26 percentage points on average across conditions, using 32 same-movie com-

parisons per condition. The lowest native cell was N24_H5 at 79.7%; the highest was N0_H3 at 100.0%. These comparisons retain the native sampling design rather than selecting trials after observing success.

Marginal accuracy by load was 0: 100.0%; 4: 99.5%; 12: 94.0%; 24: 83.6%. These marginal summaries average over the other native factors; the condition table preserves their interactions.

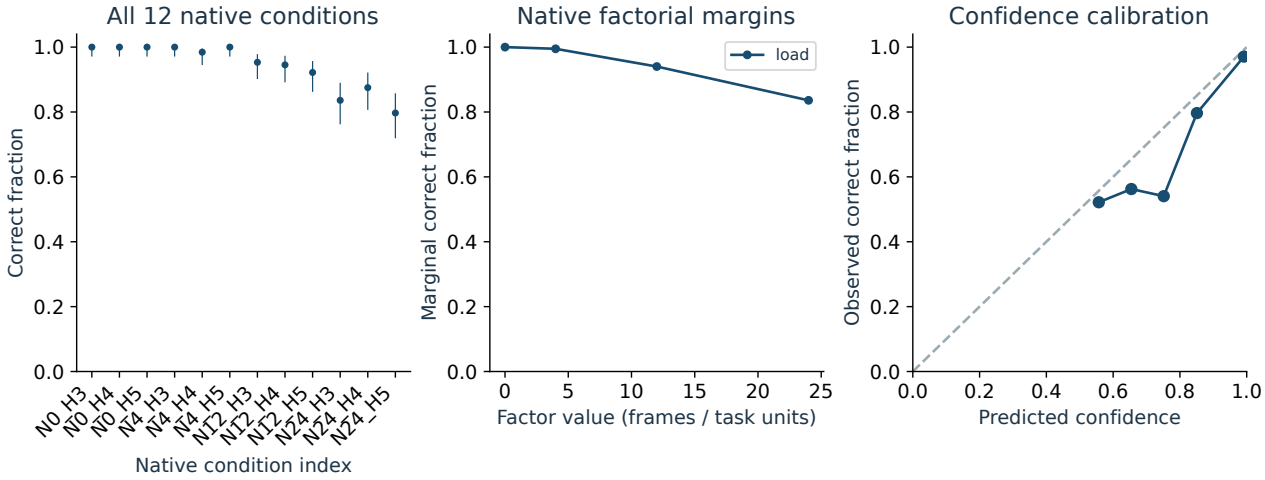


Figure 1: Behavioral phenotype. Left: accuracy and Wilson intervals for every native condition. Middle: empirical signal-strength functions or native factorial margins. Right: observed accuracy within confidence bins, against the identity line. Zero-strength challenges assess responses to ambiguous physical evidence. Native cells contain 128 trials each.

3.2 Load, false recognition and serial position

Zero-study trials are negative controls: every probe is novel. The nonzero study loads test recognition after four, twelve or twenty-four images. Hit and false-alarm curves separate missed stored items from false familiarity. Serial-position quartiles run from the earliest to latest study items, pooled across probe-hold durations. Intervals resample probe-image identities across those conditions.

At load 4, the hit rate was 100.0% and the false-alarm rate was 1.0%. At load 12, the hit rate was 98.4% and the false-alarm rate was 10.4%. At load 24, the hit rate was 94.8% and the false-alarm rate was 27.6%. The load-related error pattern can therefore be assessed as a change in recognition sensitivity and report tendency, alongside the population-memory measurements.

3.3 Time course and commitment thresholds

Threshold	Crossed	Median frames	Crossing accuracy	Premature
0.6	100.0%	1.0	57.0%	100.0%
0.7	100.0%	1.0	59.4%	100.0%
0.8	100.0%	1.0	62.5%	100.0%
0.9	98.4%	1.0	73.0%	100.0%

The representative condition N4_H5 provides 5 post-evidence frames. Median latency is conditional on crossing; the uncommitted-fraction plot retains all trials. The threshold sweep makes the speed–

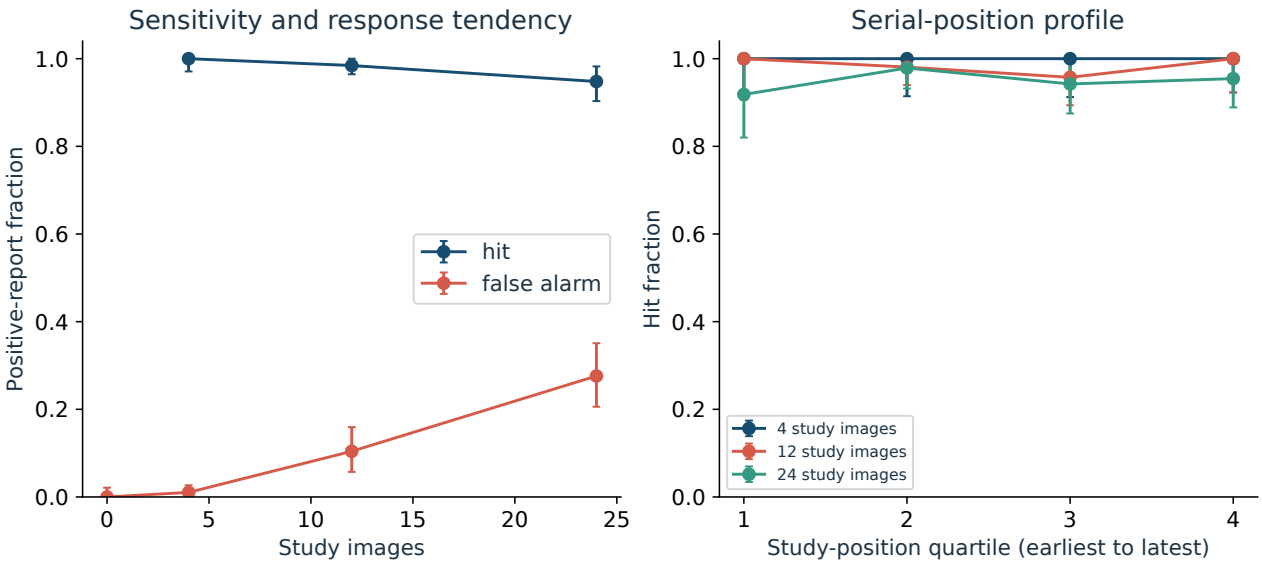


Figure 2: Recognition error structure. Left: hit and false-alarm fractions by study load. Right: hit fractions by study-position quartile. Intervals preserve repeated probe photographs across probe-hold conditions.

coverage tradeoff explicit. A rise in correct-answer probability over time can be compared with the development of location and answer decodability.

3.4 Does an early confident answer persist?

A confidence threshold defines a hypothetical commitment rule. We test that rule directly by comparing its first post-evidence choice with the unchanged terminal choice on the same movie. A rescued error is an incorrect early commitment followed by a correct final answer; a spoiled answer changes from correct to incorrect. For four-class tasks, a revision can also exchange one incorrect alternative for another. These measurements determine whether terminal accuracy transfers to early stopping.

At threshold 0.8 across all native presentations, 1,515 of 1,536 trials crossed. Of those, 438 changed their answer later, 428 corrected an early error, and 10 lost an initially correct answer. These pooled counts are descriptive; the representative condition is shown separately below.

We additionally measure retrospective choice-settling latency: the first post-evidence frame from which the argmax remains equal to its terminal value for the rest of the movie. Frame counts start at one for the first available evidence frame. This measure uses future observations to locate the final revision. It describes the dynamics of the existing computation; it is distinct from the causal first-threshold stopping rule. Terminally correct and incorrect trajectories are kept separate.

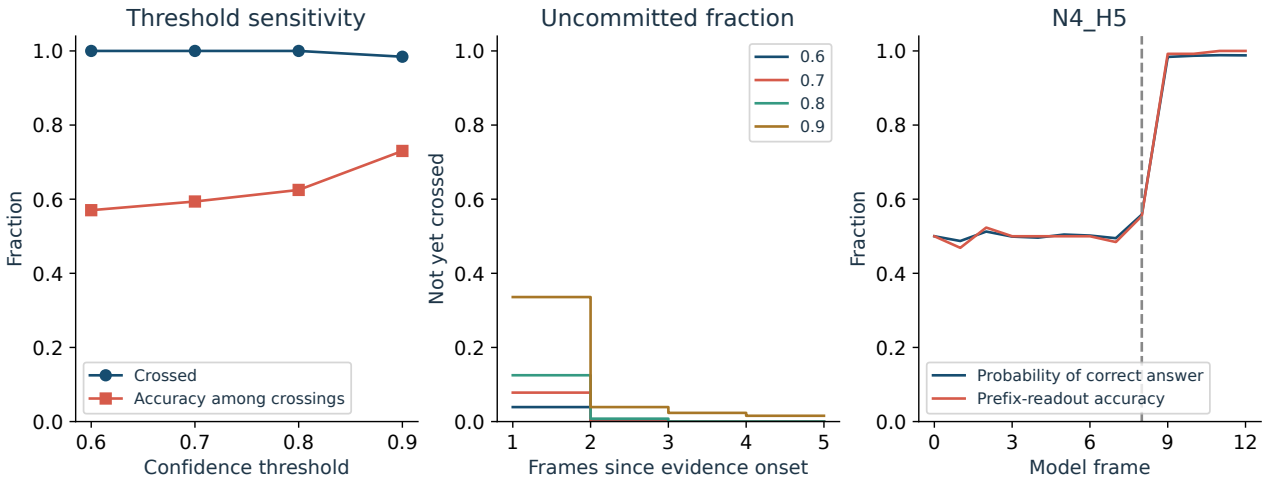


Figure 3: Threshold-defined timing. Left: the fraction reaching each confidence threshold and accuracy among those crossings. Middle: the fraction still uncommitted after each available evidence frame. Right: probability assigned to the correct response and accuracy of the unchanged head applied to prefix states. The dashed vertical line marks evidence onset.

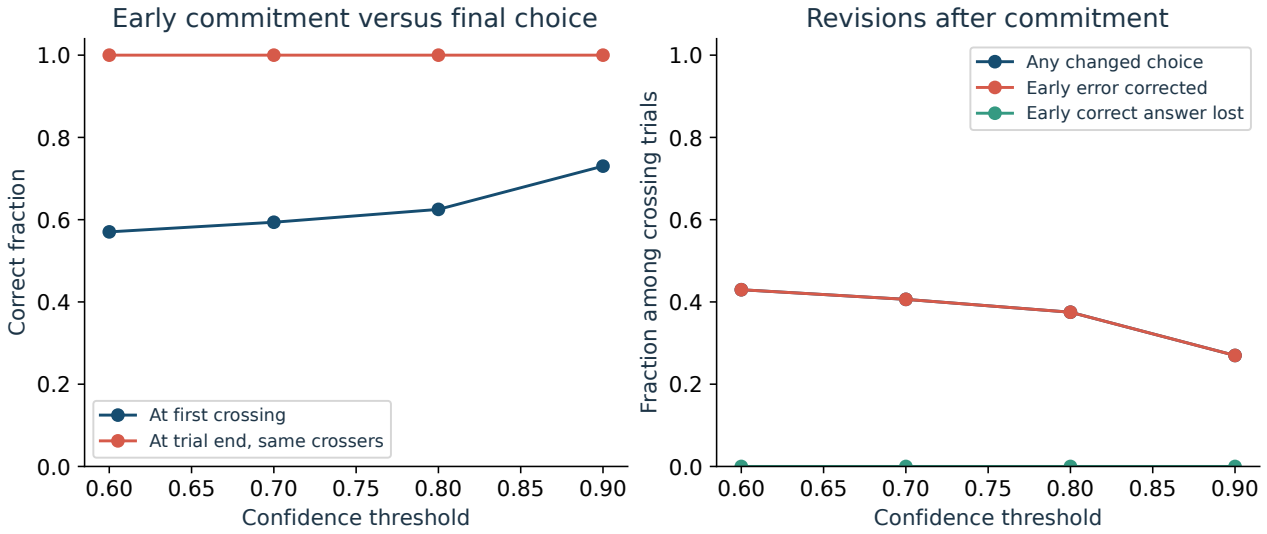


Figure 4: Validity of first-threshold commitment in the representative native condition. Early and terminal accuracy are compared on exactly the same crossing trials at each threshold; the second panel separates kinds of later revision. Trials that never cross remain censored in the preceding analysis.

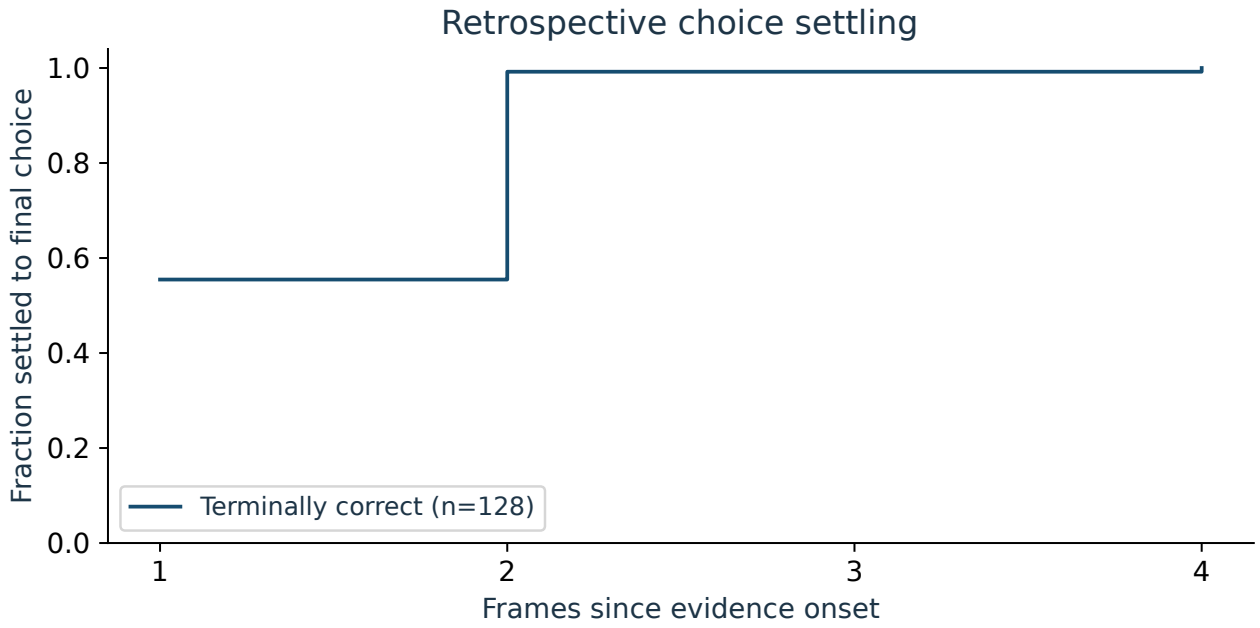


Figure 5: Cumulative distribution of retrospective choice-settling times in the representative condition. A choice is settled once all subsequent prefix classifications agree with the terminal classification. Correct and incorrect terminal decisions can both settle, and are plotted separately.

3.5 Attention across conditions and time

The analysis is organized around a direct visual question: where does the shared priority signal go as the trial unfolds, and how does that trajectory depend on the task condition? Rows retain fixed experimental conditions and physical locations. Columns follow time. The arrangement follows the heatmap-plus-time-course logic of Morgan, Albanna and Herman (2025), Figure 4 (https://arxiv.org/html/2502.10955v1).

Rows cross four versus twenty-four study images with seen versus novel probes, using five probe frames. Probe onset defines the common time origin. The central region is the middle 4-by-4 patch square; the second trace sums the remaining 84 sites. An average over different photographs measures a consistent spatial preference; the viewer separately preserves the exact photograph and its own attention.

What each plotted quantity means. For trial i, frame t and image patch p, α_{itp} is the attention probability assigned to that patch; its sum over the 100 patches is one. For a condition containing n trials, the map shows $\bar{\alpha}_{tp} = n^{-1} \sum_i \alpha_{itp}$. The 100 entries are placed back into their original 10-by-10 image grid without spatial rotation. A line for region R shows the trial-average mass $M_R(t) = n^{-1} \sum_i \sum_{p \in R} \alpha_{itp}$. A line labeled "other regions (mean) averages their separate masses rather than summing all alternatives. A dotted horizontal line marks the mass the same region would receive under uniform attention, its patch count divided by 100.

Target apertures use the same patch-center geometry throughout a task: circular masks with a 16-pixel radius for search arrays and a 12-pixel radius for the other localized tasks. VDA uses its native stimulus-cell boundaries mapped onto the 100-site grid. The central sample region is a 16-pixel-radius circle excluding candidate apertures. The source tables retain the exact region weights.

Every curve includes all selected trials, independently of whether the model answered correctly. Shaded bands are pointwise 95 percent intervals from 2,000 whole-trial bootstrap resamples. Repeated photograph identities are resampled together. These bands describe each condition separately. Phase-colored backgrounds mark encoding, retention and comparison; frame zero on the horizontal axis is the task-specific evidence onset, or the first motion transition in the duration task. Original frame numbers remain visible on the maps.

Map colors share one scale across every condition and time point within this task. A square-root color transform makes small weights visible; the colorbar retains probability units. The overview uses named temporal landmarks, with explicit original frame numbers when trial lengths differ. The appendix supplies every recorded frame, and the accompanying HTML viewer pairs an exact trial movie with its own attention overlay and the condition-average map.

Condition	Trials	Clusters
4 study images; novel probe	64	54
4 study images; seen probe	64	59
24 study images; novel probe	64	56
24 study images; seen probe	64	59

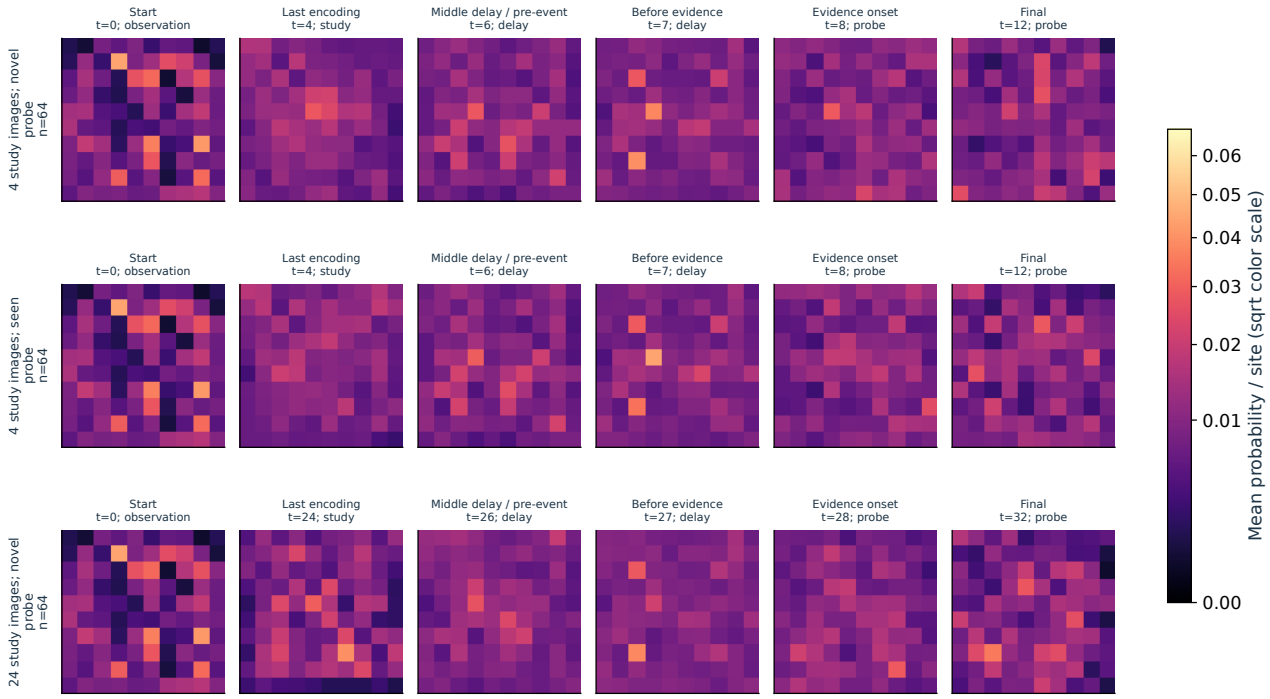


Figure 6: Condition-by-time spatial allocation. Each row averages its stated trial group at a fixed physical location. The common square-root color scale is labeled in probability per patch. Original frame t and phase identify each observation; on full-series panels the signed number additionally gives time relative to evidence onset.

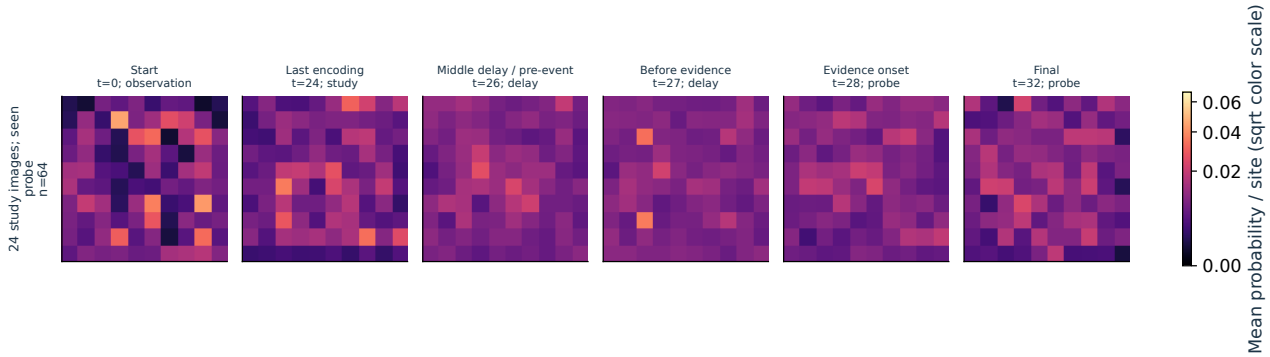


Figure 7: Condition-by-time spatial allocation. Each row averages its stated trial group at a fixed physical location. The common square-root color scale is labeled in probability per patch. Original frame t and phase identify each observation; on full-series panels the signed number additionally gives time relative to evidence onset.

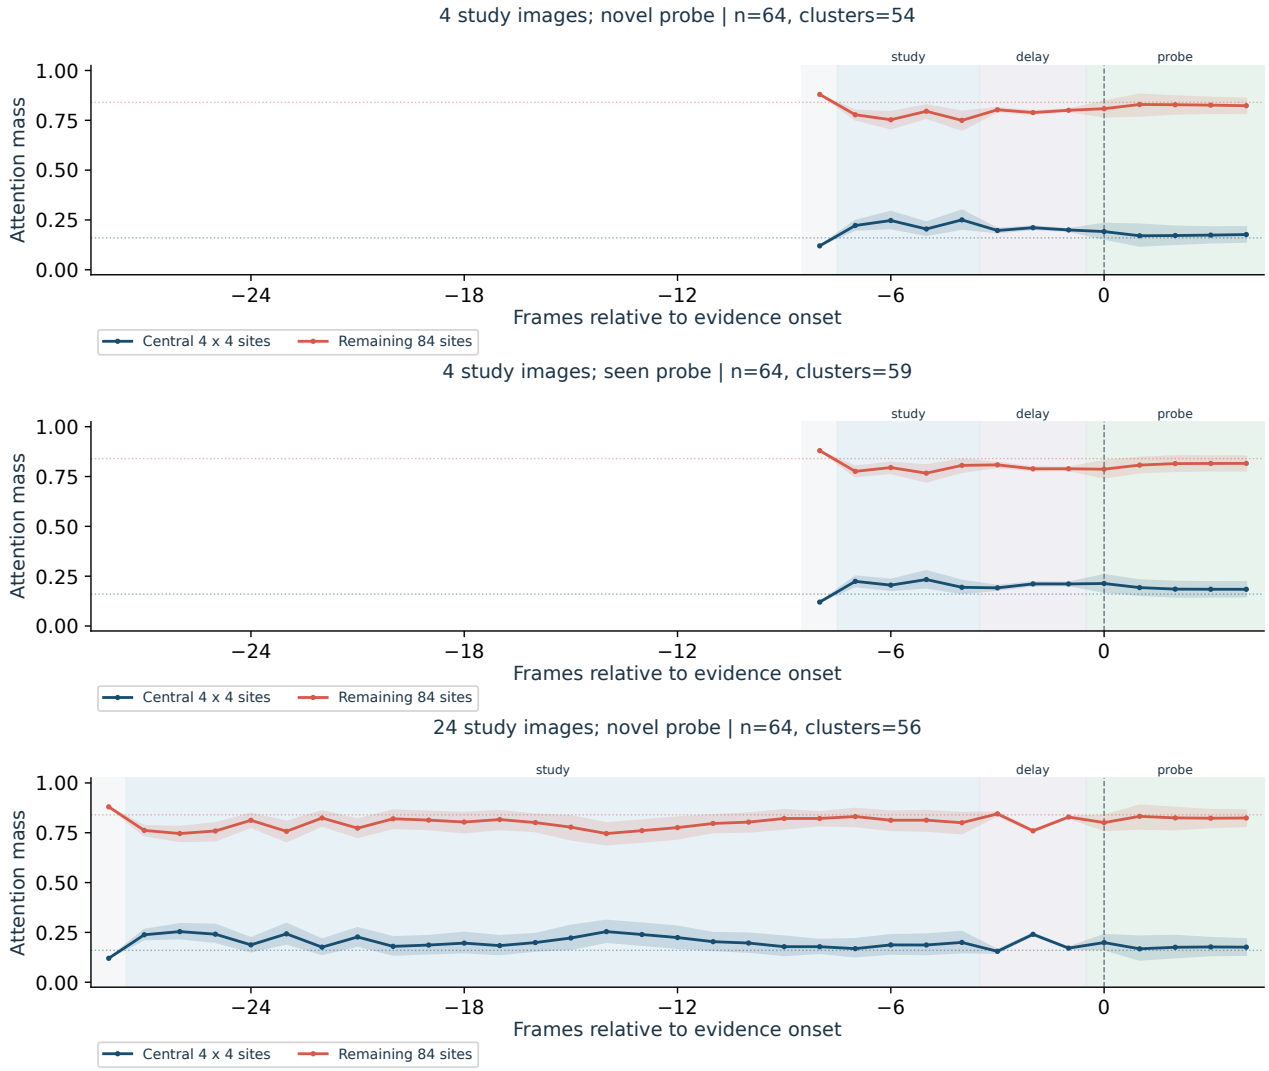


Figure 8: Regional attention through the entire trial, separately for each condition. Solid traces are mean probability masses; shading gives pointwise 95 percent cluster-bootstrap intervals. Dotted lines show uniform allocation for each region. Background bands and labels identify trial phases. The vertical dashed line is the alignment event.

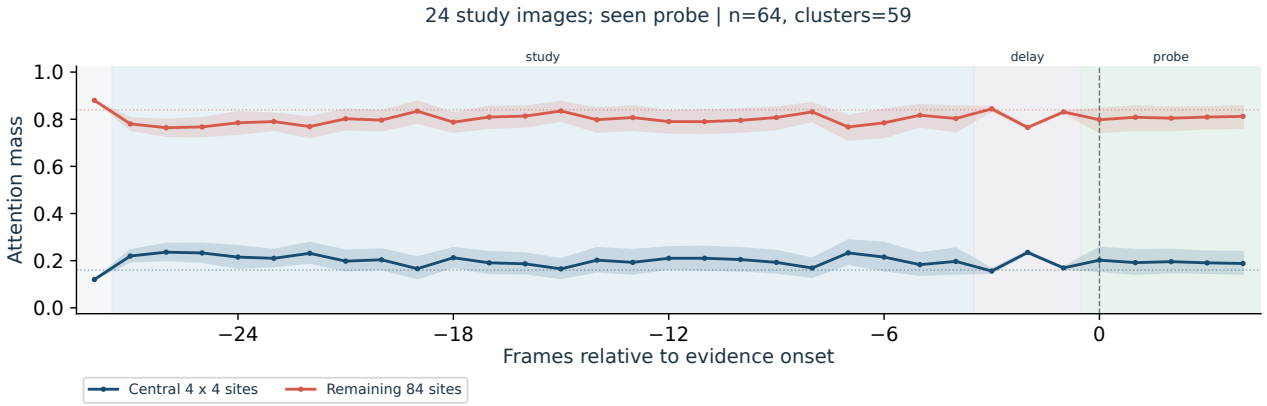


Figure 9: Regional attention through the entire trial, separately for each condition. Solid traces are mean probability masses; shading gives pointwise 95 percent cluster-bootstrap intervals. Dotted lines show uniform allocation for each region. Background bands and labels identify trial phases. The vertical dashed line is the alignment event.

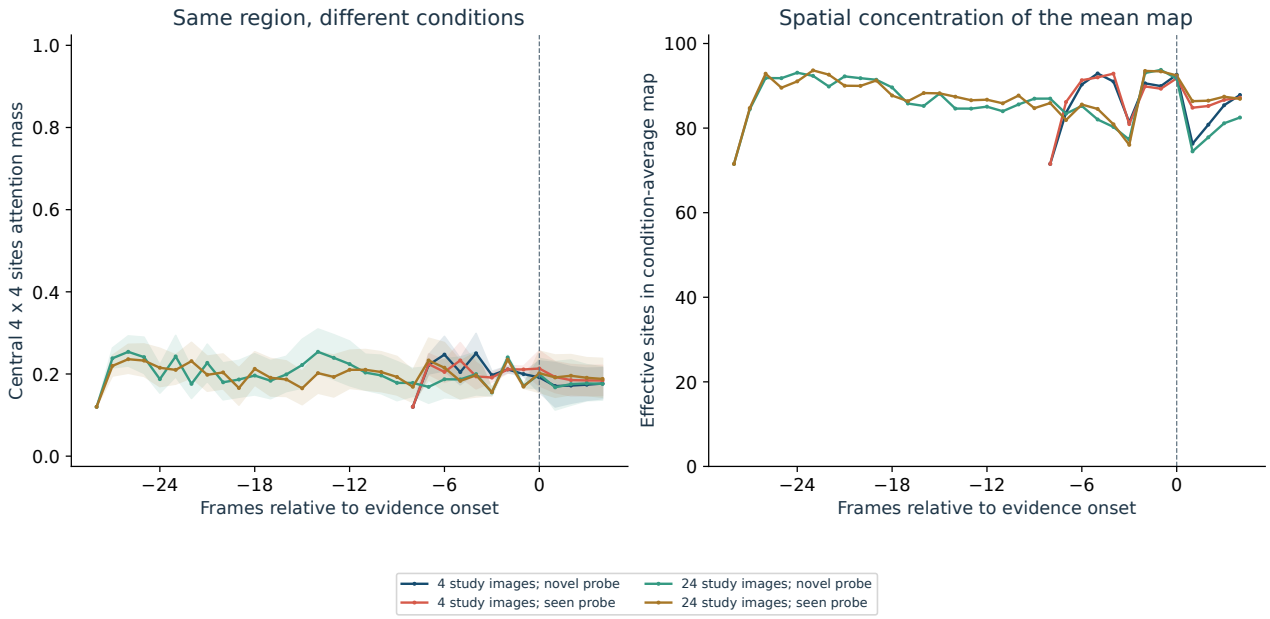


Figure 10: Direct comparison of conditions on the same axes. Left: attention at the first named region, with pointwise uncertainty. Right: concentration of the condition-average map, measured as the exponential of its entropy. A value near 100 means a broad mean map; smaller values mean concentration on fewer sites. This summary is computed after averaging maps and is distinct from averaging each trial's concentration.

Reading the observed trajectories. 4 study images; novel probe: central 4 x 4 sites mass peaks at 0.250 at original frame 4 (study), and is 0.177 on the final frame. 4 study images; seen probe: central 4 x 4 sites mass peaks at 0.233 at original frame 3 (study), and is 0.184 on the final frame. 24 study images; novel probe: central 4 x 4 sites mass peaks at 0.254 at original frame 2 (study), and is 0.176 on the final frame. 24 study images; seen probe: central 4 x 4 sites mass peaks at 0.236 at original frame 2 (study), and is 0.188 on the final frame. These summaries locate the observed allocation in time; the neighboring intervention experiments test its causal contribution to behavior.

3.6 Causal sensitivity to spatial and mnemonic interventions

For spatial_gain0_t6, paired accuracy changed by -52.3 percentage points (paired 95% interval [-60.6%, -43.3%]; paired p=0.0001; within-task Holm p=0.0062). There were 2 corrected trials and 69 newly incorrect trials. For target_-4_delay, paired accuracy changed by +0.8 percentage points (paired 95% interval [-1.6%, 3.8%]; paired p=1; within-task Holm p=1). There were 2 corrected trials and 1 newly incorrect trials. These extrema describe the observed exploratory sweep. The four predesignated spatial comparisons at dose magnitude four are evaluated jointly across the full series in the integrated synthesis.

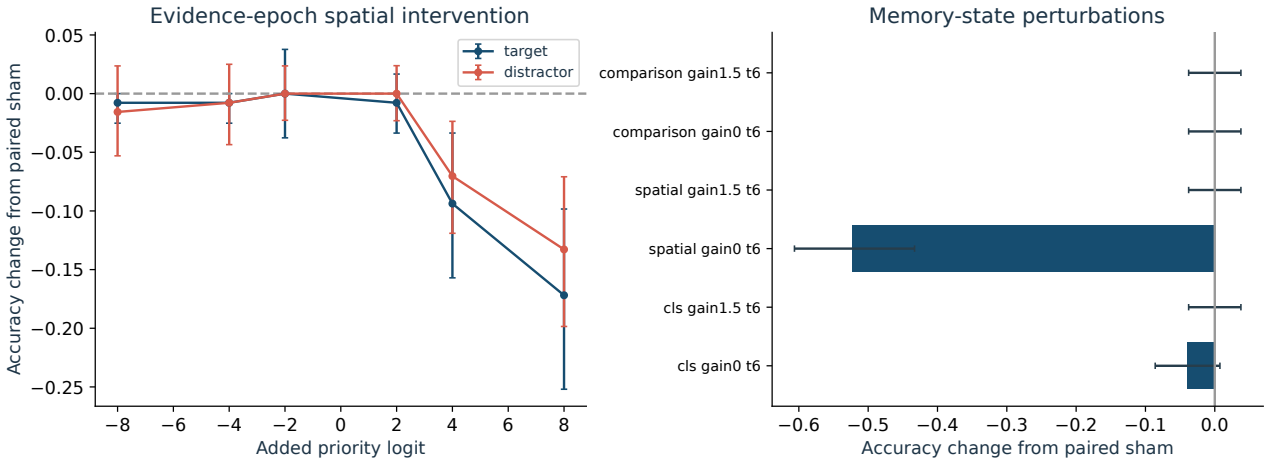


Figure 11: Matched causal effects in the representative condition. Left: changes from sham across signed spatial-priority doses during available evidence. Right: resetting or amplifying one memory component at the specified frame. Intervals resample matched trials, preserving sham–intervention pairing. Target and distractor labels denote the task geometry; full-field tasks use fixed quadrants.

3.7 Predesignated spatial comparisons across the full series

The following dose-four evidence comparisons belong to one family of 108 tests across all nineteen tasks and selected conditions. The Holm-adjusted values therefore account for the complete primary spatial family. Positive changes indicate benefit and negative changes indicate impairment relative to the same-movie sham.

Condition	Intervention	Change (pp)	Global Holm p
N24_H5	target_-4	-3.9	1
N24_H5	target_+4	-18.0	0.0276
N24_H5	distractor_-4	-3.1	1
N24_H5	distractor_+4	-11.7	0.0276
N4_H5	target_-4	-0.8	1
N4_H5	target_+4	-9.4	0.4851
N4_H5	distractor_-4	-0.8	1
N4_H5	distractor_+4	-7.0	0.708

3.8 Readable information across representation levels

Region	Final AUC	Balanced accuracy	Permutation p
appearance	0.511	50.8%	0.485
fusion	0.538	55.5%	0.155
spatial	0.788	75.8%	0.005
cls	0.992	97.7%	0.005
comparison	0.644	60.9%	0.020
attention	0.543	53.9%	0.155

All table entries are evaluated on held-out trials. Final-time permutation p-values quantify how unusual the observed decoding is relative to shuffled fitting labels; the full regional panel is exploratory. The capacity-matched probes quantify readable information in the specified projected subspaces. Choice, location and continuous-feature targets are retained in the accompanying JSON results.

3.9 Mnemonic population geometry and code stability

In cls memory, the participation ratio ranged from 0.00 to 13.08 within the retained subspace. The final step displacement was 0.459 standardized RMS units. In spatial memory, the participation ratio ranged from 0.00 to 19.09 within the retained subspace. The final step displacement was 0.118 standardized RMS units. The time-generalization matrices distinguish a stable readout from information that is readable only by a phase-specific decoder. Broad off-diagonal AUC supports persistence of a common linear discriminant; a strong diagonal with weaker transfer supports changing code geometry. Trajectories use one set of axes fitted to independent fitting trials, so apparent movement is not caused by refitting the axes at each frame.

At memory-test frame 6, coarse sample-content reconstruction had R-squared 0.053 from CLS memory and 0.099 from spatial memory. These values quantify reconstruction of the specified 8-by-8 descriptor on unseen trials.

At the same intervention boundary, resetting each component changed paired accuracy as follows: cls, -3.9 percentage points, spatial, -52.3 percentage points, comparison, +0.0 percentage points. Comparing

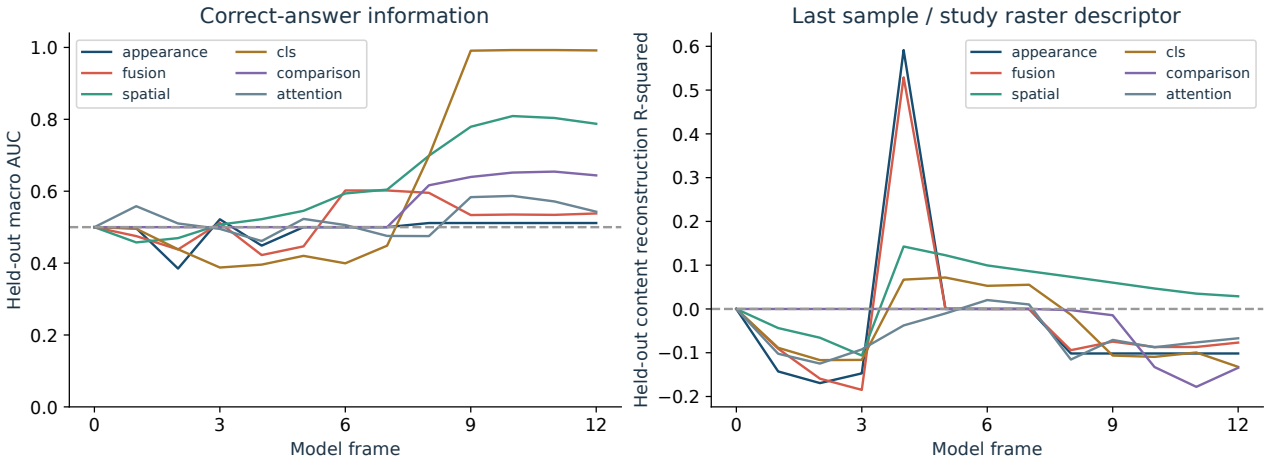


Figure 12: Information across six recording sites. The answer-decoding curves report held-out macro AUC. Sample-content curves report reconstruction of a coarse last-sample or last-study image descriptor relative to a fitting-set-mean predictor. Each region uses an independently fitted training-only projection, shared across time; the agent itself is unchanged.

these causal effects with the decoding curves distinguishes information that is recoverable from a state from information whose removal at that instant affects the subsequent choice.

3.10 Condition-resolved mechanisms

The additional panels retain differences between selected stimulus families and timing conditions. Family averages summarize a balanced native factorial; cells remain available individually in the appendix and source data. The decoding comparison uses the same external fitting protocol for every listed condition.

3.11 Full-state probe control and population selectivity

Region	Full final AUC	Memory-test AUC	Coordinates
appearance	0.565	unavailable	3200
fusion	0.561	0.600	6400
spatial	0.822	0.510	6400
cls	0.995	0.514	64
comparison	0.630	unavailable	735
attention	0.514	0.493	100

The full-state control uses the original coordinate width, while the main temporal figures retain at most 32 components. Both evaluations use independent held-out trials. At the final frame, 43 of 64 global-memory units had response-class selectivity at within-population Holm p below 0.05. This is selectivity for the task answer in a recurrent activation coordinate. The complete unit effects and cross-validated centroid-distance trajectories are stored in `deep_analysis.json`.

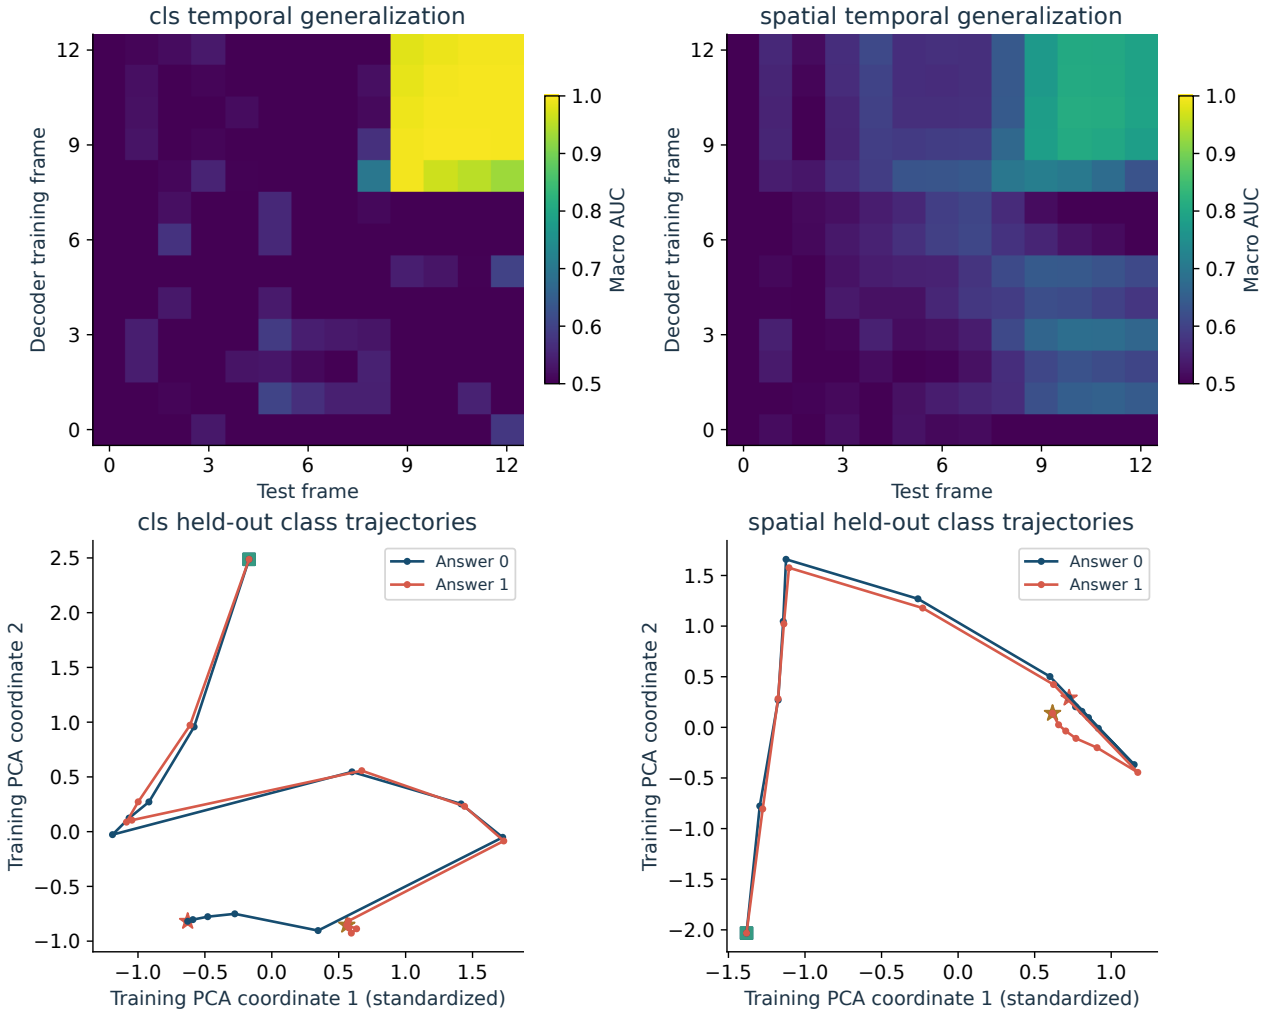


Figure 13: Temporal generalization and held-out population trajectories. Top: decoders fitted separately at each frame and tested across all frames; chance AUC is 0.5. Bottom: class-mean trajectories in a shared training-derived coordinate system, with squares marking starts and stars marking ends. Spatial and CLS populations are analyzed separately.

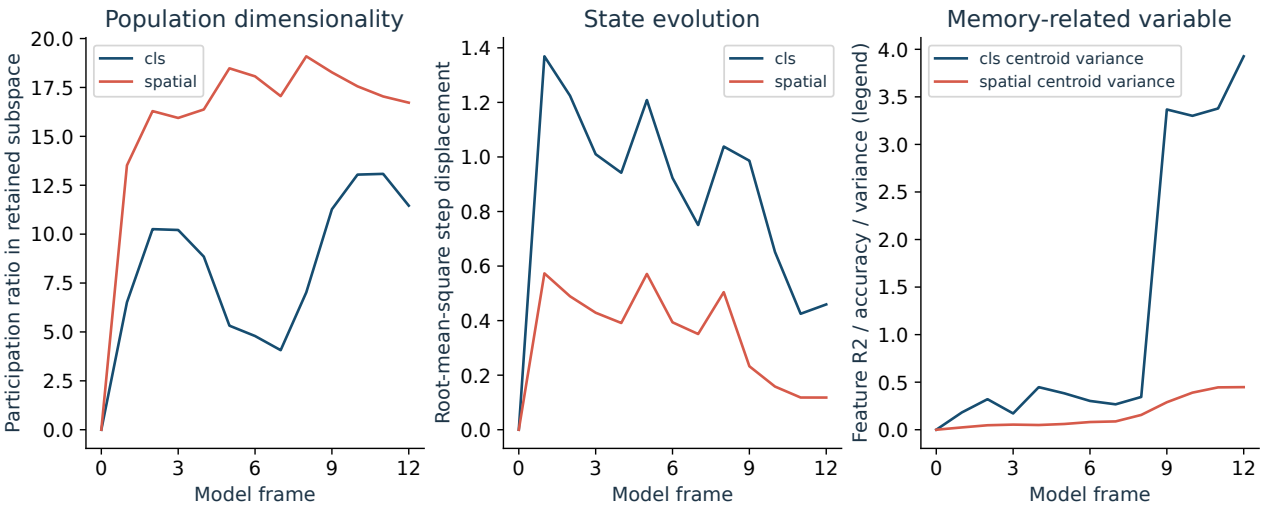


Figure 14: Population dynamics and mnemonic variables. Left: covariance participation ratio within the retained subspace. Middle: frame-to-frame RMS state displacement. Right: continuous remembered-feature reconstruction when supplied by the task, otherwise location decoding or response-class centroid variance as stated by the legend. Each quantity is tied to the original sequence clock.

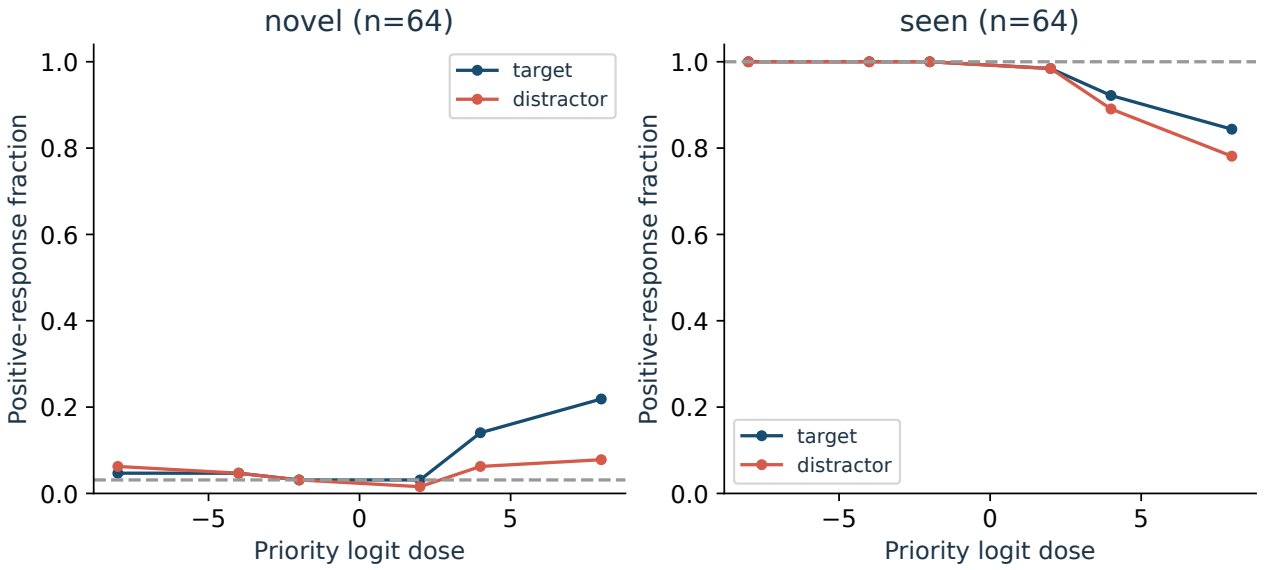


Figure 15: Event-specific causal response functions. Curves show positive reports after evidence-epoch target or alternative-site intervention; the horizontal line is paired sham. Event counts are stated above each panel. A positive report has the task-specific meaning defined in the text.

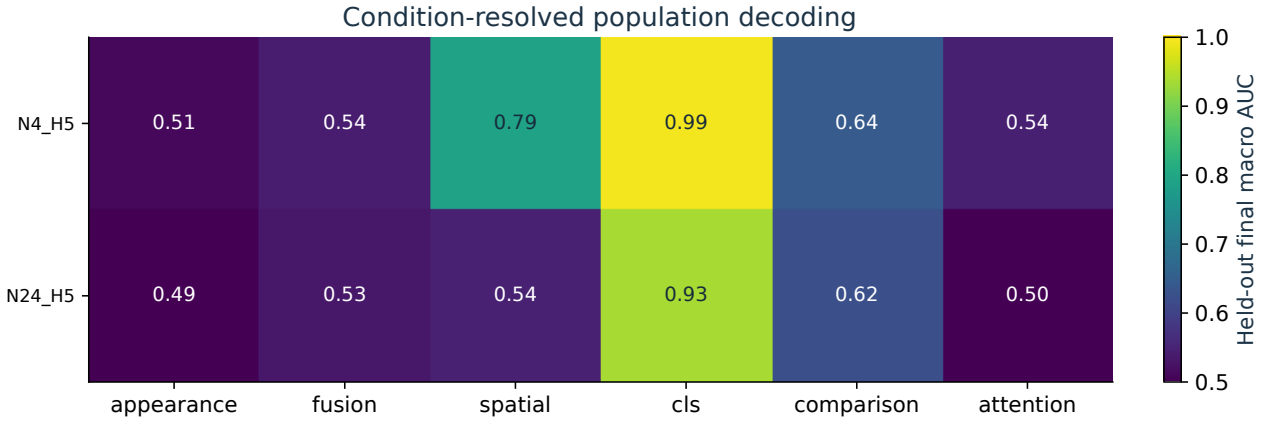


Figure 16: Held-out final answer decoding across selected conditions and recording sites. A constant-zero comparison representation is displayed at chance AUC.

3.12 Direct verification of attention redistribution

On 32 exactly replayed trials per selected condition, all six priority arms reproduced their original behavioral probabilities within numerical tolerance. The following figure measures the induced changes in spatial allocation at every frame. This subset supplies a direct map-level manipulation check.

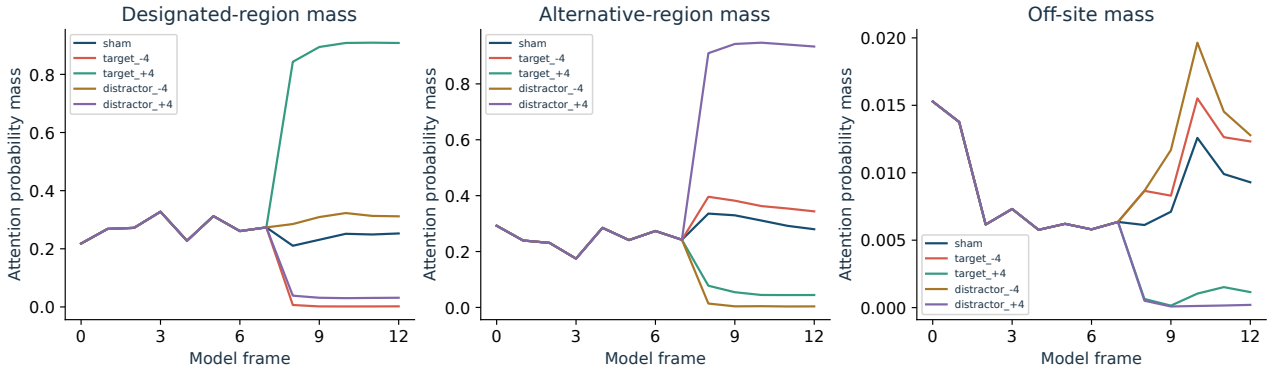


Figure 17: Matched map-level verification. Mean designated, alternative and off-site attention mass under sham and four dose-four evidence interventions. These are the first 32 exact movies from the primary intervention experiment, not a new behavioral sample.

3.13 Held-out population response profiles

The 64 CLS coordinates are ordered by the class with the largest final mean response on fitting trials, with within-class order determined by between-class response variance. The displayed means use independent test trials. Four example coordinates are selected by the largest between-class variance on fitting trials; their held-out trajectories are shown with 1.96 standard-error bands. Activation coordinates use the fitting-set mean and standard deviation across trials and time.

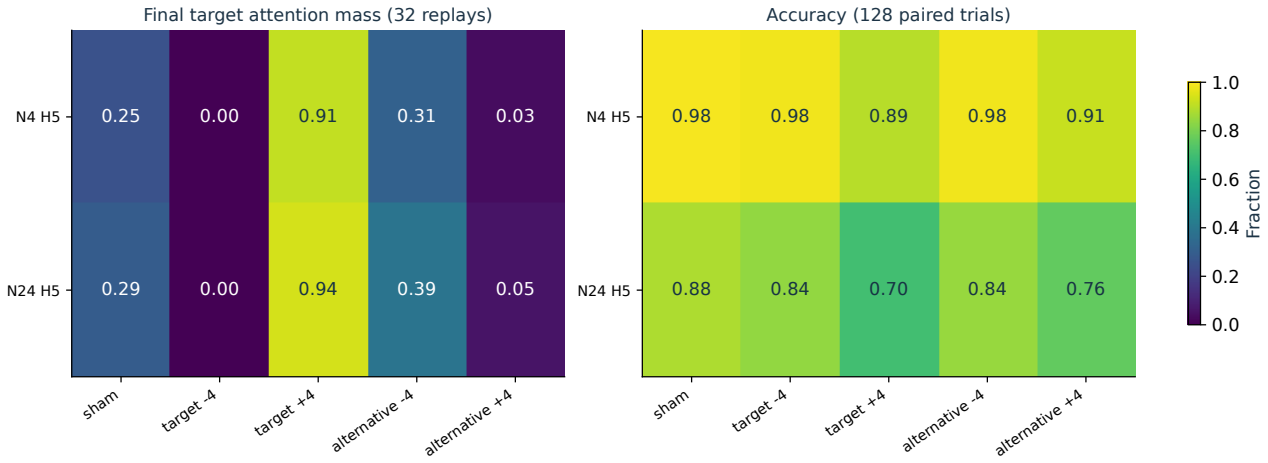


Figure 18: Condition-resolved manipulation checks. The left panel measures final target-region allocation on 32 exact replays; the right measures accuracy on all 128 paired intervention trials. All displayed spatial doses have magnitude four and act during evidence frames. Rows preserve each selected condition, making redistribution and behavioral rescue separately visible.

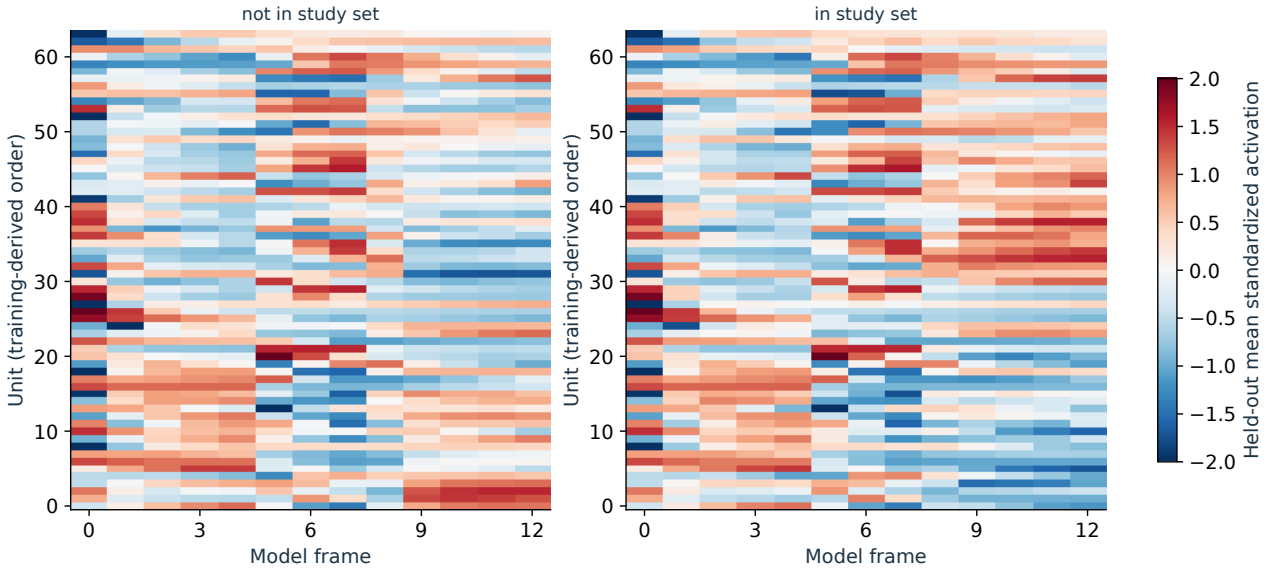


Figure 19: All 64 global-memory coordinates, shown separately for each correct-answer class. Unit ordering and standardization are learned from the fitting population; displayed activity comes from held-out trials. Colors represent activation, not firing rate.

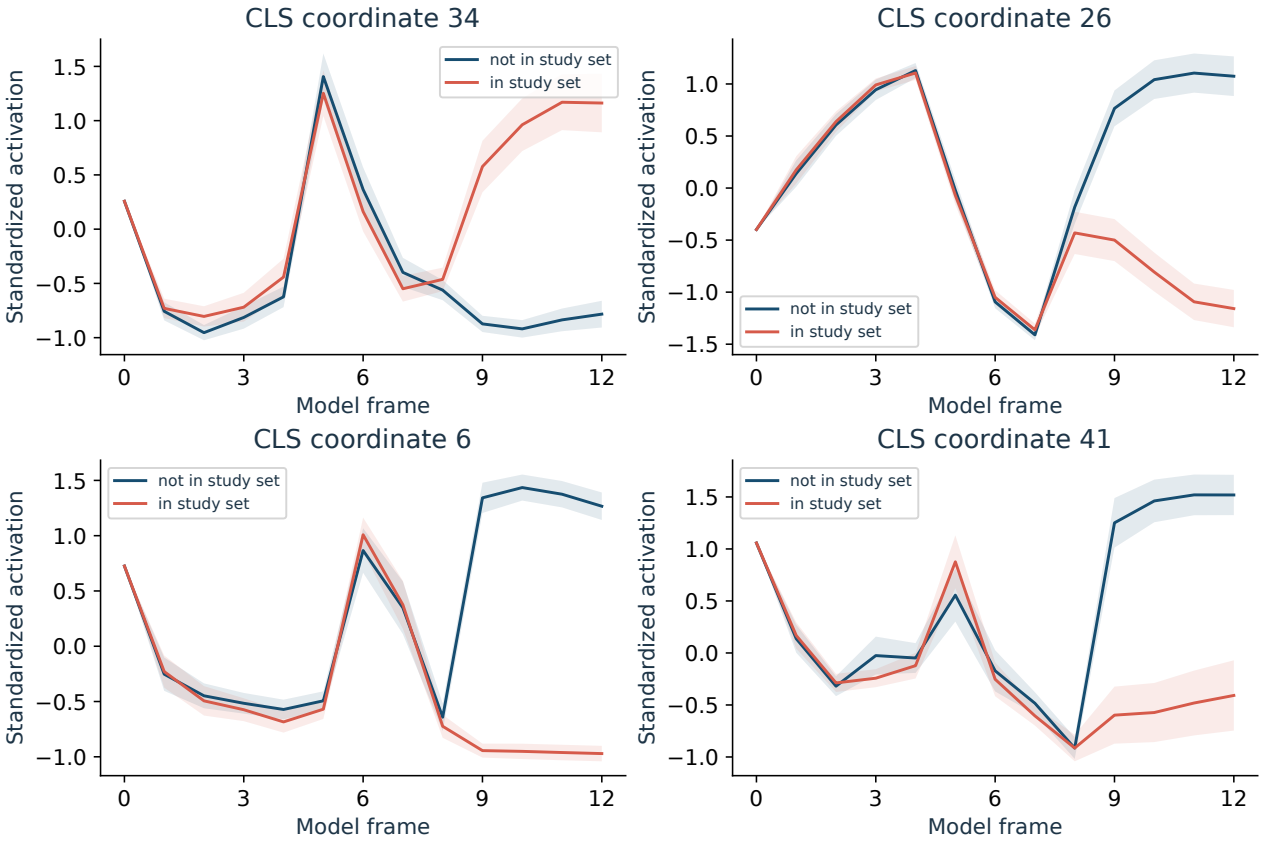


Figure 20: Four population coordinates selected on fitting trials and evaluated on independent trials. Curves separate response classes; shaded bands describe uncertainty in the mean activation.

3.14 Correct answers, actual choices and spatial instructions

The correct-answer decoder asks what the stimulus requires; a separate decoder predicts the model's actual terminal choice. They use the same independent fitting/test split and capacity-matched regional features, but distinct target labels. Errors allow these two kinds of information to separate. A location decoder uses the cue index when available, otherwise the instructed or target location. Balanced accuracy averages recall over the labels represented in the held-out population. When every response is correct, answer and choice labels coincide.

Region	Correct answer	Actual choice	Cue/target location
appearance	50.8%	52.1%	unavailable
fusion	55.5%	55.1%	unavailable
spatial	75.8%	74.4%	unavailable
cls	97.7%	99.2%	unavailable
comparison	60.9%	58.4%	unavailable
attention	53.9%	54.5%	unavailable

3.15 Class geometry in the full recurrent states

For classes a and b, let d_j^{fit} and d_j^{test} be their mean-activation differences in coordinate j, estimated from independent fitting and test populations and divided by the fitting-set standard deviation at that

frame (with a 0.05 floor). The cross-validated distance is $D_{ab} = M^{-1} \sum_{j=1}^{M} d_j^{\text{fit}} d_j^{\text{test}}$, where M is 64 for global memory and 6,400 for spatial memory. Independent differences remove the positive within-sample noise contribution present when one squared mean difference is used. Negative estimates are retained. Class codes follow the task response labels. This analysis uses every recorded recurrent coordinate and complements the low-dimensional trajectory visualization.

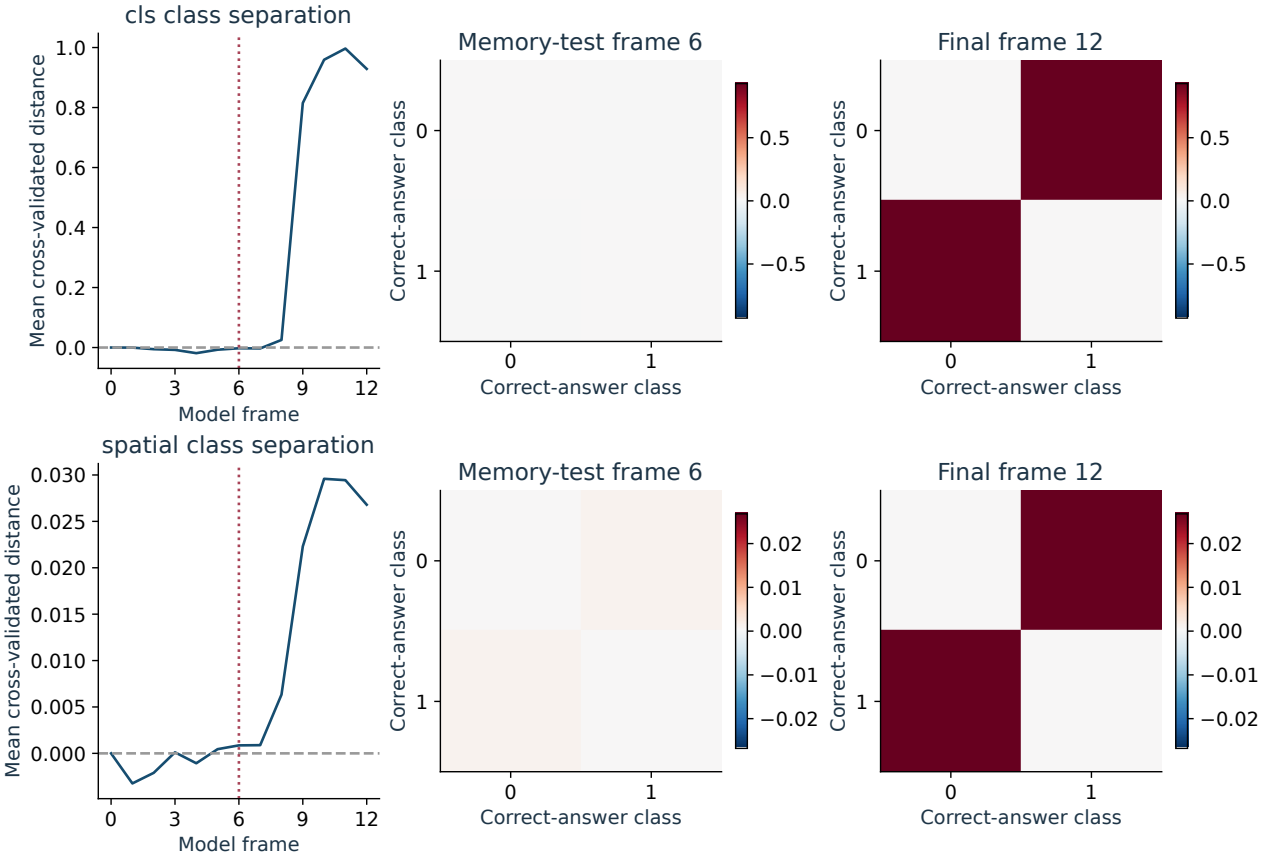


Figure 21: Cross-validated class geometry of the complete recurrent states. Left: mean off-diagonal distance over time, with the memory-test frame marked. Middle and right: class-pair distance matrices at the memory-test and final frames. Color scales are shared between the two matrices within each population. Zero is the null separation baseline; negative estimates remain visible.

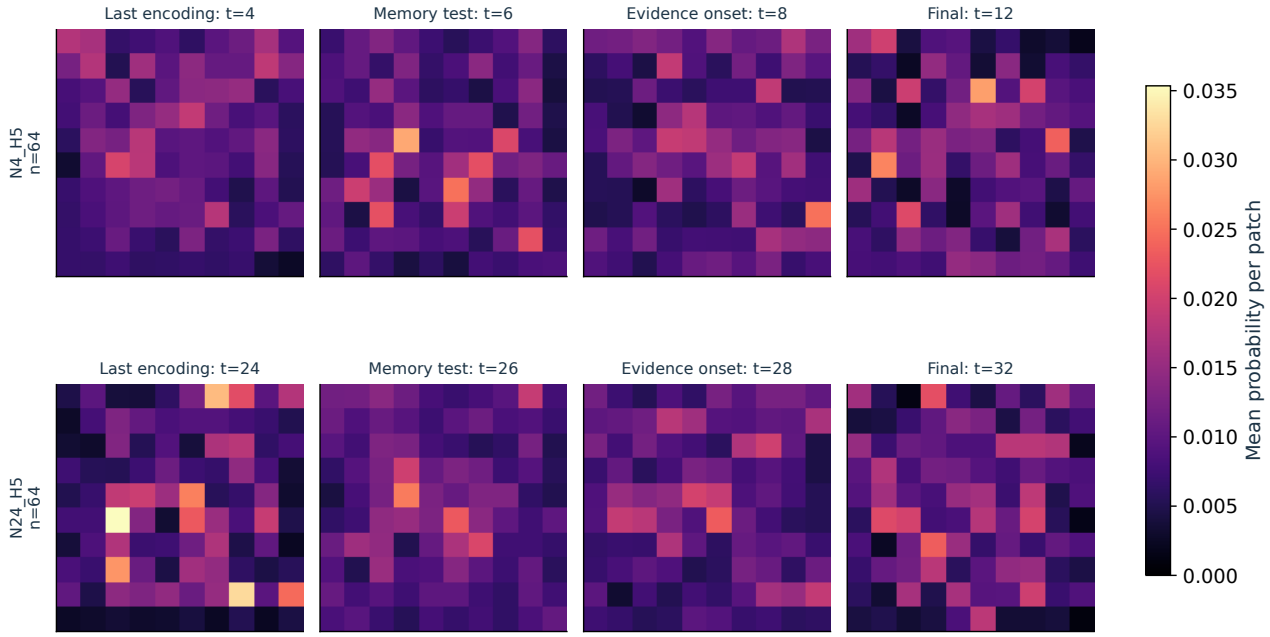


Figure 22: Condition-resolved attention at four temporal landmarks. Memory-search and pop-out rows average trials with top-left targets. Image-recognition rows average seen-probe trials. Each map is shown in the original image layout with a common probability scale across conditions; the row label gives the number of averaged trials. The memory-test frame is the middle delay, or the frame before evidence when a blank delay is absent.

3.16 Additional analysis prompted by the biological comparison

The table re-expresses the existing native recognition decisions as repeat hits, novel-image false alarms, sensitivity and criterion. Positive means "previously studied. Sensitivity is $d' = \Phi^{-1}(\widetilde{H}) - \Phi^{-1}(\widetilde{F})$ and criterion is $c = -[\Phi^{-1}(\widetilde{H}) + \Phi^{-1}(\widetilde{F})]/2$. Here Φ^{-1} converts a cumulative probability to a standard-normal quantile; $\widetilde{H} = (h + 0.5)/(n_1 + 1)$ and $\widetilde{F} = (f + 0.5)/(n_0 + 1)$ use counts of hits h, false alarms f, repeat opportunities n_1 and novel opportunities n_0. The correction keeps perfect observed rates finite. Negative criterion indicates a tendency toward positive reports in this descriptive signal-detection coordinate system.

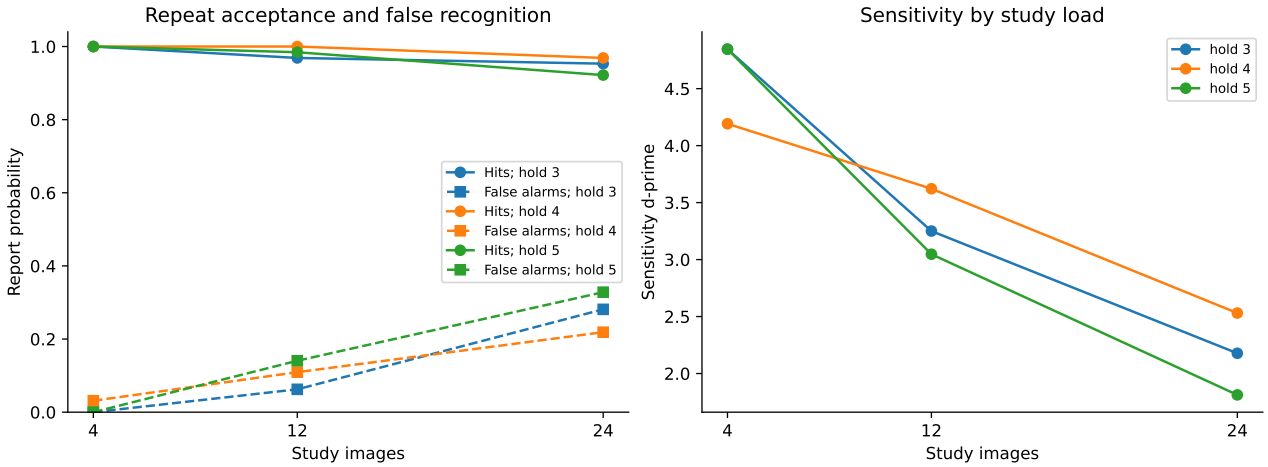


Figure 23: Recognition reanalysis of the saved native trials. Curves retain the three probe-hold conditions. Hits stay high while false recognition grows with study load; sensitivity generally decreases. These are descriptive condition estimates. There are 64 repeats and 64 novel probes per nonempty-list condition. Source-image clustering used elsewhere in the paper remains necessary for inferential comparisons across repeated photographs.

Load	Hold	Hits/repeats	False/novel	d'	c
0	3	0/0	0/128	–	–
0	4	0/0	0/128	–	–
0	5	0/0	0/128	–	–
4	3	64/64	0/64	4.85	-0.00
4	4	64/64	2/64	4.19	-0.33
4	5	64/64	0/64	4.85	-0.00
12	3	62/64	4/64	3.25	-0.14
12	4	64/64	7/64	3.62	-0.61
12	5	63/64	9/64	3.05	-0.47
24	3	61/64	18/64	2.18	-0.52
24	4	62/64	14/64	2.53	-0.50
24	5	59/64	21/64	1.81	-0.47

The empty-list condition has no repeat opportunities, so sensitivity and criterion are undefined there. At higher loads, reduced sensitivity and a positive-report tendency coexist. A criterion-only explanation would fail to capture the observed decrease in separation under this convention; an item-similarity analysis can identify what makes the novel probes seem familiar.

4 Discussion

Increasing the study load primarily increases false recognition of novel probes, while genuine repeats retain a high hit rate. This separates the dominant error pattern from simple disappearance of every stored image. The spatial-memory reset produces a large cost in the lower-load neural condition, and the final global state carries a strong recognition signal. The serial-position curves describe which stored items are most likely to be accepted; the last-image reconstruction describes only one component of the retained content. Together, these measures support studying familiarity accumulation and interference, alongside the precision with which individual study items can be recovered.

The behavioral result establishes 94.3% native accuracy for this trained subject across the tested condition distribution. The information result identifies cls as the strongest final regional readout in the representative condition under the fixed probe procedure. The causal result identifies spatial_gain0_t6 as the largest observed impairment in that condition. These three findings concern distinct levels of explanation: successful behavior, recoverable information and dependence on a manipulated component. Their conjunction is more informative than any one alone.

The most useful interpretation of a null manipulation is determined by its interval and by whether it altered an active component at a relevant time. Zero-active-frame interventions are identified in the data, and comparison memory can be exactly zero in short sequences. The shared softmax also makes priority changes competitive: increasing one region necessarily changes the relative mass elsewhere. Thus the causal object is the complete redistribution induced by the specified intervention.

Matched lure similarity and controlled intervening-image interference would extend the measured serial-position and false-alarm profiles. Reconstructing every study item would test how multiple stored images contribute to the recognition decision beyond the last-item probe reported here.

4.1 Interpreting these results alongside biological experiments

4.1.1 Miller, Li and Desimone (1993)

The model's growing false-recognition rate with study load makes match-related population signals especially relevant. The biological result distinguishes a later recognition signal from uninterrupted activity for a sample. Our last-image reconstruction describes one retained item, while the recognition decision may depend on a broader aggregate of studied content. These are different readouts of memory. [5]

4.1.2 Miller, Erickson and Desimone (1996)

Intervening images are a direct interference manipulation in both task families. The model must determine membership in a list, whereas delayed matching can designate one sample as the relevant item. That rule difference changes which intervening images should be stored or ignored. Comparing the same image sequence under sample-only and any-studied-item rules would reveal whether the network can protect a selected memory. [6]

4.1.3 Bays, Catalao and Husain (2009)

A distributed-resource account predicts declining precision as more content is retained. Recognition errors, however, also depend on the threshold for declaring a match. The signal-detection reanalysis

below separates sensitivity from positive-response tendency across load. A high hit rate with rising false alarms can arise from overlapping familiarity distributions, a criterion shift, or both; accuracy alone does not decide among them. [7]

4.2 A computational account of the observed behavior

A familiarity-style computation compares the probe with an aggregate trace of previous images. As more images contribute, a novel probe can accidentally resemble some part of that trace. A more item-specific computation stores separable representations and compares the probe against each. The model's spatial-reset cost establishes that retained state supports the judgment, while its high repeat acceptance and increasing novel acceptance identify a characteristic interference pattern. The added sensitivity-and-criterion table expresses that pattern in a common recognition framework. It uses finite-sample correction for perfect rates and keeps probe-hold conditions separate. An empty study list contains no genuine repeats, so sensitivity is undefined there even when correct rejection is perfect.

4.3 Where this task agrees with the biological evidence

The model agrees with interference-sensitive recognition and a population-level memory signal. It differs from a simple all-or-none forgetting account because errors are concentrated in accepting novel probes. The biological comparison becomes sharper by measuring image similarity and list membership separately rather than treating a single average recognition score as memory capacity.

4.4 A follow-up experiment motivated by these results

Stratify novel probes by similarity to the study list and compare them with repeated items at different serial positions. Fit a held-out familiarity predictor and an itemwise nearest-memory predictor. Use matched images across list lengths to separate interference from differences in picture difficulty.

4.5 Scope of inference

This series studies one trained parameter realization. Its uncertainty intervals describe stimulus sampling for that realization. Threshold-defined latencies are in model frames and reflect the existing classifier applied to prefix states. Spatial doses are changes to computational priority logits, and memory perturbations act on recurrent tensors. Independent training seeds, calibrated behavioral clocks and biological intervention models are the next levels of replication. The empirical results, code and task definitions are sufficient to reproduce the computational experiments reported here.

References

[1] Miller EK, Erickson CA, Desimone R (1996). Neural mechanisms of visual working memory in prefrontal cortex of the macaque. Journal of Neuroscience 16:5154-5167. https://pubmed.ncbi.nlm.nih.gov/8756444/.

[2] Chelazzi L, Miller EK, Duncan J, Desimone R (1993). A neural basis for visual search in inferior temporal cortex. Nature 363:345-347. https://pubmed.ncbi.nlm.nih.gov/8497317/.

[3] King JR, Dehaene S (2014). Characterizing the dynamics of mental representations: the temporal generalization method. Trends in Cognitive Sciences 18:203-210. https://pmc.ncbi.nlm.nih.gov/articles/PMC5635958/.

[4] Stokes MG et al. (2013). Dynamic coding for cognitive control in prefrontal cortex. Neuron 78:364-375. https://pubmed.ncbi.nlm.nih.gov/23562541/.

[5] Miller, Li and Desimone (1993). Activity of neurons in anterior inferior temporal cortex during a short-term memory task. Primary source.

[6] Miller, Erickson and Desimone (1996). Neural mechanisms of visual working memory in prefrontal cortex of the macaque. Primary source.

[7] Bays, Catalao and Husain (2009). The precision of visual working memory is set by allocation of a shared resource. Primary source.

A Complete native condition results

Condition	n	Accuracy	AUC	Brier
N0_H3	128	100.0%	unavailable	0.000
N0_H4	128	100.0%	unavailable	0.000
N0_H5	128	100.0%	unavailable	0.000
N4_H3	128	100.0%	1.000	0.003
N4_H4	128	98.4%	0.997	0.038
N4_H5	128	100.0%	1.000	0.005
N12_H3	128	95.3%	0.986	0.085
N12_H4	128	94.5%	0.979	0.094
N12_H5	128	92.2%	0.974	0.114
N24_H3	128	83.6%	0.936	0.232
N24_H4	128	87.5%	0.927	0.203
N24_H5	128	79.7%	0.867	0.300

B Every-frame attention atlas

Condition N4_H5. The first two rows show one exact native trial and its own attention overlay. The third row averages attention over 64 trials sharing the selected location/cue and response label. Every model frame is included. Averaging unrelated object identities is restricted to the attention map; the displayed RGB movie remains one real trial.



Figure 24: Native frames, own attention overlay and condition-group spatial projection. Shared color scaling within each panel represents attention probability per patch.

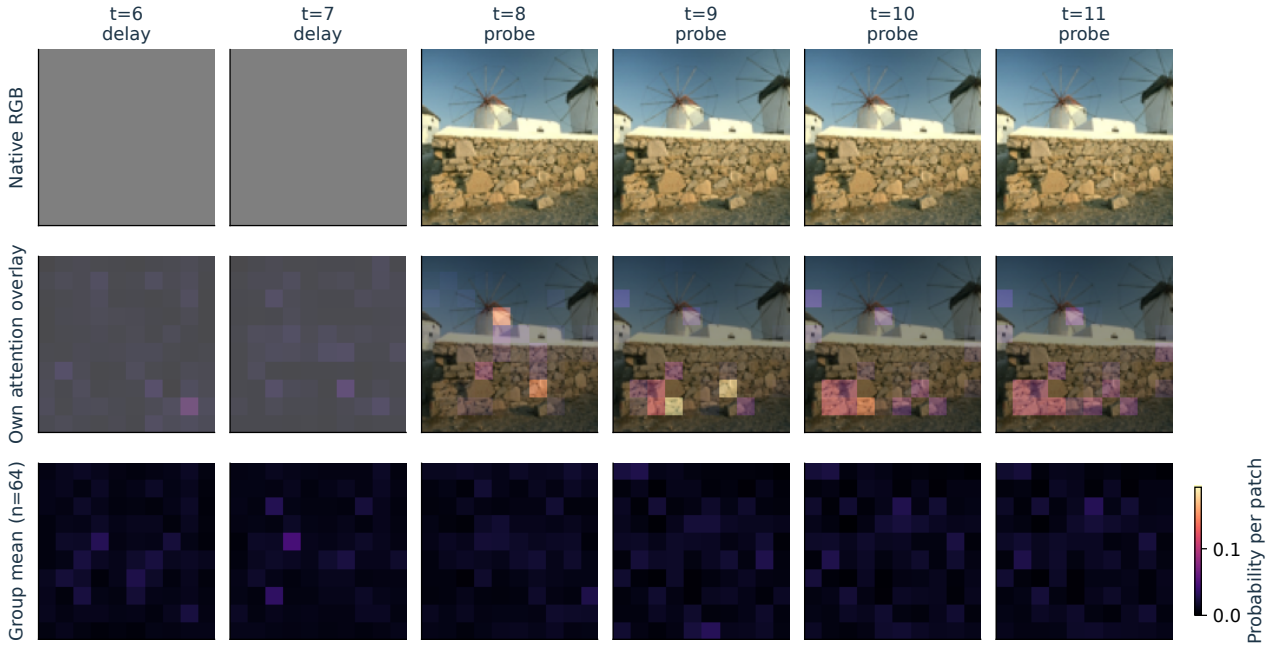


Figure 25: Native frames, own attention overlay and condition-group spatial projection. Shared color scaling within each panel represents attention probability per patch.

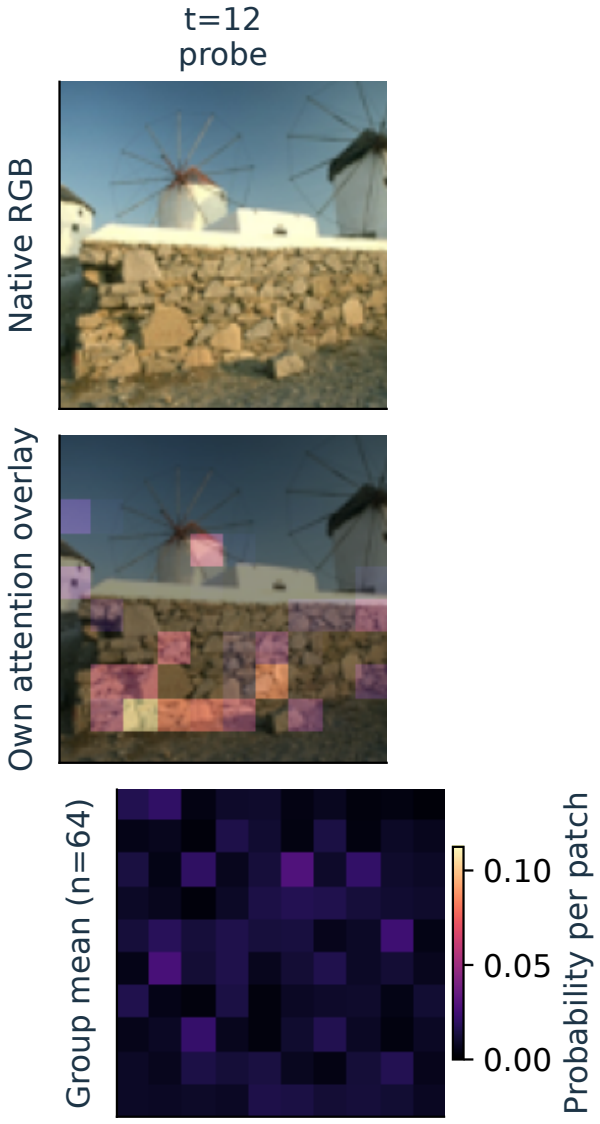


Figure 26: Native frames, own attention overlay and condition-group spatial projection. Shared color scaling within each panel represents attention probability per patch.

C Condition-by-time attention: all frames

Each panel retains the same condition definitions and color scale as the main attention section. Frames are aligned to the task-specific evidence onset. Gray cells mark times outside a particular trial, rather than missing observations. All observed frames are displayed.



Figure 27: Complete condition-average spatial trajectory. Rows are conditions, columns are aligned frames, and each title also records the original frame and task phase. Sample counts and a shared probability scale accompany every panel.

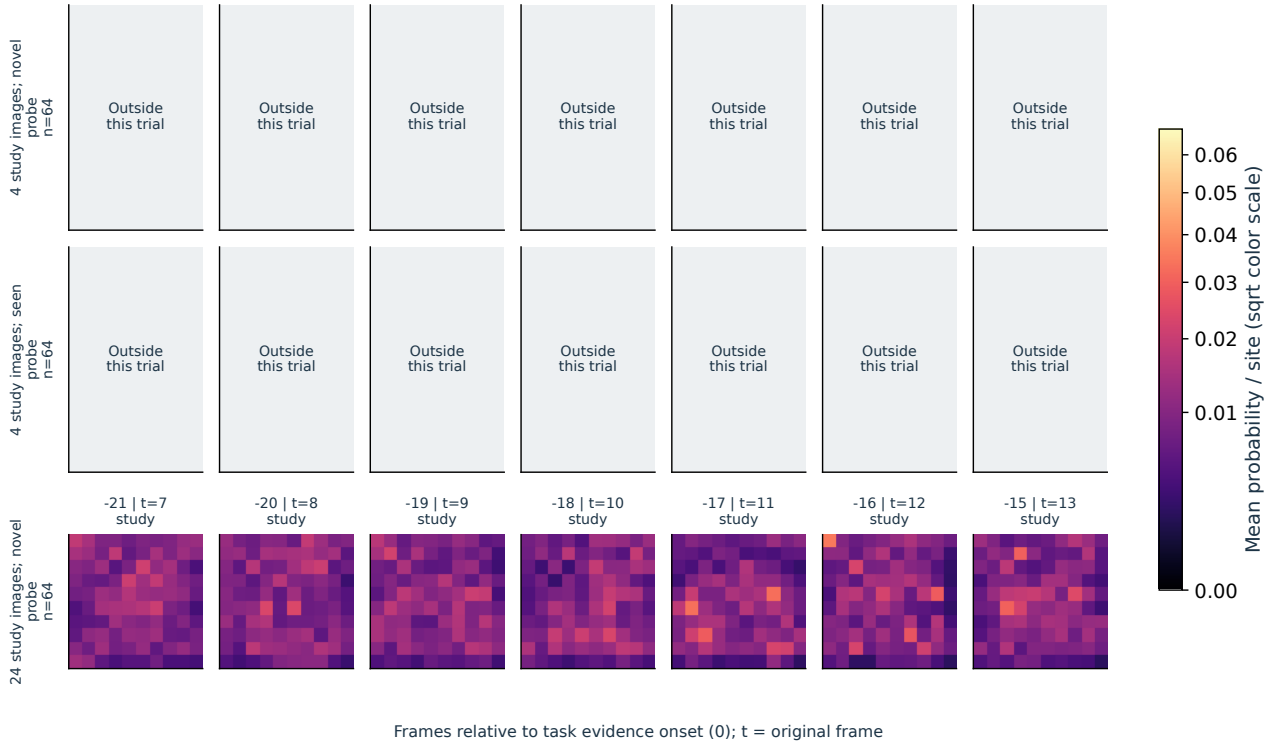


Figure 28: Complete condition-average spatial trajectory. Rows are conditions, columns are aligned frames, and each title also records the original frame and task phase. Sample counts and a shared probability scale accompany every panel.



Figure 29: Complete condition-average spatial trajectory. Rows are conditions, columns are aligned frames, and each title also records the original frame and task phase. Sample counts and a shared probability scale accompany every panel.

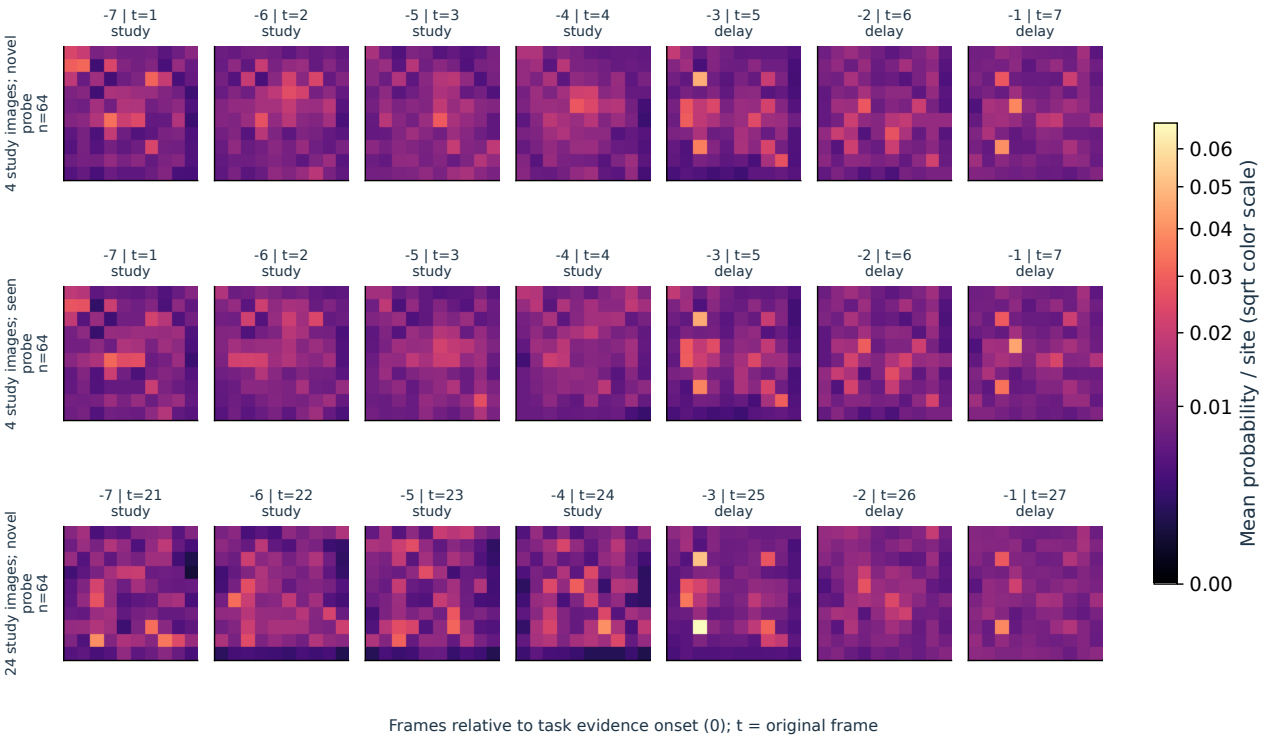


Figure 30: Complete condition-average spatial trajectory. Rows are conditions, columns are aligned frames, and each title also records the original frame and task phase. Sample counts and a shared probability scale accompany every panel.

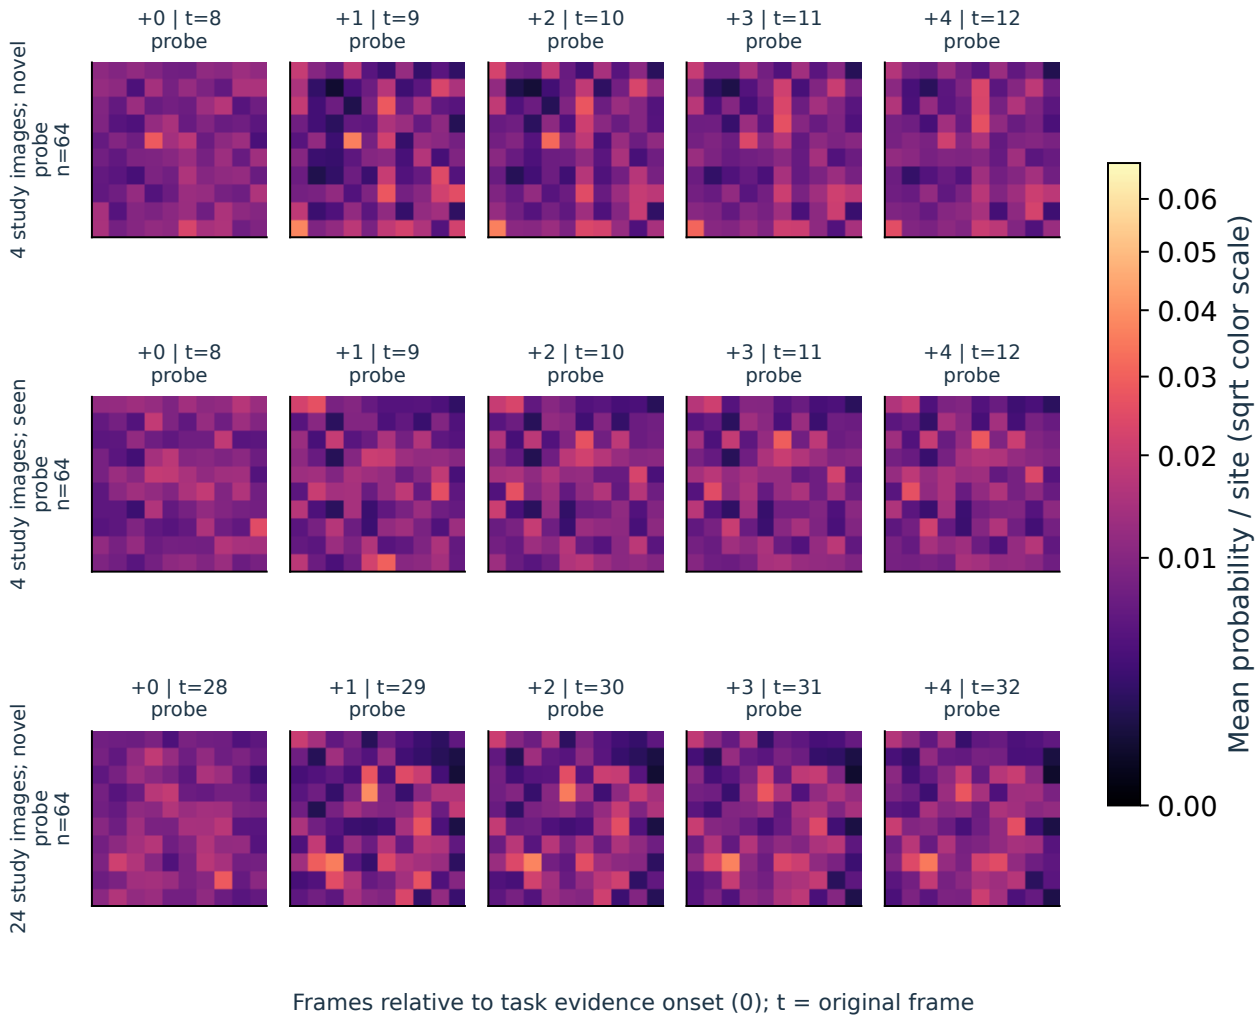


Figure 31: Complete condition-average spatial trajectory. Rows are conditions, columns are aligned frames, and each title also records the original frame and task phase. Sample counts and a shared probability scale accompany every panel.



Figure 32: Complete condition-average spatial trajectory. Rows are conditions, columns are aligned frames, and each title also records the original frame and task phase. Sample counts and a shared probability scale accompany every panel.



Figure 33: Complete condition-average spatial trajectory. Rows are conditions, columns are aligned frames, and each title also records the original frame and task phase. Sample counts and a shared probability scale accompany every panel.



Figure 34: Complete condition-average spatial trajectory. Rows are conditions, columns are aligned frames, and each title also records the original frame and task phase. Sample counts and a shared probability scale accompany every panel.



Figure 35: Complete condition-average spatial trajectory. Rows are conditions, columns are aligned frames, and each title also records the original frame and task phase. Sample counts and a shared probability scale accompany every panel.

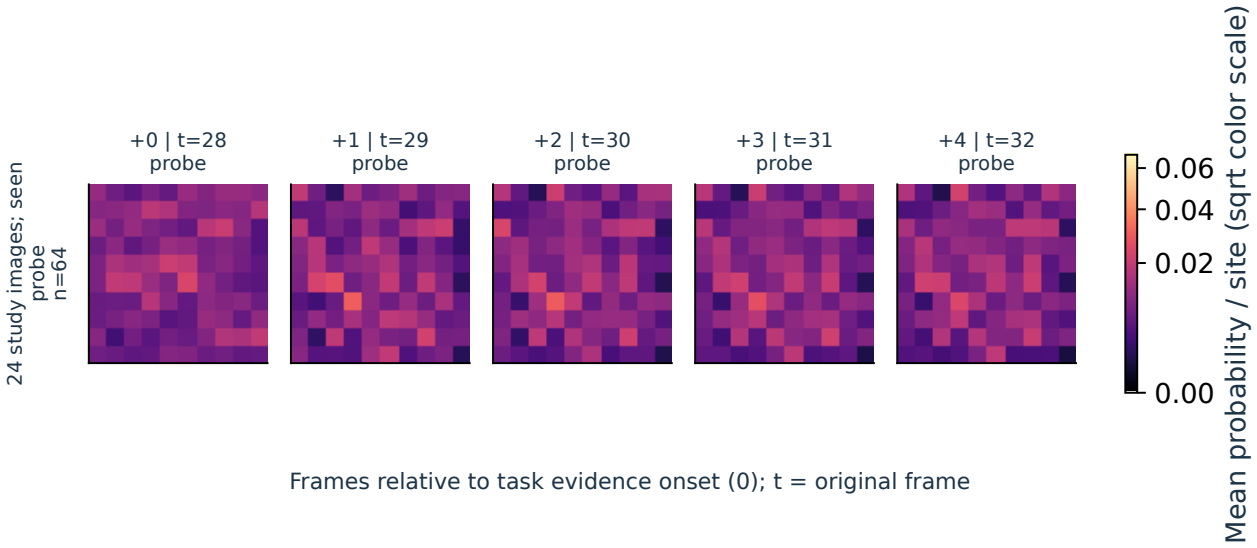


Figure 36: Complete condition-average spatial trajectory. Rows are conditions, columns are aligned frames, and each title also records the original frame and task phase. Sample counts and a shared probability scale accompany every panel.

D Reproducibility record

Main checkpoint: update 204,289. Final robustness checkpoint: update 220,637.

best: `596bc351783b3ddbfa8d37a9cf8d6514`

`6d1333dcc0097d40f0f75665b6451bcf`

latest: `c13338ff6958c5dbb617914da538bca1`

`39944b89122b848b72885ed3241995d4`

Data namespace 205903; probe fitting 205904; probe testing 205905; interventions 205906; difficulty challenges 205907; VDA counterfactuals 205908. The analysis package is `SecondPass/TaskNeuroscience`. The protocol, source hashes, parity checks, per-trial NPZ files, metadata, statistical JSON files and editable LaTeX sources are retained beside this paper. Figures and text are generated directly from completed analysis results.