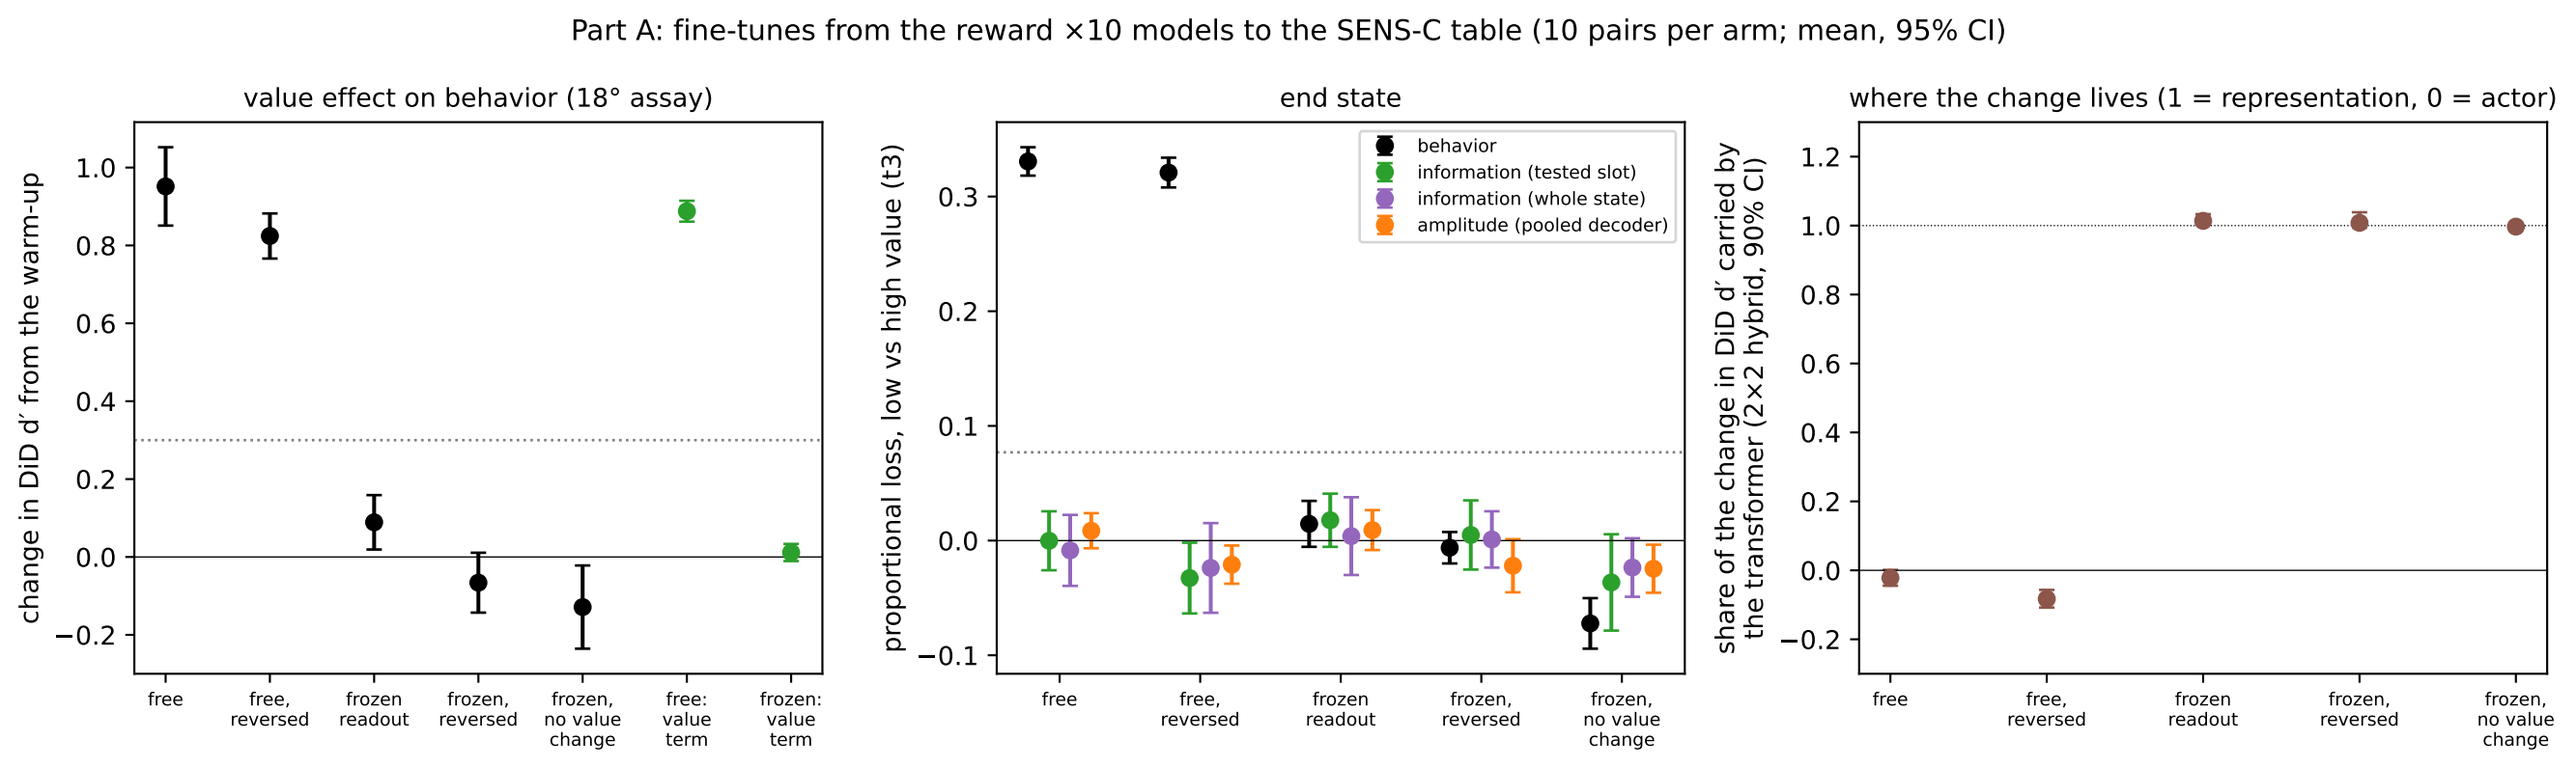
Part A: fine-tunes from the reward ×10 models to the SENS-C table (10 pairs per arm; mean, 95% CI)
value effect on behavior (18° assay)
change in DiD d′ from the warm-up
1.0
0.8
0.6
0.4
0.2
0.0
−0.2
free
free, reversed
frozen readout
frozen, reversed
frozen, no value change
free: value term
frozen: value term
end state
proportional loss, low vs high value (t3)
behavior
information (tested slot)
information (whole state)
amplitude (pooled decoder)
0.3
0.2
0.1
0.0
−0.1
free
free, reversed
frozen readout
frozen, reversed
frozen, no value change
where the change lives (1 = representation, 0 = actor)
share of the change in DiD d′ carried by the transformer (2×2 hybrid, 90% CI)
1.2
1.0
0.8
0.6
0.4
0.2
0.0
−0.2
free
free, reversed
frozen readout
frozen, reversed
frozen, no value change