

Autoencoder

By Prof. Seungchul Lee
Industrial AI Lab
<http://isystems.unist.ac.kr/>
POSTECH

Table of Contents

- [I. 1. Unsupervised Learning](#)
- [II. 2. Autoencoders](#)
- [III. 3. Autoencoder with TensorFlow](#)
 - [I. 3.1. Import Library](#)
 - [II. 3.2. Load MNIST Data](#)
 - [III. 3.3. Define an Autoencoder Shape](#)
 - [IV. 3.4. Define Weights and Biases](#)
 - [V. 3.5. Build a Model](#)
 - [VI. 3.6. Define Loss, Initializer and Optimizer](#)
 - [VII. 3.7. Summary of Model](#)
 - [VIII. 3.8. Define Configuration](#)
 - [IX. 3.9. Optimization](#)
 - [X. 3.10. Test or Evaluation](#)
- [IV. 4. Visualization](#)


1. Unsupervised Learning

Definition

- Unsupervised learning refers to most attempts to extract information from a distribution that do not require human labor to annotate example
- Main task is to find the 'best' representation of the data

Dimension Reduction

- Attempt to compress as much information as possible in a smaller representation
- Preserve as much information as possible while obeying some constraint aimed at keeping the representation simpler

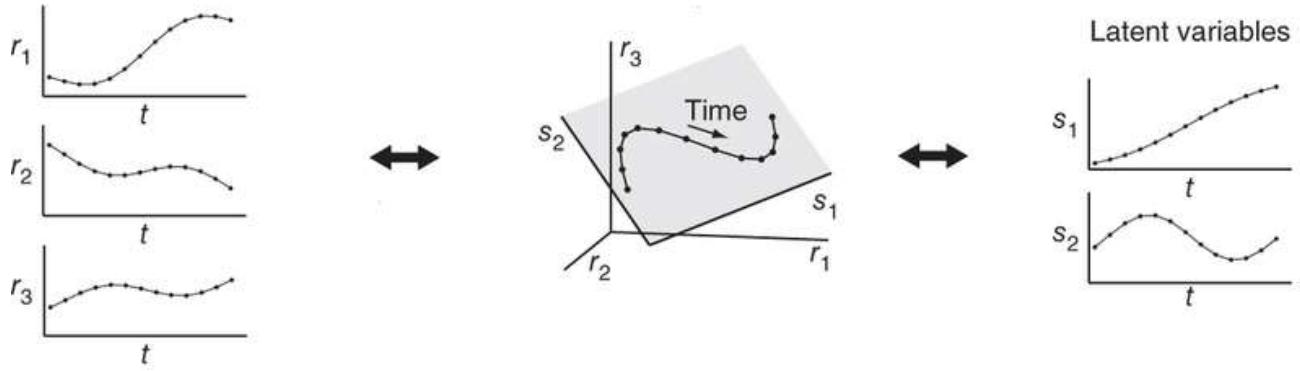

2. Autoencoders



It is like 'deep learning version' of unsupervised learning


Definition

- An autoencoder is a neural network that is trained to attempt to copy its input to its output
- The network consists of two parts: an **encoder** and a **decoder** that produce a reconstruction

Encoder and Decoder



- Encoder function : $h = f(x)$
- Decoder function : $r = g(h)$
- We learn to set $g(f(x)) = x$

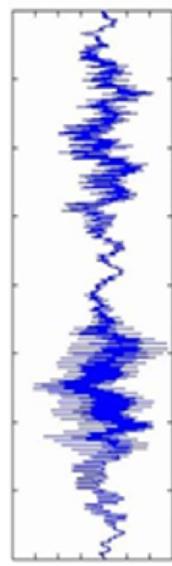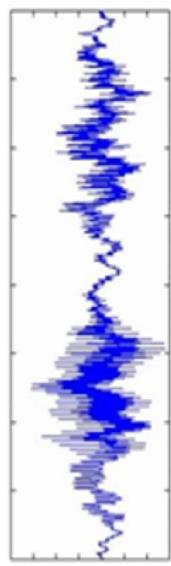

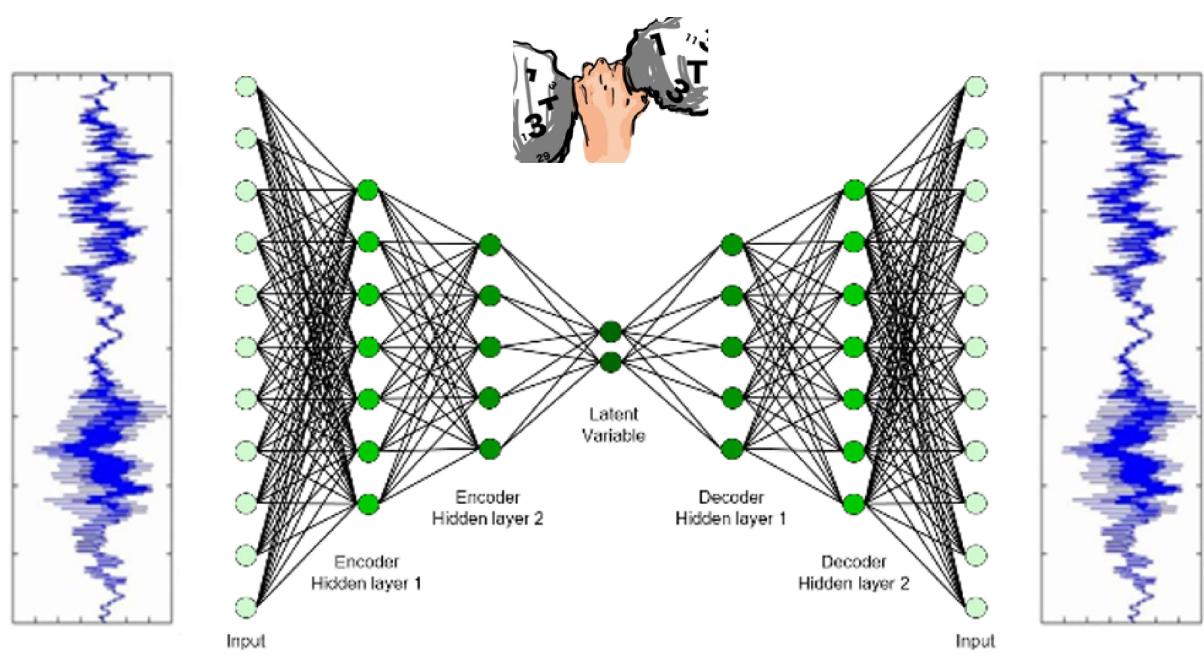

3. Autoencoder with TensorFlow

- MNIST example
- Use only (1, 5, 6) digits to visualize in 2-D

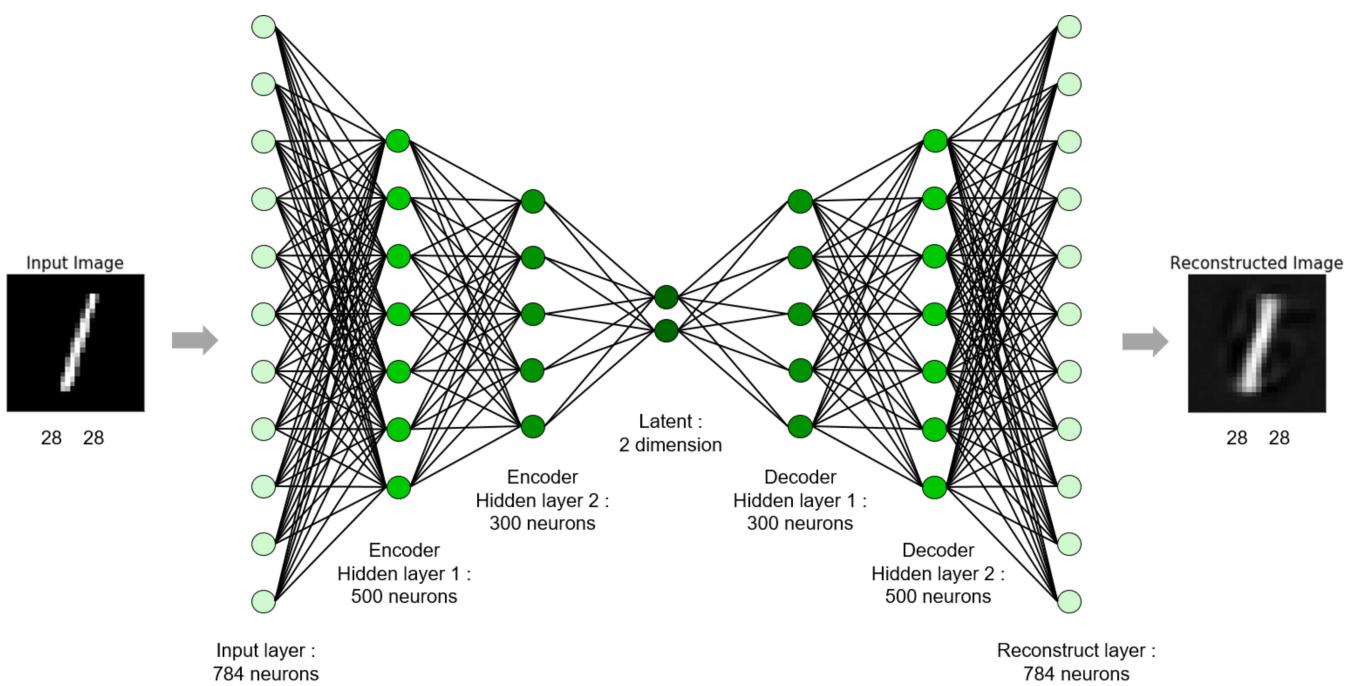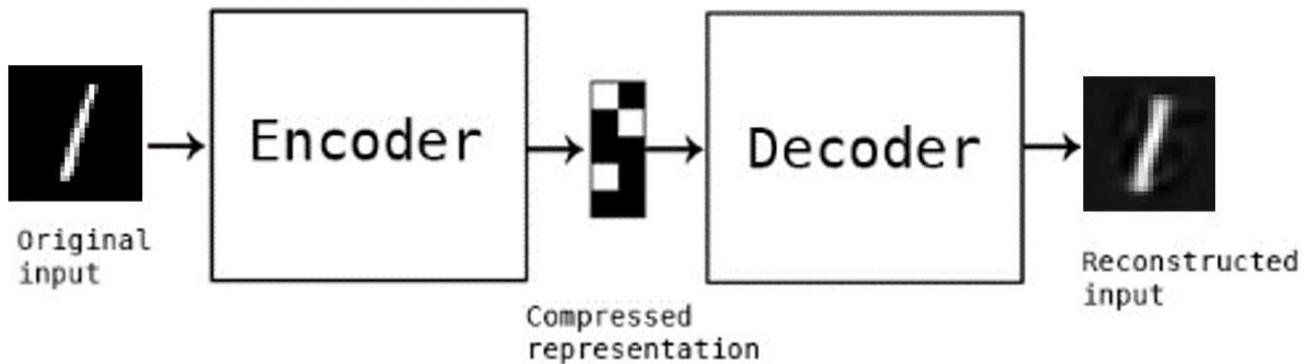

3.1. Import Library

In [1]:

```
import numpy as np
import matplotlib.pyplot as plt
import tensorflow as tf
```

3.2. Load MNIST Data

In [2]:

```
def batch_maker(batch_size, img, label):
    img_len = len(img)
    random_idx = np.random.randint(img_len, size = batch_size)
    return img[random_idx], label[random_idx]
```

In [3]:

```
from tensorflow.examples.tutorials.mnist import input_data
mnist = input_data.read_data_sets("MNIST_data/", one_hot=True)
```

```
Extracting MNIST_data/train-images-idx3-ubyte.gz
Extracting MNIST_data/train-labels-idx1-ubyte.gz
Extracting MNIST_data/t10k-images-idx3-ubyte.gz
Extracting MNIST_data/t10k-labels-idx1-ubyte.gz
```

In [4]:

```
train_idx = ((np.argmax(mnist.train.labels, 1) == 1) | \
             (np.argmax(mnist.train.labels, 1) == 5) | \
             (np.argmax(mnist.train.labels, 1) == 6))
test_idx = ((np.argmax(mnist.test.labels, 1) == 1) | \
            (np.argmax(mnist.test.labels, 1) == 5) | \
            (np.argmax(mnist.test.labels, 1) == 6))

train_imgs = mnist.train.images[train_idx]
train_labels = mnist.train.labels[train_idx]
test_imgs = mnist.test.images[test_idx]
test_labels = mnist.test.labels[test_idx]
n_train = train_imgs.shape[0]
n_test = test_imgs.shape[0]


print ("Packages loaded")
print ("The number of trainimgs : {}, shape : {}".format(n_train, train_imgs.shape))
print ("The number of testimgs : {}, shape : {}".format(n_test, test_imgs.shape))
```

Packages loaded

The number of trainimgs : 16583, shape : (16583, 784)
The number of testimgs : 2985, shape : (2985, 784)

3.3. Define an Autoencoder Shape

- Input shape and latent variable shape
- Encoder shape
- Decoder shape

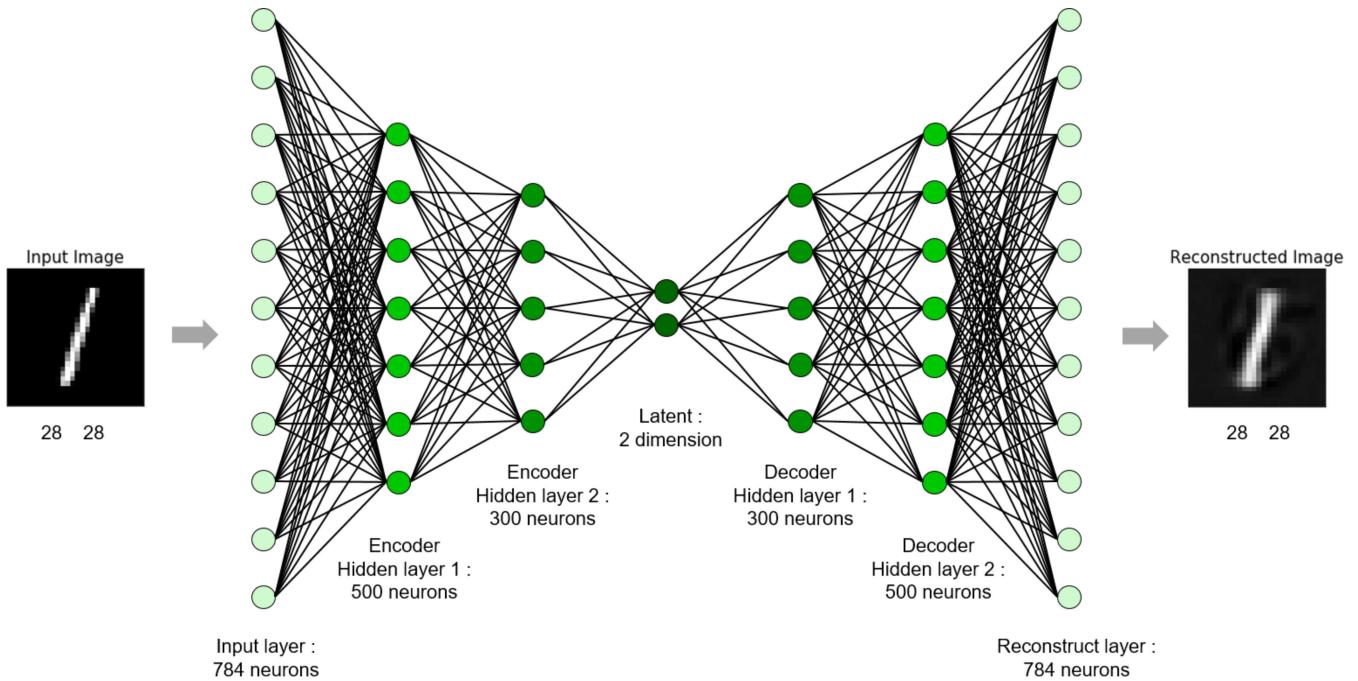

In [5]:

```
# Shape of input and latent variable
n_input = 28*28

# Encoder shape
n_encoder1 = 500
n_encoder2 = 500

n_latent = 2

# Decoder shape
n_decoder1 = 300
n_decoder2 = 500
```

3.4. Define Weights and Biases

- Define weights and biases for encoder and decoder, separately
- Based on the predefined layer size
- Initialize with normal distribution with $\mu = 0$ and $\sigma = 0.01$

In [6]:

```
weights = {
    'encoder1' : tf.Variable(tf.random_normal([n_input, n_encoder1], stddev=0.1)),
    'encoder2' : tf.Variable(tf.random_normal([n_encoder1, n_encoder2], stddev=0.1)),
    'latent' : tf.Variable(tf.random_normal([n_encoder2, n_latent], stddev=0.1)),
    'decoder1' : tf.Variable(tf.random_normal([n_latent, n_decoder1], stddev=0.1)),
    'decoder2' : tf.Variable(tf.random_normal([n_decoder1, n_decoder2], stddev=0.1)),
    'reconst' : tf.Variable(tf.random_normal([n_decoder2, n_input], stddev=0.1))
}

biases = {
    'encoder1' : tf.Variable(tf.random_normal([n_encoder1], stddev=0.1)),
    'encoder2' : tf.Variable(tf.random_normal([n_encoder2], stddev=0.1)),
    'latent' : tf.Variable(tf.random_normal([n_latent], stddev=0.1)),
    'decoder1' : tf.Variable(tf.random_normal([n_decoder1], stddev=0.1)),
    'decoder2' : tf.Variable(tf.random_normal([n_decoder2], stddev=0.1)),
    'reconst' : tf.Variable(tf.random_normal([n_input], stddev=0.1))
}

x = tf.placeholder(tf.float32, [None, n_input])
```

3.5. Build a Model

In [7]:

```
def encoder(x, weights, biases):
    encoder1 = tf.add(tf.matmul(x, weights['encoder1']), biases['encoder1'])
    encoder1 = tf.nn.tanh(encoder1)

    encoder2 = tf.add(tf.matmul(encoder1, weights['encoder2']), biases['encoder2'])
    encoder2 = tf.nn.tanh(encoder2)

    latent = tf.add(tf.matmul(encoder2, weights['latent']), biases['latent'])

    return latent
```

In [8]:

```
def decoder(latent, weights, biases):
    decoder1 = tf.add(tf.matmul(latent, weights['decoder1']), biases['decoder1'])
    decoder1 = tf.nn.tanh(decoder1)

    decoder2 = tf.add(tf.matmul(decoder1, weights['decoder2']), biases['decoder2'])
    decoder2 = tf.nn.tanh(decoder2)

    reconst = tf.add(tf.matmul(decoder2, weights['reconst']), biases['reconst'])

    return reconst
```

3.6. Define Loss, Initializer and Optimizer

Loss

- Squared loss

$$\frac{1}{N} \sum_{i=1}^N (t_i - y_i)^2$$

Optimizer

- AdamOptimizer: the most popular optimizer

Initializer

- Initialize all the empty variables

In [9]:


```
LR = 0.0001

latent = encoder(x, weights, biases)
reconst = decoder(latent, weights, biases)
loss = tf.square(tf.subtract(x, reconst))
loss = tf.reduce_mean(loss)

optm = tf.train.AdamOptimizer(LR).minimize(loss)

init = tf.global_variables_initializer()
```

3.7. Summary of Model

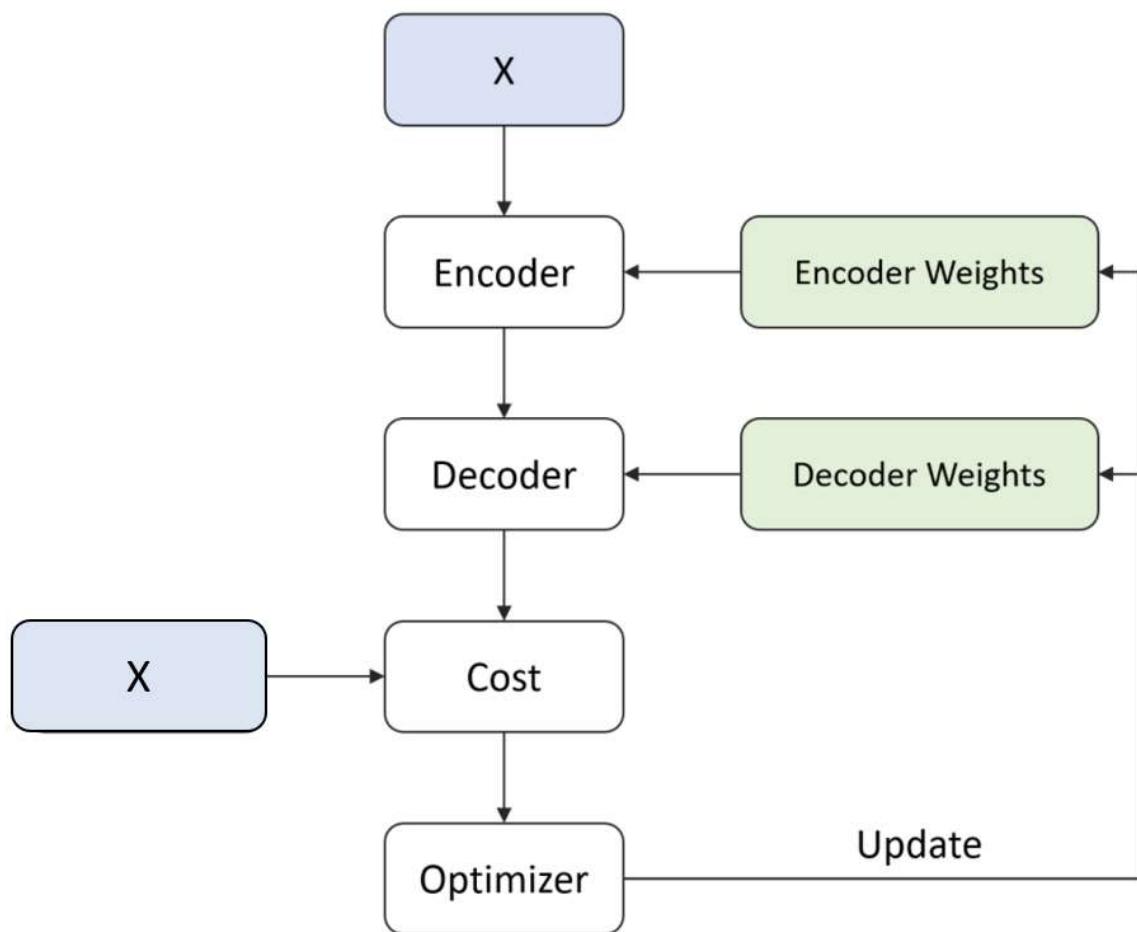

3.8. Define Configuration

- Define parameters for training autoencoder
 - n_batch : batch size for stochastic gradient descent
 - n_iter : the number of training steps
 - n_prt : check loss for every n_prt iteration

In [10]:

```
n_batch = 50
n_iter = 2500
n_prt = 250
```

3.9. Optimization

In [11]:

```
# Run initialize
# config = tf.ConfigProto(allow_soft_placement=True) # GPU Allocating policy
# sess = tf.Session(config=config)
sess = tf.Session()
sess.run(init)

# Training cycle
for epoch in range(n_iter):
    train_x, train_y = batch_maker(n_batch, train_imgs, train_labels)
    sess.run(optm, feed_dict={x : train_x})

    if epoch % n_prt == 0:
        c = sess.run(loss, feed_dict={x: train_x})
        print ("Iter : {}".format(epoch))
        print ("Cost : {}".format(c))

Iter : 0
Cost : 0.5145934820175171
Iter : 250
Cost : 0.05035573989152908
Iter : 500
Cost : 0.042507994920015335
Iter : 750
Cost : 0.04249349236488342
Iter : 1000
Cost : 0.04120152071118355
Iter : 1250
Cost : 0.040063146501779556
Iter : 1500
Cost : 0.03985742852091789
Iter : 1750
Cost : 0.03634038195014
Iter : 2000
Cost : 0.042033929377794266
Iter : 2250
Cost : 0.03859527409076691
```

3.10. Test or Evaluation


- Test reconstruction performance of the autoencoder

In [12]:

```
test_x, test_y = batch_maker(1, test_imgs, test_labels)
x_reconst = sess.run(reconst, feed_dict={x : test_x})

fig = plt.figure(figsize=(5, 3))
ax1 = fig.add_subplot(1, 2, 1)
ax1.imshow(test_x.reshape(28, 28), 'gray')
ax1.set_title('Input Image', fontsize=15)
ax1.set_xticks([])
ax1.set_yticks([])

ax2 = fig.add_subplot(1, 2, 2)
ax2.imshow(x_reconst.reshape(28, 28), 'gray')
ax2.set_title('Reconstructed Image', fontsize=15)
ax2.set_xticks([])
ax2.set_yticks([])
plt.show()
```

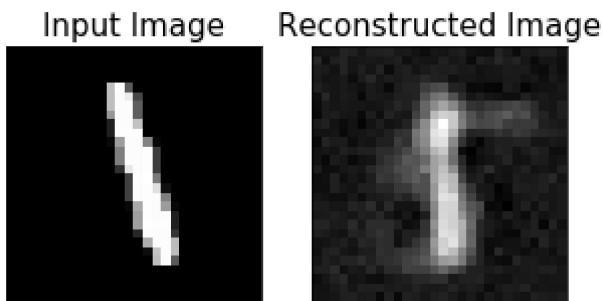


- To see the distribution of latent variables, we make a projection of 784-dimensional image space onto 2-dimensional latent space

In [13]:

```
test_x, test_y = batch_maker(500, test_imgs, test_labels)
test_y = np.argmax(test_y, axis=1)
test_latent = sess.run(latent, feed_dict={x : test_x})

plt.figure(figsize=(10,6))
plt.scatter(test_latent[test_y == 1,0], test_latent[test_y == 1,1], label = 'label = 1')
plt.scatter(test_latent[test_y == 5,0], test_latent[test_y == 5,1], label = 'label = 5')
plt.scatter(test_latent[test_y == 6,0], test_latent[test_y == 6,1], label = 'label = 6')
plt.title('Latent space', fontsize=15)
plt.xlabel('Z1', fontsize=15)
plt.ylabel('Z2', fontsize=15)
plt.legend(fontsize = 15)
plt.show()
```

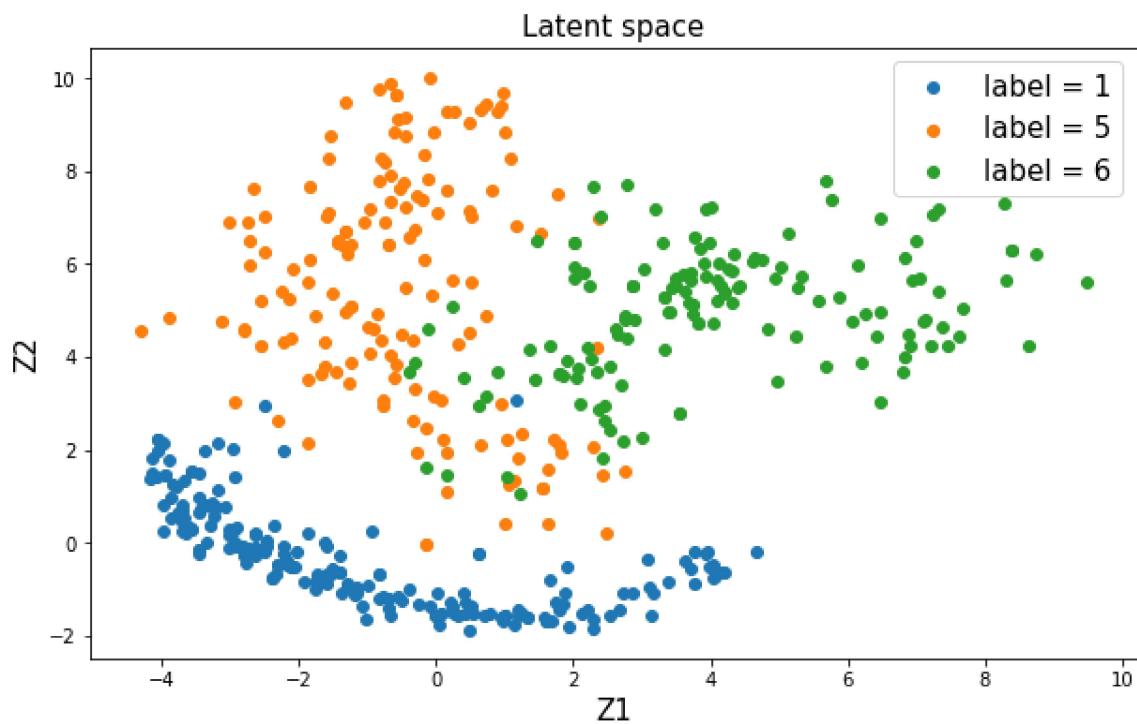

Data Generation

In []:

```
generate_data = np.array([[1, 4]])  
  
fig = plt.figure(figsize=(15,6))  
ax = plt.subplot2grid((1,3), (0,0), colspan=2)  
ax.scatter(test_latent[test_y == 1,0], test_latent[test_y == 1,1], label = 'label = 1')  
ax.scatter(test_latent[test_y == 5,0], test_latent[test_y == 5,1], label = 'label = 5')  
ax.scatter(test_latent[test_y == 6,0], test_latent[test_y == 6,1], label = 'label = 6')  
ax.scatter(generate_data[:,0], generate_data[:,1], label = 'generate', s = 150, c = 'k', marker = 'o')  
ax.set_title('Latent space', fontsize=15)  
ax.set_xlabel('Z1', fontsize=15)  
ax.set_ylabel('Z2', fontsize=15)  
ax.legend(fontsize = 15)  
  
latent_input = tf.placeholder(tf.float32, [None, n_latent])  
reconst = decoder(latent_input, weights, biases)  
generate_x = sess.run(reconst, feed_dict={latent_input : generate_data})  
  
ax = plt.subplot2grid((1, 3), (0, 2), colspan=1)  
ax.imshow(generate_x.reshape(28, 28), 'gray')  
ax.set_title('Generate Image', fontsize=15)  
ax.set_xticks([])  
ax.set_yticks([])  
plt.show()
```

4. Visualization

Image Generation

- Select an arbitrary latent variable z
- Generate images using the learned decoder


In [15]:

```
# Initialize canvas
nx = ny = 20
x_values = np.linspace(-2, 8, nx)
y_values = np.linspace(-4, 8, ny)
canvas = np.empty((28*ny, 28*nx))

# Define placeholder
latent_input = tf.placeholder(tf.float32, [None, n_latent])
reconst = decoder(latent_input, weights, biases)

for i, yi in enumerate(y_values):
    for j, xi in enumerate(x_values):
        latent_ = np.array([[xi, yi]])
        reconst_ = sess.run(reconst, feed_dict={latent_input : latent_})
        canvas[(nx-i-1)*28:(nx-i)*28,j*28:(j+1)*28] = reconst_.reshape(28, 28)

plt.figure(figsize=(10, 10))
plt.imshow(canvas, clim=(0, 1), cmap=plt.cm.jet)
plt.title('Manifold', fontsize=15)
plt.xticks([])
plt.xlabel('Z1', fontsize=15)
plt.yticks([])
plt.ylabel('Z2', fontsize=15)
plt.show()
```

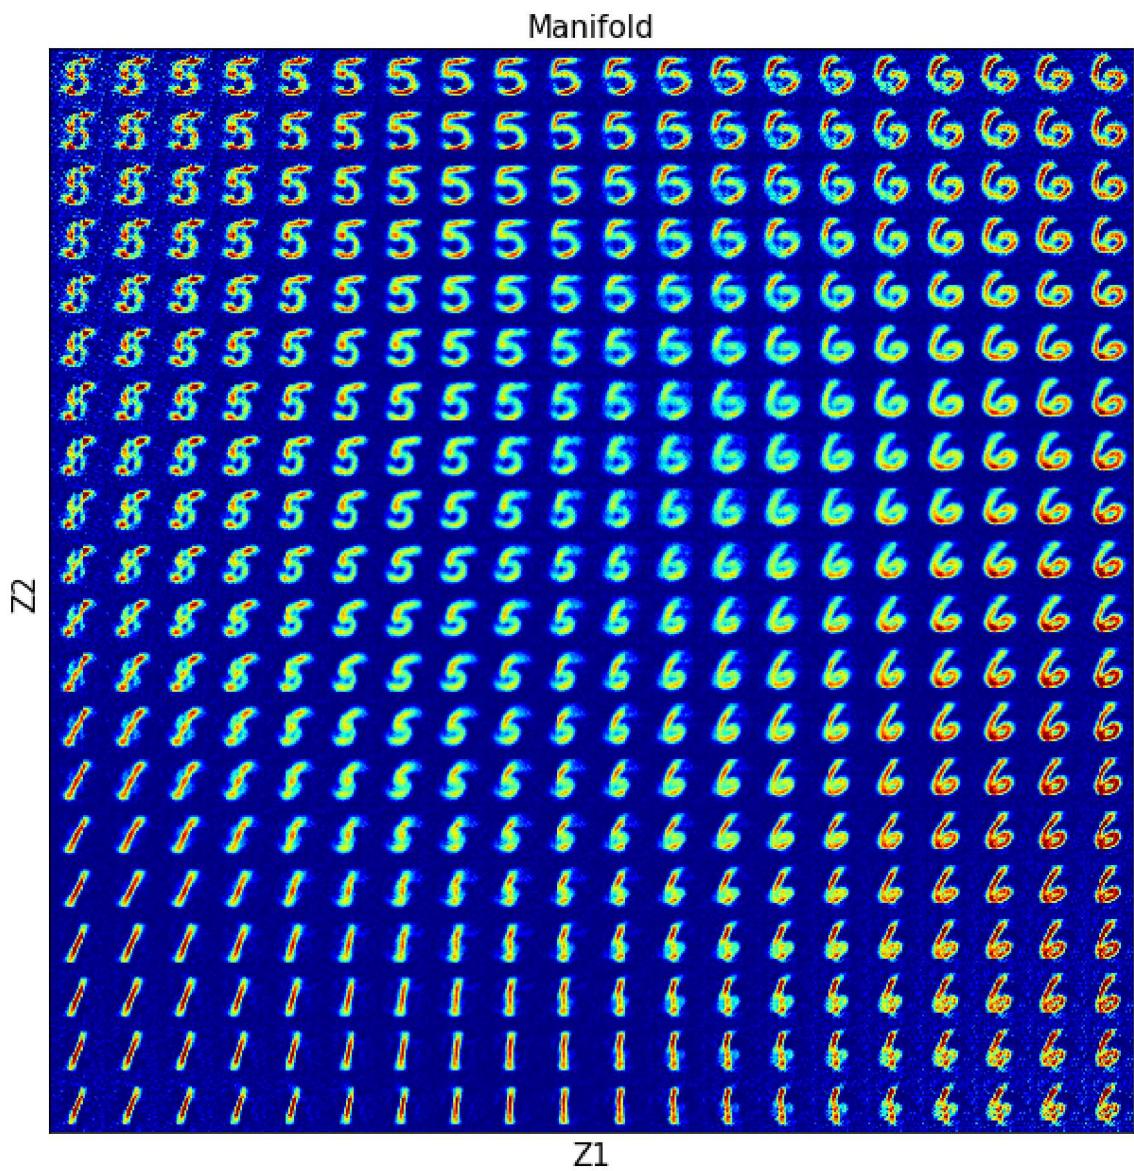

In [16]:

```
%javascript  
$.getScript('https://kmahelona.github.io/ipython_notebook_goodies/ipython_notebook_toc.  
js')
```