



Please take a minute to fill out the form
for last week if you haven't already 😊

Week 3!

COMP1511 24T1 H13C


Overview


While Loops

2D While Loops

Scanning in Loops

Structs and Enums

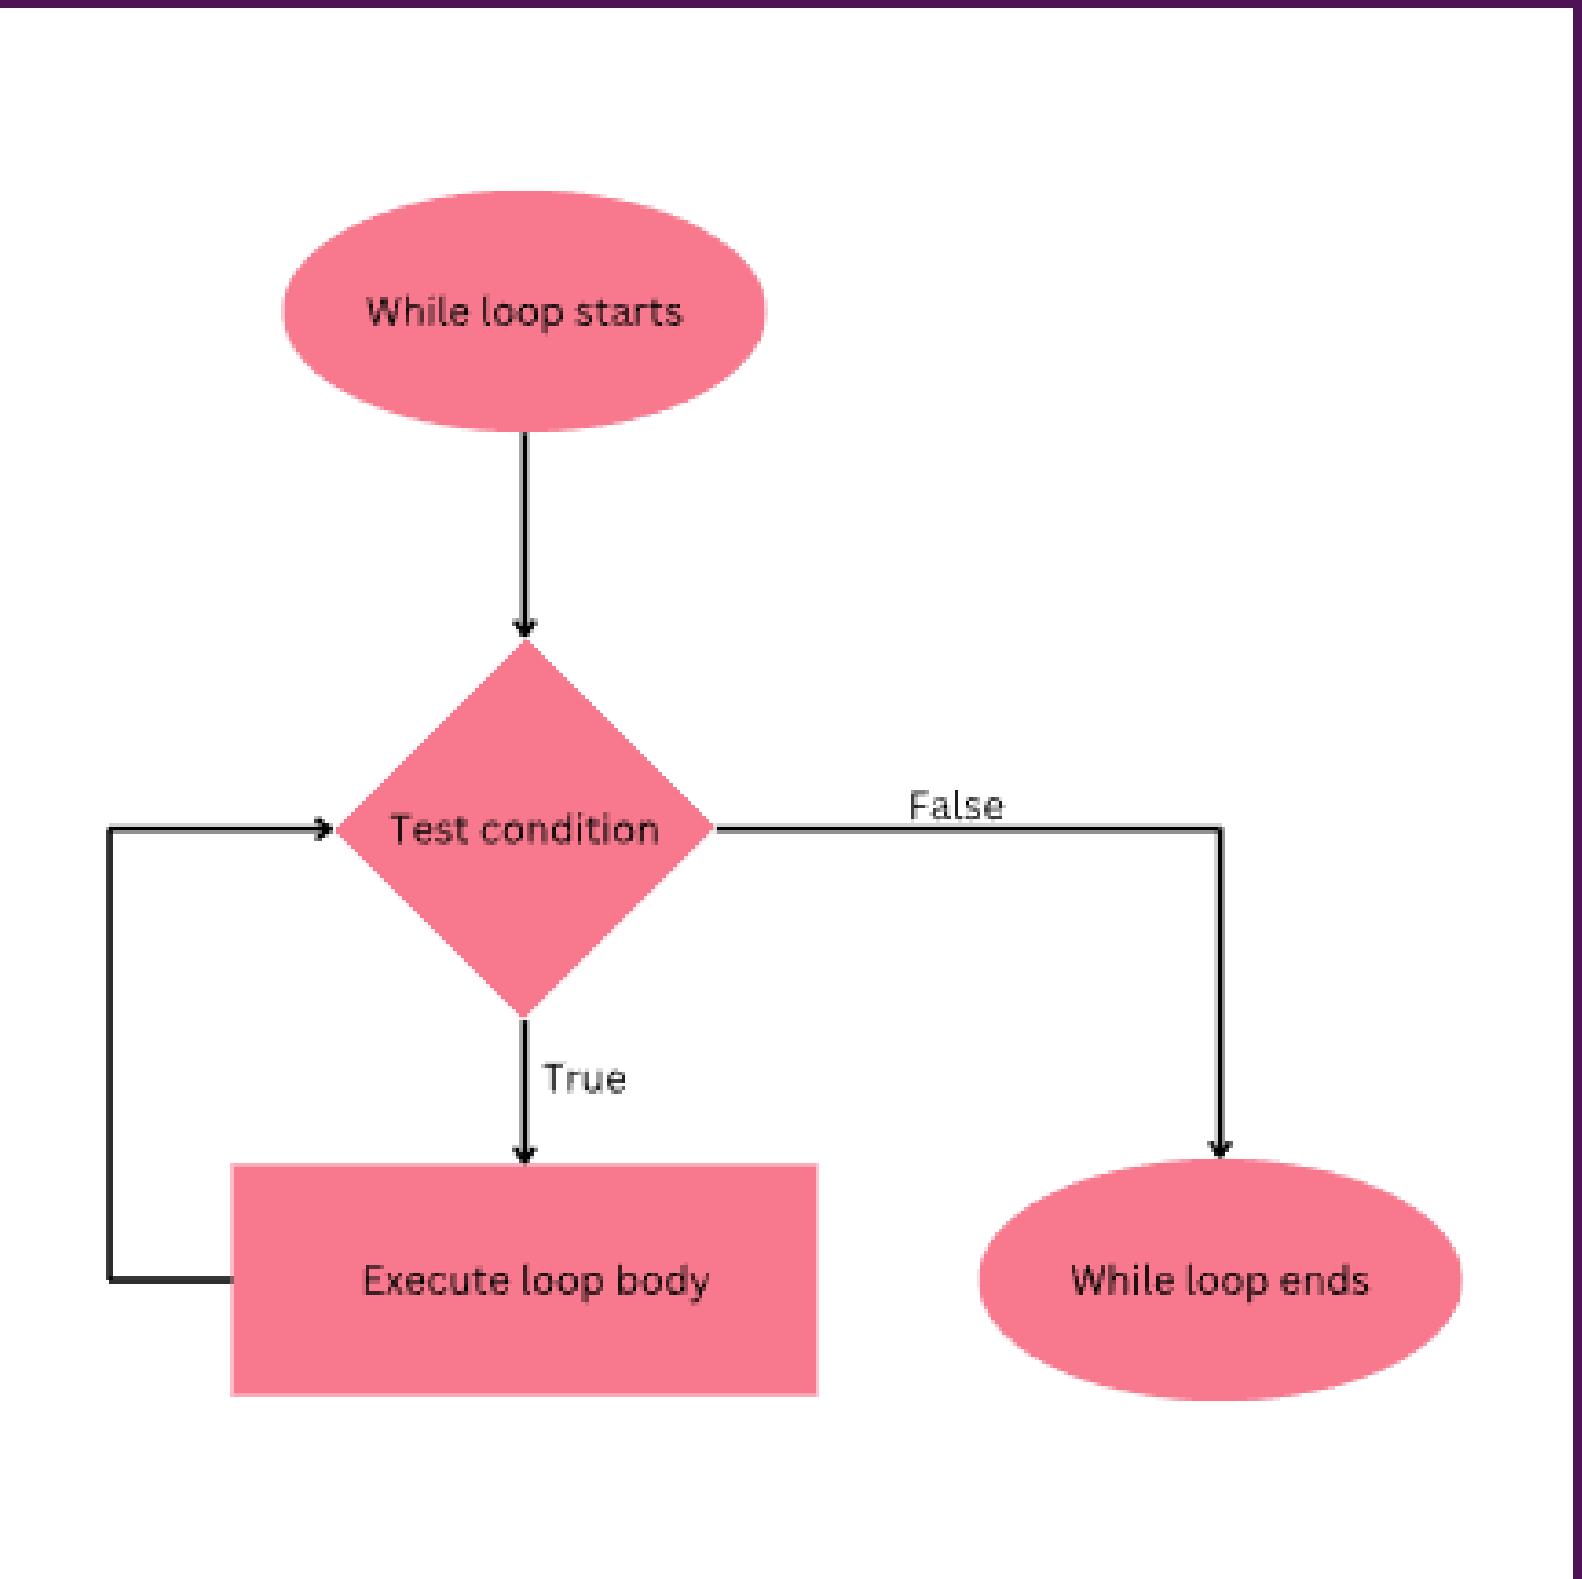

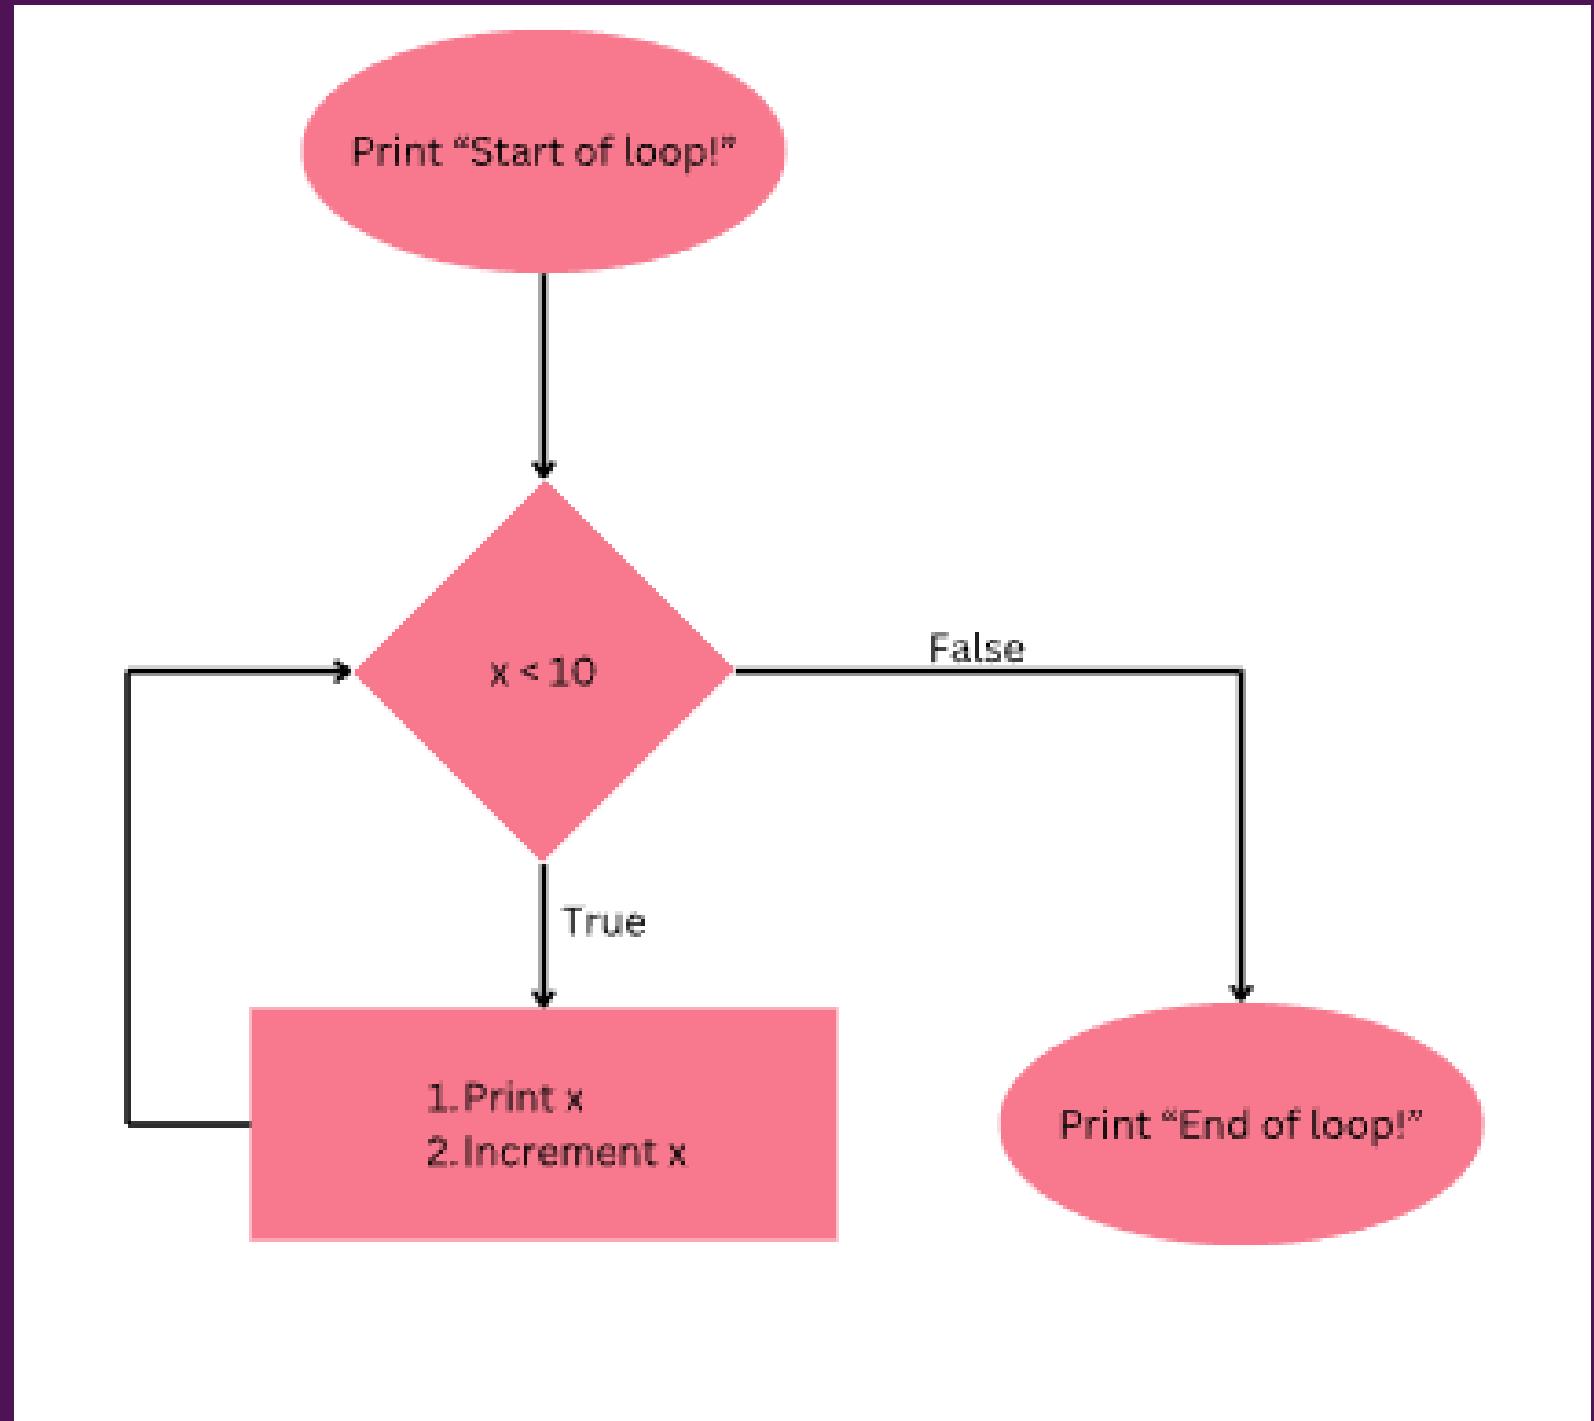

While Loops

In groups hand execute your two assigned while loops

If you are struggling, it might help to write down what values each variable is and change them as you iterate

#include <stdio.h>

A

```
int main(void) {
    int i = 0;
    while (i < 32) {
        printf("%d\n", i);
        i = i + 2;
    }
    return 0;
}
```

#include <stdio.h>

B

```
int main(void) {
    int i = 5;
    while (i >= 0) {
        printf("%d\n", i);
        i--;
    }
    return 0;
}
```

#include <stdio.h>

C

```
int main(void) {
    int i = 0;
    int keep_going = 1;
    while (keep_going == 1) {
        if (i > 3) {
            keep_going = 0;
        }
        i++;
    }
    printf("%d\n", i);
    return 0;
}
```

#include <stdio.h>

D

```
int main(void) {
    int i;
    while (i > 0) {
        printf("%d\n", i);
        i--;
    }
    return 0;
}
```

#include <stdio.h>

E

```
int main(void) {
    int i = 0;
    int max = 32;
    while (i < max) {
        printf("%d\n", i);
        max = max + 2;
    }
    return 0;
}
```

#include <stdio.h>


F


```
int main(void) {
    int i = 0;
    int keep_going = 0;
    while (keep_going == 1) {
        if (i > 3) {
            keep_going = 0;
        }
        i++;
    }
    printf("%d\n", i);
    return 0;
}
```

2D While Loops

Exactly the same as regular while loops

Nesting means the inner loop happens many times for each iteration of the outer loop

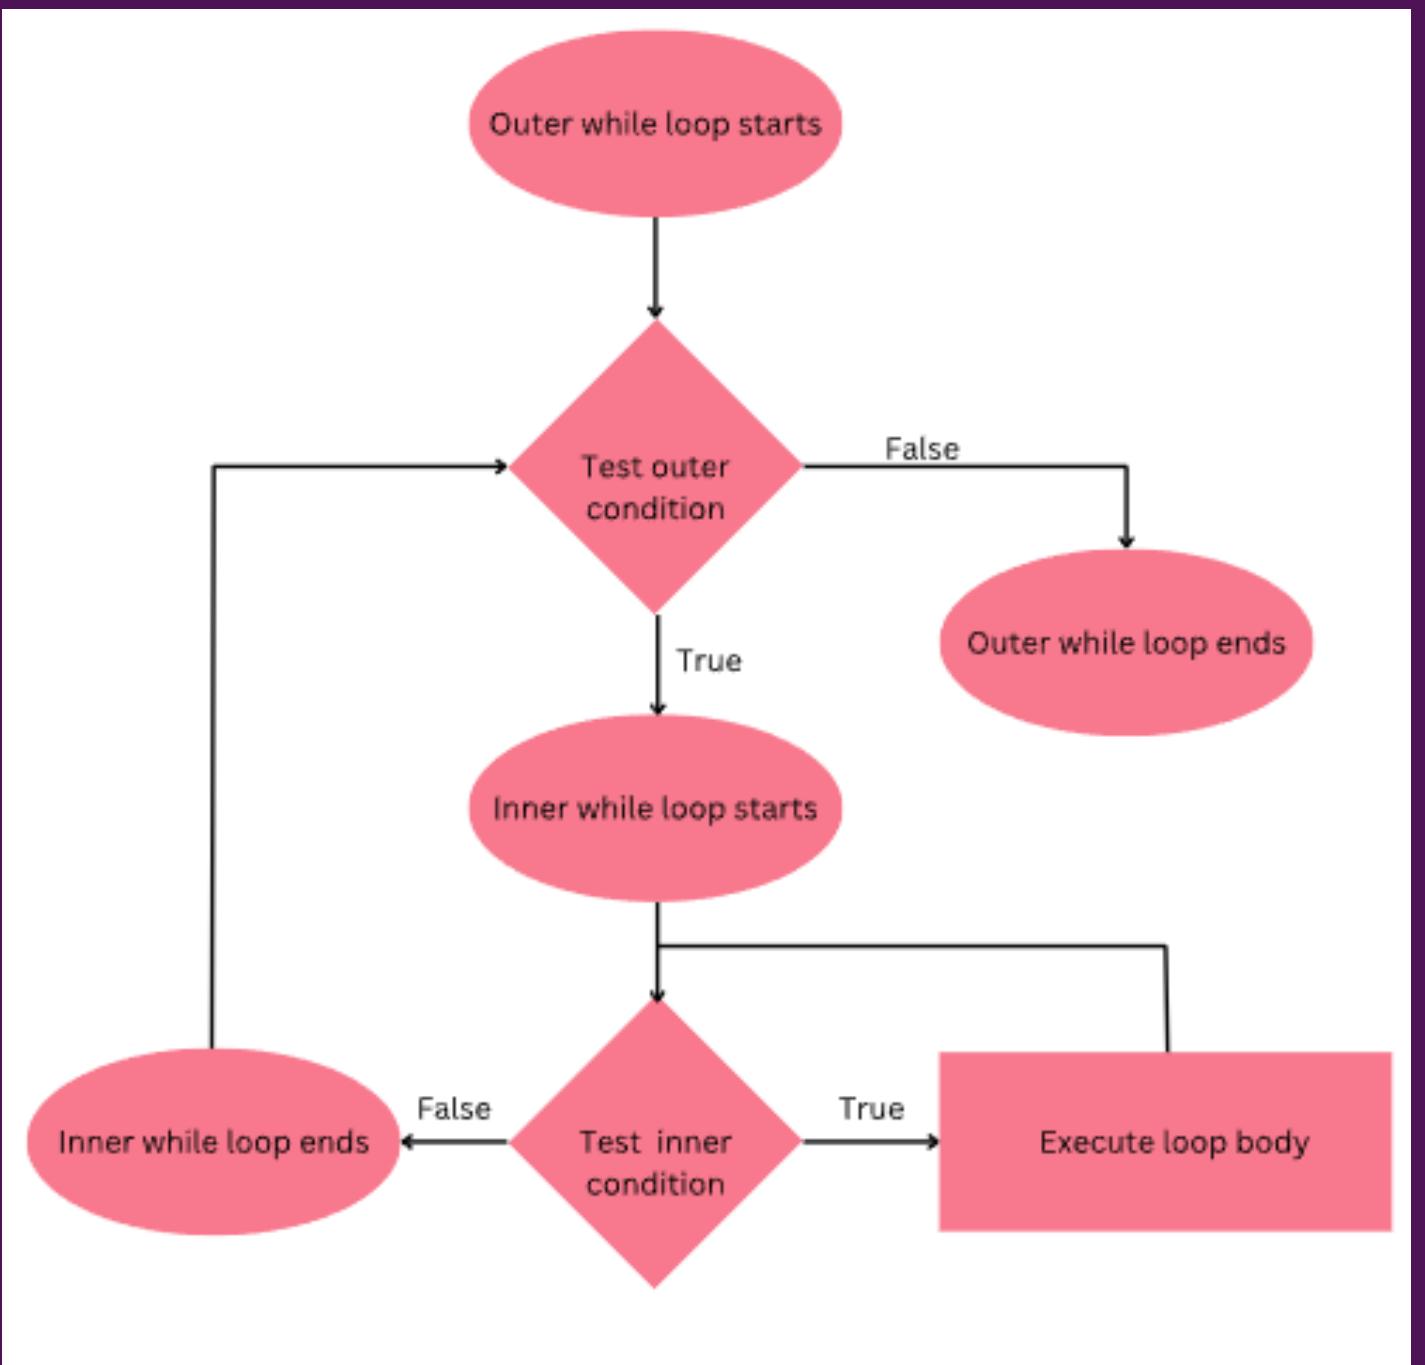

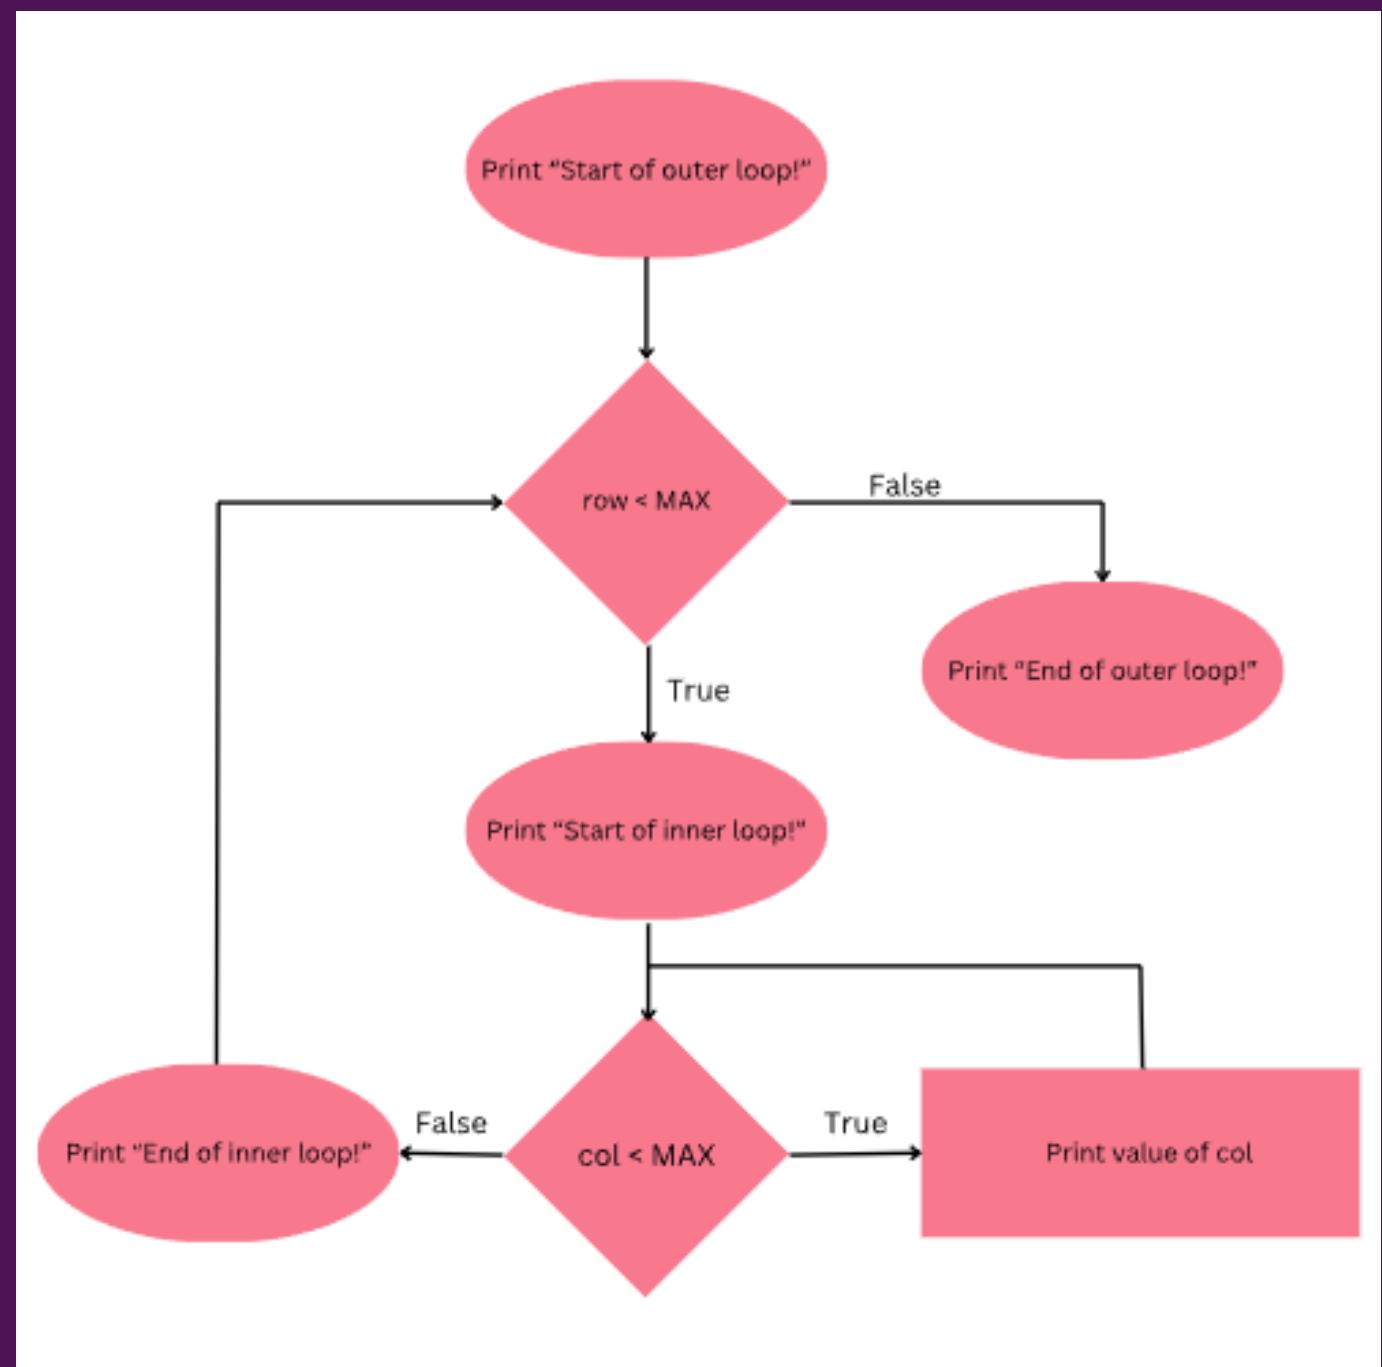

Your turn!

(A)

OXXX

XOXX

XXOX

XXXO

(B)

OXOX

OXOX

OXOX

OXOX

(C)

OXOO

XXXX

OXOO

OXOO

(D)

XXXX

XOOX

XOOX

XXXX

Scanning and Loops

A: Enter a series of integers until you reach a negative number. Then, stop and calculate the sum.

B: Enter numbers until the user presses 'q'. Then, display the count of numbers entered.

C: Scan for prime numbers within a given range until end of input and display them.

D: Scan for integers keeping a cumulative sum, until the sum of entered integers reaches or exceeds the target sum provided by the user.

Structs and Enums (coffee shop)

The Program:

1. Creates a struct coffee that stores the coffee type (an enum), the number of sugars and the size of a coffee
2. Creates an enum coffee_type which defines the different types of drinks that can be ordered.
3. The program will then take in a coffee order and store it in the struct.
4. The program will then determine the price of the coffee based on the users order, outputting the price to the terminal (stdout).

The Rules:

- The base price is always 4.5.
- A LARGE coffee incurs an additional charge.
- A LATTE, CAPPUCCINO or MATCHA incurs an additional charge.
- Every sugar added incurs an additional charge.



A large, semi-transparent circle with a gradient from dark purple at the top to bright cyan at the bottom overlaps the center of the slide. The text "Lab Time!" is centered within this circle in a bold, white, sans-serif font.

Lab Time!