

# MECH 6V29: Multiagent Robotic Systems- HW 2

Jonas Wagner

2022, March 1<sup>st</sup>

## Contents

<b>Problem 1</b>	<b>2</b>
a) Big Picture Chart . . . . .	2
<b>Problem 2</b>	<b>3</b>
a) . . . . .	3
b) . . . . .	5
<b>Problem 3</b>	<b>6</b>
<b>Problem 4</b>	<b>7</b>
<b>Problem 5</b>	<b>8</b>
<b>Problem 6</b>	<b>9</b>
<b>Problem 7</b>	<b>10</b>
<b>Problem 8</b>	<b>10</b>
<b>A MATLAB Code:</b>	<b>11</b>

# Problem 1

State a summary of lectures **lectures 6-10**, preferably by creating a concept map diagram (flow diagram). The whole purpose is to make sure that we are clear about the bigger picture, and reiterate why are we doing and discussing the specific topics in the class. Do not merely write the topics, instead create connections between topics to clarify the flow of information.

## a) Big Picture Chart

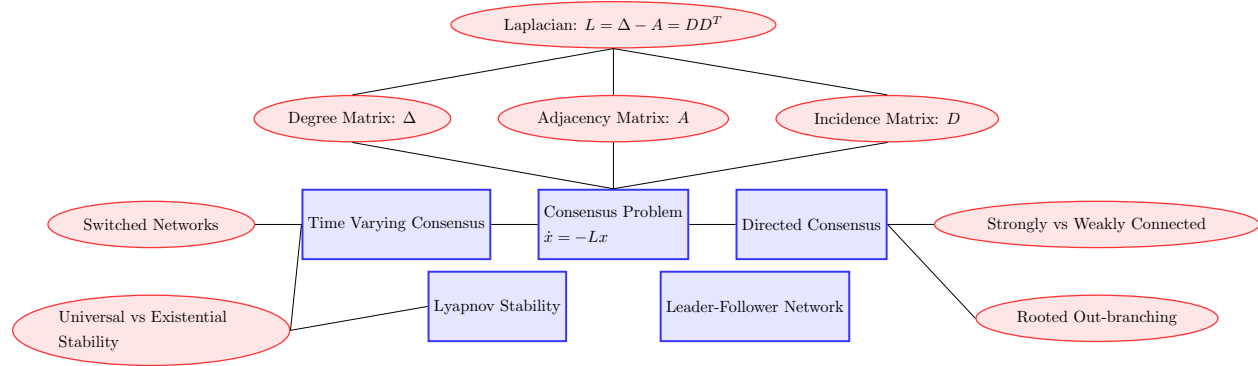


Fig. 1: Diagram of Course Topics (created w/ TikZ)

## Problem 2

Recall that if  $x_i$  is scalar, with its derivative given by the consensus equation

$$\dot{x}_i = \sum_{j \in \mathcal{N}_i} (x_j - x_i), \quad i = 1, 2, \dots, N$$

this can be written as

$$\dot{x} = -Lx$$

where  $L$  is the Laplacian of the undirected graph, and  $x = [x_1 x_2 \dots x_N]^T$ .

a)

**Problem:**

If instead

$$\dot{x} = -L^2 x$$

what are the corresponding node level dynamics, that is, find

$$\dot{x}_i = ???$$

### Preliminaries

**Definition 1.** Let graph  $G(V, E)$  with  $V = \{v_1, \dots, v_n\}$  and  $E \subseteq V \times V$ .

a. The degree matrix  $\Delta \in \mathbb{R}^{n \times n}$  is a diagonal matrix defined as

$$\Delta := \begin{bmatrix} \deg(v_1) & & & \\ & \deg(v_2) & & \\ & & \ddots & \\ & & & \deg(v_n) \end{bmatrix}$$

b. The adjacency matrix  $A \in \mathbb{R}^{n \times n}$  is a symmetric matrix ( $A = A^T$ ) defined s.t.

$$A = [a_{ij}] : a_{ij} \begin{cases} 1 & (v_i, v_j) \in E \\ 0 & (v_i, v_j) \notin E \end{cases}$$

c. The incidence matrix  $D \in \mathbb{R}^{n \times m}$  is defined as

$$D = [d_{ij}] : d_{ij} \begin{cases} 1 & (v_i, -) \in e_j \\ -1 & (-, v_i) \in e_j \\ 0 & \text{otherwise} \end{cases}$$

d. The Laplacian matrix  $L \in \mathbb{R}^{n \times n}$  is a symmetric ( $L = L^T$ ) and strictly semi-positive definite ( $L \succeq 0$ ) is defined as

$$L := \Delta - A = DD^T$$

and

$$L = \begin{bmatrix} \deg(v_1) & -a_{12} & -a_{13} & \cdots & -a_{1n} \\ -a_{21} & \deg(v_2) & -a_{23} & \cdots & -a_{2n} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ -a_{n1} & -a_{n2} & -a_{n3} & \cdots & \deg(v_n) \end{bmatrix}$$

e. For a weighted graph  $G(V, E, W)$ , the diagonal weighted matrix  $W \in \mathbb{R}^{m \times m}$  is defined as

$$W = [w_{ij}] \forall_{ij \in E}$$

where  $w_{ij}$  are the corresponding weights for  $e_{ij} = (v_i, v_j)$ .

**Definition 2.** Let undirected and unweighted graph  $G(V, E)$  with  $V = \{v_1, \dots, v_n\}$  and  $E \subseteq V \times V$ . The consensus dynamics of network  $G(V, E)$  is defined by

$$\forall_{i=1, \dots, n} \dot{x}_i = \sum_{j \in \mathcal{N}_i} (x_j - x_i) \iff \dot{x} = -Lx$$

For the case with weighted graph  $G(V, E, W)$  with diagonal weight matrix  $W = [w_{ij}]$ , weighted consensus dynamics are given as

$$\dot{x}_i = \sum_{j \in \mathcal{N}_i} w_{ij} (x_j - x_i) \implies \dot{x} = -L_w x$$

where weighted Laplacian matrix  $L_w$  is defined as

$$L_w = DW D^T$$

**Solution:**

From the definition of the Laplacian Matrix (Definition 1), we have

$$L = \Delta - A$$

and therefore

$$\begin{aligned} L^2 &= L * L = (\Delta - A)(\Delta - A) \\ &= \Delta^2 - \Delta A - A\Delta + A^2 \\ &= \begin{bmatrix} \deg(v_1)^2 & 0 & 0 & \cdots & 0 \\ 0 & \deg(v_2)^2 & 0 & \cdots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & 0 & \cdots & \deg(v_n)^2 \end{bmatrix} \\ &\quad + \begin{bmatrix} 0 & -a_{12} \deg(v_1) & -a_{13} \deg(v_1) & \cdots & -a_{1n} \deg(v_1) \\ -a_{21} \deg(v_2) & 0 & -a_{23} \deg(v_2) & \cdots & -a_{2n} \deg(v_2) \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ -a_{n1} \deg(v_n) & -a_{n2} \deg(v_n) & -a_{n3} \deg(v_n) & \cdots & 0 \end{bmatrix} \\ &\quad + \begin{bmatrix} 0 & -a_{12} \deg(v_1) & -a_{13} \deg(v_2) & \cdots & -a_{1n} \deg(v_3) \\ -a_{21} \deg(v_1) & 0 & -a_{23} \deg(v_2) & \cdots & -a_{2n} \deg(v_3) \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ -a_{n1} \deg(v_1) & -a_{n2} \deg(v_2) & -a_{n3} \deg(v_3) & \cdots & 0 \end{bmatrix} \end{aligned}$$

$$+ \begin{bmatrix} \sum_{i \neq 1}^n a_{1,i} a_{i,1} & \sum_{i \neq 1,2} a_{1,i} a_{i,2} & \cdots & \sum_{i \neq 1,n} a_{1,i} a_{i,2} \\ \sum_{i \neq 2,1} a_{2,i} a_{i,1} & \sum_{i \neq 2} a_{2,i} a_{i,2} & \cdots & \sum_{i \neq 1,n} a_{1,i} a_{i,n} \\ \vdots & \vdots & \ddots & \vdots \\ \sum_{i \neq n,1} a_{n,i} a_{i,1} & \sum_{i \neq n,2} a_{n,i} a_{i,2} & \cdots & \sum_{i \neq n} a_{n,i} a_{i,n} \end{bmatrix}$$

which results in

$$\boxed{\dot{x}^{(i)} = - \left( \deg(v_1)^2 + \sum_{j \neq i} a_{i,j} a_{j,i} \right) x^{(i)} - \sum_{j \neq i} \left( -a_{i,j} (\deg(v_i) + \deg(v_j)) + \sum_{k \neq j} a_{i,k} a_{k,j} \right) x^{(j)}}$$

b)

**Problem:**

Can you give a graph-theoretic interpretation to your answer in (A)?

**Solution:**

A potential graph-theoretical interpretation could be would be a

### Problem 3

Consider a leader-follower network with two leaders and two followers, as shown in Fig.2. Assume that leaders and followers are on the real line, and the underlying network graph is a path graph with the end nodes being the static leaders. Moreover, let the dynamics be given by the following:

$$\dot{x}_1 = \alpha_1((x_3 - x_1) + (x_2 - x_1))$$

$$\dot{x}_2 = \alpha_2((x_1 - x_2) + (x_4 - x_2))$$

$$\dot{x}_3 = \dot{x}_4 = 0$$

Where to  $x_1$  and  $x_2$  end up as  $t \rightarrow \infty$  if  $x_3 = \beta$  and  $x_4 = \gamma$ ?



Fig. 2: Leader-follower Network

#### Solution:

The dynamics of the network overall are described by the dynamics  $\dot{x} = A_{cls}x$  with matrix

$$A_{cls} = \begin{bmatrix} -2\alpha_1 & \alpha_1 & \alpha_1 & 0 \\ \alpha_2 & -2\alpha_2 & 0 & \alpha_2 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \end{bmatrix}$$

This can further be redefined into the dynamical system  $\dot{x} = Ax + Bu$  with matrices

$$A = \begin{bmatrix} -2\alpha_1 & \alpha_1 \\ \alpha_2 & -2\alpha_2 \end{bmatrix}$$

$$B = \begin{bmatrix} \alpha_1 \\ \alpha_2 \end{bmatrix}$$

where  $u$  is the static "input" of

$$u = \begin{bmatrix} \beta \\ \gamma \end{bmatrix}$$

Assuming that  $\alpha_1, \alpha_2 > 0$ ,  $A$  is stable and therefore the system will decay to the reference signal  $u$ . *Note:* If  $u$  changes then the response would be governed by transfer function  $(sI - A)^{-1}B$ . The final state will be the solution to

$$\dot{x} = 0 = A_{cls}x = Ax + Bu$$

which is calculated to be

$$x_\infty = \begin{bmatrix} \frac{2\beta + \gamma}{3} \\ \frac{\beta + 2\gamma}{3} \end{bmatrix}$$

## Problem 4

### Problem:

Given an undirected network containing a total of  $N$  nodes. There is a single anchor node that is connected to every one of the follower nodes, that is, anchor has a degree of  $N - 1$ . Find the simple expression for the following quantities.

- a.  $l$
- b.  $L_f \mathbf{1}$

where  $L_f$  is the matrix obtained from the partition of the Laplacian matrix as we discussed in class.

Also, relate your answers to where the followers end up as  $t \rightarrow \infty$ .

### Preliminaries:

**Definition 3.** Let undirected and unweighted graph  $G(V, E)$  with  $V = \{v_1, \dots, v_n\}$  and  $E \subseteq V \times V$ . Vertices in  $V$  are classified as either leaders ( $v_i \in V_l$ ) or followers ( $v_i \in V_f$ ). The leader-follower dynamics of the states within network  $G(V, E)$  are defined by

$$\begin{cases} \dot{x}_i = -\sum_{j \neq N_i} (x_i - x_j) & \forall_i : v_i \in V_f \\ \dot{x}_i = 0 & \forall_i : v_i \in V_l \end{cases}$$

or equivalently when  $V_l = \{v_n\}$  (single leader node)

$$\dot{x} = \begin{bmatrix} -L_f & -l \\ 0 & 0 \end{bmatrix}$$

### Solution:

## Problem 5



## Problem 6

**Problem 7**

**Problem 8**

## A MATLAB Code:

All code I write in this course can be found on my GitHub repository:

[https://github.com/jonaswagner2826/MECH6V29\\_MultiagentRoboticSystems](https://github.com/jonaswagner2826/MECH6V29_MultiagentRoboticSystems)

□