

Anleitung MariaDB

12.03.2024

Inhalt

Installation.....	2
MariaDB.....	2
VS Code.....	7
VS Code Extensions installieren.....	8
Verwendung	9
Datenbank Server starten	10
Datenbank Server beenden.....	11
Verbindung zur Datenbank in VS Code herstellen	12

Installation

Falls Sie einen Rechner im PC-Pool verwenden, fahren sie mit Punkt *VS Code Extensions installieren* fort.

MariaDB

Laden Sie die Version **10.11.2** von MariaDB Server herunter:

https://mariadb.org/download/?t=mariadb&p=mariadb&r=10.11.2&os=windows&cpu=x86_64&pkg=msi&m=hs-esslingen

The screenshot shows the MariaDB download page. The top navigation bar includes links for Download, Documentation, Contribute, Server Fest, Events, Sponsor, Blog, Planet MariaDB Server, and About. A banner below the navigation bar lists the latest releases (11.4.1 (RC), 11.3.2, 11.2.3, 11.1.4, 11.0.5, 10.11.7, 10.6.17, 10.5.24, 10.4.33) and encourages voting in a poll to help improve future versions. The left sidebar contains links for Download MariaDB Server, REST API, Release Schedule, Reporting Bugs, MariaDB Server Statistics, and Download MariaDB Server Documentation. The main content area has tabs for MariaDB Server, MariaDB Server Repositories, and Connectors. The MariaDB Server tab is active, showing a dropdown menu for MariaDB Server Version with 'MariaDB Server 10.11.2' selected. Below this is a checkbox for 'Display older releases' which is checked. The Operating System dropdown is set to 'Windows', the Architecture dropdown is set to 'x86_64', and the Package Type dropdown is set to 'MSI Package'. A 'Download' button is visible, and a 'Mirror' dropdown is set to 'MariaDB Archives'.

Download | Documentation | Contribute | Server Fest | Events | Sponsor | Blog | Planet MariaDB Server | About



Latest releases 11.4.1 (RC), 11.3.2, 11.2.3, 11.1.4, 11.0.5, 10.11.7, 10.6.17, 10.5.24, 10.4.33. Vote in our poll!
will help improve future MariaDB Server versions!



Download MariaDB Server
REST API
Release Schedule
Reporting Bugs
MariaDB Server Statistics
Download MariaDB Server Documentation

View all releases for:
MariaDB Server
Connector/C
Connector/J
Connector/ODBC
Connector/Python
Connector/Node.js


MariaDB Server | MariaDB Server Repositories | Connectors

MariaDB Server Version
MariaDB Server 10.11.2
Display older releases ☒
Operating System
Windows
Architecture
x86_64
Package Type
MSI Package
Download
Mirror
MariaDB Archives

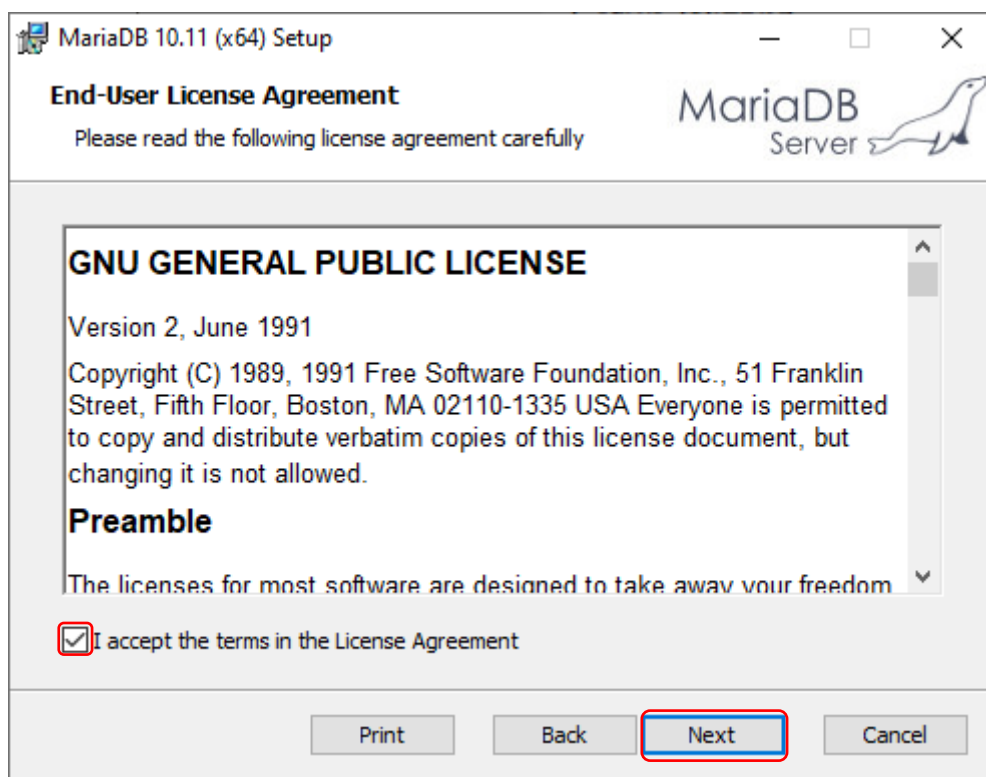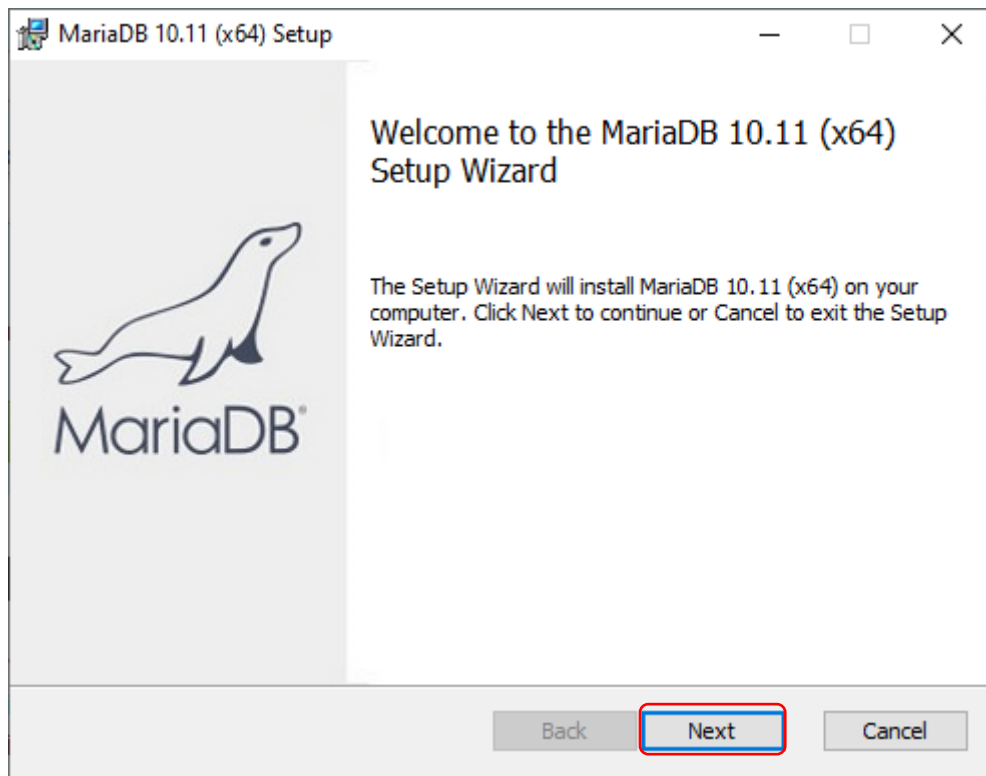

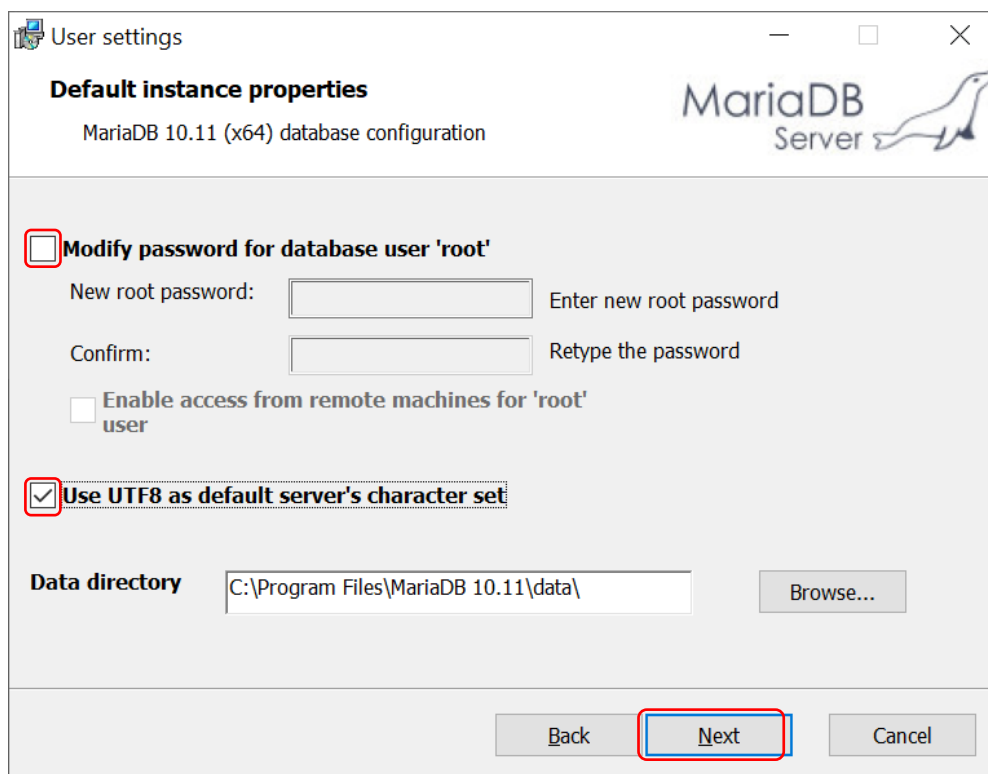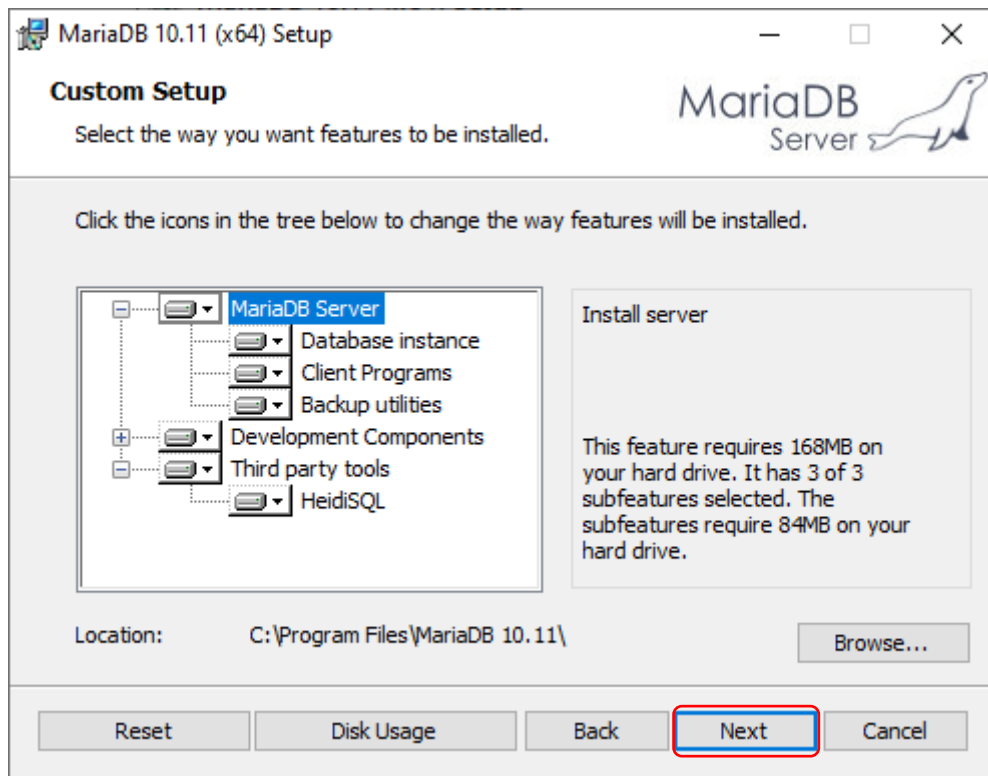

„Install as service“ deaktivieren.

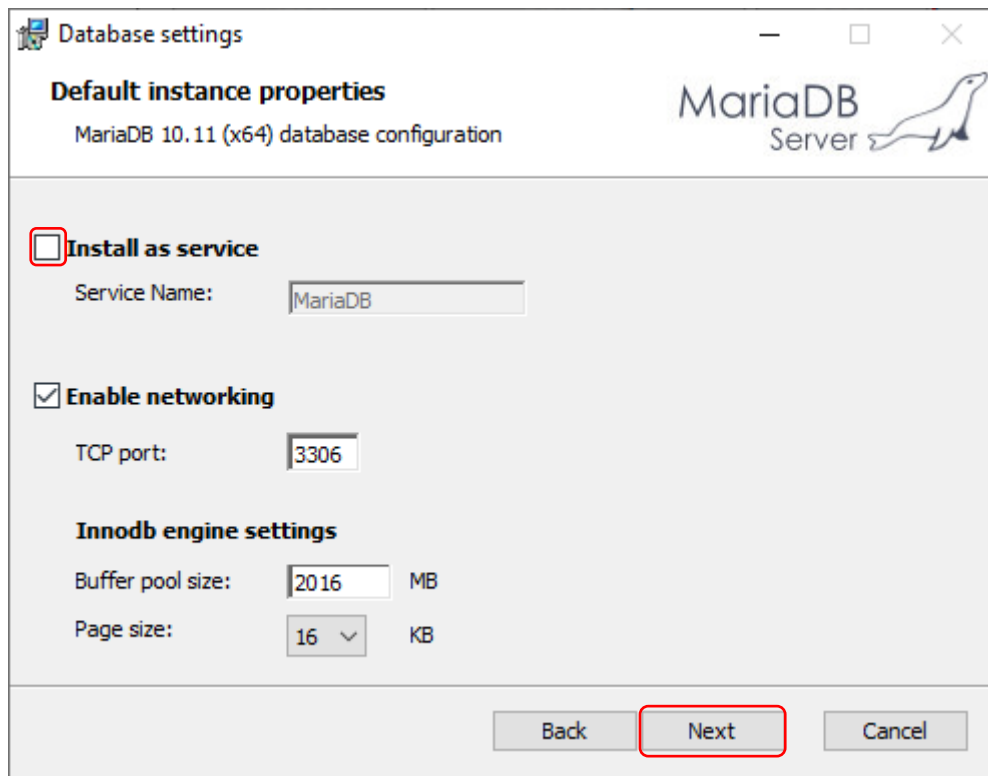

Database settings

Default instance properties
MariaDB 10.11 (x64) database configuration




☐ **Install as service**
Service Name:

☒ **Enable networking**
TCP port:

InnoDB engine settings
Buffer pool size: MB
Page size: KB

Back Next Cancel

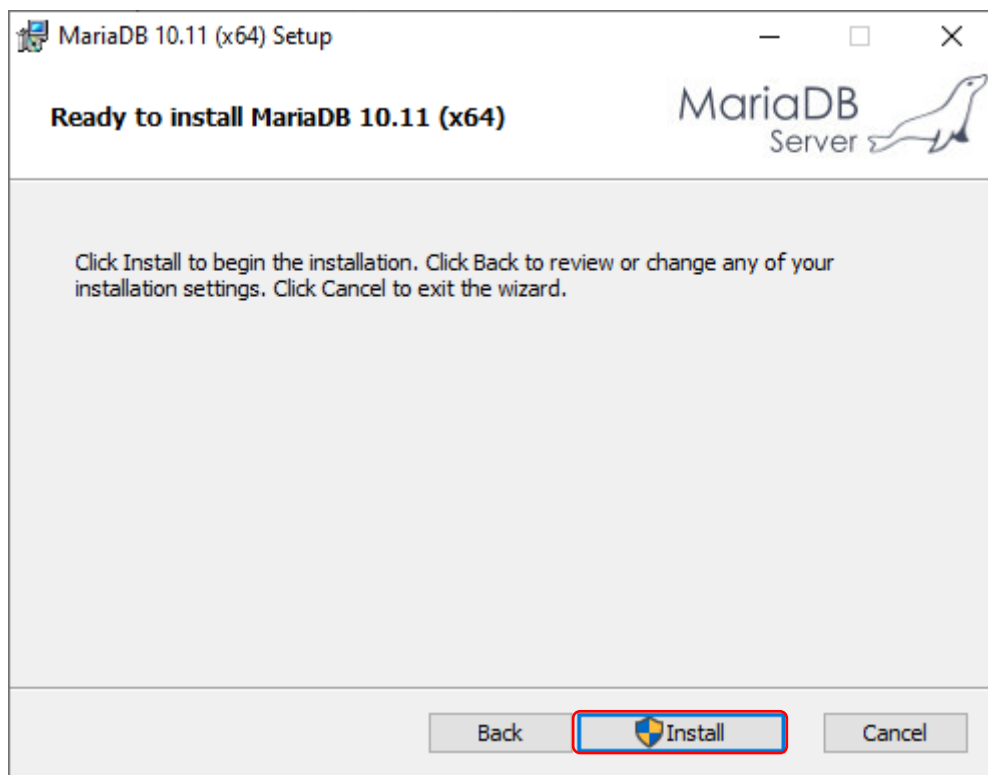


MariaDB 10.11 (x64) Setup

Ready to install MariaDB 10.11 (x64)



Click Install to begin the installation. Click Back to review or change any of your installation settings. Click Cancel to exit the wizard.

Back Install Cancel

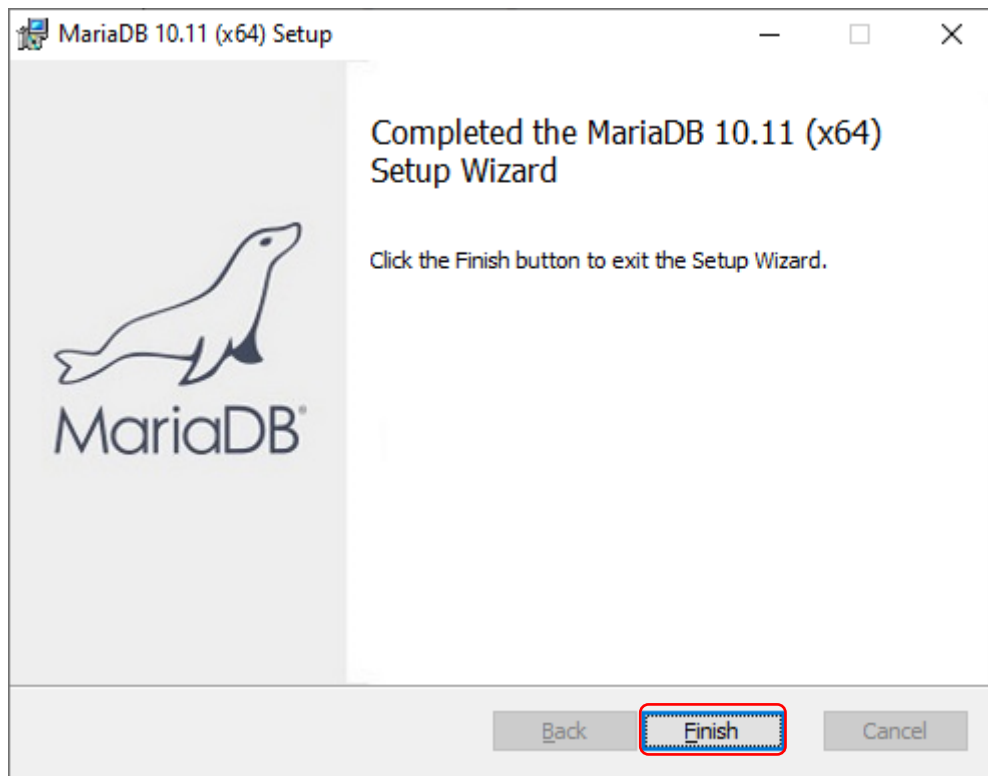


VS Code

VS Code herunterladen: <https://code.visualstudio.com/Download>

Download Visual Studio Code

Free and built on open source. Integrated Git, debugging and extensions.

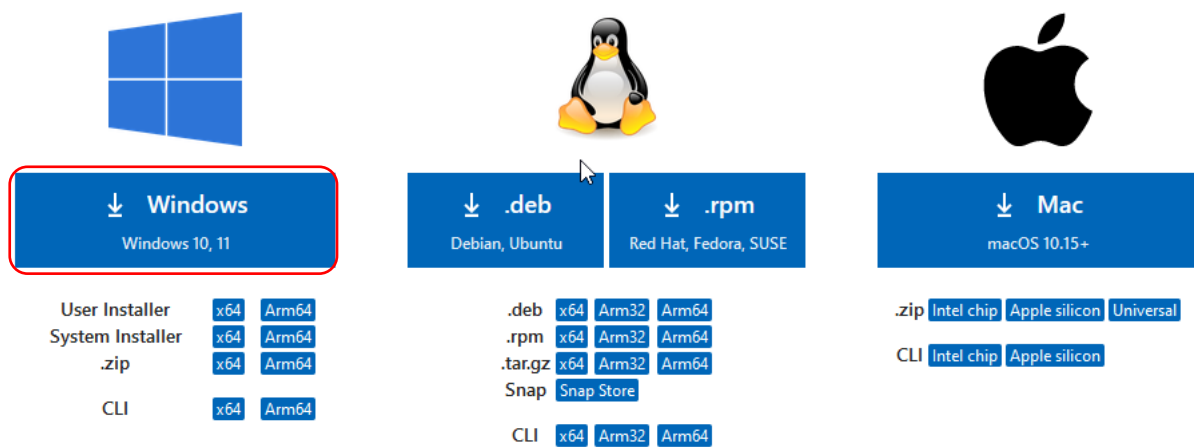


The image shows the Visual Studio Code download page layout. It features three main columns for different operating systems: Windows, Linux, and Mac. Each column has a header with the OS logo and a blue button with a download icon and the OS name. Below the buttons, there are lists of available download formats and their supported architectures. The Windows section is highlighted with a red border. The Linux section has two buttons for .deb and .rpm formats. The Mac section has a button for .zip format and a CLI option.

Operating System	Download Format	Architecture
Windows	User Installer	x64, Arm64
	System Installer	x64, Arm64
	.zip	x64, Arm64
	CLI	x64, Arm64
Linux	.deb	x64, Arm32, Arm64
	.rpm	x64, Arm32, Arm64
	.tar.gz	x64, Arm32, Arm64
	Snap	Snap Store
	CLI	x64, Arm32, Arm64
Mac	.zip	Intel chip, Apple silicon, Universal
	CLI	Intel chip, Apple silicon

Mit den Standardeinstellungen installieren.

VS Code Extensions installieren

SQLTools

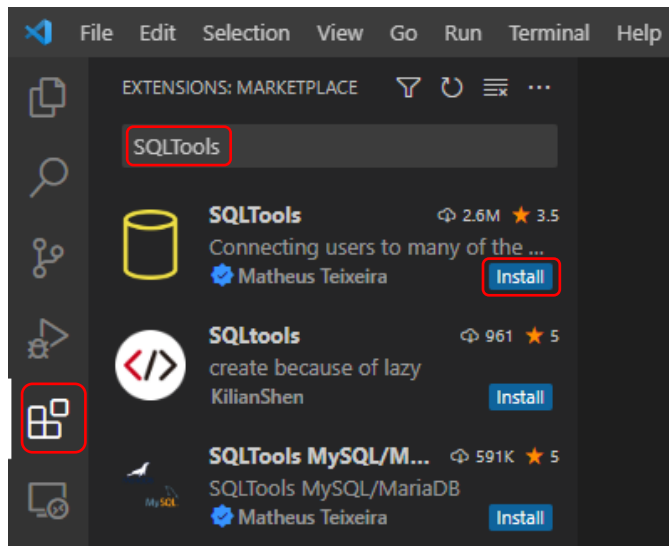

Verwendung

Zur komfortablen Nutzung laden Sie sich zwei Skripte aus dem Moodle-Kurs herunter:

Übung

 01 Entity Relationship Modell

 02 relationales Modell


 Skripte MariaDB

Klicken Sie direkt auf die Dateien und speichern Sie diese auf Ihrem Z-Laufwerk ab.

(Hinweis: auf dem C-Laufwerk können Sie keine Skripte ausführen!)

Skripte MariaDB

Hier finden Sie Skripte zur Nutzung von MariaDB.




Verzeichnis herunterladen

Datenbank Server starten

Klicken Sie doppelt auf das Skript „mysql_start.bat“.

Falls Windows die Ausführung verhindert, mit Rechtsklick auf die Datei die Eigenschaften öffnen. Hier unter Allgemein -> Sicherheit auf Zulassen klicken und mit OK bestätigen. Nun sollte das Skript mit Doppelklick ausführbar sein. Die gleichen Schritte auch bei „mysql_stop.bat“ durchführen.

Falls die Skripte noch nicht ausführbar sind, stellen Sie sicher, dass sie auf Ihrem Z-Laufwerk liegen.

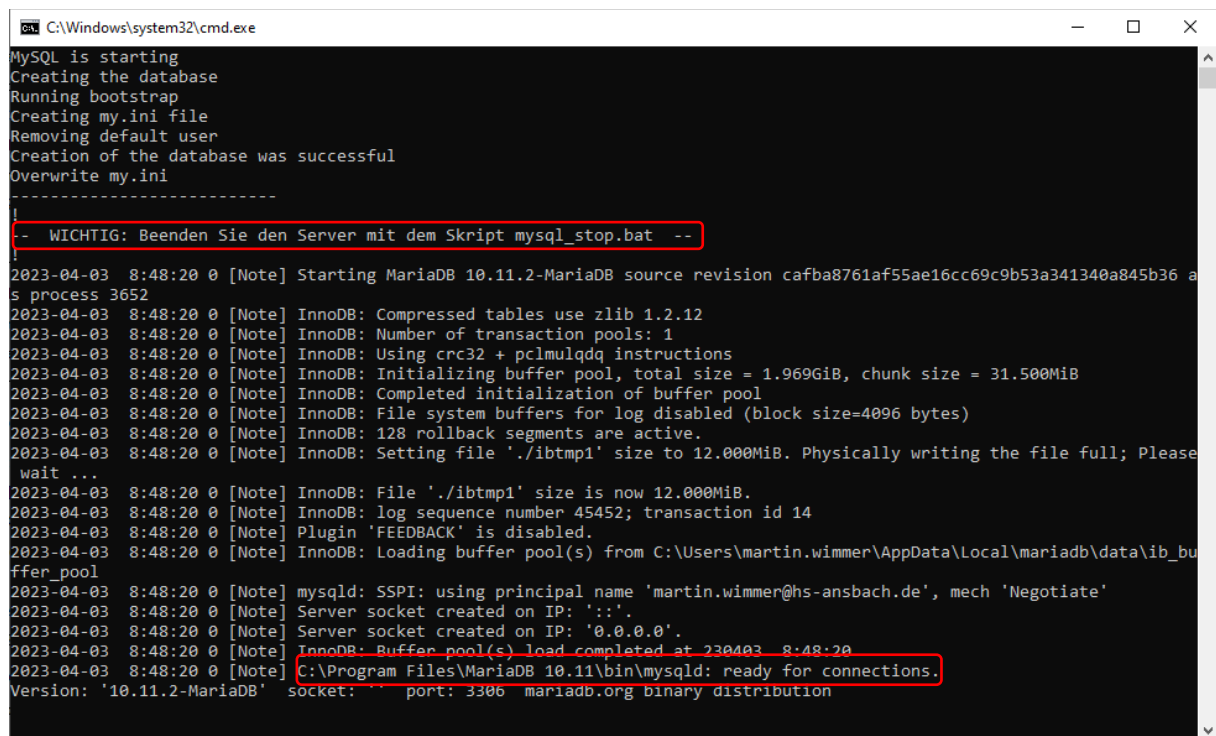

```
C:\Windows\system32\cmd.exe
MySQL is starting
Creating the database
Running bootstrap
Creating my.ini file
Removing default user
Creation of the database was successful
Overwrite my.ini
-----
-- WICHTIG: Beenden Sie den Server mit dem Skript mysql_stop.bat --
2023-04-03 8:48:20 0 [Note] Starting MariaDB 10.11.2-MariaDB source revision cafba8761af55ae16cc69c9b53a341340a845b36 a
s process 3652
2023-04-03 8:48:20 0 [Note] InnoDB: Compressed tables use zlib 1.2.12
2023-04-03 8:48:20 0 [Note] InnoDB: Number of transaction pools: 1
2023-04-03 8:48:20 0 [Note] InnoDB: Using crc32 + pclmulqdq instructions
2023-04-03 8:48:20 0 [Note] InnoDB: Initializing buffer pool, total size = 1.969GiB, chunk size = 31.500MiB
2023-04-03 8:48:20 0 [Note] InnoDB: Completed initialization of buffer pool
2023-04-03 8:48:20 0 [Note] InnoDB: File system buffers for log disabled (block size=4096 bytes)
2023-04-03 8:48:20 0 [Note] InnoDB: 128 rollback segments are active.
2023-04-03 8:48:20 0 [Note] InnoDB: Setting file './ibtmp1' size to 12.000MiB. Physically writing the file full; Please
wait ...
2023-04-03 8:48:20 0 [Note] InnoDB: File './ibtmp1' size is now 12.000MiB.
2023-04-03 8:48:20 0 [Note] InnoDB: log sequence number 45452; transaction id 14
2023-04-03 8:48:20 0 [Note] Plugin 'FEEDBACK' is disabled.
2023-04-03 8:48:20 0 [Note] InnoDB: Loading buffer pool(s) from C:\Users\martin.wimmer\AppData\Local\mariadb\data\ib_bu
ffer_pool
2023-04-03 8:48:20 0 [Note] mysqld: SSPI: using principal name 'martin.wimmer@hs-ansbach.de', mech 'Negotiate'
2023-04-03 8:48:20 0 [Note] Server socket created on IP: '::'.
2023-04-03 8:48:20 0 [Note] Server socket created on IP: '0.0.0.0'.
2023-04-03 8:48:20 0 [Note] InnoDB: Buffer pool(s) load completed at 230403 8:48:20
2023-04-03 8:48:20 0 [Note] C:\Program Files\MariaDB 10.11\bin\mysqld: ready for connections.
Version: '10.11.2-MariaDB' socket: '' port: 3306 mariadb.org binary distribution
```

Sobald „ready for connections“ in der Eingabeaufforderung erscheint, wurde der Datenbank Server erfolgreich gestartet.


Das Fenster darf während der Nutzung der Datenbank nicht geschlossen werden!

Datenbank Server beenden

Beenden Sie immer mit einem Doppelklick auf das Skript „mysql_stop.bat“.

Der Server wurde erfolgreich beendet, sobald in der Eingabeaufforderung „Drücken Sie eine beliebige Taste ...“ erscheint.

Das Fenster kann nun geschlossen werden.

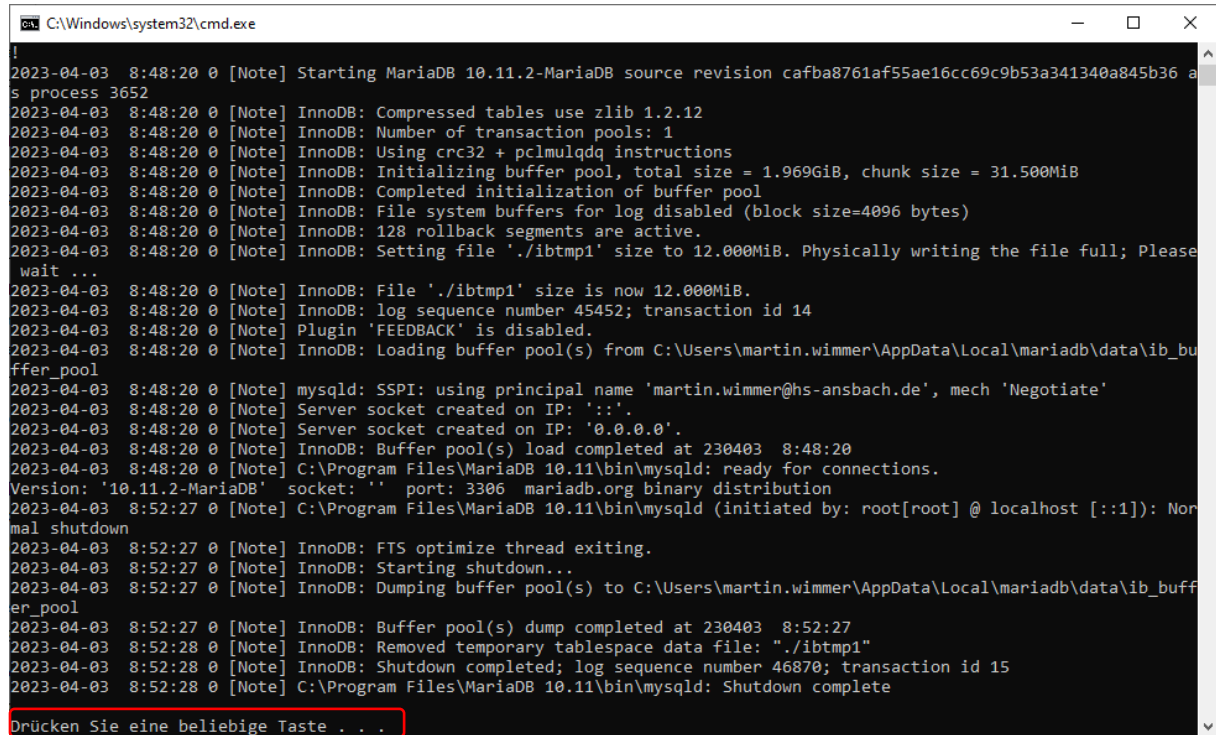

```
C:\Windows\system32\cmd.exe
!
2023-04-03 8:48:20 0 [Note] Starting MariaDB 10.11.2-MariaDB source revision cafba8761af55ae16cc69c9b53a341340a845b36 a
s process 3652
2023-04-03 8:48:20 0 [Note] InnoDB: Compressed tables use zlib 1.2.12
2023-04-03 8:48:20 0 [Note] InnoDB: Number of transaction pools: 1
2023-04-03 8:48:20 0 [Note] InnoDB: Using crc32 + pclmulqdq instructions
2023-04-03 8:48:20 0 [Note] InnoDB: Initializing buffer pool, total size = 1.969GiB, chunk size = 31.500MiB
2023-04-03 8:48:20 0 [Note] InnoDB: Completed initialization of buffer pool
2023-04-03 8:48:20 0 [Note] InnoDB: File system buffers for log disabled (block size=4096 bytes)
2023-04-03 8:48:20 0 [Note] InnoDB: 128 rollback segments are active.
2023-04-03 8:48:20 0 [Note] InnoDB: Setting file './ibtmp1' size to 12.000MiB. Physically writing the file full; Please
wait ...
2023-04-03 8:48:20 0 [Note] InnoDB: File './ibtmp1' size is now 12.000MiB.
2023-04-03 8:48:20 0 [Note] InnoDB: log sequence number 45452; transaction id 14
2023-04-03 8:48:20 0 [Note] Plugin 'FEEDBACK' is disabled.
2023-04-03 8:48:20 0 [Note] InnoDB: Loading buffer pool(s) from C:\Users\martin.wimmer\AppData\Local\mariadb\data\ib_bu
ffer_pool
2023-04-03 8:48:20 0 [Note] mysqld: SSPI: using principal name 'martin.wimmer@hs-ansbach.de', mech 'Negotiate'
2023-04-03 8:48:20 0 [Note] Server socket created on IP: '::'.
2023-04-03 8:48:20 0 [Note] Server socket created on IP: '0.0.0.0'.
2023-04-03 8:48:20 0 [Note] InnoDB: Buffer pool(s) load completed at 230403 8:48:20
2023-04-03 8:48:20 0 [Note] C:\Program Files\MariaDB 10.11\bin\mysqld: ready for connections.
Version: '10.11.2-MariaDB' socket: '' port: 3306 mariadb.org binary distribution
2023-04-03 8:52:27 0 [Note] C:\Program Files\MariaDB 10.11\bin\mysqld (initiated by: root[root] @ localhost [::1]): Nor
mal shutdown
2023-04-03 8:52:27 0 [Note] InnoDB: FTS optimize thread exiting.
2023-04-03 8:52:27 0 [Note] InnoDB: Starting shutdown...
2023-04-03 8:52:27 0 [Note] InnoDB: Dumping buffer pool(s) to C:\Users\martin.wimmer\AppData\Local\mariadb\data\ib_buff
er_pool
2023-04-03 8:52:27 0 [Note] InnoDB: Buffer pool(s) dump completed at 230403 8:52:27
2023-04-03 8:52:28 0 [Note] InnoDB: Removed temporary tablespace data file: "ibtmp1"
2023-04-03 8:52:28 0 [Note] InnoDB: Shutdown completed; log sequence number 46870; transaction id 15
2023-04-03 8:52:28 0 [Note] C:\Program Files\MariaDB 10.11\bin\mysqld: Shutdown complete
Drücken Sie eine beliebige Taste . . .
```



Verbindung zur Datenbank in VS Code herstellen

Starten Sie den Datenbank Server mit Doppelklick auf „mysql_start.bat“.

In VS Code auf die Erweiterung „SQLTools“ in der linken Leiste klicken.



Klicken Sie auf „Add New Connection“

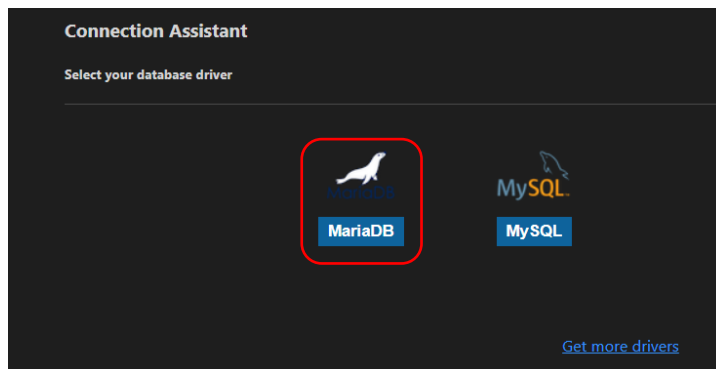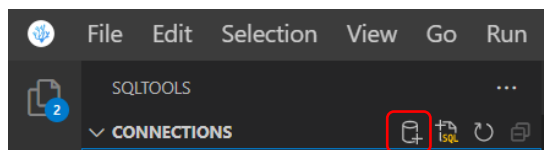

Connection Assistant < Step 2/3

Connection Settings

Connection name*

Connection group

Connect using*

Server Address*

Port*

Database*

Username*

Password mode

MySQL driver specific options

Authentication Protocol

Try to switch protocols in case you have problems.

Connection Timeout

Show records default limit

[Open Settings](#) [TEST CONNECTION](#) [SAVE CONNECTION](#)

Klicken Sie rechts unten auf „TEST CONNECTION“.

Connection Timeout

Show records default limit

Successfully connected!

[SAVE CONNECTION](#) [TEST CONNECTION](#)

Es sollte „Successfully connected!“ erscheinen.

Klicken Sie nun auf “SAVE CONNECTION”

Verbindung zur Datenbank herstellen

