



Debug — sample-mode (N=3) recovers logit-mode metrics (Gemma series)


μ -decisiveness · fitted preference strength

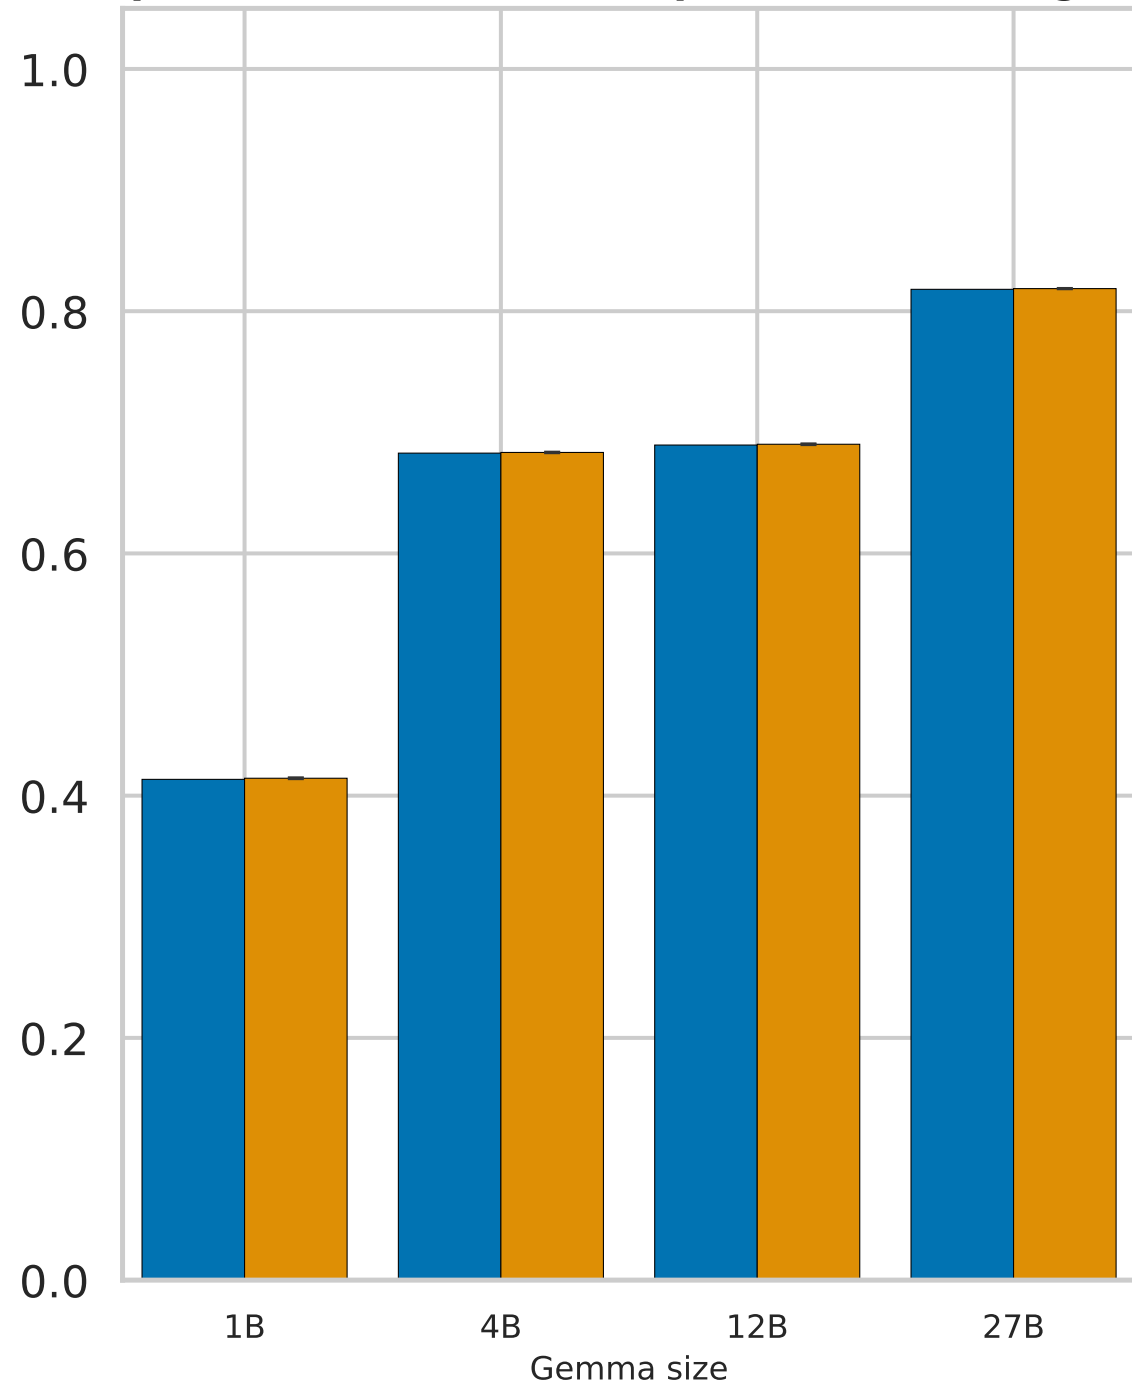


P(repeat) · self-agreement

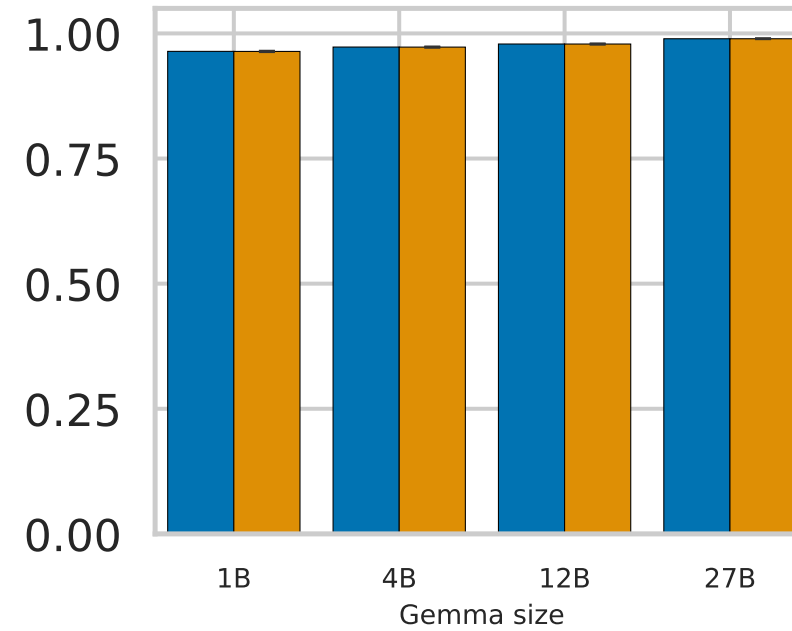


P(agree | A,B vs B,A) · order

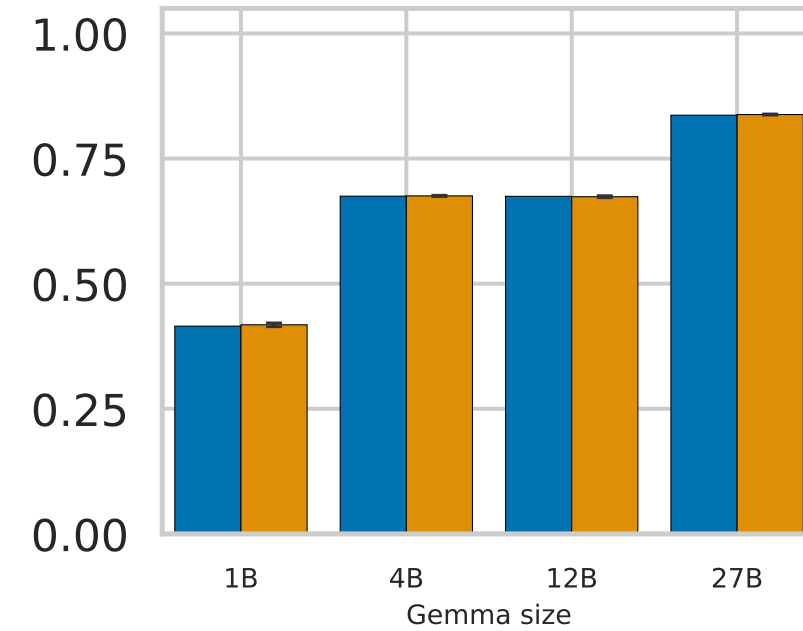

P(no cycle) · transitivity

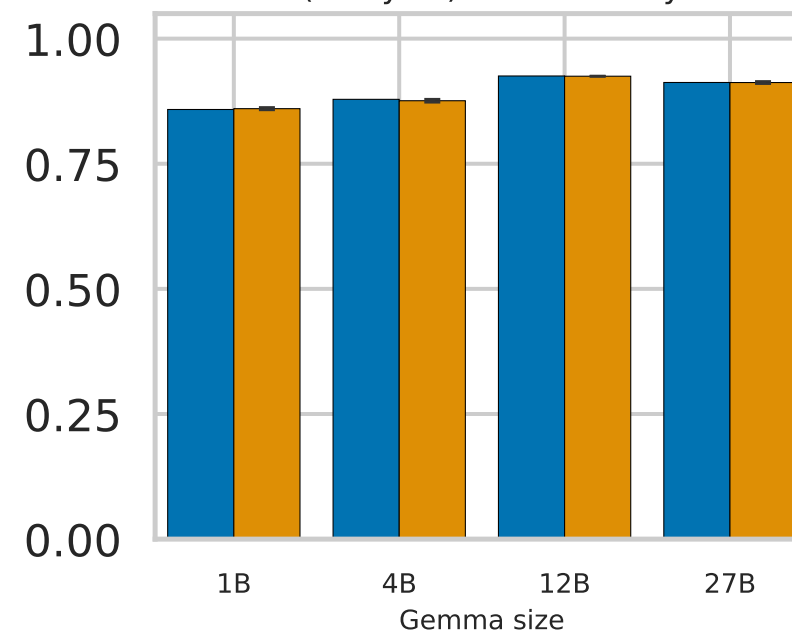

P(agree | Q_i vs Q_i) · framing

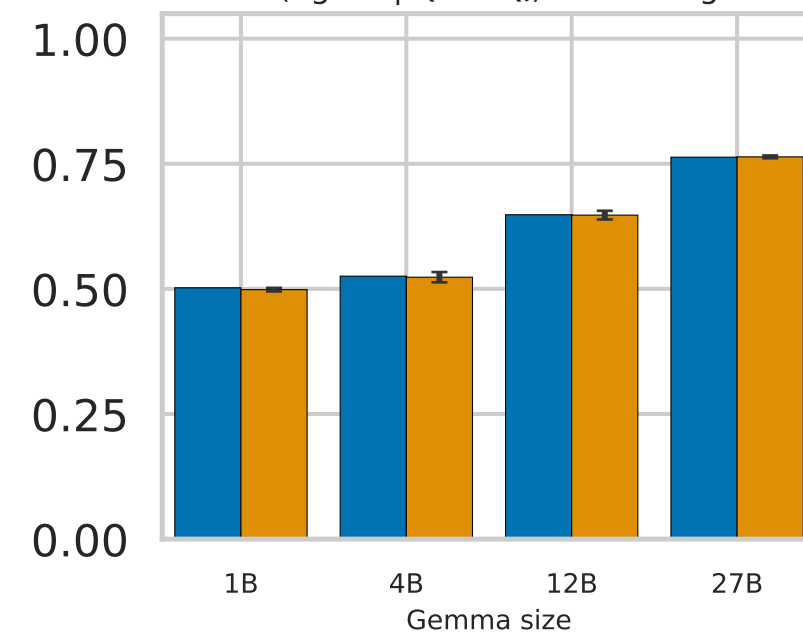

logit-mode (saved P(A)) simulated sample-mode (N=3)