

Cucumber Report

9 nov. 2022 16:34:45

Start : nov. 09, 4:34:09.326 p. m.

End : nov. 09, 4:34:44.705 p. m.

Duration : 35.379 s

Features

Scenarios

Steps

PASSED - 0

FAILED - 1

SKIPPED - 0

PASSED - 0

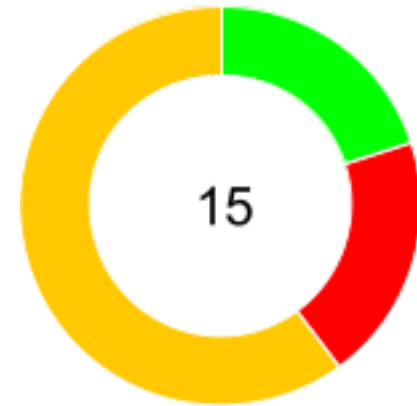
FAILED - 3

SKIPPED - 0

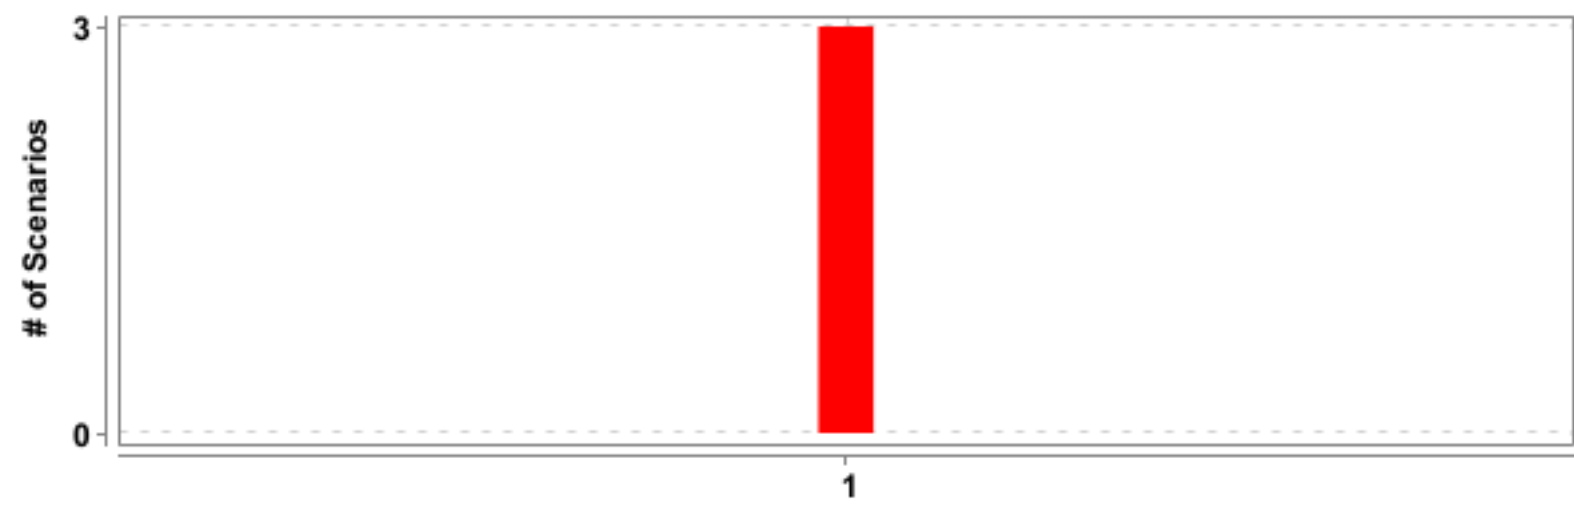
PASSED - 3

FAILED - 3

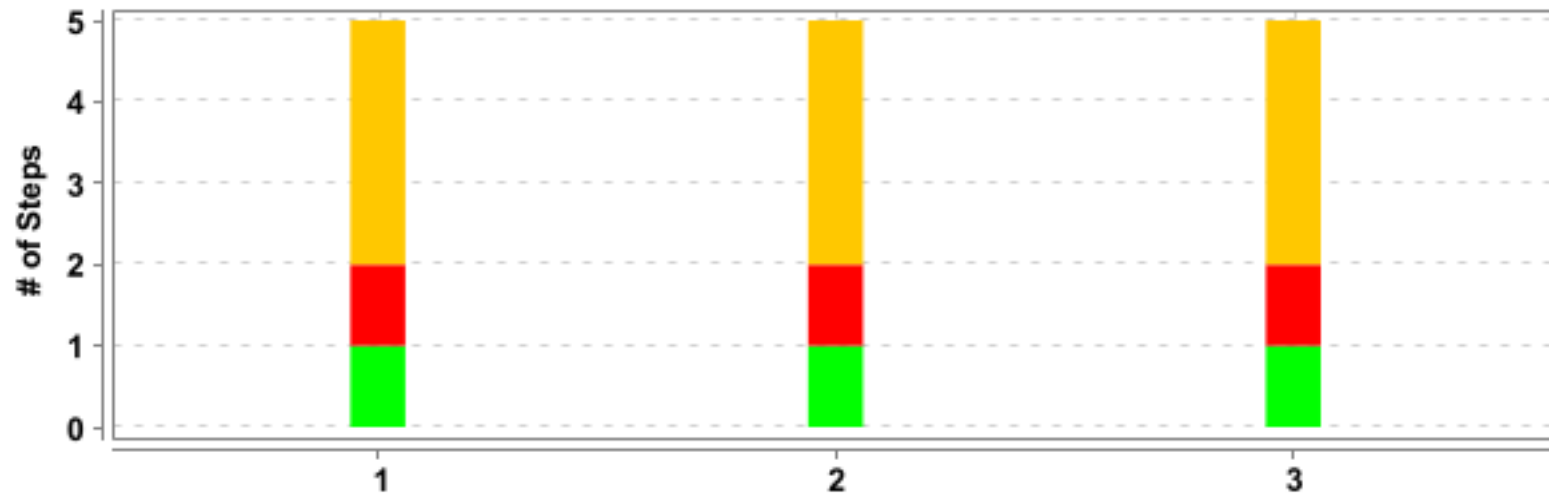
SKIPPED - 9



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Billing Address Feature</u>	35.379 s	3	0	3	0	15	3	3	9





#	Feature Name	T	P	F	S	Duration
1	<u>Billing Address Feature</u>	3	0	3	0	35.379 s

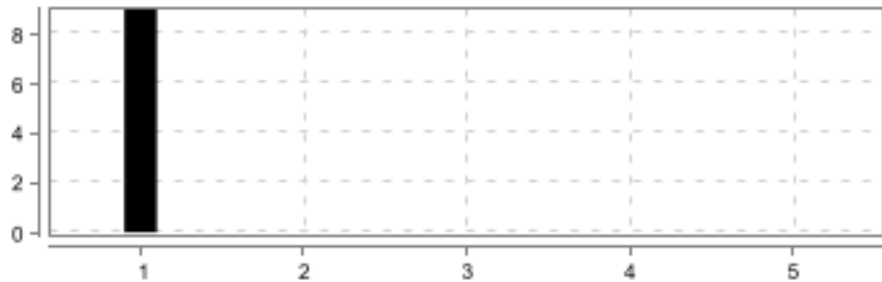



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Billing Address Feature</u>	<u>Billing Address form with different set of data</u>	5	1	1	3	12.314 s
2	<u>Billing Address Feature</u>	<u>Billing Address form with different set of data</u>	5	1	1	3	11.012 s
3	<u>Billing Address Feature</u>	<u>Billing Address form with different set of data</u>	5	1	1	3	12.028 s

Billing Address Feature


FAILED	DURATION - 35.379 s	Scenarios		Steps	
/ 4:34:09.326 p. m. // 4:34:44.705 p. m. /		Total - 3		Total - 15	
		Pass - 0		Pass - 3	
		Fail - 3		Fail - 3	
		Skip - 0		Skip - 9	

Billing Address form with different set of data

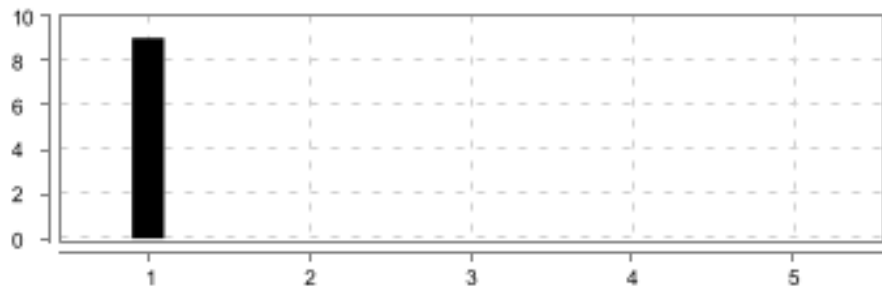

<div><div>FAILED</div><div>DURATION - 12.314 s</div></div>			Steps	
/ 4:34:09.331 p. m. // 4:34:21.645 p. m. /			Total - 5	
Billing Address Feature			Pass - 1	
			Fail - 1	
			Skip - 3	

#	Step / Hook Details	Status	Duration	
1	Given user has already logged in to application	PASSED	8.989 s	
	username			password
	jonathan_cucho@hotmail.com			realpassword12345
2	And user navigates to billing address page	FAILED	0.003 s	
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepDefinitions.BillingAddressSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)			

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) </p>		


#	Step / Hook Details	Status	Duration
	... 46 more Caused by: java.lang.NullPointerException at com.pages.BillingAddressPage.<init>(BillingAddressPage.java:37) at com.stepDefinitions.BillingAddressSteps.<init>(BillingAddressSteps.java:21)		
3	When user fills the form from the given sheetname "billingData" and rowNum 0	SKIPPED	0.001 s
4	And user clicks on save address	SKIPPED	0.000 s
5	Then it shows a message "Address changed successfully."	SKIPPED	0.000 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.232 s
	Billing_Address_form_with_different_set_of_data		
			

Billing Address form with different set of data

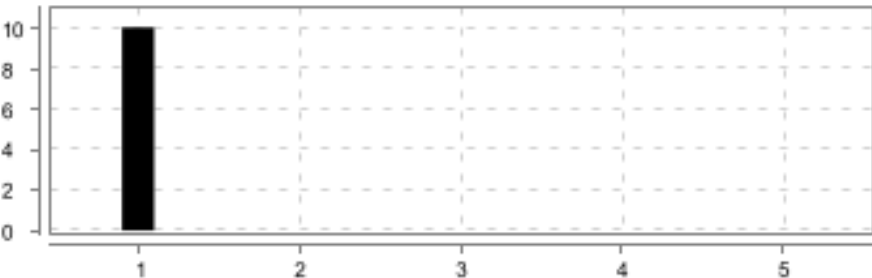

FAILED		DURATION - 11.012 s			Steps Total - 5 Pass - 1 Fail - 1 Skip - 3			
/ 4:34:21.658 p. m. // 4:34:32.670 p. m. /								
Billing Address Feature								

#	Step / Hook Details	Status	Duration	
1	Given user has already logged in to application	PASSED	9.010 s	
	username			password
	jonathan_cucho@hotmail.com			realpassword12345
2	And user navigates to billing address page	FAILED	0.001 s	
	io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepDefinitions.BillingAddressSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)			

#	Step / Hook Details	Status	Duration
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235)		

#	Step / Hook Details	Status	Duration
	<pre> at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 46 more Caused by: java.lang.NullPointerException at com.pages.BillingAddressPage.<init>(BillingAddressPage.java:37) at com.stepDefinitions.BillingAddressSteps.<init>(BillingAddressSteps.java:21) </pre>		
3	When user fills the form from the given sheetname "billingData" and rowNumber 1	SKIPPED	0.000 s
4	And user clicks on save address	SKIPPED	0.000 s
5	Then it shows a message "Address changed successfully."	SKIPPED	0.001 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.188 s
	Billing_Address_form_with_different_set_of_data		
			

Billing Address form with different set of data

<div>FAILED</div> <div>DURATION - 12.028 s</div>		<div></div>	<div>Steps</div> <div>Total - 5</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 3</div>	<div></div>
/ 4:34:32.677 p. m. // 4:34:44.705 p. m. /				
Billing Address Feature				

#	Step / Hook Details		Status	Duration
1	Given user has already logged in to application		PASSED	10.041 s
	username	password		
	jonathan_cucho@hotmail.com	realpassword12345		

#	Step / Hook Details	Status	Duration
2	<p>And user navigates to billing address page</p> <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class com.stepDefinitions.BillingAddressSteps at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) </pre>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 46 more Caused by: java.lang.NullPointerException at com.pages.BillingAddressPage.<init>(BillingAddressPage.java:37) at com.stepDefinitions.BillingAddressSteps.<init>(BillingAddressSteps.java:21) </pre>		
3	When user fills the form from the given sheetname "billingData" and rowNum 2	SKIPPED	0.001 s
4	And user clicks on save address	SKIPPED	0.000 s
5	Then it shows a message "Address changed successfully."	SKIPPED	0.000 s
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.182 s
	Billing_Address_form_with_different_set_of_data		
	