

[GETNET] Install Oracle RAC 19c in Linux – PROD

NOTA IMPORTANTE: A INSTALAÇÃO DE PROD É DIFERENTE DA INSTALAÇÃO DE HML, A NÍVEL DE VCENTER. ESTA DOCUMENTAÇÃO NÃO ESTÁ COMPLETA VISTO AS ALTERAÇÕES SOFRIDAS POR PARTE DO CLIENTE.

PRA INSTALAÇÃO EM HML, SIGA A NOTA: <https://repo.oraex.com.br/repo/install-oracle-rac-19c-in-linux-hml/>

Premissa da atividade: Instalar um RAC Linux, virtualizado no VMWare usando um deploy inicial, de máquinas StandAlone no Ansible.


Vantagens de usar o Ansible: Os hosts já saem configurados com todos os padrões da Getnet. Bastamos apenas remover os binários e dropar diskgroups e arquivos de configuração.

1 – Deploy de 2 servidores StandAlone.

Seguir o último template vigente do Ansible para Red Hat 8 e Oracle Linux 19. A ideia de usar a esteira é já ter os dois nós do RAC configurados com o padrão da Getnet tais como packages, limites e diretórios.


1.1 – Criação da folder

Afim de organizar os RACs dentro do Data Store, acreditamos que podemos criar pastas para agrupar as 2 VMs. No caso, utilizamos o nome usado do SCAN para o nome da pasta: controlm-prd.

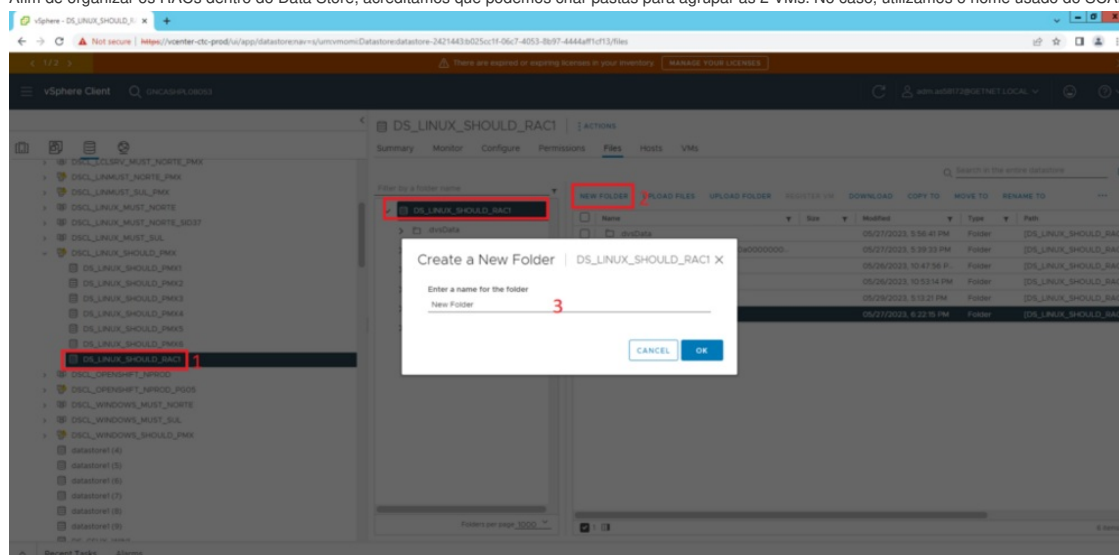


1.2 – Move das VMs para folder

Para mover a VM para dentro da pasta criada, selecionem a VM e "Move to":

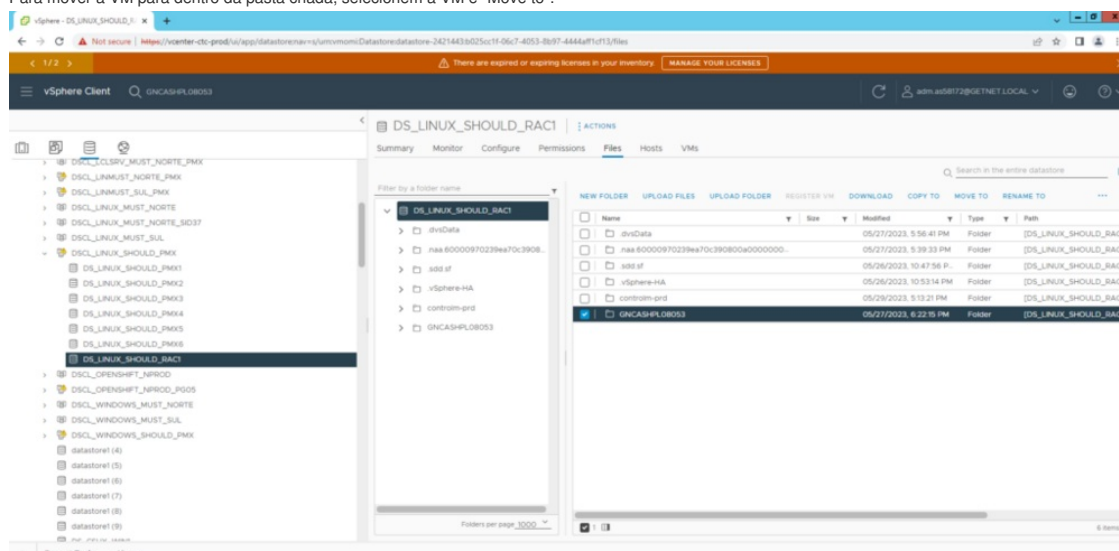

Mover para a pasta criada:

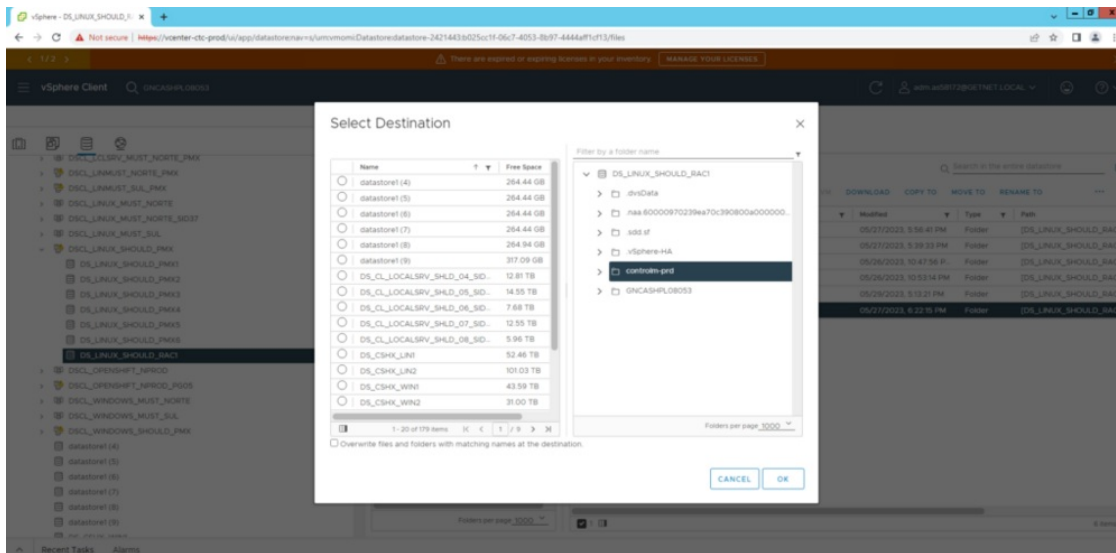

2- Configuração de IPs

No SSO, reservar os IPs do Interconnect, VIP e Scan (pré-requisito para RAC Oracle).
Dúvidas: Felipe Horn.

GNCASHPL08052


IP Público: 180.104.135.221
IP Branca: 22.248.237.207
IP Backup: 22.240.237.182
Interconnect: 172.27.135.40
IP VIP: 180.104.135.227


Scan1: 180.104.135.229
Scan2: 180.104.135.230
Scan3: 180.104.135.231

GNCASHPL08053


IP Público: 180.104.135.222
IP Branca: 2.248.237.208
IP Backup: 22.240.237.183
Interconnect: 172.27.135.41
IP VIP 180.104.135.228

Repare na imagem da reserva de IPS no SSO:

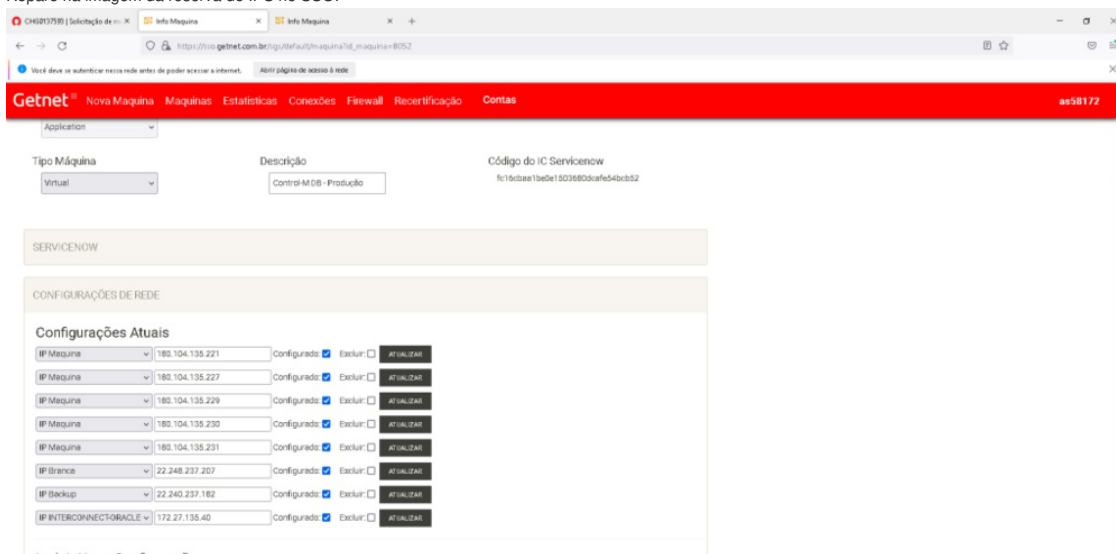

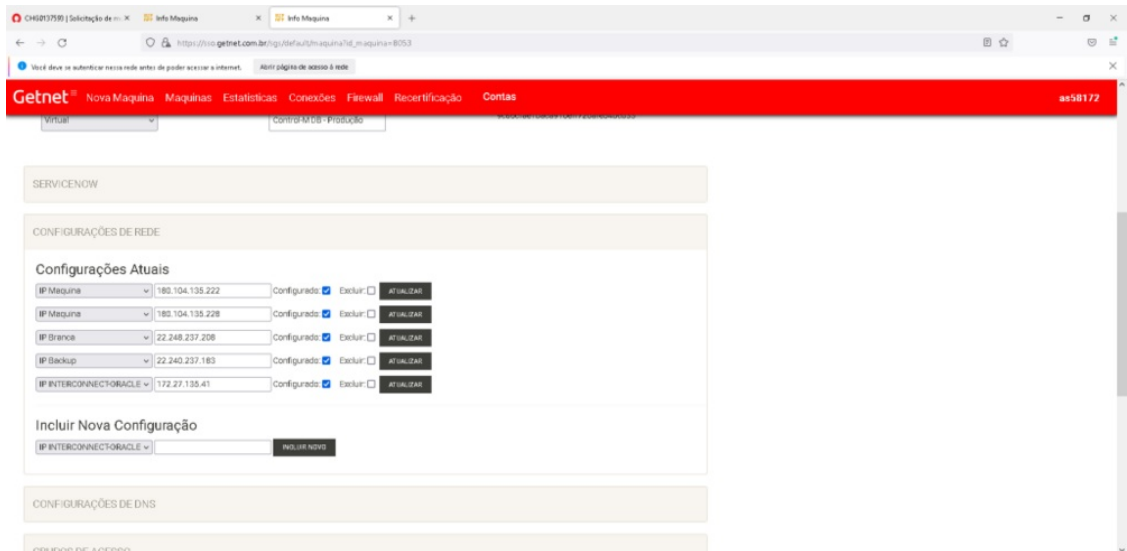

Ao fim da página, há um registro com todas as VLANs, lá podemos pegar o nome da VLAN do Interconnect:

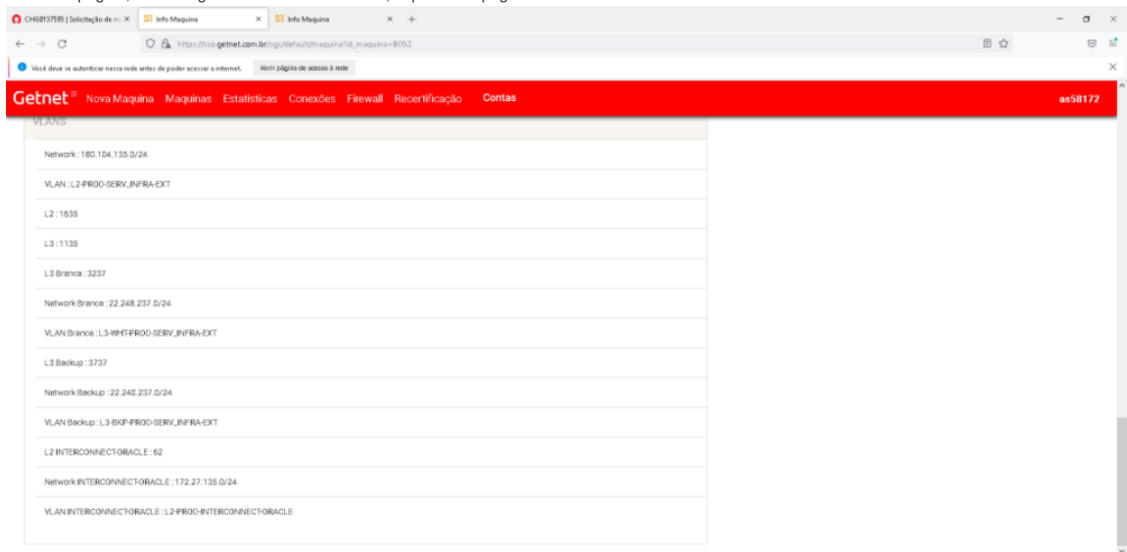

3- Registro de DNS

Registro de DNS do SCAN Oracle RAC:

DNS: controlm-prd-scan

IPS:

180.104.135.229

180.104.135.230

180.104.135.231

Configuração do /etc/hosts de cada nó :

```
180.104.135.221 GNCASHPL08052 GNCASHPL08052.getnet.local
22.240.237.182 GNCASHPL08052.bkp GNCASHPL08052.bkp.getnet.local
22.248.237.207 GNCASHPL08052.wt GNCASHPL08052.wt.getnet.local
180.104.135.227 GNCASHPL08052-vip GNCASHPL08052-vip.getnet.local
```

```
180.104.135.222 GNCASHPL08053 GNCASHPL08053.getnet.local
22.240.237.183 GNCASHPL08053.bkp GNCASHPL08053.bkp.getnet.local
22.248.237.208 GNCASHPL08053.wt GNCASHPL08053.wt.getnet.local
180.104.135.228 GNCASHPL08053-vip GNCASHPL08053-vip.getnet.local
```

Configuração da interface do interconnect que não é criada automaticamente:

```
cd /etc/sysconfig/network-scripts/
[root@GNCASHPL08052 network-scripts]# cat ifcfg-ens193
# Generated by VMWare customization engine.
NAME=ens193
DEVICE=ens193
HWADDR=00:50:56:b6:71:6c
ONBOOT=yes
USERCTL=no
BOOTPROTO=static
NETMASK=255.255.248.0
IPADDR=172.27.135.40
PEERDNS=no
IPV6INIT=no

check_link_down() {
    return 1;
}

[root@GNCASHPL08052 network-scripts]# ifup ens193
Connection successfully activated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/113)

[root@GNCASHPL08053 network-scripts]# cat ifcfg-ens193
# Interconnect RAC Oracle
NAME=ens193
DEVICE=ens193
HWADDR=00:50:56:b6:4e:e6
ONBOOT=yes
USERCTL=no
BOOTPROTO=static
NETMASK=255.255.248.0
IPADDR=172.27.135.41
PEERDNS=no
IPV6INIT=no

check_link_down() {
    return 1;
}

[root@GNCASHPL08053 network-scripts]# ifup ens193
Connection successfully activated (D-Bus active path: /org/freedesktop/NetworkManager/ActiveConnection/113)
```

4 – Ajustes de packages faltantes

Pacotes X11 para usarmos a instalação gráfica.
NOTA: fiz nos 2 hosts, registrei apenas um deles:

```
[root@GNCASHPL08052 ~]# yum install xorg-x11-xauth
Updating Subscription Management repositories.
Zabbix 5.0 frontend                        38 kB/s | 2.1 kB    00:00
Red Hat Enterprise Linux 8 for x86_64 - AppStream (RPMs)  55 kB/s | 2.8 kB    00:00
Zabbix - Rhel6 x86_64                      39 kB/s | 2.1 kB    00:00
Zabbix - Rhel7                            40 kB/s | 2.1 kB    00:00
Red Hat Enterprise Linux 8 for x86_64 - High Availability (RPMs)  45 kB/s | 2.4 kB    00:00
Zabbix - Rhel8                            42 kB/s | 2.1 kB    00:00
Red Hat Enterprise Linux 8 for x86_64 - BaseOS (RPMs)      46 kB/s | 2.4 kB    00:00
Red Hat Satellite Tools 6.9 for RHEL 8 x86_64 (RPMs)       40 kB/s | 2.1 kB    00:00
Zabbix - Rhel6 I386                               41 kB/s | 2.1 kB    00:00
Dependencies resolved.

=====
=
Package                Architecture  Version      Repository                                Size
=====
=
Installing:
xorg-x11-xauth          x86_64       1:1.0.9-12.el8  rhel-8-for-x86_64-appstream-rpms    39 k

Transaction Summary
```

```

=====
=
Install 1 Package

Total download size: 39 k
Installed size: 63 k
Is this ok [y/N]: y
Downloading Packages:
xorg-x11-xauth-1.0.9-12.el8.x86_64.rpm          682 kB/s | 39 kB    00:00
-----
Total                                          656 kB/s | 39 kB    00:00
Running transaction check
Transaction check succeeded.
Running transaction test
Transaction test succeeded.
Running transaction
  Preparing      :                                1/1
  Installing     : xorg-x11-xauth-1:1.0.9-12.el8.x86_64          1/1
  Running scriptlet: xorg-x11-xauth-1:1.0.9-12.el8.x86_64          1/1
  Verifying      : xorg-x11-xauth-1:1.0.9-12.el8.x86_64          1/1
Installed products updated.

Installed:
  xorg-x11-xauth-1:1.0.9-12.el8.x86_64

Complete!

[root@GNCASHPL08052 ~]# yum install xterm
Updating Subscription Management repositories.
Zabbix 5.0 frontend                        41 kB/s | 2.1 kB    00:00
Red Hat Enterprise Linux 8 for x86_64 - AppStream (RPMs)  50 kB/s | 2.8 kB    00:00
Zabbix - Rhel6 x86_64                        42 kB/s | 2.1 kB    00:00
Zabbix - Rhel7                              40 kB/s | 2.1 kB    00:00
Red Hat Enterprise Linux 8 for x86_64 - High Availability (RPMs)  46 kB/s | 2.4 kB    00:00
Zabbix - Rhel8                              41 kB/s | 2.1 kB    00:00
Red Hat Enterprise Linux 8 for x86_64 - BaseOS (RPMs)      42 kB/s | 2.4 kB    00:00
Red Hat Satellite Tools 6.9 for RHEL 8 x86_64 (RPMs)      41 kB/s | 2.1 kB    00:00
Zabbix - Rhel6 I386                                42 kB/s | 2.1 kB    00:00
Dependencies resolved.

=====
===
Package            Architecture Version      Repository                                Size
=====
Installing:
xterm              x86_64      331-1.el8_3.2  rhel-8-for-x86_64-appstream-rpms        529 k
Installing dependencies:
xterm-resize       x86_64      331-1.el8_3.2  rhel-8-for-x86_64-appstream-rpms        38 k
Installing weak dependencies:
xorg-x11-fonts-misc noarch      7.5-19.el8     rhel-8-for-x86_64-appstream-rpms       5.8 M

Transaction Summary
=====
===
Install 3 Packages

Total download size: 6.3 M
Installed size: 8.3 M
Is this ok [y/N]: y
Downloading Packages:
(1/3): xterm-resize-331-1.el8_3.2.x86_64.rpm          439 kB/s | 38 kB    00:00
(2/3): xterm-331-1.el8_3.2.x86_64.rpm                4.5 MB/s | 529 kB    00:00
(3/3): xorg-x11-fonts-misc-7.5-19.el8.noarch.rpm      25 MB/s | 5.8 MB    00:00
-----
Total                                          27 MB/s | 6.3 MB    00:00
Running transaction check
Transaction check succeeded.
Running transaction test
Transaction test succeeded.
Running transaction
  Preparing      :                                1/1
  Installing     : xterm-331-1.el8_3.2.x86_64.rpm          1/1
  Running scriptlet: xterm-331-1.el8_3.2.x86_64.rpm          1/1
  Verifying      : xterm-331-1.el8_3.2.x86_64.rpm          1/1
  Installing     : xorg-x11-fonts-misc-7.5-19.el8.noarch.rpm 1/1
  Running scriptlet: xorg-x11-fonts-misc-7.5-19.el8.noarch.rpm 1/1
  Verifying      : xorg-x11-fonts-misc-7.5-19.el8.noarch.rpm 1/1
Installed products updated.

Installed:
  xterm-331-1.el8_3.2.x86_64.rpm
  xorg-x11-fonts-misc-7.5-19.el8.noarch.rpm

Complete!

```

```
Preparing      :                               1/1
Installing     : xterm-resize-331-1.el8_3.2.x86_64           1/3
Installing     : xorg-x11-fonts-misc-7.5-19.el8.noarch       2/3
Running scriptlet: xorg-x11-fonts-misc-7.5-19.el8.noarch     2/3
Installing     : xterm-331-1.el8_3.2.x86_64                 3/3
Running scriptlet: xterm-331-1.el8_3.2.x86_64               3/3
Verifying      : xorg-x11-fonts-misc-7.5-19.el8.noarch       1/3
Verifying      : xterm-331-1.el8_3.2.x86_64                 2/3
Verifying      : xterm-resize-331-1.el8_3.2.x86_64           3/3
Installed products updated.

Installed:
  xorg-x11-fonts-misc-7.5-19.el8.noarch  xterm-331-1.el8_3.2.x86_64  xterm-resize-331-1.el8_3.2.x86_64

Complete!
[root@GNCASHPL08052 ~]#
```

Particularidade, vi que a pasta do meu user não foi criada depois de instalar o X11, criei na mão:

```
[root@GNCASHPL08053 home]# mkdir adm.as58172
[root@GNCASHPL08053 home]# chown adm.as58172 adm.as58172
[root@GNCASHPL08053 home]# chmod 775 adm.as58172
```

5 – Remoção dos binários de StandAlne

Baixe o banco, drop dos diskgroups, remova os binários do Oracle Database e Grid Infrastructure e limpe todos os arquivos de instalação
Baixando o Banco:

```
oracle@GNCASHPL08052 ~]$ . db_profile
[oracle@GNCASHPL08052 ~]$ ps -ef | grep pmon
grid      3056      1  0 13:40 ?        00:00:00 asm_pmon_+ASM
oracle    3194      1  0 13:40 ?        00:00:00 ora_pmon_CTRLM1
oracle    26749  26687  0 14:33 pts/0    00:00:00 grep --color=auto pmon
[oracle@GNCASHPL08052 ~]$ sqlplus / as sysdba
```

SQL*Plus: Release 19.0.0.0.0 - Production on Wed Feb 15 14:34:04 2023
Version 19.16.0.0.0

Copyright (c) 1982, 2022, Oracle. All rights reserved.

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.16.0.0.0

```
SQL> shutdown immediate;
Database closed.
Database dismounted.
ORACLE instance shut down.
SQL> exit
Disconnected from Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.16.0.0.0
```

```
[oracle@GNCASHPL08053 ~]$ ps -ef | grep pmon
grid      3016      1  0 13:38 ?        00:00:00 asm_pmon_+ASM
oracle    3196      1  0 13:38 ?        00:00:00 ora_pmon_CTRLM2
oracle    22397  22329  0 14:33 pts/0    00:00:00 grep --color=auto pmon
[oracle@GNCASHPL08053 ~]$ sqlplus / as sysdba
```

SQL*Plus: Release 19.0.0.0.0 - Production on Wed Feb 15 14:34:04 2023
Version 19.16.0.0.0

Copyright (c) 1982, 2022, Oracle. All rights reserved.

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.16.0.0.0

```
SQL> shutdown immediate;
Database closed.
Database dismounted.
ORACLE instance shut down.
SQL> exit
Disconnected from Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.16.0.0.0
```

Baixando o Cluster:


```
[grid@GNCASHPL08052 ~]$ crsctl stop has -f
CRS-2791: Starting shutdown of Oracle High Availability Services-managed resources on 'gncashpl08052'
CRS-2673: Attempting to stop 'ora.evmd' on 'gncashpl08052'
CRS-2673: Attempting to stop 'ora.DATA_CTRL1M1.dg' on 'gncashpl08052'
CRS-2673: Attempting to stop 'ora.LISTENER.lsnr' on 'gncashpl08052'
CRS-2677: Stop of 'ora.DATA_CTRL1M1.dg' on 'gncashpl08052' succeeded
CRS-2673: Attempting to stop 'ora.asm' on 'gncashpl08052'
CRS-2677: Stop of 'ora.LISTENER.lsnr' on 'gncashpl08052' succeeded
CRS-2677: Stop of 'ora.evmd' on 'gncashpl08052' succeeded
CRS-2677: Stop of 'ora.asm' on 'gncashpl08052' succeeded
CRS-2673: Attempting to stop 'ora.cssd' on 'gncashpl08052'
CRS-2677: Stop of 'ora.cssd' on 'gncashpl08052' succeeded
CRS-2793: Shutdown of Oracle High Availability Services-managed resources on 'gncashpl08052' has completed
CRS-4133: Oracle High Availability Services has been stopped.
```

```
[grid@GNCASHPL08053 ~]$ crsctl stop has -f
CRS-2791: Starting shutdown of Oracle High Availability Services-managed resources on 'gncashpl08053'
CRS-2673: Attempting to stop 'ora.LISTENER.lsnr' on 'gncashpl08053'
CRS-2673: Attempting to stop 'ora.DATA_CTRL2M2.dg' on 'gncashpl08053'
CRS-2677: Stop of 'ora.DATA_CTRL2M2.dg' on 'gncashpl08053' succeeded
CRS-2673: Attempting to stop 'ora.evmd' on 'gncashpl08053'
CRS-2673: Attempting to stop 'ora.asm' on 'gncashpl08053'
CRS-2677: Stop of 'ora.LISTENER.lsnr' on 'gncashpl08053' succeeded
CRS-2677: Stop of 'ora.evmd' on 'gncashpl08053' succeeded
CRS-2677: Stop of 'ora.asm' on 'gncashpl08053' succeeded
CRS-2673: Attempting to stop 'ora.cssd' on 'gncashpl08053'
CRS-2677: Stop of 'ora.cssd' on 'gncashpl08053' succeeded
CRS-2793: Shutdown of Oracle High Availability Services-managed resources on 'gncashpl08053' has completed
CRS-4133: Oracle High Availability Services has been stopped.
```

Dropando os discos do ASM:

```

[root@GNCASHPL08052 ~]# oracleasm listdisks
ARCH01_CTRL1M1
ARCH02_CTRL1M1
ARCH03_CTRL1M1
ARCH04_CTRL1M1
DATA01_AUX_CTRL1M1
DATA01_CTRL1M1
DATA02_AUX_CTRL1M1
DATA02_CTRL1M1
DATA03_AUX_CTRL1M1
DATA03_CTRL1M1
DATA04_AUX_CTRL1M1
DATA04_CTRL1M1
[root@GNCASHPL08052 ~]# oracleasm deletedisk ARCH01_CTRL1M1
Clearing disk header: done
Dropping disk: done
[root@GNCASHPL08052 ~]# oracleasm deletedisk ARCH02_CTRL1M1
Clearing disk header: done
Dropping disk: done
[root@GNCASHPL08052 ~]# oracleasm deletedisk ARCH03_CTRL1M1
Clearing disk header: done
Dropping disk: done
[root@GNCASHPL08052 ~]# oracleasm deletedisk ARCH04_CTRL1M1
Clearing disk header: done
Dropping disk: done
[root@GNCASHPL08052 ~]# oracleasm deletedisk DATA01_AUX_CTRL1M1
Clearing disk header: done
Dropping disk: done
[root@GNCASHPL08052 ~]# oracleasm deletedisk DATA01_CTRL1M1
Clearing disk header: done
Dropping disk: done
[root@GNCASHPL08052 ~]# oracleasm deletedisk DATA02_AUX_CTRL1M1
Clearing disk header: done
Dropping disk: done
[root@GNCASHPL08052 ~]# oracleasm deletedisk DATA02_CTRL1M1
Clearing disk header: done
Dropping disk: done
[root@GNCASHPL08052 ~]# oracleasm deletedisk DATA03_AUX_CTRL1M1
Clearing disk header: done
Dropping disk: done
[root@GNCASHPL08052 ~]# oracleasm deletedisk DATA03_CTRL1M1
Clearing disk header: done
Dropping disk: done
[root@GNCASHPL08052 ~]# oracleasm deletedisk DATA04_AUX_CTRL1M1
Clearing disk header: done
Dropping disk: done
[root@GNCASHPL08052 ~]# oracleasm deletedisk DATA04_CTRL1M1
Clearing disk header: done
Dropping disk: done
[root@GNCASHPL08052 ~]#

[root@GNCASHPL08052 ~]# oracleasm scandisks
Reloading disk partitions: done
Cleaning any stale ASM disks...
Scanning system for ASM disks...

[root@GNCASHPL08052 ~]# oracleasm listdisks

```

Removendo a instalação de Banco e Grid:
 NOTA: faça nos 2 nós

```
[root@GNCASHPL08052 ~]# cd /tmp
[root@GNCASHPL08052 tmp]# rm -rf *
[root@GNCASHPL08052 tmp]# rm -rf /etc/oraInst.loc
[root@GNCASHPL08052 tmp]# cd /etc/oracle
[root@GNCASHPL08052 oracle]# rm -rf *
[root@GNCASHPL08052 oracle]# rm -rf /etc/oratab
[root@GNCASHPL08052 oracle]# rm -rf /tmp/.oracle
[root@GNCASHPL08052 oracle]# /usr/lib/methods/ucfgacfsctl -l ofscctl
-bash: /usr/lib/methods/ucfgacfsctl: No such file or directory
[root@GNCASHPL08052 oracle]# /usr/lib/methods/ucfgadvmctl -l advmctl
-bash: /usr/lib/methods/ucfgadvmctl: No such file or directory
[root@GNCASHPL08052 oracle]# /usr/lib/methods/udefacfsctl -l ofscctl
-bash: /usr/lib/methods/udefacfsctl: No such file or directory
[root@GNCASHPL08052 oracle]# /usr/lib/methods/udefadvmctl -l advmctl
-bash: /usr/lib/methods/udefadvmctl: No such file or directory
[root@GNCASHPL08052 oracle]# /usr/sbin/rmauth -h oracle
-bash: /usr/sbin/rmauth: No such file or directory
[root@GNCASHPL08052 oracle]# rmrole oracle_devmgmt
-bash: rmrole: command not found
[root@GNCASHPL08052 oracle]# setkst
-bash: setkst: command not found
[root@GNCASHPL08052 oracle]# rm /usr/lib/drivers/oracle*
rm: cannot remove '/usr/lib/drivers/oracle*': No such file or directory
[root@GNCASHPL08052 oracle]# rm /usr/lib/methods/*advm* /usr/lib/methods/*acfs*
rm: cannot remove '/usr/lib/methods/*advm*': No such file or directory
rm: cannot remove '/usr/lib/methods/*acfs*': No such file or directory
[root@GNCASHPL08052 oracle]# rm -rf /sbin/helpers/acfs
[root@GNCASHPL08052 oracle]# rm /usr/sbin/acfsutil* /usr/sbin/advmutil*
rm: cannot remove '/usr/sbin/acfsutil*': No such file or directory
rm: cannot remove '/usr/sbin/advmutil*': No such file or directory
[root@GNCASHPL08052 oracle]# rm /sbin/acfsutil* /sbin/advmutil*
rm: cannot remove '/sbin/acfsutil*': No such file or directory
rm: cannot remove '/sbin/advmutil*': No such file or directory
```

Remover, no vcenter, os discos que não usaremos mais no ASM, e vamos recria-los como Shared para compartilhar entre as 2 máquinas.
NOTA: os discos do ASM são sdc, sdd e sde (discos com 4 partições)

```
[root@GNCASHPL08053 ~]# fdisk -l
Disk /dev/sda: 37 GiB, 39728447488 bytes, 77594624 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: gpt
Disk identifier: 95993A3B-301E-46D2-9653-14795FF1B965

Device      Start      End  Sectors  Size Type
/dev/sda1    2048    1230847   1228800  600M EFI System
/dev/sda2   1230848   3327999   2097152    1G Linux filesystem
/dev/sda3   3328000  77594590  74266591  35.4G Linux filesystem

Disk /dev/sdb: 162 GiB, 173946175488 bytes, 339738624 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: dos
Disk identifier: 0x607a5588

Device      Boot Start      End  Sectors  Size Id Type
/dev/sdb1    2048 339738623 339736576 162G 83 Linux

Disk /dev/sde: 37 GiB, 39728447488 bytes, 77594624 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: dos
Disk identifier: 0x13309624

Device      Boot Start      End  Sectors  Size Id Type
/dev/sde1    2048 133096223 133094176 65.5G 83 Linux
```

```
/dev/sde1 2048 19398655 19398656 9.3G 83 Linux
/dev/sde2 19398656 38797311 19398656 9.3G 83 Linux
/dev/sde3 38797312 58195967 19398656 9.3G 83 Linux
/dev/sde4 58195968 77594623 19398656 9.3G 83 Linux
```

Disk /dev/sdc: 145 GiB, 155692564480 bytes, 304087040 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: dos
Disk identifier: 0x812e2918

Device	Boot	Start	End	Sectors	Size	Id	Type
/dev/sdc1		2048	76021759	76019712	36.3G	83	Linux
/dev/sdc2		76021760	152043519	76021760	36.3G	83	Linux
/dev/sdc3		152043520	228065279	76021760	36.3G	83	Linux
/dev/sdc4		228065280	304087039	76021760	36.3G	83	Linux

Disk /dev/sdd: 145 GiB, 155692564480 bytes, 304087040 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: dos
Disk identifier: 0x935836e6

Device	Boot	Start	End	Sectors	Size	Id	Type
/dev/sdd1		2048	76021759	76019712	36.3G	83	Linux
/dev/sdd2		76021760	152043519	76021760	36.3G	83	Linux
/dev/sdd3		152043520	228065279	76021760	36.3G	83	Linux
/dev/sdd4		228065280	304087039	76021760	36.3G	83	Linux

Disk /dev/mapper/rhel-root: 16.4 GiB, 17620271104 bytes, 34414592 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes

Disk /dev/mapper/rhel-swap: 18 GiB, 19327352832 bytes, 37748736 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes

Disk /dev/mapper/vg_oracle-lv_u01: 80 GiB, 85899345920 bytes, 167772160 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes

Disk /dev/mapper/vg_oracle-lv_u02: 80 GiB, 85899345920 bytes, 167772160 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
[root@GNCASHPL08053 ~]#

No VCenter, desconectei os discos, sem remover da pasta, para caso, de algum erro, eu retomar, porém, depois do Restart da VM, vi que removi os discos corretamente, evidencia do /u01 e /u02 intactos:


```
[root@GNCASHPL08052 ~]# df -h
Filesystem      Size  Used Avail Use% Mounted on
devtmpfs        16G   0  16G   0% /dev
tmpfs           16G   0  16G   0% /dev/shm
tmpfs           16G  9.0M  16G   1% /run
tmpfs           16G   0  16G   0% /sys/fs/cgroup
/dev/mapper/rhel-root 17G  6.1G  11G  37% /
/dev/mapper/vg_oracle-lv_u02 80G  620M  80G   1% /u02
/dev/mapper/vg_oracle-lv_u01 80G  21G  59G  27% /u01
/dev/sda2       1014M 271M  744M  27% /boot
/dev/sda1       599M  5.8M  594M   1% /boot/efi
tmpfs           3.2G   0  3.2G   0% /run/user/1237252925
```

```
[root@GNCASHPL08053 ~]# df -h
Filesystem      Size  Used Avail Use% Mounted on
devtmpfs        16G   0  16G   0% /dev
tmpfs           16G   0  16G   0% /dev/shm
tmpfs           16G  9.0M  16G   1% /run
tmpfs           16G   0  16G   0% /sys/fs/cgroup
/dev/mapper/rhel-root 17G  6.1G  11G  37% /
/dev/mapper/vg_oracle-lv_u02 80G  620M  80G   1% /u02
/dev/mapper/vg_oracle-lv_u01 80G  21G  59G  27% /u01
/dev/sda2       1014M 271M  744M  27% /boot
/dev/sda1       599M  5.8M  594M   1% /boot/efi
tmpfs           3.2G   0  3.2G   0% /run/user/1237252925
```


E só depois, entrei na folder das VMs e removi definitivamente os Discos.

6- Configuração das VLans necessárias

Ainda no Vcenter, vamos adicionar a Vlan do Interconnect:

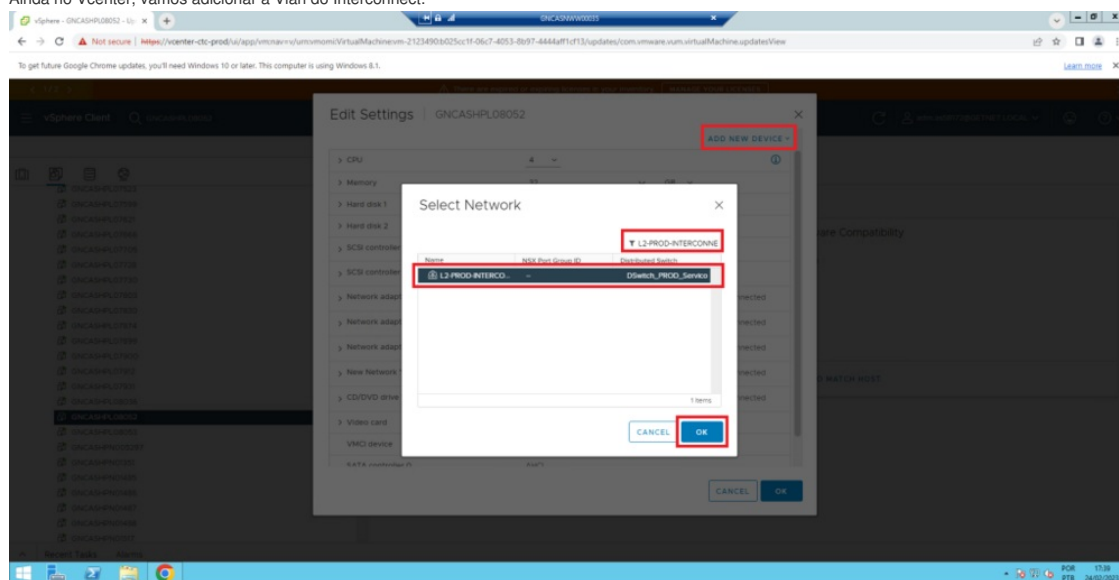

Depois que adicionar a interface de rede do interconnect nos 2 nós, teremos uma 4ª interface de rede:

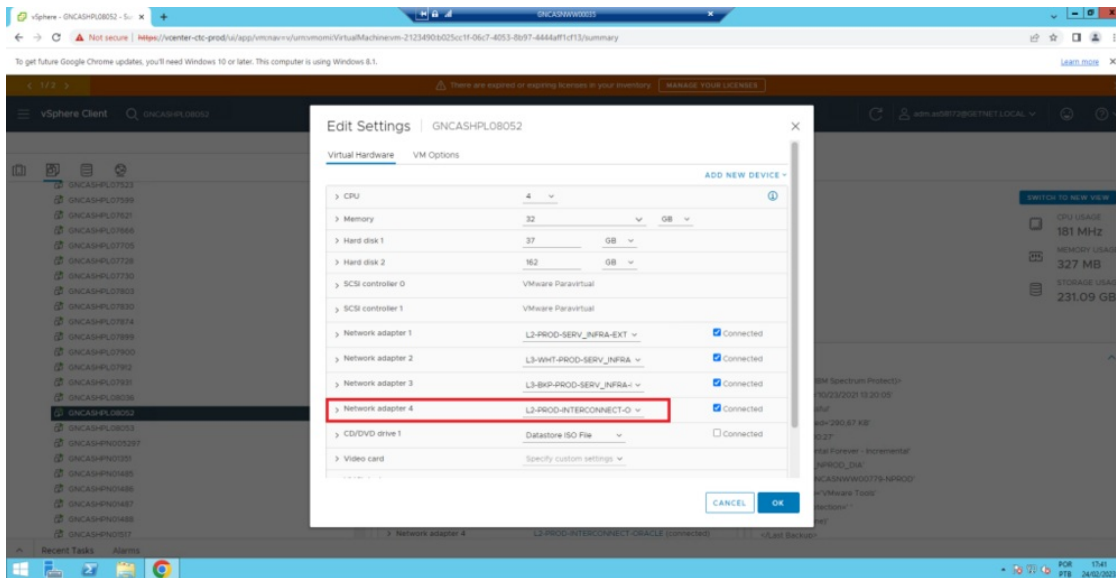

Fiz um novo restart nos 2 hosts para garantir o Interconnect funcionado.

Evidência das interfaces de rede no S.O:

```
[root@GNCASHPL08052 ~]# ifconfig -a
ens161: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 22.240.237.182 netmask 255.255.255.0 broadcast 22.240.237.255
    inet6 fe80::250:56ff:feb6:1c60 prefixlen 64 scopeid 0x20<link>
    ether 00:50:56:b6:1c:60 txqueuelen 1000 (Ethernet)
    RX packets 69 bytes 5923 (5.7 KiB)
    RX errors 0 dropped 8 overruns 0 frame 0
    TX packets 15 bytes 1102 (1.0 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

ens192: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 180.104.135.221 netmask 255.255.255.0 broadcast 180.104.135.255
    inet6 fe80::250:56ff:feb6:ec42 prefixlen 64 scopeid 0x20<link>
    ether 00:50:56:b6:ec:42 txqueuelen 1000 (Ethernet)
    RX packets 3117 bytes 556328 (543.2 KiB)
    RX errors 0 dropped 8 overruns 0 frame 0
    TX packets 4358 bytes 1798486 (1.7 MiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

ens193: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet6 fe80::35bc:3f77:f927:17bb prefixlen 64 scopeid 0x20<link>
    ether 00:50:56:b6:71:6c txqueuelen 1000 (Ethernet)
    RX packets 34 bytes 4770 (4.6 KiB)
    RX errors 0 dropped 3 overruns 0 frame 0
    TX packets 38 bytes 6287 (6.1 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

ens224: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 22.248.237.207 netmask 255.255.255.0 broadcast 22.248.237.255
    inet6 fe80::250:56ff:feb6:4a0e prefixlen 64 scopeid 0x20<link>
    ether 00:50:56:b6:4a:0e txqueuelen 1000 (Ethernet)
    RX packets 277 bytes 41217 (40.2 KiB)
    RX errors 0 dropped 7 overruns 0 frame 0
    TX packets 251 bytes 40632 (39.6 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 582 bytes 99844 (97.5 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 582 bytes 99844 (97.5 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

```
[root@GNCASHPL08052 ~]#
```

```
[root@GNCASHPL08053 ~]# ifconfig -a
ens161: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 22.240.237.183 netmask 255.255.255.0 broadcast 22.240.237.255
    inet6 fe80::250:56ff:feb6:eb4f prefixlen 64 scopeid 0x20<link>
    ether 00:50:56:b6:eb:4f txqueuelen 1000 (Ethernet)
    RX packets 67 bytes 5707 (5.5 KiB)
    RX errors 0 dropped 8 overruns 0 frame 0
    TX packets 15 bytes 1102 (1.0 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

ens192: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 180.104.135.222 netmask 255.255.255.0 broadcast 180.104.135.255
    inet6 fe80::250:56ff:feb6:d922 prefixlen 64 scopeid 0x20<link>
    ether 00:50:56:b6:d9:22 txqueuelen 1000 (Ethernet)
    RX packets 3264 bytes 564620 (551.3 KiB)
    RX errors 0 dropped 9 overruns 0 frame 0
    TX packets 4329 bytes 1753134 (1.6 MiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

ens193: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet6 fe80::3649:6e00:af10:799a prefixlen 64 scopeid 0x20<link>
    ether 00:50:56:b6:4e:e6 txqueuelen 1000 (Ethernet)
    RX packets 31 bytes 4863 (4.7 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 37 bytes 5954 (5.8 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

ens224: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 22.248.237.208 netmask 255.255.255.0 broadcast 22.248.237.255
    inet6 fe80::250:56ff:feb6:7c27 prefixlen 64 scopeid 0x20<link>
    ether 00:50:56:b6:7c:27 txqueuelen 1000 (Ethernet)
    RX packets 167 bytes 18569 (18.1 KiB)
    RX errors 0 dropped 8 overruns 0 frame 0
    TX packets 108 bytes 15402 (15.0 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 642 bytes 103444 (101.0 KiB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 642 bytes 103444 (101.0 KiB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

[root@GNCASHPL08053 ~]#
```


7- Adição de um disco compartilhado no nó 01

7.1- Desabilitar feature conflitante

Adição de disco compartilhado:


Para compartilhar o disco, o primeiro passo é desfazer a configuração do CTK (habilitada, por padrão nas novas VMs):

vm options > advanced > edit configuration . filtra por CTK ctkEnabled . False

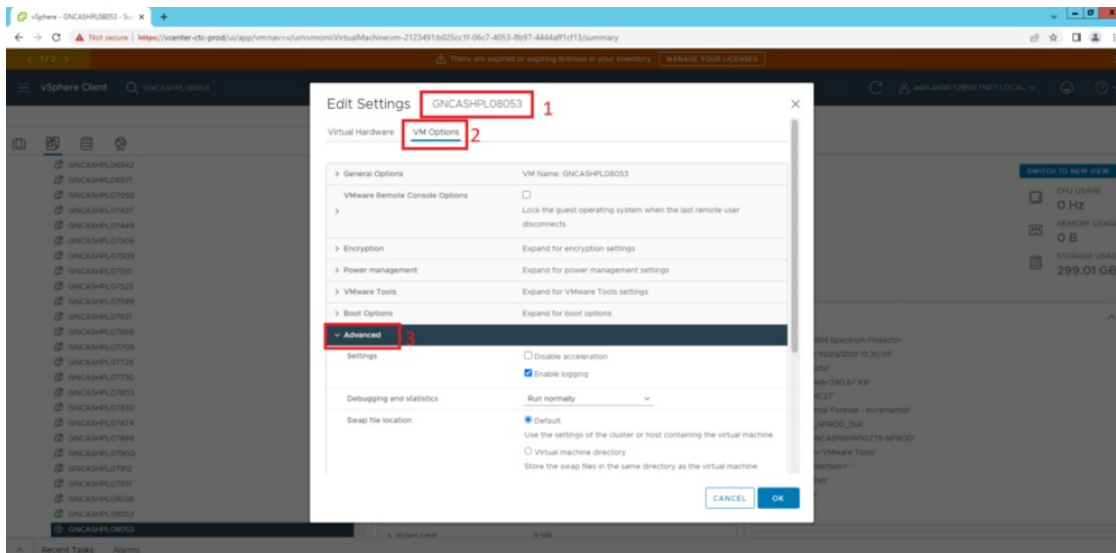

Na imagem anterior, desça o scroll até "EDIT CONFIGURATION..."

Em edit configuration, filtre por CTK, os 3 campos que vão aparecer, conforme imagem abaixo, altere-os para "FALSE":

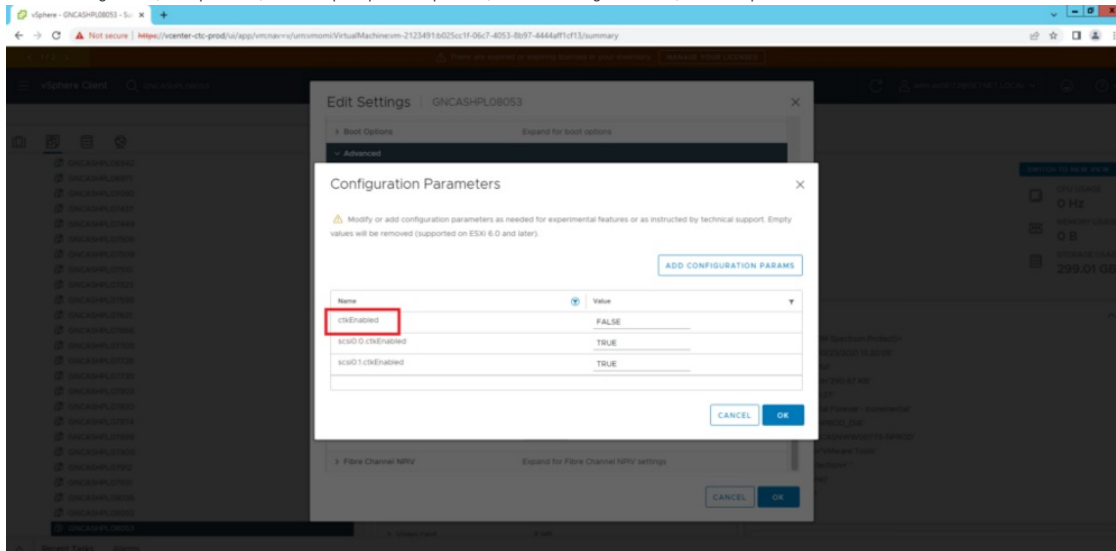


Antes da adição dos discos, é necessário configurar uma segunda controladora, do tipo "VMWare

7.2 – Adição de controladora

Paravirtual". Configurações:

- Change Type: VMWare Paravirtual
- SCSI Bus Sharing: none

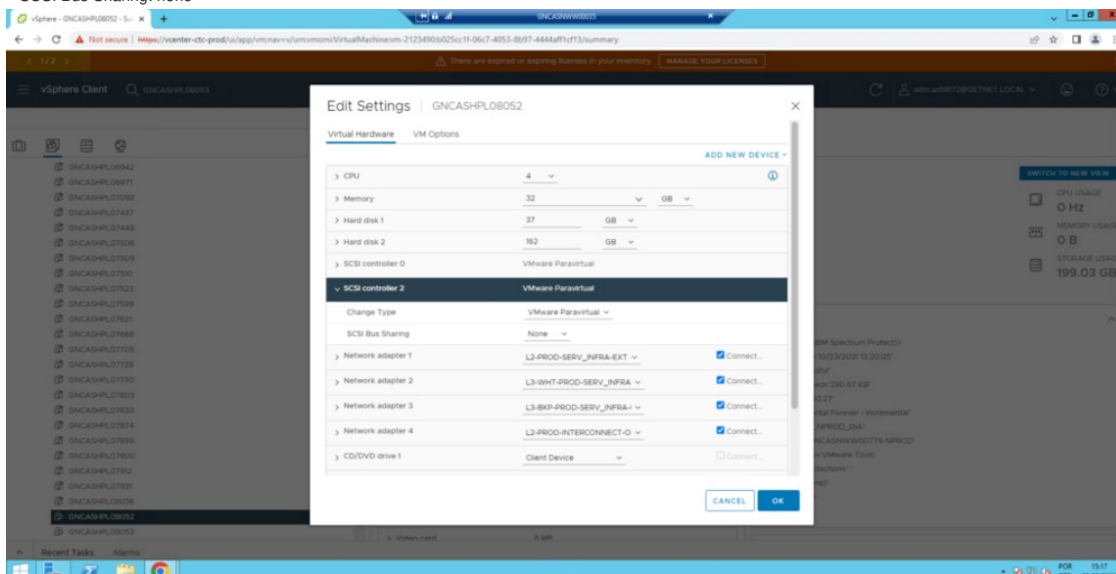


7.3 – Adição do disco compartilhado

Criação do disco, no nó 01, propriamente dito! Configurações importantes:

- Type: Thick Provision Eager Zeroed
- Sharing: Multi-writer
- Shares: high

Disk Mode: Independent – Persistent

Virtual Device Node: SCSI Controller 2 (aquela que configuramos previamente)

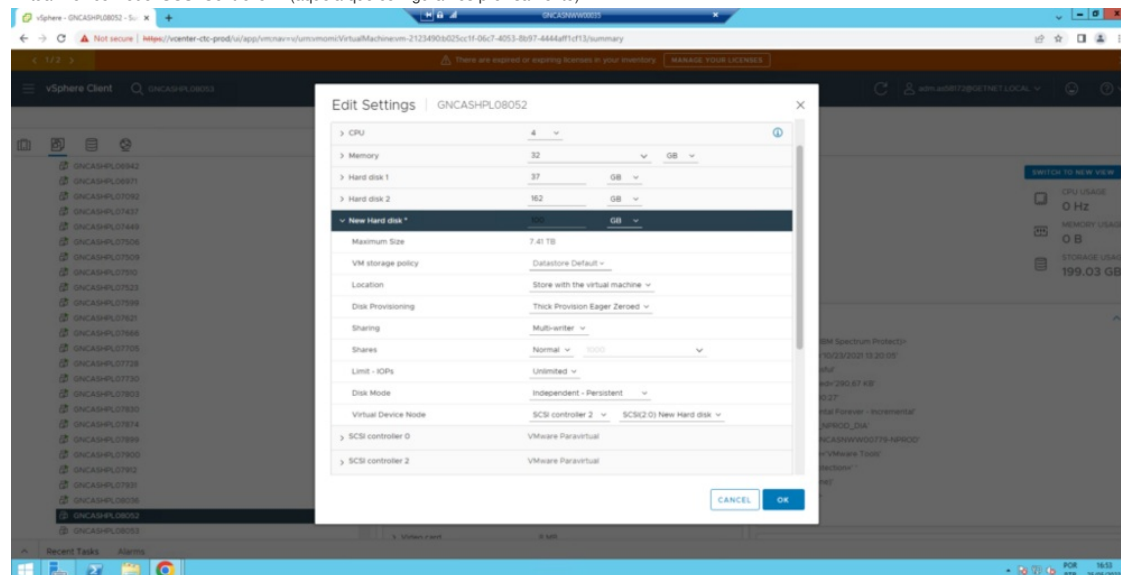

Como o tamanho do disco já é previamente alocado, demora!
Subimos a VM e já identificamos o disco de 100gb lá!

```
[root@GNCASHPL08052 ~]# fdisk -l
Disk /dev/sda: 37 GiB, 39728447488 bytes, 77594624 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: gpt
Disk identifier: 95993A3B-301E-46D2-9653-14795FF1B965

Device      Start      End  Sectors  Size Type
/dev/sda1    2048    1230847  1228800  600M EFI System
/dev/sda2   1230848   3327999  2097152   1G Linux filesystem
/dev/sda3   3328000  77594590 74266591 35.4G Linux filesystem
```

```
Disk /dev/sdc: 100 GiB, 107374182400 bytes, 209715200 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
```

```
Disk /dev/sdb: 162 GiB, 173946175488 bytes, 339738624 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: dos
Disk identifier: 0x607a5588
```

```
Device  Boot Start      End  Sectors  Size Id Type
/dev/sdb1    2048 339738623 339736576 162G 83 Linux
```

```
Disk /dev/mapper/rhel-root: 16.4 GiB, 17620271104 bytes, 34414592 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
```

```
Disk /dev/mapper/rhel-swap: 18 GiB, 19327352832 bytes, 37748736 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
```

```
Disk /dev/mapper/vg_oracle-lv_u01: 80 GiB, 85899345920 bytes, 167772160 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
```

```
Disk /dev/mapper/vg_oracle-lv_u02: 80 GiB, 85899345920 bytes, 167772160 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
```

Formatação do disco atribuído:

```
[root@GNCASHPL08052 ~]# fdisk /dev/sdc
```

Welcome to fdisk (util-linux 2.32.1).
Changes will remain in memory only, until you decide to write them.
Be careful before using the write command.

Device does not contain a recognized partition table.
Created a new DOS disklabel with disk identifier 0x80adad52.

Command (m for help): n

Partition type

- p primary (0 primary, 0 extended, 4 free)
- e extended (container for logical partitions)

Select (default p): p

Partition number (1-4, default 1):

First sector (2048-209715199, default 2048):

Last sector, +sectors or +size{K,M,G,T,P} (2048-209715199, default 209715199):

Created a new partition 1 of type 'Linux' and of size 100 GiB.

Command (m for help): w

The partition table has been altered.

Calling ioctl() to re-read partition table.

Syncing disks.

A configuração do oracleasm não é necessária pois o deploy do host já entrega o pacote configurado. Porém, segue o padrão:

```
[root@GNCASHPL08052 ~]# oracleasm configure -i  
Configuring the Oracle ASM library driver.
```

This will configure the on-boot properties of the Oracle ASM library driver. The following questions will determine whether the driver is loaded on boot and what permissions it will have. The current values will be shown in brackets ('[]'). Hitting <ENTER> without typing an answer will keep that current value. Ctrl-C will abort.


Default user to own the driver interface [grid]:

Default group to own the driver interface [asmadmin]:


Scan for Oracle ASM disks on boot (y/n) [y]: y

Writing Oracle ASM library driver configuration: done

Para adicionar o disco compartilhado no tópico anterior, é necessário saber em qual datastore a VM está. No caso da GNCASHPL08052, ela está no DS_LINUX_SHOULD_PMX2. Outro detalhe importante é pegar o nome do disco:

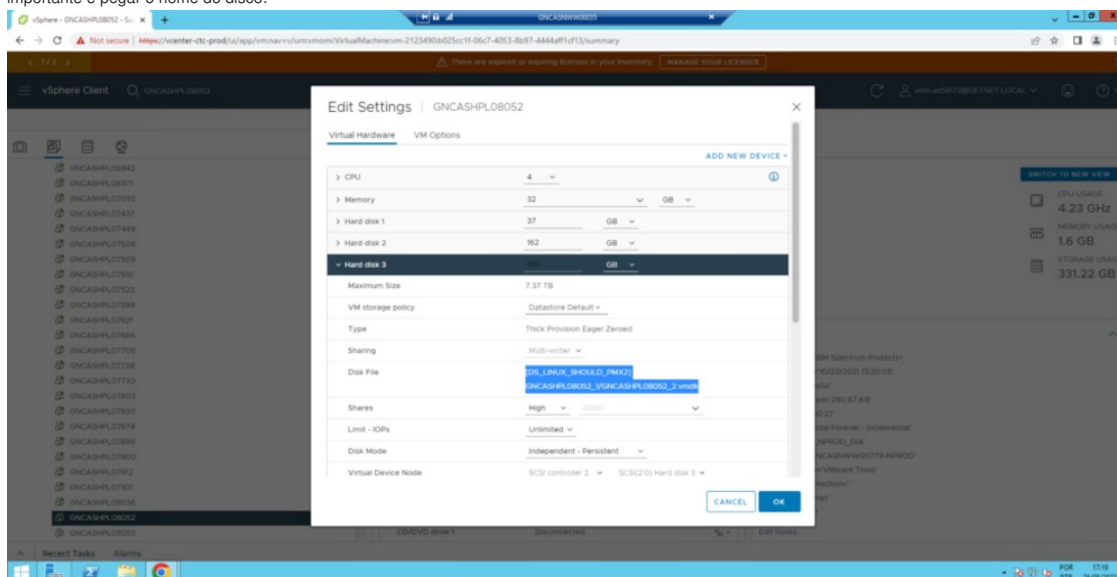

Já no segundo nó, invés de adicionar um disco, vamos adiciona rum disco existente:

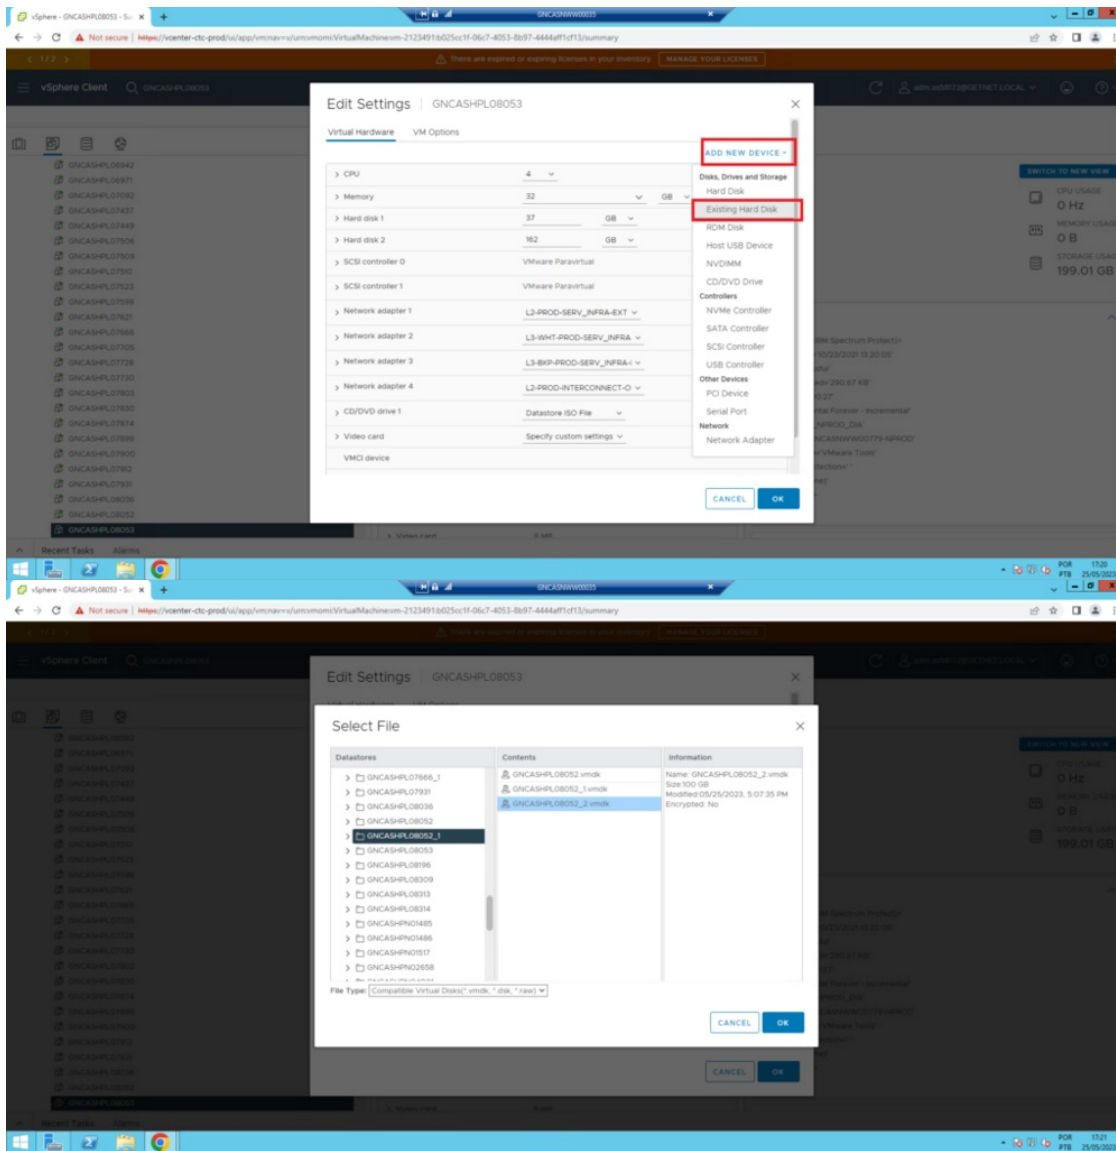

Configuração dos discos de ASM:

```
[root@GNCASHPL08052 ~]# oracleasm createdisk ASM01 /dev/sdc1
Writing disk header: done
Instantiating disk: done
[root@GNCASHPL08052 ~]# oracleasm listdisks
ASM01
```

NOTA: Necessário fazer o scan no nó 02 também:

```
[root@GNCASHPL08053 u01]# oracleasm listdisks
[root@GNCASHPL08053 u01]# oracleasm scandisks
Reloading disk partitions: done
Cleaning any stale ASM disks...
Scanning system for ASM disks...
Instantiating disk "ASM01"
[root@GNCASHPL08053 u01]# oracleasm listdisks
ASM01
```

Instalação:

Remoção de todos os arquivos legados:

```
cd /tmp
rm -rf *
rm -rf /etc/oraInst.loc
cd /etc/oracle
rm -rf *
rm -rf /etc/oratab
rm -rf /tmp/.oracle
```

para não ter problemas com acfs, remover também:

```
/usr/lib/methods/ucfgacfsctl -l ofscctl (Continue if error states "failed to look up ODM CuDv object class" or "device is already unconfigured")
/usr/lib/methods/ucfgadvmtctl -l advmtctl (Continue if error states "failed to look up ODM CuDv object class" or "device is already unconfigured")
/usr/lib/methods/udefacfsctl -l ofscctl (Continue if error states "failed to look up ODM CuDv object class")
/usr/lib/methods/udefadvmtctl -l advmtctl (Continue if error states "failed to look up ODM CuDv object class")
/usr/sbin/rmauth -h oracle
rmrole oracle_devmgmt
setkst
rm /usr/lib/drivers/oracle*
rm /usr/lib/methods/*advmt* /usr/lib/methods/*acfs*
rm -rf /sbin/helpers/acfs
rm /usr/sbin/acfsutil* /usr/sbin/advmtutil*
rm /sbin/acfsutil* /sbin/advmtutil*
```

Download dos binários novos:

```
su - grid
. grid_profile
cd /u02/oracle/patches
```

```
wget https://repository.getnet.com.br/binarios/oracle/odb/PST19C_TEMPLATE/LINUX.X64_193000_grid_home.zip
wget https://repository.getnet.com.br/binarios/oracle/odb/PST19C_TEMPLATE/LINUX.X64_193000_db_home.zip
wget https://repository.getnet.com.br/binarios/oracle/odb/PST19C_TEMPLATE/p6880880_190000_Linux-x86-64.zip
```

```
wget https://repository.getnet.com.br/binarios/oracle/odb/PST19C_TEMPLATE/p34762026_190000_Linux-x86-64.zip
wget https://repository.getnet.com.br/binarios/oracle/odb/PST19C_TEMPLATE/p34786990_190000_Linux-x86-64.zip
wget https://repository.getnet.com.br/binarios/oracle/odb/PST19C_TEMPLATE/p34777391_190000_Linux-x86-64.zip
```

Profiles Criados:

```
vi /home/oracle/db_profile
```

```
export ORACLE_BASE=/u01/app/oracle_19c
export ORACLE_HOME=/u01/app/oracle/product/19.18.0/dbhome_1
export ORACLE_SID=CONTROLM2
export OH=$ORACLE_HOME
export JAVA_HOME=/usr/bin/java
export GGS_HOME=/ggs
export PATH=.:usr/bin/java/bin:usr/local/bin:bin:usr/bin:usr/local/sbin:usr/sbin:/home/oracle/bin:$ORACLE_HOME/bin:$ORACLE_HOME/OPatch:$PATH
export CLASSPATH=$ORACLE_HOME/JRE:$ORACLE_HOME/jlib:$ORACLE_HOME/rdbms/jlib:$ORACLE_HOME/network/jlib
export LD_LIBRARY_PATH=$ORACLE_HOME/lib:$ORACLE_HOME/oracm/lib:/lib:/usr/lib:/usr/local/lib
export LIBPATH=/ggs:$ORACLE_HOME/lib:/usr/lib:$LIBPATH
```

```
chmod 775 /home/oracle/db_profile
chown oracle:oinstall /home/oracle/db_profile
vi /home/grid/grid_profile
```

```
export ORACLE_BASE=/u01/app/grid_19c
export ORACLE_HOME=/u01/app/19.18.0/grid
export ORACLE_SID=+ASM;
export OH=$ORACLE_HOME
export PATH=$ORACLE_HOME/bin:$ORACLE_HOME/OPatch:$PATH
export LD_LIBRARY_PATH=$ORACLE_HOME/lib:/lib:/usr/lib
```

```
chmod 775 /home/grid/grid_profile
chown grid:oinstall /home/grid/grid_profile
```

```
mkdir -p /u01/app/oracle/product/19.18.0/dbhome_1
mkdir -p /u01/app/19.18.0/grid
chown -R grid:oinstall /u01/app/19.18.0/
chown -R oracle:oinstall /u01/app/oracle/product/19.18.0
mkdir -p /u01/app/grid_19c
mkdir -p /u01/app/oracle_19c
chown -R grid:oinstall /u01/app/grid_19c/
chown -R oracle:oinstall /u01/app/oracle_19c/
chmod 775 /u01/app/oracle_19c/
chmod 775 /u01/app/grid_19c/
```

Unzip dos binários do Grid Infrastructure no nó 01

```
[grid@GNCASHPL08052 ~]$ . grid_profile
[grid@GNCASHPL08052 ~]$ cd $ORACLE_HOME
[grid@GNCASHPL08052 grid]$ pwd
/u01/app/19.18.0/grid
[grid@GNCASHPL08052 grid]$ cp /u02/oracle/patches/LINUX.X64_193000_grid_home.zip .
[grid@GNCASHPL08052 grid]$ unzip LINUX.X64_193000_grid_home.zip
```

Unzip dos binários do Oracle Database no nó 01

```
[oracle@GNCASHPL08052 ~]$ . db_profile
[oracle@GNCASHPL08052 ~]$ cd $ORACLE_HOME
[oracle@GNCASHPL08052 dbhome_1]$ pwd
/u01/app/oracle/product/19.18.0/dbhome_1
[oracle@GNCASHPL08052 dbhome_1]$ cp /u02/oracle/patches/LINUX.X64_193000_db_home.zip .
[oracle@GNCASHPL08052 dbhome_1]$ unzip LINUX.X64_193000_db_home.zip
```

Configuração do SSH (user grid e user oracle).

NOTA: Necessário adicionar o grupo oinstall o /etc/ssh/sshd_config:

NOTA2: sempre rode os scripts de um nó para o outro e repito ao contrário.

```
[root@GNCASHPL08053 ~]# vi /etc/ssh/sshd_config
# Allowed Groups
AllowGroups oinstall GL_Acesso_SSH GG_Acesso_Infra-Estrutura_TS GG_Acesso_EquipeDBA GG_GNCASHPL08053_USR GG_GNCASHPL0
8053_ADM
--- Última linha

[grid@GNCASHPL08053 ~]$ . grid_profile
[grid@GNCASHPL08052 grid]$ cd $ORACLE_HOME/oui/prov/resources/scripts/
[grid@GNCASHPL08052 grid]$ ./sshUserSetup.sh -user grid -hosts "GNCASHPL08052 GNCASHPL08053" -noPromptPassphrase

-- dica importante: é gerada uma linha de ssh para cada host, coloco as 2 linhas em cada authorized keys , exemplo:
[grid@GNCASHPL08052 ~]$ cat /home/grid/.ssh/authorized_keys
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQgQDg79YrzQfVIWYcm8jLeiyt3+6Lv4jl/9n+s9FwVdTp9DXN2m2QywZUCcX7VtNACdZA5VuJOL3
6vXbJJVAHE2PDX8JVWPdCpdKShPz2+HqvruuF7E4BO+4HhwXfCUPSSfVOof97lf2HggZEsTmmIVDFimIMqV0vLgCrUz9/9saR.JQ== grid@GNC
ASHPL08053
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQgQC/nzadaTy6BUlpGcUewzm+qDk7NAsYe0HQZWqHXkza/bqYYvOcx8/a5Q3C1Q4pRSpu1YBe
DGkQr2mHuCP756zOkO+40BgeZ0KC4X2t+SpUpkiIwvHfyBJ9OCJDacXViq6NYopEimsKhdlybGbk5jK8IOzTarsdVBg2m9WswCCaw== grid@GN
CASHPL08052
[grid@GNCASHPL08052 ~]$

-- Teste

[grid@GNCASHPL08052 ~]$ . grid_profile
[grid@GNCASHPL08052 ~]$ /usr/bin/ssh -x -l grid GNCASHPL08053 date
Mon May 29 19:26:01 -03 2023
[grid@GNCASHPL08052 ~]$ /usr/bin/ssh -x -l grid GNCASHPL08052 date
Mon May 29 19:26:08 -03 2023

Fazer o mesmo para o user oracle:
./sshUserSetup.sh -user oracle -hosts "GNCASHPL08052 GNCASHPL08053" -noPromptPassphrase
```

Ajustes pré-install:

Umask: <https://www.cyberciti.biz/tips/understanding-linux-unix-umask-value-usage.html>
Ajustar o /etc/resolv.conf:

```
[root@GNCASHPL08053 network-scripts]# cat /etc/resolv.conf
# Generated by NetworkManager
domain getnet.local
nameserver 180.104.129.12
nameserver 180.104.135.15
nameserver 180.104.135.16
options timeout:1
```


Install

```
[adm.as58172@GNCASHPL08052 ~]$ xauth list
GNCASHPL08052/unix:10 MIT-MAGIC-COOKIE-1 52acd2c0c70de57d7a4fba8017714360
GNCASHPL08052/unix:11 MIT-MAGIC-COOKIE-1 5fc0a9fa33696d1f44ac630b5e4bdb0d
GNCASHPL08052/unix:12 MIT-MAGIC-COOKIE-1 7c03258a9657b9bfc08da8222d032515
[adm.as58172@GNCASHPL08052 ~]$ echo $DISPLAY
localhost:10.0
[adm.as58172@GNCASHPL08052 ~]$ sudo su -
Last login: Mon May 29 19:29:32 -03 2023 on pts/0
[root@GNCASHPL08052 ~]# su - grid
Last login: Mon May 29 19:29:01 -03 2023 on pts/0
[grid@GNCASHPL08052 ~]$ . grid_profile
[grid@GNCASHPL08052 ~]$ cd $ORACLE_HOME
[grid@GNCASHPL08052 grid]$ pwd
/u01/app/19.18.0/grid
[grid@GNCASHPL08052 grid]$ xauth add GNCASHPL08052/unix:10 MIT-MAGIC-COOKIE-1 52acd2c0c70de57d7a4fba8017714360
[grid@GNCASHPL08052 grid]$ export DISPLAY=localhost:10.0

[grid@GNCASHPL08052 grid]$ rm -rf OPatch/
[grid@GNCASHPL08052 grid]$ cp /u02/oracle/patches/p6880880_190000_Linux-x86-64.zip .
[grid@GNCASHPL08052 grid]$ unzip p6880880_190000_Linux-x86-64.zip



[grid@GNCASHPL08052 grid]$ ./gridSetup.sh
```

Logo na minha primeira tentativa, tomei um erro:

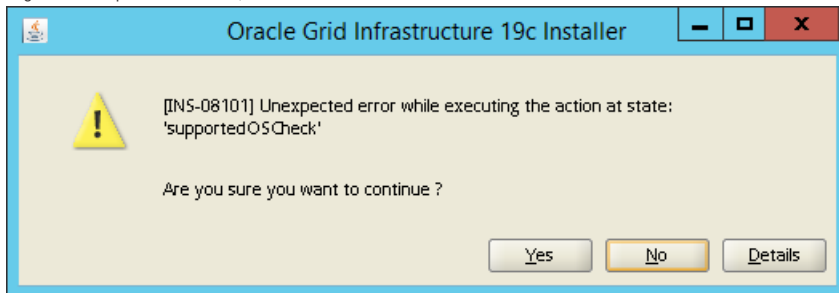

Fazendo o troubleshooting, cheguei a seguinte variável:
NOTA: rodar antes de chamar o gridsetup.

```
[grid@GNCASHPL08052 ~]$ export CV_ASSUME_DISTID=OEL8.1
```

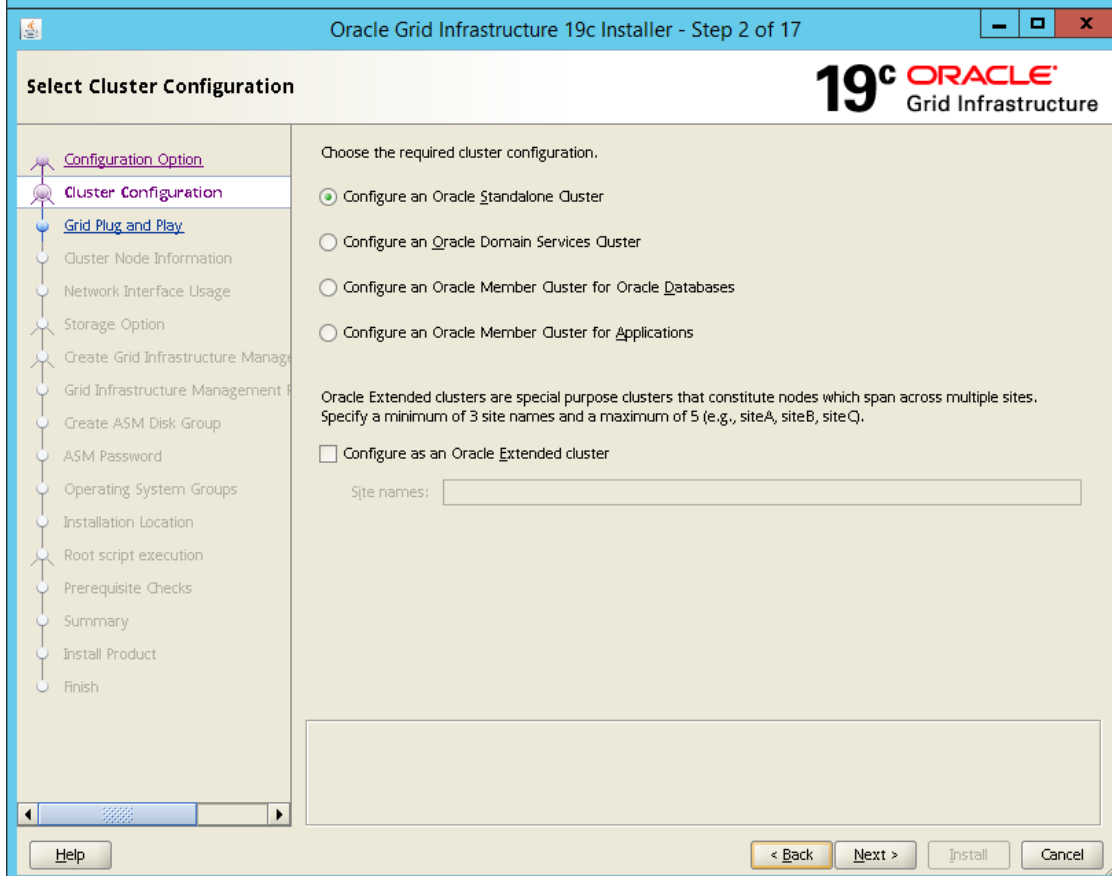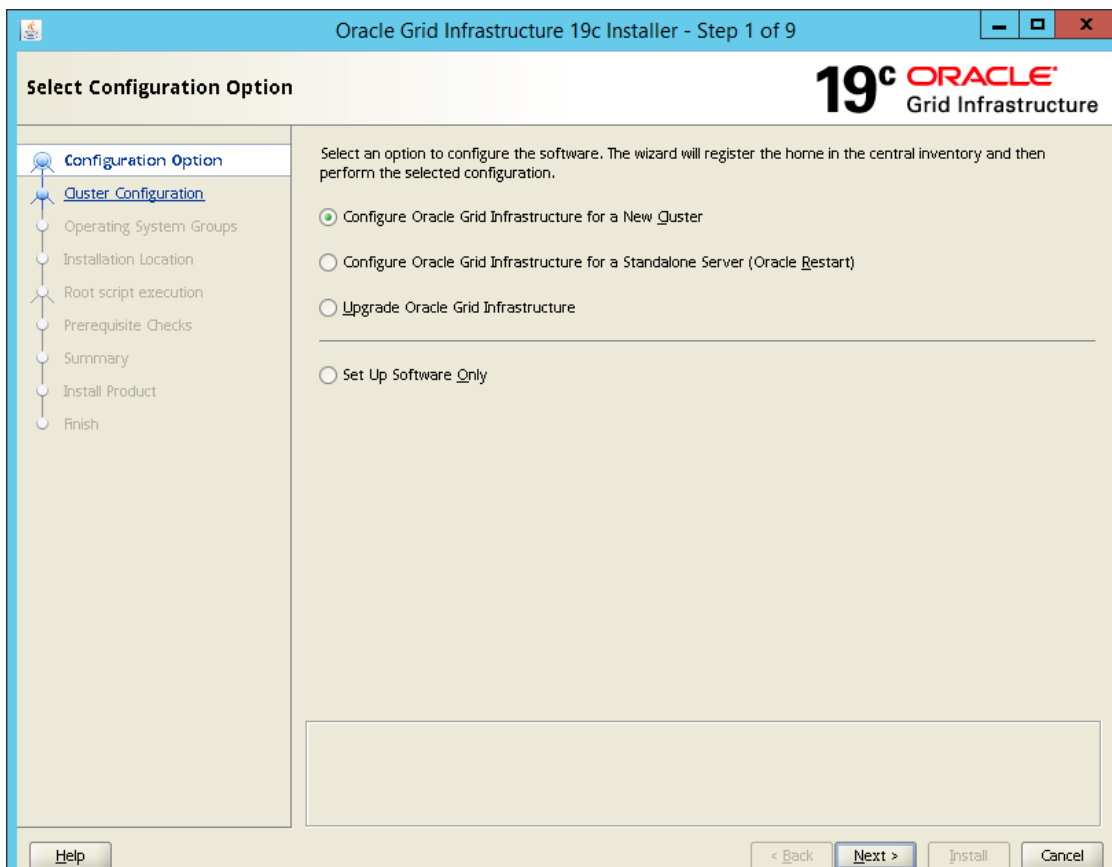

Oracle Grid Infrastructure 19c Installer - Step 3 of 17

Grid Plug and Play Information

Configuration Option

Cluster Configuration

Grid Plug and Play

Cluster Node Information

Network Interface Usage

Storage Option

Create Grid Infrastructure Management Repository

Grid Infrastructure Management Repository

Create ASM Disk Group

ASM Password

Operating System Groups

Installation Location

Root script execution

Prerequisite Checks

Summary

Install Product

Finish

Single Client Access Name (SCAN) allows clients to use one name in connection strings to connect to the cluster as a whole. Client connect requests to the SCAN name can be handled by any cluster node.

☒ Create Local SCAN

Cluster Name:

SCAN Name:

SCAN Port:

☐ Use Shared SCAN

SCAN Client Data:

☐ **Configure GNS**

☐ Configure nodes Virtual IPs as assigned by the Dynamic Networks

☒ Create a new GNS

GNS VIP Address:

GNS Sub Domain:

☐ Use Shared GNS

GNS Client Data:

Help

< Back

Next >

Install

Cancel

Oracle Grid Infrastructure 19c Installer - Step 4 of 17

Cluster Node Information

Configuration Option

Cluster Configuration

Grid Plug and Play

Cluster Node Information

Network Interface Usage

Storage Option

Create Grid Infrastructure Management Repository

Grid Infrastructure Management Repository

Create ASM Disk Group

ASM Password

Operating System Groups

Installation Location

Root script execution

Prerequisite Checks

Summary

Install Product

Finish

Provide the list of nodes to be managed by Oracle Grid Infrastructure with their Public Hostname and Virtual Hostname.

Public Hostname	Virtual Hostname
GNCASHPL08052	GNCASHPL08052-vip

SSH connectivity...

Help

< Back

Next >

Install

Cancel

Clique em "Add.."

Add Cluster Node Information

☒ Add a single node

Specify the name for the public host name. If you want to configure virtual host name manually, then you will be prompted for the virtual IP address.

Public Hostname:

Virtual Hostname:

☐ Add a range of nodes

Specify the node range expression for the required nodes. You can use the following patterns to build the expression: Constant strings such as "myhostname", single character ranges such as "[a-z]" and multi-character sequences such as "[ab|cd|.]"

Public Hostname Expression:

Virtual Hostname Suffix:

Nodes to be generated:

Oracle Grid Infrastructure 19c Installer - Step 4 of 17

Cluster Node Information

Configuration Option

Cluster Configuration

Grid Plug and Play

Cluster Node Information

Network Interface Usage

Storage Option

Create Grid Infrastructure Management Repository

Grid Infrastructure Management Repository

Create ASM Disk Group

ASM Password

Operating System Groups

Installation Location

Root script execution

Prerequisite Checks

Summary

Install Product

Finish

Provide the list of nodes to be managed by Oracle Grid Infrastructure with their Public Hostname and Virtual Hostname.

Public Hostname	Virtual Hostname
GNCASHPL08052	GNCASHPL08052-vip
GNCASHPL08053	GNCASHPL08053-vip


SSH connectivity...

Use Cluster Configuration File...

Clique em "SSH connectivity..."


Consegui configurar, neste ponto, apenas usando a mesma senha, nos dois nós, para o user grid – pgoldstandard2015

Assim como AIX, peguei o mesmo erro de SSH, onde é necessário aplicar um patch:

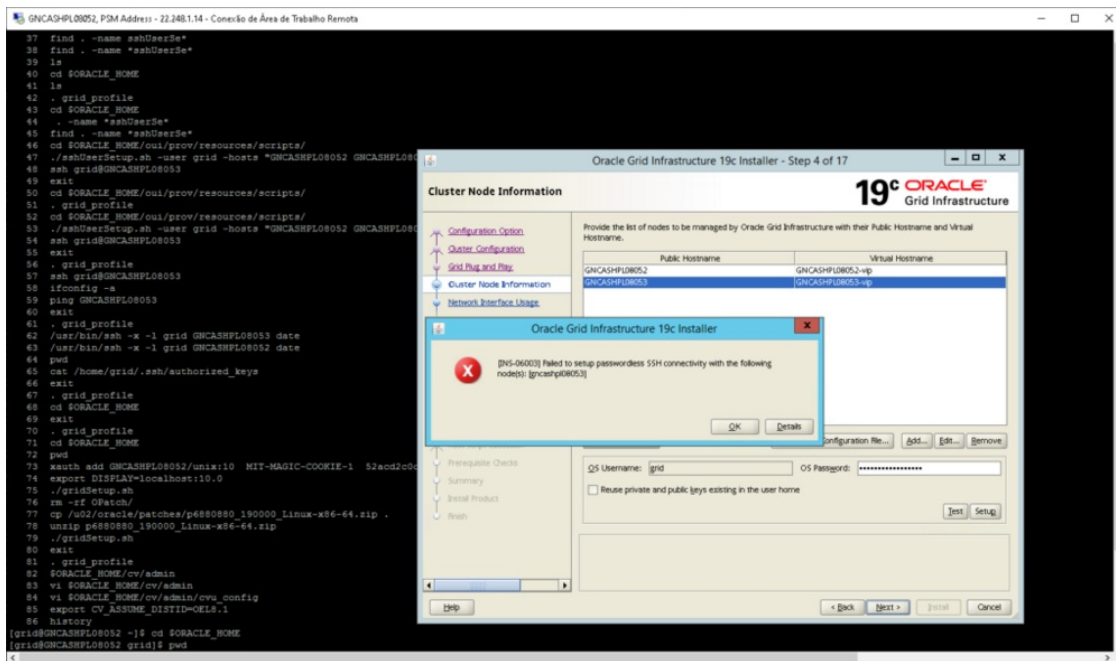

INS-00006 GI RunInstaller Fails If OpenSSH Is Upgraded to 8.x (Doc ID 2555697.1)

Download do patch:

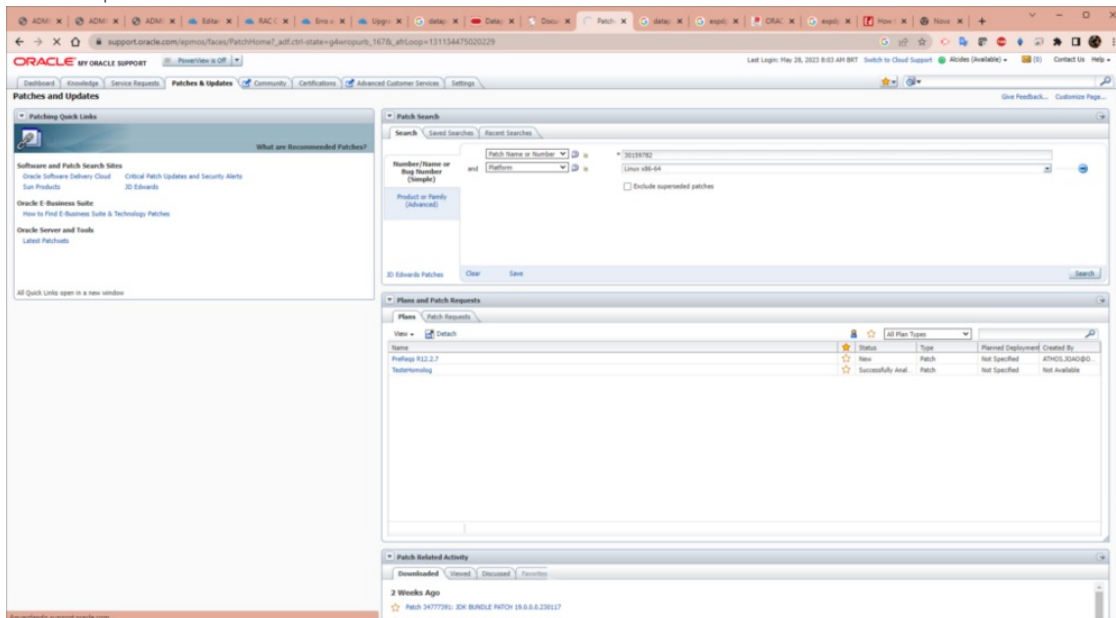

Já no repositório da getnet, deixei:

wget https://repository.getnet.com.br/binarios/oracle/odb/PST19C_TEMPLATE/p30159782_195000OCWRU_Linux-x86-64.zip

Aplicando o patch na home:

```
[grid@GNCASHPL08052 patches]$ cd $ORACLE_HOME
[grid@GNCASHPL08052 grid]$ ./gridSetup.sh -silent -applyRUR /u02/oracle/patches/30159782/
Preparing the home to patch...
Applying the patch /u02/oracle/patches/30159782/...
Successfully applied the patch.
The log can be found at: /tmp/GridSetupActions2023-05-29_08-16-24PM/installerPatchActions_2023-05-29_08-16-24PM.log
Launching Oracle Grid Infrastructure Setup Wizard...

[FATAL] [INS-40426] Grid installation option has not been specified.
ACTION: Specify the valid installation option.
```

Disparando novamente:

Oracle Grid Infrastructure 19c Installer - Step 4 of 17

19^c ORACLE[®]

Grid Infrastructure

Cluster Node Information

Configuration Option

Cluster Configuration

Grid Plug and Play

Cluster Node Information

Network Interface Usage

Storage Option

Create Grid Infrastructure Management Repository

Create Grid Infrastructure Management Repository

Create ASM Disk Group

ASM Password

Operating System Groups

Installation Location

Root script execution

Prerequisite Checks

Summary

Install Product

Finish

Provide the list of nodes to be managed by Oracle Grid Infrastructure with their Public Hostname and Virtual Hostname.

Public Hostname	Virtual Hostname
GNCASHPL08052	GNCASHPL08052-vip
GNCASHPL08053	GNCASHPL08053-vip

SSH connectivity...

Use Cluster Configuration File...

Add...

Edit...

Remove

OS Username: grid

OS Password:

☐ Reuse private and public keys existing in the user home

Test

Setup

Help

< Back

Next >

Install

Cancel

Oracle Grid Infrastructure 19c Installer - Step 5 of 17

19^c ORACLE[®]

Grid Infrastructure

Specify Network Interface Usage

Configuration Option

Cluster Configuration

Grid Plug and Play

Cluster Node Information

Network Interface Usage

Storage Option

Create Grid Infrastructure Management Repository

Create Grid Infrastructure Management Repository

Create ASM Disk Group

ASM Password

Operating System Groups

Installation Location

Root script execution

Prerequisite Checks

Summary

Install Product

Finish

Private interfaces are used by Oracle Grid Infrastructure for internode traffic.

Interface Name	Subnet	Use for
ens161	22.240.237.0	Do Not Use
ens192	180.104.135.0	Public
ens193	172.27.128.0	ASM & Private
ens224	22.248.237.0	Do Not Use



Help

< Back

Next >

Install

Cancel

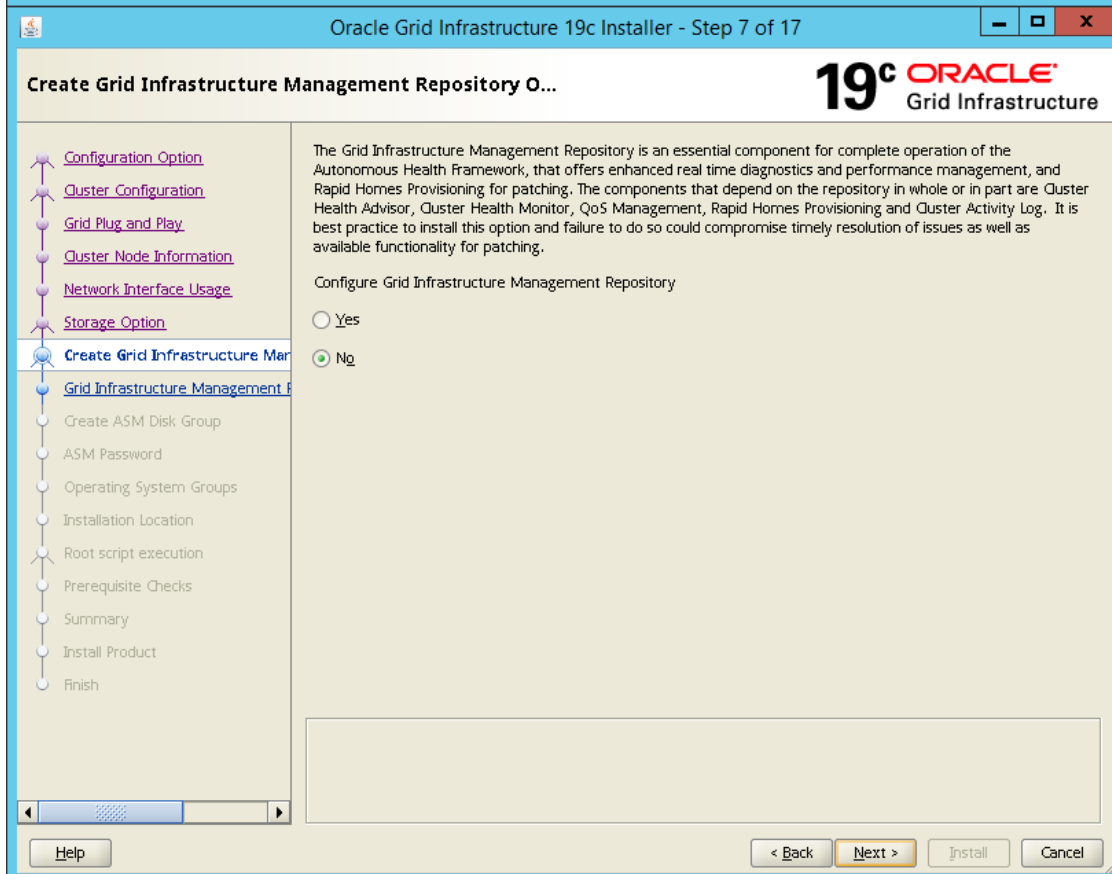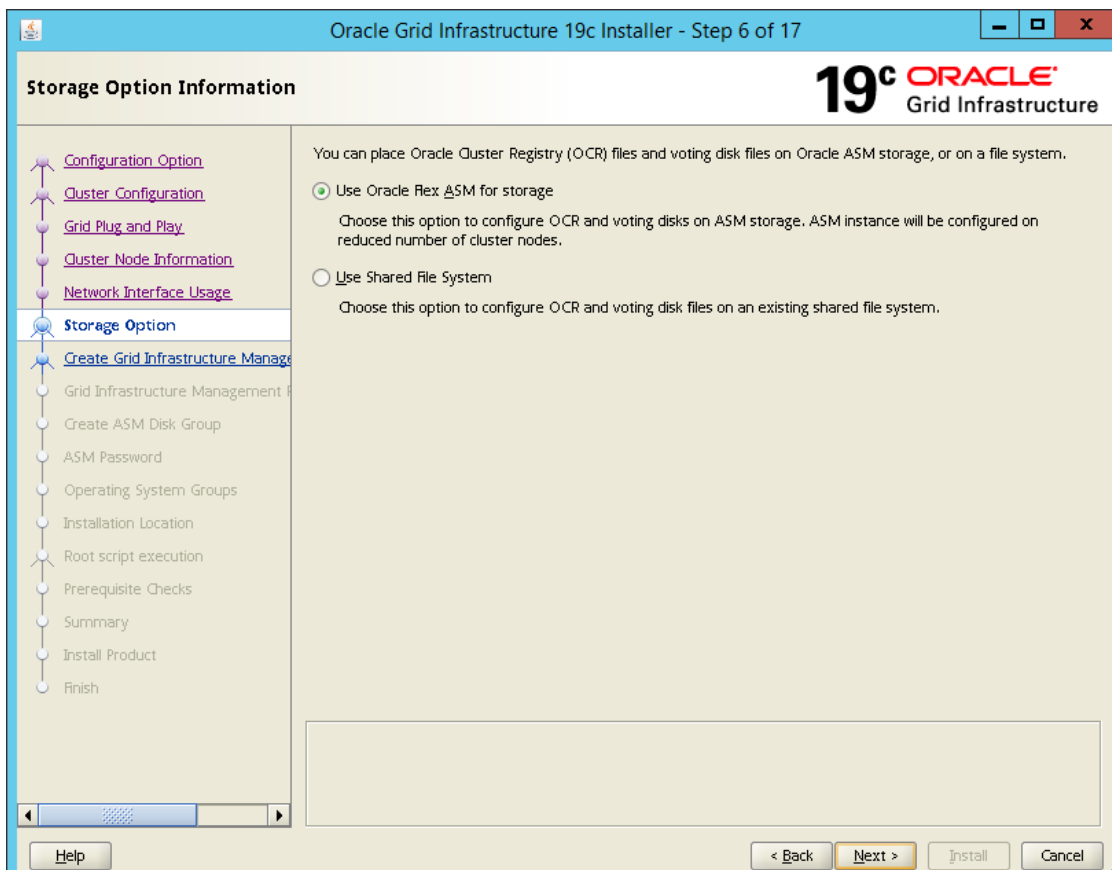

Oracle Grid Infrastructure 19c Installer - Step 8 of 16

19c

ORACLE

Grid Infrastructure

Create ASM Disk Group

Configuration Option

Cluster Configuration

Grid Plug and Play

Cluster Node Information

Network Interface Usage

Storage Option

Create Grid Infrastructure Manag...

Create ASM Disk Group

ASM Password

Operating System Groups

Installation Location

Root script execution

Prerequisite Checks

Summary

Install Product

Finish

OCR and Voting disk data will be stored in the following ASM Disk group. Select disks and characteristics of this Disk group.

Disk group name

DATA

Redundancy

☐ Flex
☐ High
☐ Normal
☒ External

Allocation Unit Size

4

MB

Select Disks

Show Candidate/Provisioned Disks

	Disk Path	Size (in MB)	Status
☒	/dev/oracleasm/disks/ASM01	30719	Provisioned

Disk Discovery Path: /dev/oracleasm/disks/*

Change Discovery Path...

☐ Configure Oracle ASM filter Driver

Select this option to configure ASM Filter Driver(AFD) to simplify configuration and management of disk devices by Oracle ASM.

Help

< Back

Next >

Install

Cancel

Lembre-se de indicar:

Redundancy: external

Change Discovery Path... /dev/oracleasm/disks/*

Change Disk Discovery Path

Changing the Disk Discovery Path will affect all Disk Groups

Disk Discovery Path:

/dev/oracleasm/disks/*

OK

Cancel

Core Assets/Documentation/GETNET -
DBA
ORAEX Cloud Consulting | GETNET | Jan 30, 2026 - 12:04am

30

Oracle Grid Infrastructure 19c Installer - Step 9 of 16

19c ORACLE Grid Infrastructure

Specify ASM Password

Configuration Option

Cluster Configuration

Grid Plug and Play

Cluster Node Information

Network Interface Usage

Storage Option

Create Grid Infrastructure Manag

Create ASM Disk Group

ASM Password

Operating System Groups

Installation Location

Root script execution

Prerequisite Checks

Summary

Install Product

Finish

The new Oracle Automatic Storage Management (Oracle ASM) instance requires its own SYS user with SYSASM privileges for administration. Oracle recommends that you create a less privileged ASMSNMP user with SYSDBA privileges to monitor the ASM instance.

Specify the password for these user accounts.

☐ Use different passwords for these accounts

	Password	Confirm Password
SYS		
ASMSNMP		

☒ Use same passwords for these accounts

Specify Password: Confirm Password:

Messages:

Specify Password:[INS-30011] The password entered does not conform to the Oracle recommended standards.

Help

< Back

Next >

Install

Cancel

Oracle Grid Infrastructure 19c Installer - Step 10 of 18

19c ORACLE Grid Infrastructure

Failure Isolation Support

Configuration Option

Cluster Configuration

Grid Plug and Play

Cluster Node Information

Network Interface Usage

Storage Option

Create Grid Infrastructure Manag

Create ASM Disk Group

ASM Password

Failure Isolation

Management Options

Operating System Groups

Installation Location

Root script execution

Prerequisite Checks

Summary

Install Product

Finish

Choose one of the following Failure Isolation Support options.

☐ Use Intelligent Platform Management Interface (IPMI)

To ensure successful installation with IPMI enabled, ensure your IPMI drivers are properly installed and enabled.

User Name :

Password :

☒ Do not use Intelligent Platform Management Interface (IPMI)

Help

< Back

Next >

Install

Cancel

Oracle Grid Infrastructure 19c Installer - Step 13 of 18

19c ORACLE

Grid Infrastructure

Specify Installation Location

Configuration Option

Cluster Configuration

Grid Plug and Play

Cluster Node Information

Network Interface Usage

Storage Option

Create Grid Infrastructure Manage

Create ASM Disk Group

ASM Password

Failure Isolation

Management Options

Operating System Groups

Installation Location

Root script execution

Prerequisite Checks

Summary

Install Product

Finish

Specify the Oracle base. The Oracle base directory for the Oracle Grid Infrastructure installation is the location where diagnostic and administrative logs, and other logs associated with Oracle ASM and Oracle Clusterware are stored. This location would also contain files pertaining to the configuration of Oracle Clusterware.

Oracle base:

This software directory is the Oracle Grid Infrastructure home directory.

Software location: /u01/app/19.18.0/grid

Oracle Grid Infrastructure 19c Installer - Step 14 of 19

19c ORACLE

Grid Infrastructure

Create Inventory

Configuration Option

Cluster Configuration

Grid Plug and Play

Cluster Node Information

Network Interface Usage

Storage Option

Create Grid Infrastructure Manage

Create ASM Disk Group

ASM Password

Failure Isolation

Management Options

Operating System Groups

Installation Location

Create Inventory

Root script execution

Prerequisite Checks

Summary

Install Product

Finish

You are starting your first installation on this host. Specify a directory for installation metadata files (for example, install log files). This directory is called the "inventory directory". The installer automatically sets up subdirectories for each product to contain inventory data. The subdirectory for each product typically requires 150 kilobytes of disk space.

Inventory Directory:

Members of the following operating system group (the primary group) will have write permission to the inventory directory (oraInventory).

oraInventory Group Name: oinstall

Oracle Grid Infrastructure 19c Installer - Step 15 of 19

19c ORACLE Grid Infrastructure

Root script execution configuration

- Configuration Option
- Cluster Configuration
- Grid Plug and Play
- Cluster Node Information
- Network Interface Usage
- Storage Option
- Create Grid Infrastructure Manag
- Create ASM Disk Group
- ASM Password
- Failure Isolation
- Management Options
- Operating System Groups
- Installation Location
- Create Inventory
- Root script execution
- Prerequisite Checks
- Summary
- Install Product
- Finish

During the software configuration, certain operations have to be performed as "root" user. You can choose to have the installer perform these operations automatically by specifying inputs for one of the options below. The input specified will also be used by the installer to perform additional prerequisite checks.

☐ Automatically run configuration scripts

☒ Use "root" user credential

Password :

☐ Use sudo

Program path :

User name :

Password :

Help

< Back

Next >

Install

Cancel

Oracle Grid Infrastructure 19c Installer - Step 16 of 19

19c ORACLE Grid Infrastructure

Perform Prerequisite Checks

- Configuration Option
- Cluster Configuration
- Grid Plug and Play
- Cluster Node Information
- Network Interface Usage
- Storage Option
- Create Grid Infrastructure Manag
- Create ASM Disk Group
- ASM Password
- Failure Isolation
- Management Options
- Operating System Groups
- Installation Location
- Create Inventory
- Root script execution
- Prerequisite Checks
- Summary
- Install Product
- Finish

Verification Result

Fixup Result

Some of the minimum requirements for installation are not completed. Review and fix the issues listed in the following table, and recheck the system.

☒ Ignore All

Checks	Status	Fixable
Checks		
Domain Sockets	Ignored	No
RPM Package Manager database	Ignored	No
Kernel retpoline support	Ignored	No

This task verifies Clusterware domain sockets [\(more details\)](#)

Check Failed on Nodes: [gncashp108053, gncashp108052]


Help

< Back

Next >

Install

Cancel

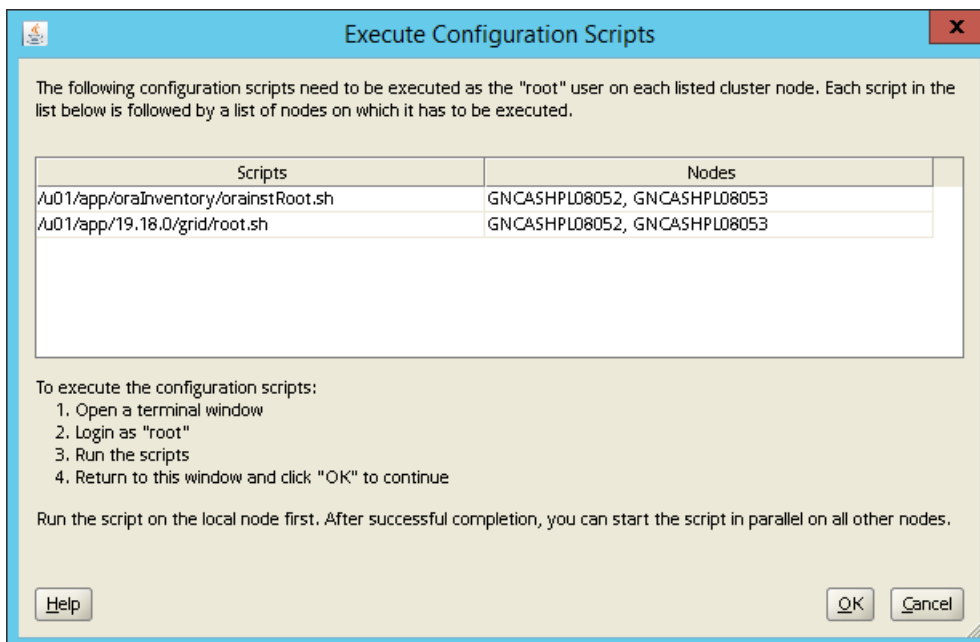

```
[root@GNCASHPL08052 disks]# /u01/app/orainventory/orainstRoot.sh
Changing permissions of /u01/app/orainventory.
Adding read,write permissions for group.
Removing read,write,execute permissions for world.
```

```
Changing groupname of /u01/app/orainventory to oinstall.
The execution of the script is complete.
```

```
[root@GNCASHPL08053 u01]# /u01/app/orainventory/orainstRoot.sh
Changing permissions of /u01/app/orainventory.
Adding read,write permissions for group.
Removing read,write,execute permissions for world.
```

```
Changing groupname of /u01/app/orainventory to oinstall.
The execution of the script is complete.
```

```
[root@GNCASHPL08052 disks]# /u01/app/19.18.0/grid/root.sh
Performing root user operation.
```

```
The following environment variables are set as:
ORACLE_OWNER= grid
ORACLE_HOME= /u01/app/19.18.0/grid
```

```
Enter the full pathname of the local bin directory: [/usr/local/bin]:
The contents of "dbhome" have not changed. No need to overwrite.
The contents of "oraenv" have not changed. No need to overwrite.
The contents of "coraenv" have not changed. No need to overwrite.
```

```
Creating /etc/oratab file...
Entries will be added to the /etc/oratab file as needed by
Database Configuration Assistant when a database is created
Finished running generic part of root script.
Now product-specific root actions will be performed.
Relinking oracle with rac_on option
Using configuration parameter file: /u01/app/19.18.0/grid/crs/install/crsconfig_params
The log of current session can be found at:
/u01/app/grid_19c/crsdata/gncashpl08052/crsconfig/rootcrs_gncashpl08052_2023-05-29_10-13-13PM.log
2023/05/29 22:13:59 CLSRSC-594: Executing installation step 1 of 19: 'SetupTFA'.
2023/05/29 22:13:59 CLSRSC-594: Executing installation step 2 of 19: 'ValidateEnv'.
2023/05/29 22:14:00 CLSRSC-363: User ignored prerequisites during installation
2023/05/29 22:14:00 CLSRSC-594: Executing installation step 3 of 19: 'CheckFirstNode'.
2023/05/29 22:14:03 CLSRSC-594: Executing installation step 4 of 19: 'GenSiteGUIDs'.
2023/05/29 22:14:05 CLSRSC-594: Executing installation step 5 of 19: 'SetupOSD'.
2023/05/29 22:14:05 CLSRSC-594: Executing installation step 6 of 19: 'CheckCRSConfig'.
2023/05/29 22:14:06 CLSRSC-594: Executing installation step 7 of 19: 'SetupLocalGPNP'.
```

```
2023/05/29 22:14:27 CLSRSC-594: Executing installation step 8 of 19: 'CreateRootCert'.
2023/05/29 22:14:33 CLSRSC-594: Executing installation step 9 of 19: 'ConfigOLR'.
2023/05/29 22:14:36 CLSRSC-4002: Successfully installed Oracle Trace File Analyzer (TFA) Collector.
2023/05/29 22:14:50 CLSRSC-594: Executing installation step 10 of 19: 'ConfigCHMOS'.
2023/05/29 22:14:51 CLSRSC-594: Executing installation step 11 of 19: 'CreateOHASD'.
2023/05/29 22:14:58 CLSRSC-594: Executing installation step 12 of 19: 'ConfigOHASD'.
2023/05/29 22:14:58 CLSRSC-330: Adding Clusterware entries to file 'oracle-ohasd.service'
2023/05/29 22:15:29 CLSRSC-594: Executing installation step 13 of 19: 'InstallAFD'.
2023/05/29 22:15:36 CLSRSC-594: Executing installation step 14 of 19: 'InstallACFS'.
2023/05/29 22:15:44 CLSRSC-594: Executing installation step 15 of 19: 'InstallKA'.
2023/05/29 22:15:50 CLSRSC-594: Executing installation step 16 of 19: 'InitConfig'.
Redirecting to /bin/systemctl restart rsyslog.service
```

ASM has been created and started successfully.

[DBT-30001] Disk groups created successfully. Check /u01/app/grid_19c/cfgtoollogs/asmca/asmca-230529PM101624.log for details.

```
2023/05/29 22:18:11 CLSRSC-482: Running command: '/u01/app/19.18.0/grid/bin/ocrconfig -upgrade grid oinstall'
```

CRS-4256: Updating the profile

Successful addition of voting disk ac3829e6dfec4f9abfe7429151024ff9.

Successfully replaced voting disk group with +DATA.

CRS-4256: Updating the profile

CRS-4266: Voting file(s) successfully replaced

##	STATE	File Universal Id	File Name	Disk group
----	-------	-------------------	-----------	------------

1.	ONLINE	ac3829e6dfec4f9abfe7429151024ff9	(/dev/oracleasm/disks/ASM01)	[DATA]
----	--------	----------------------------------	------------------------------	--------

Located 1 voting disk(s).

```
2023/05/29 22:20:07 CLSRSC-594: Executing installation step 17 of 19: 'StartCluster'.
```

```
2023/05/29 22:21:54 CLSRSC-343: Successfully started Oracle Clusterware stack
```

```
2023/05/29 22:21:54 CLSRSC-594: Executing installation step 18 of 19: 'ConfigNode'.
```

```
2023/05/29 22:23:28 CLSRSC-594: Executing installation step 19 of 19: 'PostConfig'.
```

```
2023/05/29 22:24:06 CLSRSC-325: Configure Oracle Grid Infrastructure for a Cluster ... succeeded
```

```
[root@GNCASHPL08052 disks]#
```

```
[root@GNCASHPL08053 u01]# /u01/app/19.18.0/grid/root.sh
```

Performing root user operation.

The following environment variables are set as:

ORACLE_OWNER= grid

ORACLE_HOME= /u01/app/19.18.0/grid

Enter the full pathname of the local bin directory: [/usr/local/bin]:

The contents of "dbhome" have not changed. No need to overwrite.

The contents of "oraenv" have not changed. No need to overwrite.

The contents of "coraenv" have not changed. No need to overwrite.

Creating /etc/oratab file...

Entries will be added to the /etc/oratab file as needed by

Database Configuration Assistant when a database is created

Finished running generic part of root script.

Now product-specific root actions will be performed.

Relinking oracle with rac_on option

Using configuration parameter file: /u01/app/19.18.0/grid/crs/install/crsconfig_params

The log of current session can be found at:

/u01/app/grid_19c/crsdata/gncashpl08053/crsconfig/rootcrs_gncashpl08053_2023-05-29_10-25-34PM.log

```
2023/05/29 22:26:18 CLSRSC-594: Executing installation step 1 of 19: 'SetupTFA'.
```

```
2023/05/29 22:26:18 CLSRSC-594: Executing installation step 2 of 19: 'ValidateEnv'.
```

```
2023/05/29 22:26:19 CLSRSC-363: User ignored prerequisites during installation
```

```
2023/05/29 22:26:19 CLSRSC-594: Executing installation step 3 of 19: 'CheckFirstNode'.
```

```
2023/05/29 22:26:21 CLSRSC-594: Executing installation step 4 of 19: 'GenSiteGUIDs'.
```

```
2023/05/29 22:26:21 CLSRSC-594: Executing installation step 5 of 19: 'SetupOSD'.
```

```
2023/05/29 22:26:21 CLSRSC-594: Executing installation step 6 of 19: 'CheckCRSConfig'.
```

```
2023/05/29 22:26:23 CLSRSC-594: Executing installation step 7 of 19: 'SetupLocalGPNP'.
```

```
2023/05/29 22:26:25 CLSRSC-594: Executing installation step 8 of 19: 'CreateRootCert'.
```

```
2023/05/29 22:26:25 CLSRSC-594: Executing installation step 9 of 19: 'ConfigOLR'.
```

```
2023/05/29 22:26:35 CLSRSC-594: Executing installation step 10 of 19: 'ConfigCHMOS'.
```

```
2023/05/29 22:26:36 CLSRSC-594: Executing installation step 11 of 19: 'CreateOHASD'.
```

```
2023/05/29 22:26:38 CLSRSC-594: Executing installation step 12 of 19: 'ConfigOHASD'.
```

```
2023/05/29 22:26:38 CLSRSC-330: Adding Clusterware entries to file 'oracle-ohasd.service'
```

```
2023/05/29 22:26:50 CLSRSC-4002: Successfully installed Oracle Trace File Analyzer (TFA) Collector.
```

```

2023/05/29 22:26:53 CLSRSC-4002: Successfully installed Oracle Trace File Analyzer (TFA) Collector.
2023/05/29 22:27:05 CLSRSC-594: Executing installation step 13 of 19: 'InstallAFD'.
2023/05/29 22:27:07 CLSRSC-594: Executing installation step 14 of 19: 'InstallACFS'.
2023/05/29 22:27:09 CLSRSC-594: Executing installation step 15 of 19: 'InstallKA'.
2023/05/29 22:27:11 CLSRSC-594: Executing installation step 16 of 19: 'InitConfig'.
Redirecting to /bin/systemctl restart rsyslog.service
2023/05/29 22:27:23 CLSRSC-594: Executing installation step 17 of 19: 'StartCluster'.
2023/05/29 22:28:19 CLSRSC-343: Successfully started Oracle Clusterware stack
2023/05/29 22:28:19 CLSRSC-594: Executing installation step 18 of 19: 'ConfigNode'.
2023/05/29 22:28:34 CLSRSC-594: Executing installation step 19 of 19: 'PostConfig'.
2023/05/29 22:28:43 CLSRSC-325: Configure Oracle Grid Infrastructure for a Cluster ... succeeded

```

```

[root@GNCASHPL08053 u01]# . /home/grid/grid_profile
[root@GNCASHPL08053 u01]# crsctl status res -t

```


Name	Target	State	Server	State details

Local Resources				

ora.LISTENER.lsnr				
	ONLINE	ONLINE	gncashpl08052	STABLE
	ONLINE	ONLINE	gncashpl08053	STABLE
ora.chad				
	ONLINE	ONLINE	gncashpl08052	STABLE
	ONLINE	ONLINE	gncashpl08053	STABLE
ora.net1.network				
	ONLINE	ONLINE	gncashpl08052	STABLE
	ONLINE	ONLINE	gncashpl08053	STABLE
ora.ons				
	ONLINE	ONLINE	gncashpl08052	STABLE
	ONLINE	ONLINE	gncashpl08053	STABLE

Cluster Resources				

ora.ASMNET1LSNR_ASM.lsnr(ora.asmgroup)				
1	ONLINE	ONLINE	gncashpl08052	STABLE
2	ONLINE	ONLINE	gncashpl08053	STABLE
3	OFFLINE	OFFLINE		STABLE
ora.DATA.dg(ora.asmgroup)				
1	ONLINE	ONLINE	gncashpl08052	STABLE
2	ONLINE	ONLINE	gncashpl08053	STABLE
3	OFFLINE	OFFLINE		STABLE
ora.LISTENER_SCAN1.lsnr				
1	ONLINE	ONLINE	gncashpl08053	STABLE
ora.LISTENER_SCAN2.lsnr				
1	ONLINE	ONLINE	gncashpl08052	STABLE
ora.LISTENER_SCAN3.lsnr				
1	ONLINE	ONLINE	gncashpl08052	STABLE
ora.asm(ora.asmgroup)				
1	ONLINE	ONLINE	gncashpl08052	Started,STABLE
2	ONLINE	ONLINE	gncashpl08053	Started,STABLE
3	OFFLINE	OFFLINE		STABLE
ora.asmnet1.asmnetwork(ora.asmgroup)				
1	ONLINE	ONLINE	gncashpl08052	STABLE
2	ONLINE	ONLINE	gncashpl08053	STABLE
3	OFFLINE	OFFLINE		STABLE
ora.cvu				
1	ONLINE	ONLINE	gncashpl08052	STABLE
ora.gncashpl08052.vip				
1	ONLINE	ONLINE	gncashpl08052	STABLE
ora.gncashpl08053.vip				
1	ONLINE	ONLINE	gncashpl08053	STABLE
ora.qosmserver				
1	ONLINE	ONLINE	gncashpl08052	STABLE
ora.scan1.vip				
1	ONLINE	ONLINE	gncashpl08053	STABLE
ora.scan2.vip				
1	ONLINE	ONLINE	gncashpl08052	STABLE
ora.scan3.vip				
1	ONLINE	ONLINE	gncashpl08052	STABLE

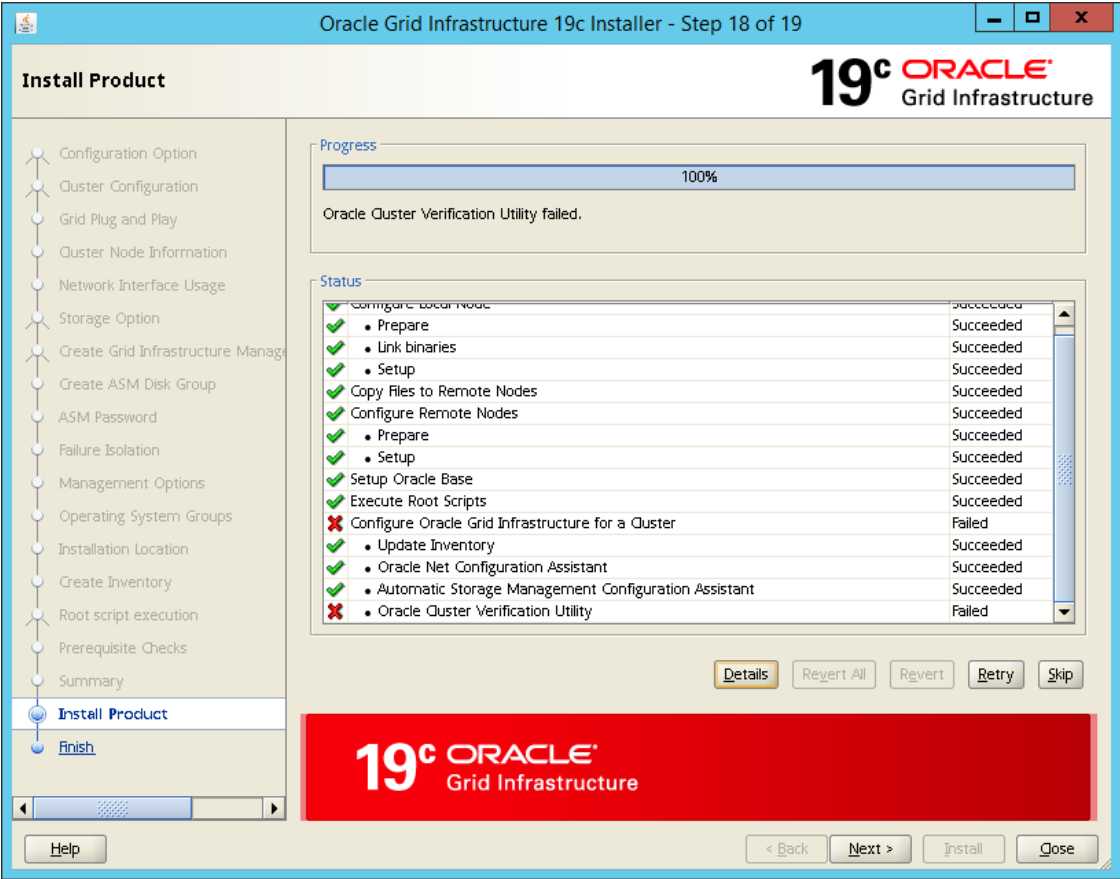


Na hora do check do cluster, foi identificado que o NTP não está rodando corretamente nos 2 nós.

Fiz este ajuste:

NOTA: No nó 01 estava bem configurado, no nó 02 não.

<https://linuxconfig.org/redhat-8-configure-ntp-server>

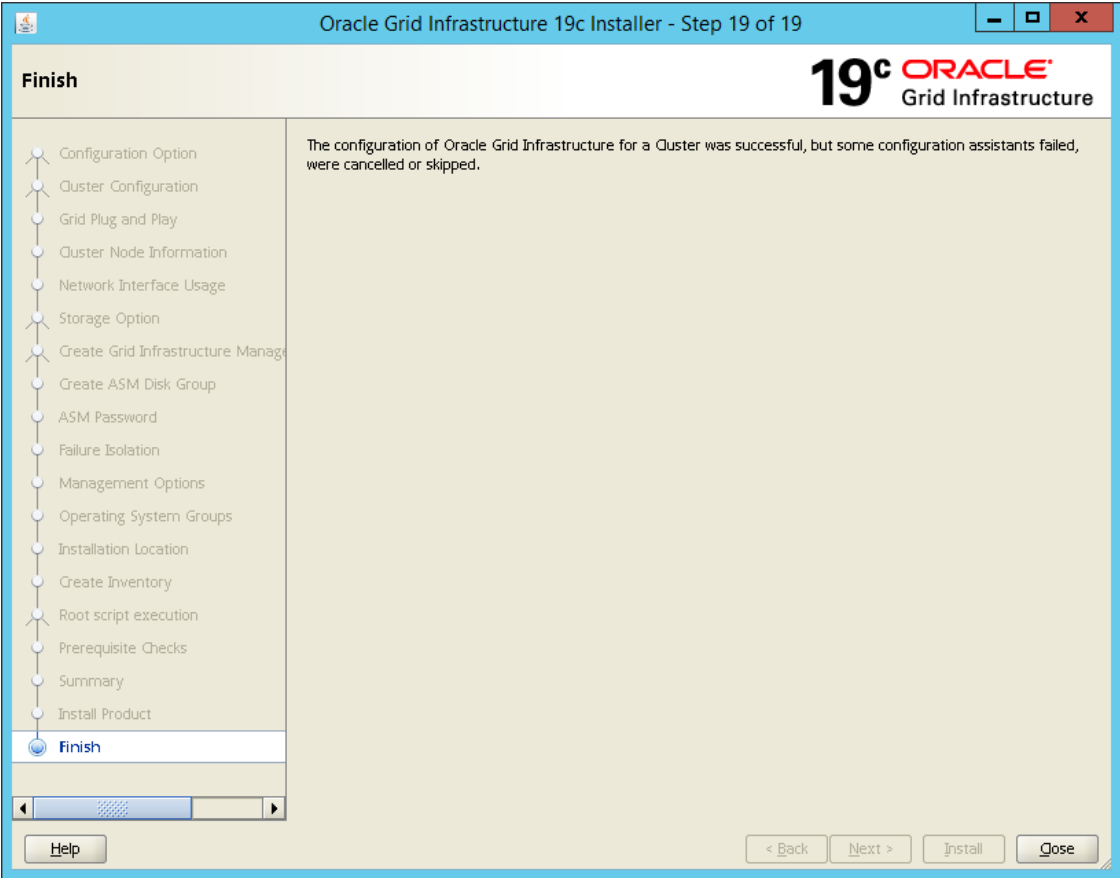


Install Oracle

```
[root@GNCASHPL08052 ~]# su - oracle
Last login: Mon May 29 22:39:59 -03 2023
[oracle@GNCASHPL08052 ~]$ . db_profile
[oracle@GNCASHPL08052 ~]$ xauth add GNCASHPL08052/unix:10 MIT-MAGIC-COOKIE-1 52acd2c0c70de57d7a4fba8017714360
xauth: file /home/oracle/.Xauthority does not exist
[oracle@GNCASHPL08052 ~]$ export DISPLAY=localhost:10.0
[oracle@GNCASHPL08052 ~]$ xauth add GNCASHPL08052/unix:10 MIT-MAGIC-COOKIE-1 52acd2c0c70de57d7a4fba8017714360
[oracle@GNCASHPL08052 ~]$ export DISPLAY=localhost:10.0
[oracle@GNCASHPL08052 ~]$ cd $ORACLE_HOME
[oracle@GNCASHPL08052 dbhome_1]$ pwd
/u01/app/oracle/product/19.18.0/dbhome_1
[oracle@GNCASHPL08052 dbhome_1]$ export CV_ASSUME_DISTID=OEL8.1

[oracle@GNCASHPL08052 dbhome_1]$ ./runInstaller -silent -applyRUR /u02/oracle/patches/30159782/
Preparing the home to patch...
Applying the patch /u02/oracle/patches/30159782/...
Successfully applied the patch.
The log can be found at: /u01/app/oraInventory/logs/InstallActions2023-05-29_10-58-11PM/installerPatchActions_2023-05-29_10-58-11PM.log
Launching Oracle Database Setup Wizard...

[FATAL] [INS-35071] Global database name cannot be left blank.
CAUSE: The Global database name was left blank.
ACTION: Specify a value for the Global database name.

[oracle@GNCASHPL08052 dbhome_1]$ ./runInstaller
ERROR: Unable to verify the graphical display setup. This application requires X display. Make sure that xdpinfo exist under PATH variable.
Launching Oracle Database Setup Wizard...
```

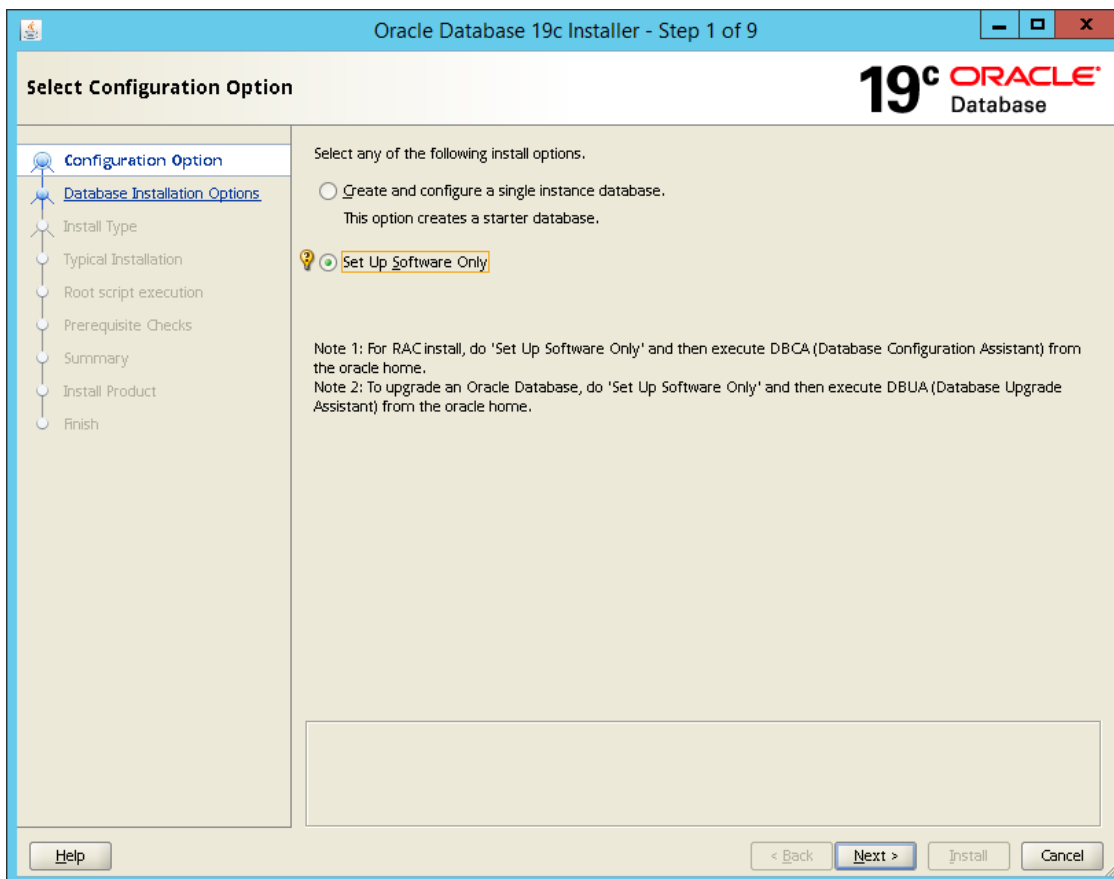

Oracle Database 19c Installer - Step 2 of 9

19^c ORACLE[®]
Database

Select Database Installation Option

Configuration Option

Database Installation Options

Install Type

Typical Installation

Root script execution

Prerequisite Checks

Summary

Install Product

Finish

Select the type of database installation you want to perform.

Single instance database installation

☒ Oracle Real Application Clusters database installation

Help

< Back

Next >

Install

Cancel

Oracle Database 19c Installer - Step 3 of 10

19^c ORACLE[®]
Database

Select List of Nodes

Configuration Option

Database Installation Options

Nodes Selection

Install Type

Typical Installation

Root script execution

Prerequisite Checks

Summary

Install Product

Finish

Select nodes (in addition to the local node) in the cluster where the installer should install Oracle RAC or Oracle RAC One.

	Node name
☒	1 gncashpl08052
☒	2 gncashpl08053

SSH connectivity...

Select all

Deselect all

OS Username: oracle

OS Password:

☐ Reuse private and public keys existing in the user home

Test

Setup

Help

< Back



Next >

Install

Cancel

Core Assets/Documentation/GETNET -
DBA
ORAEX Cloud Consulting | GETNET | Jan 30, 2026 - 12:04am

40

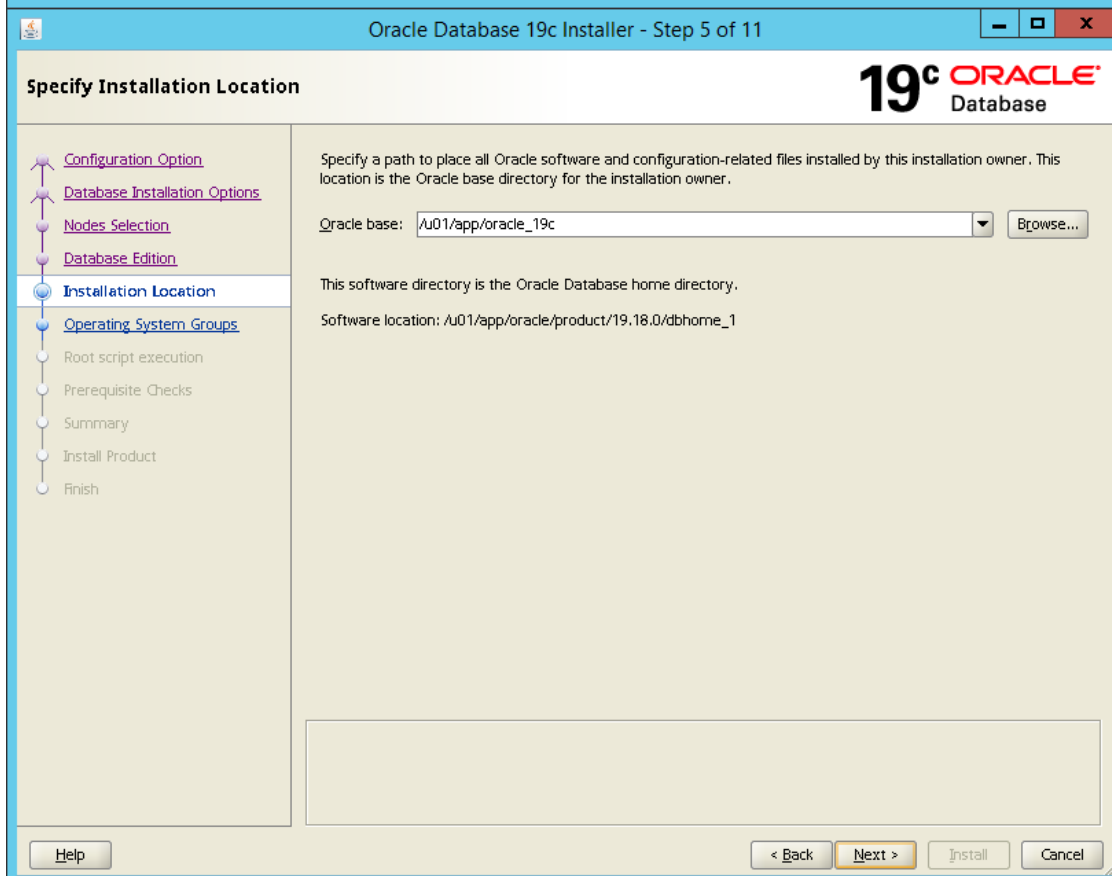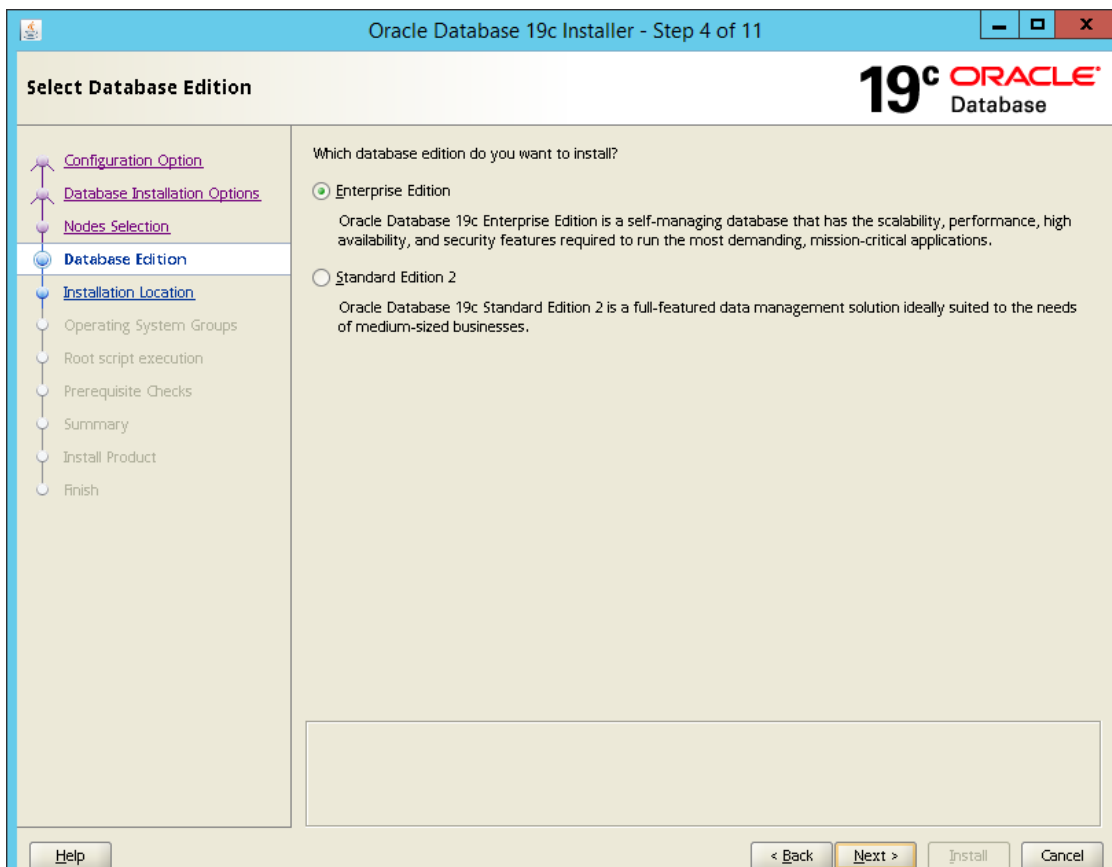

Oracle Database 19c Installer - Step 6 of 11

19c ORACLE Database

Privileged Operating System groups

Configuration Option

Database Installation Options

Nodes Selection

Database Edition

Installation Location

Operating System Groups

Root script execution

Prerequisite Checks

Summary

Install Product

Finish

SYS privileges are required to create a database using operating system (OS) authentication. Membership in OS Groups grants the corresponding SYS privilege, eg. membership in OSDBA grants the SYSDBA privilege.

Database Administrator (OSDBA) group:

Database Operator (OSOPER) group (Optional):

Database Backup and Recovery (OSBACKUPDBA) group:

Data Guard administrative (OSDGDBA) group:

Encryption Key Management administrative (OSKMDBA) group:

Real Application Cluster administrative (OSRACDBA) group:

Help

< Back

Next >

Install

Cancel

Oracle Database 19c Installer - Step 7 of 11

19c ORACLE Database

Root script execution configuration

Configuration Option

Database Installation Options

Nodes Selection

Database Edition

Installation Location

Operating System Groups

Root script execution

Prerequisite Checks

Summary

Install Product

Finish

During the software configuration, certain operations have to be performed as "root" user. You can choose to have the installer perform these operations automatically by specifying inputs for one of the options below. The input specified will also be used by the installer to perform additional prerequisite checks.

☐ Automatically run configuration scripts

☒ Use "root" user credential

 Password :

☐ Use sudo

 Program path :

 User name :

 Password :



Help

< Back

Next >

Install

Cancel

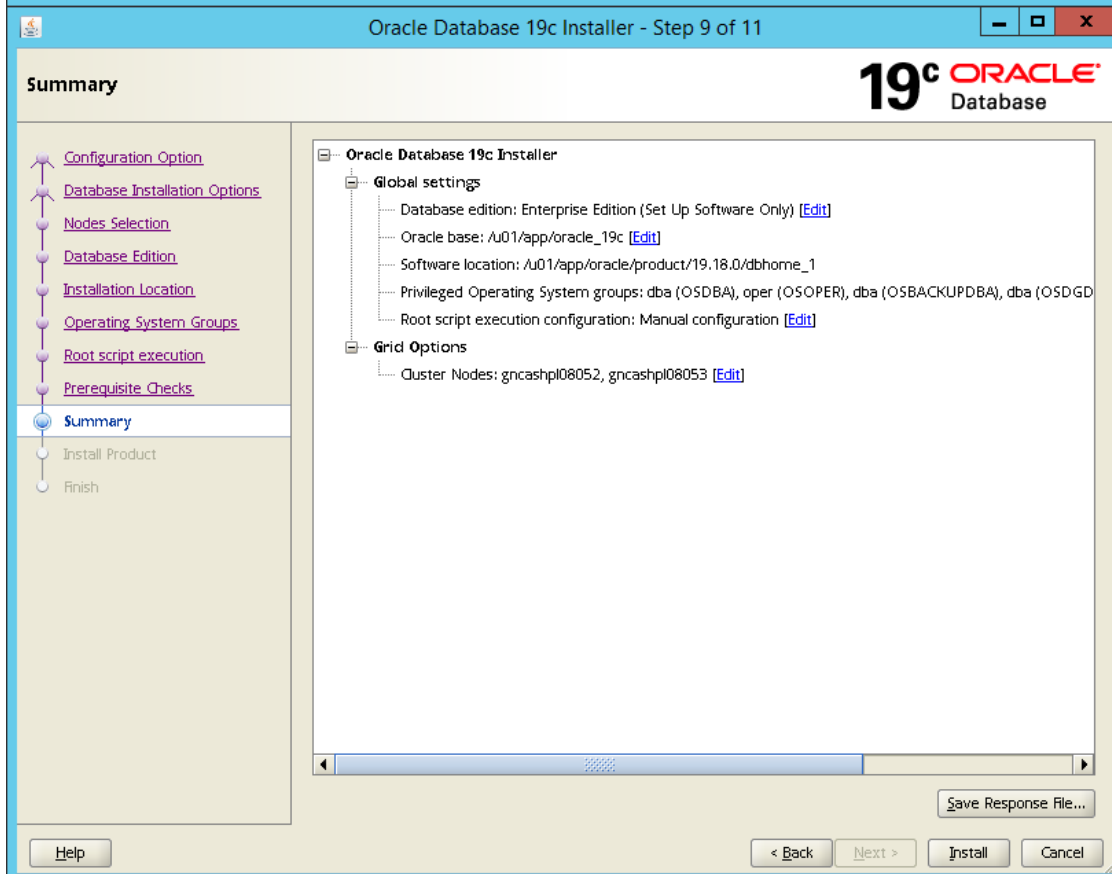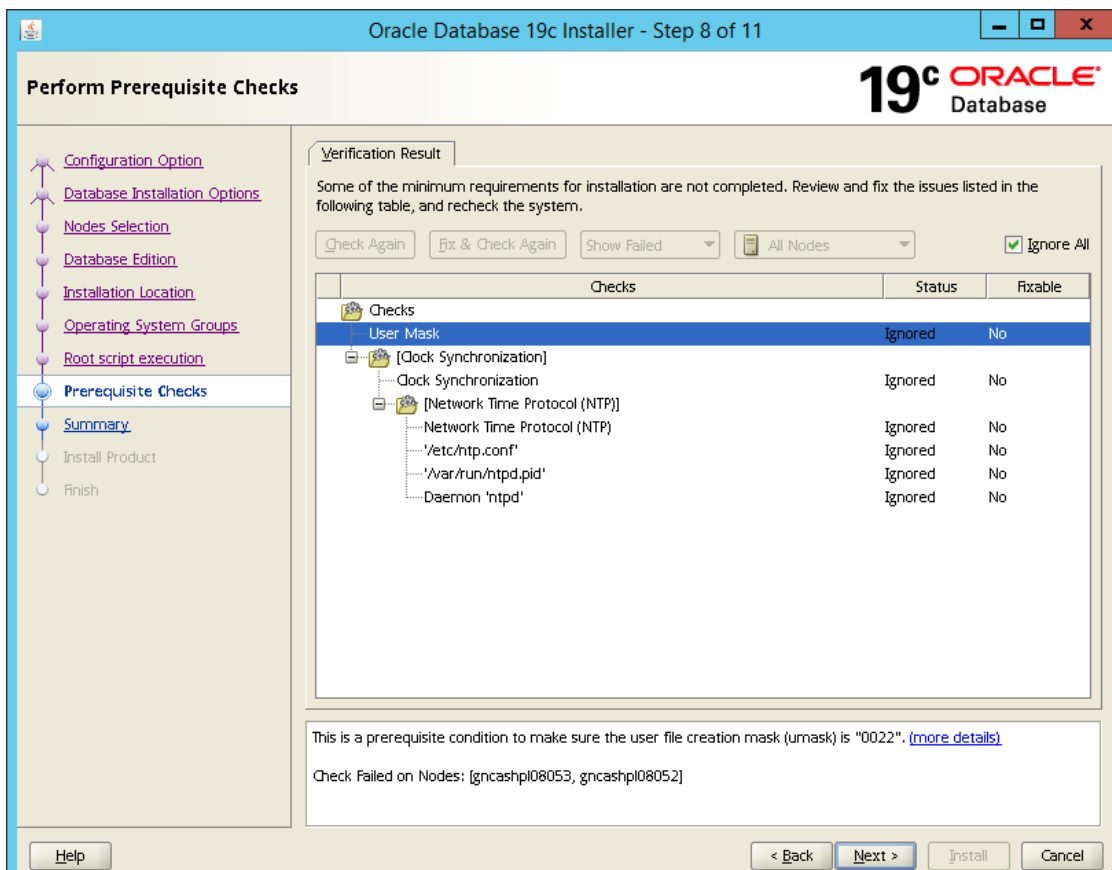

```
[root@GNCASHPL08052 ~]# /u01/app/oracle/product/19.18.0/dbhome_1/root.sh
Performing root user operation.
```

The following environment variables are set as:

```
ORACLE_OWNER= oracle
ORACLE_HOME= /u01/app/oracle/product/19.18.0/dbhome_1
```

Enter the full pathname of the local bin directory: [/usr/local/bin]:
The contents of "dbhome" have not changed. No need to overwrite.
The contents of "oraenv" have not changed. No need to overwrite.
The contents of "coraenv" have not changed. No need to overwrite.

Entries will be added to the /etc/oratab file as needed by
Database Configuration Assistant when a database is created
Finished running generic part of root script.
Now product-specific root actions will be performed.


```
[root@GNCASHPL08053 ~]# /u01/app/oracle/product/19.18.0/dbhome_1/root.sh
Performing root user operation.
```

The following environment variables are set as:

```
ORACLE_OWNER= oracle
ORACLE_HOME= /u01/app/oracle/product/19.18.0/dbhome_1
```

Enter the full pathname of the local bin directory: [/usr/local/bin]:
The contents of "dbhome" have not changed. No need to overwrite.
The contents of "oraenv" have not changed. No need to overwrite.
The contents of "coraenv" have not changed. No need to overwrite.

Entries will be added to the /etc/oratab file as needed by
Database Configuration Assistant when a database is created
Finished running generic part of root script.
Now product-specific root actions will be performed.

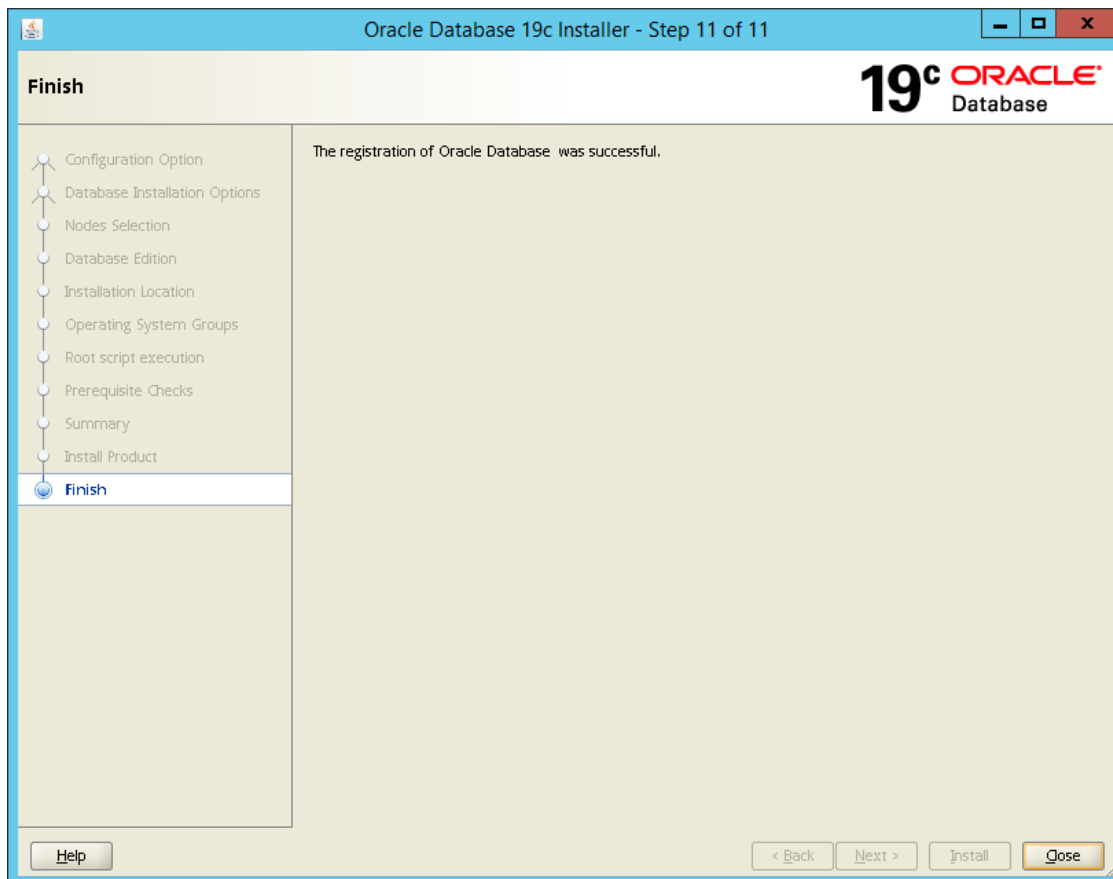

Criação do database

NOTA: como fizemos apenas para teste, sem os 3 diskgroups, não tem a parte do asmca, direto para o dbca:

Database Configuration Assistant - Create a database - Step 1 of 14

Database Operation

Creation Mode

Deployment Type

Database Identification

Storage Option

Fast Recovery Option

Database Options

Configuration Options

Management Options

User Credentials

Creation Option

Summary

Progress Page

Finish

Select the operation that you want to perform.

☒ Create a database
☐ Configure an existing database
☐ Delete database
☐ Manage templates
☐ Manage pluggable databases
☐ Oracle RAC database instance management

Help

< Back

Next >

Finish

Cancel

Database Configuration Assistant - Create a database - Step 2 of 14

Database Operation

Creation Mode

Deployment Type

Database Identification

Storage Option

Fast Recovery Option

Database Options

Configuration Options

Management Options

User Credentials

Creation Option

Summary

Progress Page

Finish

☐ Typical configuration

Global database name: orcl
Storage type: Automatic Storage Management (ASM)
Database files location: +DATA/(DB_UNIQUE_NAME) Browse...
Fast Recovery Area (FRA): +DATA Browse...
Database character set: AL32UTF8 - Unicode UTF-8 Universal character set
Administrative password:
Confirm password:
☒ Create as Container database
Pluggable database name:

☒ Advanced configuration

Help

< Back

Next >

Finish

Cancel

Database Configuration Assistant - Create a database - Step 3 of 14

Database Operation

Creation Mode

Deployment Type

Database Identification

Storage Option

Fast Recovery Option

Database Options

Configuration Options

Management Options

User Credentials

Creation Option

Summary

Progress Page

Finish

Select the type of database you want to create.

Database type: Oracle Real Application Cluster (RAQ database)

Configuration type: Admin Managed

Select a template for your database.

Templates that include datafiles contain pre-created databases. They allow you to create a new database quickly. Use templates without datafiles only when necessary, such as when you need to change attributes like block size that cannot be altered after database creation.

	Template name	Include datafiles	Details
☐	Data Warehouse	Yes	View details
☐	Custom Database	No	View details
☒	General Purpose or Transaction Processing	Yes	View details

Template location: /u01/app/oracle/product/19.18.0/dbhome_1/assistants/dbca/templates

Change...

Help

< Back

Next >

Finish

Cancel

Database Configuration Assistant - Create a database - Step 4 of 16

Database Operation

Creation Mode

Deployment Type

Nodes Selection

Database Identification

Storage Option

Fast Recovery Option

Database Options

Configuration Options

Management Options

User Credentials

Creation Option

Prerequisite Checks

Summary

Progress Page

Finish

Select the nodes on which you want to create the cluster database. The local node "gncashpl08052" should always be selected.

	Node name
☒	1 gncashpl08052
☒	2 gncashpl08053

Select all

Deselect all

Help

< Back

Next >

Finish

Cancel

Database Configuration Assistant - Create a database - Step 5 of 16

19^c ORACLE[®] Database

Specify Database Identification Details

- Database Operation
- Creation Mode
- Deployment Type
- Nodes Selection
- Database Identification**
- Storage Option
- Fast Recovery Option
- Database Options
- Configuration Options
- Management Options
- User Credentials
- Creation Option
- Prerequisite Checks
- Summary
- Progress Page
- Finish

Provide a unique database identifier information. An Oracle database is uniquely identified by a Global database name, typically of the form "name.domain".

Global database name:

SID Prefix:

Service name:

☐ Create as Container database

A Container database can be used for consolidating multiple databases into a single database, and it enables database virtualization. A Container database (CDB) can have zero or more pluggable databases (PDB).

☒ Use Local Undo tablespace for PDBs

☐ Create an empty Container database

☒ Create a Container database with one or more PDBs

Number of PDBs:

PDB name:

Help
< Back
Next >
Finish
Cancel

Database Configuration Assistant - Create 'CONTROLM' database - Step 6 of 16

19^c ORACLE[®] Database

Select Database Storage Option

- Database Operation
- Creation Mode
- Deployment Type
- Nodes Selection
- Database Identification
- Storage Option**
- Fast Recovery Option
- Database Options
- Configuration Options
- Management Options
- User Credentials
- Creation Option
- Prerequisite Checks
- Summary
- Progress Page
- Finish

☐ Use template file for database storage attributes

Storage type and location for database files will be picked up from the specified template (General Purpose or Transaction Processing).

☒ Use following for the database storage attributes

All the database files will be put at the specified location below. You can customize the name and location of each datafile in the subsequent screen.

Database files storage type:

Database files location:

Oracle Managed files option will enable Oracle to automatically generate the names of the datafiles for simplified database management.

☒ Use Oracle-Managed Files (OMF)

Help
< Back
Next >
Finish
Cancel

Database Configuration Assistant - Create 'CONTROLM' database - Step 7 of 16

19c ORACLE Database

Select Fast Recovery Option

Database Operation

Creation Mode

Deployment Type

Nodes Selection

Database Identification

Storage Option

Fast Recovery Option

Database Options

Configuration Options

Management Options

User Credentials

Creation Option

Prerequisite Checks

Summary

Progress Page

Finish

Choose the recovery options for the database.

☐ Specify Fast Recovery Area

Recovery files storage type: Automatic Storage Management (ASM)

Fast Recovery Area: +DATA

Fast Recovery Area size: 8256 MB

☐ Enable archiving

Edit archive mode parameters...

Help

< Back

Next >

Finish

Cancel

Database Configuration Assistant - Create 'CONTROLM' database - Step 9 of 16

Specify Configuration Options

19c ORACLE Database

- Database Operation
- Creation Mode
- Deployment Type
- Nodes Selection
- Database Identification
- Storage Option
- Fast Recovery Option
- Data Vault Option
- Configuration Options**
- Management Options
- User Credentials
- Creation Option
- Prerequisite Checks
- Summary
- Progress Page
- Finish

Memory

Sizing

Character sets

Connection mode

Sample schemas

☒ Use Automatic Shared Memory Management

SGA size: 9576 MB

490 12769 31924

PGA Size: 3193 MB

490 12769 31924

☐ Use Manual Shared Memory Management

Shared pool size: 0 MB

Buffer cache size: 0 MB

Java pool size: 0 MB

Large pool size: 0 MB

PGA size: 0 MB

Total memory for database 0 MB

☐ Use Automatic Memory Management

Memory target: 12769 MB

490 12769 31924 39%

Help

< Back

Next >

Finish

Cancel

Database Configuration Assistant - Create 'CONTROLM' database - Step 10 of 16

Specify Management Options

19c ORACLE Database

- Database Operation
- Creation Mode
- Deployment Type
- Nodes Selection
- Database Identification
- Storage Option
- Fast Recovery Option
- Data Vault Option
- Configuration Options
- Management Options**
- User Credentials
- Creation Option
- Prerequisite Checks
- Summary
- Progress Page
- Finish

Specify the management options for the database.

☐ Run Cluster Verification Utility (CVU) checks periodically

☐ **Configure Enterprise Manager (EM) database express**

EM database express port: 5500

☐ Register with Enterprise Manager (EM) cloud control

OMS host:

OMS port:

EM admin username:

EM admin password:

ASMSNMP user password:

Help

< Back

Next >

Finish

Cancel

Database Configuration Assistant - Create 'CONTROLM' database - Step 11 of 16

19c ORACLE Database

Specify Database User Credentials

- Database Operation
- Creation Mode
- Deployment Type
- Nodes Selection
- Database Identification
- Storage Option
- Fast Recovery Option
- Data Vault Option
- Configuration Options
- Management Options
- User Credentials**
- Creation Option
- Prerequisite Checks
- Summary
- Progress Page
- Finish

You must specify passwords for the following user accounts in the new database for security reasons.

☐ Use different administrative passwords

	Password	Confirm password
SYS		
SYSTEM		

☒ Use the same administrative password for all accounts

Password:
Confirm password:

Messages:

Warning: [DBT-06208] The 'ADMIN' password entered does not conform to the Oracle recommended standards.

Help
< Back
Next >
Finish
Cancel

Database Configuration Assistant - Create 'CONTROLM' database - Step 12 of 16

19c ORACLE Database

Select Database Creation Option

- Database Operation
- Creation Mode
- Deployment Type
- Nodes Selection
- Database Identification
- Storage Option
- Fast Recovery Option
- Data Vault Option
- Configuration Options
- Management Options
- User Credentials
- Creation Option**
- Prerequisite Checks
- Summary
- Progress Page
- Finish

Select the database creation options.

☒ Create database

Specify the SQL scripts you want to run after the database is created. The scripts are run in the order listed below.

Post DB creation scripts:

☐ Save as a database template

Template name:

Template location:



Description:

☐ Generate database creation scripts

Destination directory:

Following advanced configuration options can be used to configure initialization parameters and customize database storage locations.

Help
< Back
Next >
Finish
Cancel

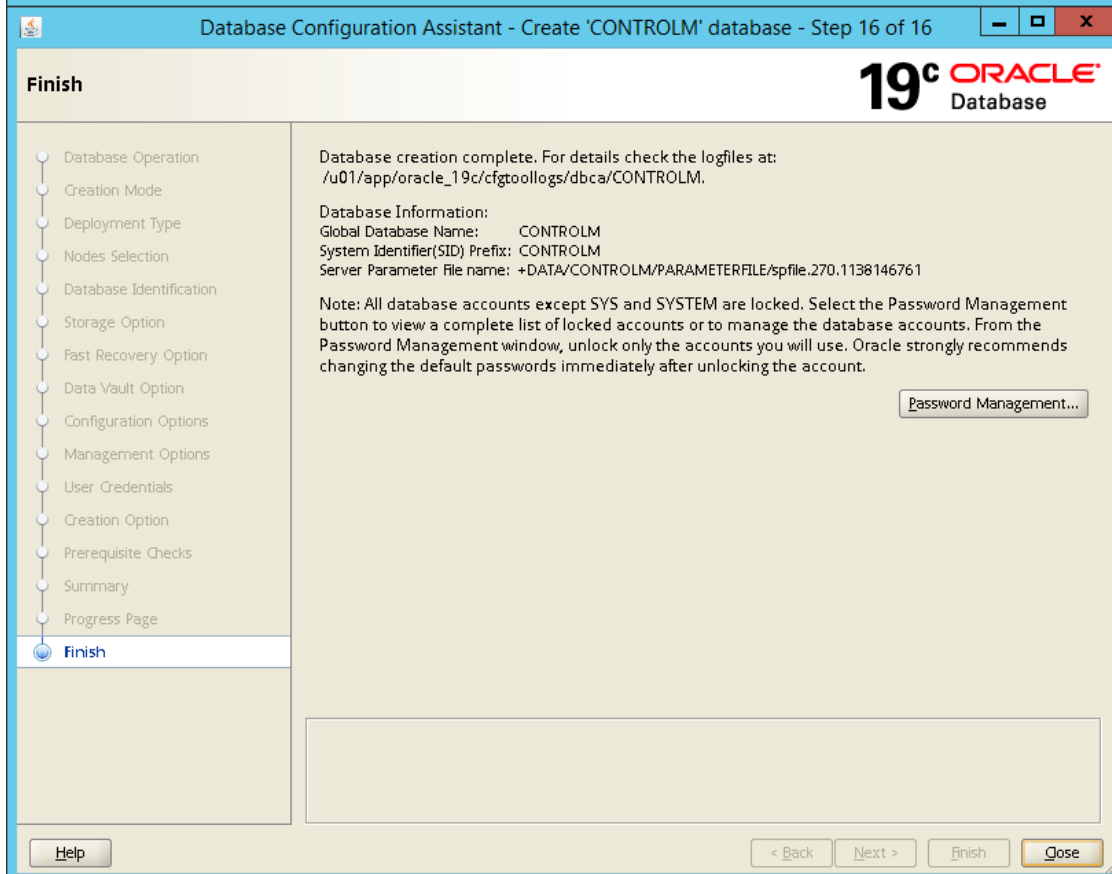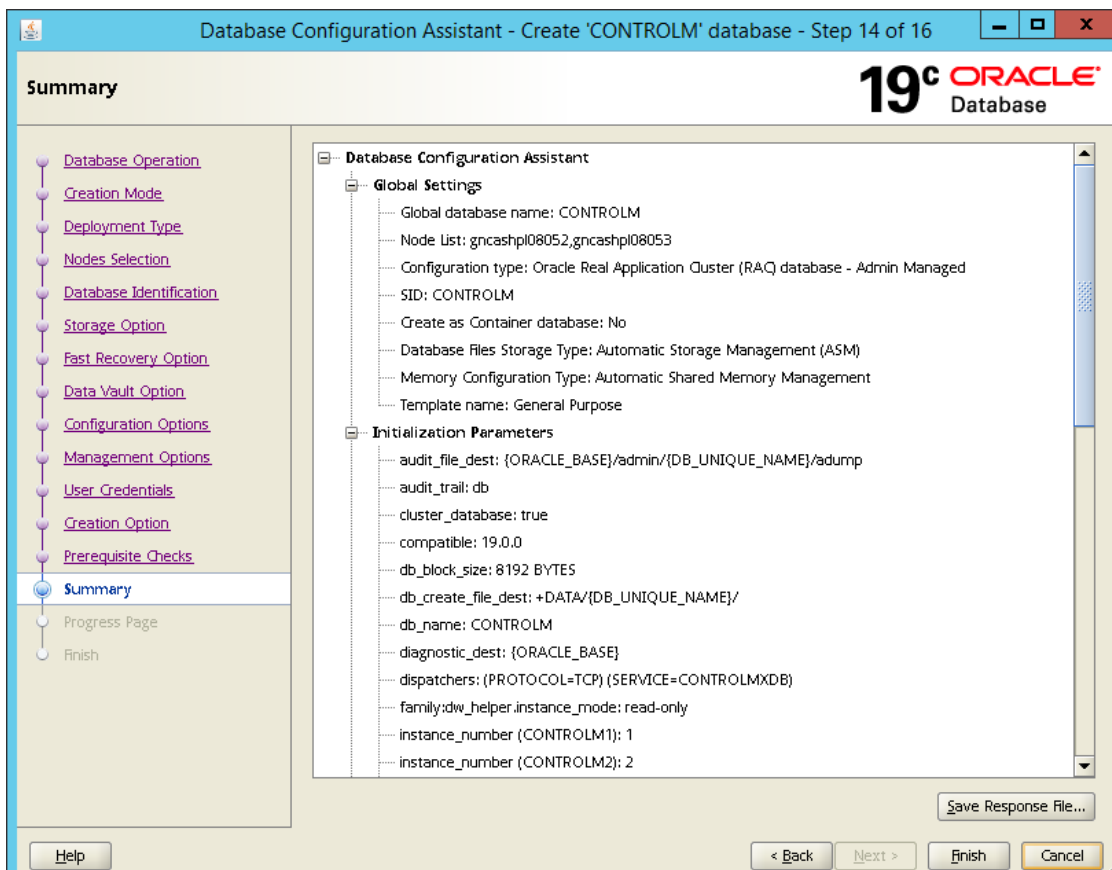

Aplicando o PSU 19.18.

NOTA: atualizei o Opatch na home do grid e home do oracle nos 2 nós. Foi necessário fazer o mesmo export do GridSetup e runInstaller.

```
[root@GNCASHPL08053 OPatch]# export CV_ASSUME_DISTID=OEL8.1
[root@GNCASHPL08053 OPatch]# ./opatchauto apply /u02/oracle/patches/34762026
```

OPatchauto session is initiated at Tue May 30 10:02:49 2023

System initialization log file is /u01/app/19.18.0/grid/cfgtoollogs/opatchauto_db/systemconfig2023-05-30_10-03-05AM.log

System initialization log file is /u01/app/19.18.0/grid/cfgtoollogs/patchauto/patchauto2023-05-30_10-03-31AM.log.

Session log file is /u01/app/19.18.0/grid/cfgtoollogs/patchauto/patchauto2023-05-30_10-03-31AM.log

The id for this session is FJ3Y

Executing OPatch prereq operations to verify patch applicability on home /u01/app/19.18.0/grid

Executing OPatch prereq operations to verify patch applicability on home /u01/app/oracle/product/19.18.0/dbhome_1

Patch applicability verified successfully on home /u01/app/19.18.0/grid

Patch applicability verified successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Executing patch validation checks on home /u01/app/19.18.0/grid

Patch validation checks successfully completed on home /u01/app/19.18.0/grid

Executing patch validation checks on home /u01/app/oracle/product/19.18.0/dbhome_1

Patch validation checks successfully completed on home /u01/app/oracle/product/19.18.0/dbhome_1

Verifying SQL patch applicability on home /u01/app/oracle/product/19.18.0/dbhome_1

SQL patch applicability verified successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Preparing to bring down database service on home /u01/app/oracle/product/19.18.0/dbhome_1

Successfully prepared home /u01/app/oracle/product/19.18.0/dbhome_1 to bring down database service

Performing prepatch operations on CRS - bringing down CRS service on home /u01/app/19.18.0/grid

Prepatch operation log file location: /u01/app/grid_19c/crsdata/gncashpl08053/crsconfig/crs_prepatch_apply_inplace_gncashpl08053_2023-05-30_10-05-19AM.log

CRS service brought down successfully on home /u01/app/19.18.0/grid

Performing prepatch operation on home /u01/app/oracle/product/19.18.0/dbhome_1

Prepatch operation completed successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Start applying binary patch on home /u01/app/oracle/product/19.18.0/dbhome_1

Binary patch applied successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Performing postpatch operation on home /u01/app/oracle/product/19.18.0/dbhome_1

Postpatch operation completed successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Start applying binary patch on home /u01/app/19.18.0/grid

Binary patch applied successfully on home /u01/app/19.18.0/grid

Performing postpatch operations on CRS - starting CRS service on home /u01/app/19.18.0/grid

Postpatch operation log file location: /u01/app/grid_19c/crsdata/gncashpl08053/crsconfig/crs_postpatch_apply_inplace_gncashpl08053_2023-05-30_10-28-18AM.log

CRS service started successfully on home /u01/app/19.18.0/grid

Preparing home /u01/app/oracle/product/19.18.0/dbhome_1 after database service restarted

No step execution required.....

Trying to apply SQL patch on home /u01/app/oracle/product/19.18.0/dbhome_1

No SQL patch operations are required on local node for this home

OPatchAuto successful.

-----Summary-----

Patching is completed successfully. Please find the summary as follows:

Host:gncashpl08053

root@GNCASHPL08052

RAC Home:/u01/app/oracle/product/19.18.0/dbhome_1

Version:19.0.0.0.0

Summary:

==Following patches were SKIPPED:

Patch: /u02/oracle/patches/34762026/34768569

Reason: This patch is not applicable to this specified target type - "rac_database"

Patch: /u02/oracle/patches/34762026/33575402

Reason: This patch is not applicable to this specified target type - "rac_database"

Patch: /u02/oracle/patches/34762026/34863894

Reason: This patch is not applicable to this specified target type - "rac_database"

==Following patches were SUCCESSFULLY applied:

Patch: /u02/oracle/patches/34762026/34765931

Log: /u01/app/oracle/product/19.18.0/dbhome_1/cfgtoollogs/patchauto/core/patch/patch2023-05-30_10-08-30AM_1.log

Patch: /u02/oracle/patches/34762026/34768559

Log: /u01/app/oracle/product/19.18.0/dbhome_1/cfgtoollogs/patchauto/core/patch/patch2023-05-30_10-08-30AM_1.log

Host:gncashpl08053

CRS Home:/u01/app/19.18.0/grid

Version:19.0.0.0.0

Summary:

==Following patches were SUCCESSFULLY applied:

Patch: /u02/oracle/patches/34762026/33575402

Log: /u01/app/19.18.0/grid/cfgtoollogs/patchauto/core/patch/patch2023-05-30_10-19-16AM_1.log

Patch: /u02/oracle/patches/34762026/34765931

Log: /u01/app/19.18.0/grid/cfgtoollogs/patchauto/core/patch/patch2023-05-30_10-19-16AM_1.log

Patch: /u02/oracle/patches/34762026/34768559

Log: /u01/app/19.18.0/grid/cfgtoollogs/patchauto/core/patch/patch2023-05-30_10-19-16AM_1.log

Patch: /u02/oracle/patches/34762026/34768569

Log: /u01/app/19.18.0/grid/cfgtoollogs/patchauto/core/patch/patch2023-05-30_10-19-16AM_1.log

Patch: /u02/oracle/patches/34762026/34863894

Log: /u01/app/19.18.0/grid/cfgtoollogs/patchauto/core/patch/patch2023-05-30_10-19-16AM_1.log

OPatchauto session completed at Tue May 30 10:37:50 2023

Time taken to complete the session 34 minutes, 46 seconds

[root@GNCASHPL08052 OPatch]# export CV_ASSUME_DISTID=OEL8.1

[root@GNCASHPL08052 OPatch]# ./opatchauto apply /u02/oracle/patches/34762026

OPatchauto session is initiated at Tue May 30 10:59:51 2023

System initialization log file is /u01/app/19.18.0/grid/cfgtoollogs/patchautodb/systemconfig2023-05-30_11-00-06AM.log.

Session log file is /u01/app/19.18.0/grid/cfgtoollogs/patchauto/patchauto2023-05-30_11-00-33AM.log

The id for this session is NTZU

Executing OPatch prereq operations to verify patch applicability on home /u01/app/19.18.0/grid

Executing OPatch prereq operations to verify patch applicability on home /u01/app/oracle/product/19.18.0/dbhome_1

Patch applicability verified successfully on home /u01/app/19.18.0/grid

Patch applicability verified successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Executing patch validation checks on home /u01/app/19.18.0/grid
Patch validation checks successfully completed on home /u01/app/19.18.0/grid

Executing patch validation checks on home /u01/app/oracle/product/19.18.0/dbhome_1
Patch validation checks successfully completed on home /u01/app/oracle/product/19.18.0/dbhome_1

Verifying SQL patch applicability on home /u01/app/oracle/product/19.18.0/dbhome_1
SQL patch applicability verified successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Preparing to bring down database service on home /u01/app/oracle/product/19.18.0/dbhome_1
Successfully prepared home /u01/app/oracle/product/19.18.0/dbhome_1 to bring down database service

Performing prepatch operations on CRS - bringing down CRS service on home /u01/app/19.18.0/grid
Prepatch operation log file location: /u01/app/grid_19c/crsdata/gncashpl08052/crsconfig/crs_prepatch_apply_inplace_gncashpl08052_2023-05-30_11-02-46AM.log
CRS service brought down successfully on home /u01/app/19.18.0/grid

Performing prepatch operation on home /u01/app/oracle/product/19.18.0/dbhome_1
Prepatch operation completed successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Start applying binary patch on home /u01/app/oracle/product/19.18.0/dbhome_1
Binary patch applied successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Performing postpatch operation on home /u01/app/oracle/product/19.18.0/dbhome_1
Postpatch operation completed successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Start applying binary patch on home /u01/app/19.18.0/grid
Binary patch applied successfully on home /u01/app/19.18.0/grid

Performing postpatch operations on CRS - starting CRS service on home /u01/app/19.18.0/grid
Postpatch operation log file location: /u01/app/grid_19c/crsdata/gncashpl08052/crsconfig/crs_postpatch_apply_inplace_gncashpl08052_2023-05-30_11-25-21AM.log
CRS service started successfully on home /u01/app/19.18.0/grid

Preparing home /u01/app/oracle/product/19.18.0/dbhome_1 after database service restarted
No step execution required.....

Trying to apply SQL patch on home /u01/app/oracle/product/19.18.0/dbhome_1
SQL patch applied successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

OPatchAuto successful.

-----Summary-----

Patching is completed successfully. Please find the summary as follows:

Host:gncashpl08052
RAC Home:/u01/app/oracle/product/19.18.0/dbhome_1
Version:19.0.0.0.0
Summary:

==Following patches were SKIPPED:

Patch: /u02/oracle/patches/34762026/34768569
Reason: This patch is not applicable to this specified target type - "rac_database"

Patch: /u02/oracle/patches/34762026/33575402
Reason: This patch is not applicable to this specified target type - "rac_database"

Patch: /u02/oracle/patches/34762026/34863894
Reason: This patch is not applicable to this specified target type - "rac_database"

==Following patches were SUCCESSFULLY applied:

Patch: /u02/oracle/patches/34762026/34765931
Log: /u01/app/oracle/product/19.18.0/dbhome_1/cfgtoollogs/patchauto/core/patch/patch2023-05-30_11-05-37AM_1.log

Patch: /u02/oracle/patches/34762026/34768559
Log: /u01/app/oracle/product/19.18.0/dbhome_1/cfgtoollogs/patchauto/core/patch/patch2023-05-30_11-05-37AM_1.log

Host:gncashpl08052
CRS Home:/u01/app/19.18.0/grid
Version:19.0.0.0.0
Summary:

==Following patches were SUCCESSFULLY applied:

Patch: /u02/oracle/patches/34762026/33575402
Log: /u01/app/19.18.0/grid/cfgtoollogs/patchauto/core/patch/patch2023-05-30_11-16-20AM_1.log

Patch: /u02/oracle/patches/34762026/34765931
Log: /u01/app/19.18.0/grid/cfgtoollogs/patchauto/core/patch/patch2023-05-30_11-16-20AM_1.log

Patch: /u02/oracle/patches/34762026/34768559
Log: /u01/app/19.18.0/grid/cfgtoollogs/patchauto/core/patch/patch2023-05-30_11-16-20AM_1.log

Patch: /u02/oracle/patches/34762026/34768569
Log: /u01/app/19.18.0/grid/cfgtoollogs/patchauto/core/patch/patch2023-05-30_11-16-20AM_1.log

Patch: /u02/oracle/patches/34762026/34863894
Log: /u01/app/19.18.0/grid/cfgtoollogs/patchauto/core/patch/patch2023-05-30_11-16-20AM_1.log

OPatchauto session completed at Tue May 30 11:51:16 2023
Time taken to complete the session 51 minutes, 10 seconds
[root@GNCASHPL08052 OPatch]#

Aplicando JDK 19.18

```
[root@GNCASHPL08053 ~]# . /home/grid/grid_profile
[root@GNCASHPL08053 ~]# cd $ORACLE_HOME/OPatch
[root@GNCASHPL08053 OPatch]# export CV_ASSUME_DISTID=OEL8.1
[root@GNCASHPL08053 OPatch]# ./opatchauto apply /u02/oracle/patches/34777391
```

OPatchauto session is initiated at Tue May 30 11:52:46 2023

System initialization log file is /u01/app/19.18.0/grid/cfgtoollogs/patchautodb/systemconfig2023-05-30_11-52-49AM.log.

Session log file is /u01/app/19.18.0/grid/cfgtoollogs/patchauto/patchauto2023-05-30_11-53-22AM.log
The id for this session is HIQX

Executing OPatch prereq operations to verify patch applicability on home /u01/app/oracle/product/19.18.0/dbhome_1

Executing OPatch prereq operations to verify patch applicability on home /u01/app/19.18.0/grid
Patch applicability verified successfully on home /u01/app/19.18.0/grid

Patch applicability verified successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Executing patch validation checks on home /u01/app/19.18.0/grid
Patch validation checks successfully completed on home /u01/app/19.18.0/grid

Executing patch validation checks on home /u01/app/oracle/product/19.18.0/dbhome_1
Patch validation checks successfully completed on home /u01/app/oracle/product/19.18.0/dbhome_1

Patch validation checks successfully completed on home /u01/app/oracle/product/19.18.0/dbhome_1

Verifying SQL patch applicability on home /u01/app/oracle/product/19.18.0/dbhome_1
No sqlpatch prereq operations are required on the local node for this home
No step execution required.....

Preparing to bring down database service on home /u01/app/oracle/product/19.18.0/dbhome_1
Successfully prepared home /u01/app/oracle/product/19.18.0/dbhome_1 to bring down database service

Bringing down database service on home /u01/app/oracle/product/19.18.0/dbhome_1
No step execution required.....

Performing prepatch operations on CRS - bringing down CRS service on home /u01/app/19.18.0/grid
Prepatch operation log file location: /u01/app/grid_19c/crsdata/gncashpl08053/crsconfig/crs_prepatch_apply_inplace_gncashpl08053_2023-05-30_11-54-20AM.log
CRS service brought down successfully on home /u01/app/19.18.0/grid

Performing prepatch operation on home /u01/app/oracle/product/19.18.0/dbhome_1
Prepatch operation completed successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Start applying binary patch on home /u01/app/oracle/product/19.18.0/dbhome_1
Binary patch applied successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Performing postpatch operation on home /u01/app/oracle/product/19.18.0/dbhome_1
Postpatch operation completed successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Start applying binary patch on home /u01/app/19.18.0/grid
Binary patch applied successfully on home /u01/app/19.18.0/grid

Performing postpatch operations on CRS - starting CRS service on home /u01/app/19.18.0/grid
Postpatch operation log file location: /u01/app/grid_19c/crsdata/gncashpl08053/crsconfig/crs_postpatch_apply_inplace_gncashpl08053_2023-05-30_12-00-13AM.log
CRS service started successfully on home /u01/app/19.18.0/grid

Starting database service on home /u01/app/oracle/product/19.18.0/dbhome_1
No step execution required.....

Preparing home /u01/app/oracle/product/19.18.0/dbhome_1 after database service restarted
No step execution required.....

Trying to apply SQL patch on home /u01/app/oracle/product/19.18.0/dbhome_1
No SQL patch operations are required on local node for this home

OPatchAuto successful.

-----Summary-----

Patching is completed successfully. Please find the summary as follows:

Host:gncashpl08053
RAC Home:/u01/app/oracle/product/19.18.0/dbhome_1
Version:19.0.0.0.0
Summary:

==Following patches were SUCCESSFULLY applied:

Patch: /u02/oracle/patches/34777391
Log: /u01/app/oracle/product/19.18.0/dbhome_1/cfgtoollogs/patchauto/core/patch/patch2023-05-30_11-57-48AM_1.log

Host:gncashpl08053
CRS Home:/u01/app/19.18.0/grid
Version:19.0.0.0.0
Summary:

==Following patches were SUCCESSFULLY applied:

Patch: /u02/oracle/patches/34777391
Log: /u01/app/19.18.0/grid/cfgtoollogs/patchauto/core/patch/patch2023-05-30_11-59-03AM_1.log

OPatchauto session completed at Tue May 30 12:03:59 2023
Time taken to complete the session 11 minutes, 13 seconds
[root@GNCASHPL08053 OPatch]#

[root@GNCASHPL08052 OPatch]# ./opatchauto apply /u02/oracle/patches/34777391

OPatchauto session is initiated at Tue May 30 12:04:49 2023

System initialization log file is /u01/app/19.18.0/grid/cfgtoollogs/patchautodb/systemconfig2023-05-30_12-04-52PM.log.

Session log file is /u01/app/19.18.0/grid/cfgtoollogs/patchauto/patchauto2023-05-30_12-05-30PM.log
The id for this session is UFMM

Executing OPatch prereq operations to verify patch applicability on home /u01/app/19.18.0/grid

Executing OPatch prereq operations to verify patch applicability on home /u01/app/oracle/product/19.18.0/dbhome_1
Patch applicability verified successfully on home /u01/app/19.18.0/grid

Patch applicability verified successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Executing patch validation checks on home /u01/app/19.18.0/grid
Patch validation checks successfully completed on home /u01/app/19.18.0/grid

Executing patch validation checks on home /u01/app/oracle/product/19.18.0/dbhome_1
Patch validation checks successfully completed on home /u01/app/oracle/product/19.18.0/dbhome_1

Verifying SQL patch applicability on home /u01/app/oracle/product/19.18.0/dbhome_1
No sqlpatch prereq operations are required on the local node for this home
No step execution required.....

Preparing to bring down database service on home /u01/app/oracle/product/19.18.0/dbhome_1
Successfully prepared home /u01/app/oracle/product/19.18.0/dbhome_1 to bring down database service

Bringing down database service on home /u01/app/oracle/product/19.18.0/dbhome_1
No step execution required.....

Performing prepatch operations on CRS - bringing down CRS service on home /u01/app/19.18.0/grid
Prepatch operation log file location: /u01/app/grid_19c/crsdata/gncashpl08052/crsconfig/crs_prepatch_apply_inplace_gncashpl08052_2023-05-30_12-06-29AM.log
CRS service brought down successfully on home /u01/app/19.18.0/grid

Performing prepatch operation on home /u01/app/oracle/product/19.18.0/dbhome_1
Prepatch operation completed successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Start applying binary patch on home /u01/app/oracle/product/19.18.0/dbhome_1
Binary patch applied successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Performing postpatch operation on home /u01/app/oracle/product/19.18.0/dbhome_1

```

Performing postpatch operation on home /u01/app/oracle/product/19.18.0/dbhome_1
Postpatch operation completed successfully on home /u01/app/oracle/product/19.18.0/dbhome_1

Start applying binary patch on home /u01/app/19.18.0/grid
Binary patch applied successfully on home /u01/app/19.18.0/grid

Performing postpatch operations on CRS - starting CRS service on home /u01/app/19.18.0/grid
Postpatch operation log file location: /u01/app/grid_19c/crsdata/gncashpl08052/crsconfig/crs_postpatch_apply_inplace_gncashpl08052_2023-05-30_12-12-42AM.log
CRS service started successfully on home /u01/app/19.18.0/grid

Starting database service on home /u01/app/oracle/product/19.18.0/dbhome_1
No step execution required.....

Preparing home /u01/app/oracle/product/19.18.0/dbhome_1 after database service restarted
No step execution required.....

Trying to apply SQL patch on home /u01/app/oracle/product/19.18.0/dbhome_1
No SQL patch operations are required on local node for this home

OPatchAuto successful.

-----Summary-----

Patching is completed successfully. Please find the summary as follows:

Host:gncashpl08052
RAC Home:/u01/app/oracle/product/19.18.0/dbhome_1
Version:19.0.0.0.0
Summary:

==Following patches were SUCCESSFULLY applied:

Patch: /u02/oracle/patches/34777391
Log: /u01/app/oracle/product/19.18.0/dbhome_1/cfgtoollogs/patchauto/core/patch/patch2023-05-30_12-09-47PM_1.log

Host:gncashpl08052
CRS Home:/u01/app/19.18.0/grid
Version:19.0.0.0.0
Summary:

==Following patches were SUCCESSFULLY applied:

Patch: /u02/oracle/patches/34777391
Log: /u01/app/19.18.0/grid/cfgtoollogs/patchauto/core/patch/patch2023-05-30_12-11-29PM_1.log

OPatchauto session completed at Tue May 30 12:16:52 2023
Time taken to complete the session 12 minutes, 3 seconds
[root@GNCASHPL08052 OPatch]#

```

Aplicando o OJVM 19.18
 NOTA: lembre que é necessário baixar o banco

```

[oracle@GNCASHPL08053 ~]$ srvctl stop instance -d CONTROLM -node GNCASHPL08053
[oracle@GNCASHPL08053 ~]$ cd $ORACLE_HOME/OPatch
[oracle@GNCASHPL08053 OPatch]$ ./opatch apply /u02/oracle/patches/34786990
Oracle Interim Patch Installer version 12.2.0.1.37
Copyright (c) 2023, Oracle Corporation. All rights reserved.

Oracle Home      : /u01/app/oracle/product/19.18.0/dbhome_1
Central Inventory : /u01/app/oraInventory
from              : /u01/app/oracle/product/19.18.0/dbhome_1/oraInst.loc

```

```
OPatch version   : 12.2.0.1.37
OUI version      : 12.2.0.7.0
Log file location : /u01/app/oracle/product/19.18.0/dbhome_1/cfgtoollogs/patch/opatch/opatch2023-05-30_12-20-43PM_1.log
```

Verifying environment and performing prerequisite checks...

OPatch continues with these patches: 34786990

Do you want to proceed? [y|n]

y

User Responded with: Y

All checks passed.

Please shutdown Oracle instances running out of this ORACLE_HOME on the local system.

(Oracle Home = '/u01/app/oracle/product/19.18.0/dbhome_1')

Is the local system ready for patching? [y|n]

y

User Responded with: Y

Backing up files...

Applying interim patch '34786990' to OH '/u01/app/oracle/product/19.18.0/dbhome_1'

Patching component oracle.javavm.server, 19.0.0.0.0...

Patching component oracle.javavm.server.core, 19.0.0.0.0...

Patching component oracle.rdbms.dbscripts, 19.0.0.0.0...

Patching component oracle.rdbms, 19.0.0.0.0...

Patching component oracle.javavm.client, 19.0.0.0.0...

Patch 34786990 successfully applied.

Log file location: /u01/app/oracle/product/19.18.0/dbhome_1/cfgtoollogs/patch/opatch/opatch2023-05-30_12-20-43PM_1.log

OPatch succeeded.

[oracle@GNCASHPL08053 OPatch]\$ srvctl start instance -d CONTROLM -node GNCASHPL08053

[oracle@GNCASHPL08052 ~]\$. db_profile

[oracle@GNCASHPL08052 ~]\$ cd \$ORACLE_HOME/OPatch

[oracle@GNCASHPL08052 OPatch]\$ srvctl stop instance -d CONTROLM -node GNCASHPL08052

[oracle@GNCASHPL08052 OPatch]\$./opatch apply /u02/oracle/patches/34786990

Oracle Interim Patch Installer version 12.2.0.1.37

Copyright (c) 2023, Oracle Corporation. All rights reserved.

Oracle Home : /u01/app/oracle/product/19.18.0/dbhome_1

Central Inventory : /u01/app/oraInventory

from : /u01/app/oracle/product/19.18.0/dbhome_1/oraInst.loc

OPatch version : 12.2.0.1.37

OUI version : 12.2.0.7.0

Log file location : /u01/app/oracle/product/19.18.0/dbhome_1/cfgtoollogs/patch/opatch/opatch2023-05-30_12-25-05PM_1.log

Verifying environment and performing prerequisite checks...

OPatch continues with these patches: 34786990

Do you want to proceed? [y|n]

y

User Responded with: Y

All checks passed.

Please shutdown Oracle instances running out of this ORACLE_HOME on the local system.

(Oracle Home = '/u01/app/oracle/product/19.18.0/dbhome_1')

Is the local system ready for patching? [y|n]

y

User Responded with: Y

Backing up files...

```
Applying interim patch '34786990' to OH '/u01/app/oracle/product/19.18.0/dbhome_1'

Patching component oracle.javavm.server, 19.0.0.0.0...

Patching component oracle.javavm.server.core, 19.0.0.0.0...

Patching component oracle.rdbms.dbscripts, 19.0.0.0.0...

Patching component oracle.rdbms, 19.0.0.0.0...

Patching component oracle.javavm.client, 19.0.0.0.0...
Patch 34786990 successfully applied.
Log file location: /u01/app/oracle/product/19.18.0/dbhome_1/cfgtoollogs/opatch/opatch2023-05-30_12-25-05PM_1.log

OPatch succeeded.

[oracle@GNCASHPL08052 OPatch]$ srvctl start instance -d CONTROLM -node GNCASHPL08052
```

Datapatch do OVJM 19.18

```
[oracle@GNCASHPL08052 OPatch]$ cd $ORACLE_HOME/OPatch
[oracle@GNCASHPL08052 OPatch]$ ./datapatch -verbose
SQL Patching tool version 19.18.0.0.0 Production on Tue May 30 12:28:22 2023
Copyright (c) 2012, 2023, Oracle. All rights reserved.

Log file for this invocation: /u01/app/oracle_19c/cfgtoollogs/sqlpatch/sqlpatch_800156_2023_05_30_12_28_22/sqlpatc
h_invocation.log

Connecting to database...OK
Gathering database info...done
Bootstrapping registry and package to current versions...done
Determining current state...done

Current state of interim SQL patches:
Interim patch 34786990 (OJVM RELEASE UPDATE: 19.18.0.0.230117 (34786990)):
  Binary registry: Installed
  SQL registry: Not installed

Current state of release update SQL patches:
  Binary registry:
    19.18.0.0.0 Release_Update 230127005551: Installed
  SQL registry:
    Applied 19.18.0.0.0 Release_Update 230127005551 successfully on 30-MAY-23 11.51.12.696385 AM

Adding patches to installation queue and performing prereq checks...done
Installation queue:
  No interim patches need to be rolled back
  No release update patches need to be installed
  The following interim patches will be applied:
    34786990 (OJVM RELEASE UPDATE: 19.18.0.0.230117 (34786990))

Installing patches...
Patch installation complete. Total patches installed: 1

Validating logfiles...done
Patch 34786990 apply: SUCCESS
  logfile: /u01/app/oracle_19c/cfgtoollogs/sqlpatch/34786990/25032666/34786990_apply_CONTROLM_2023May30_12_28_56.l
og (no errors)
SQL Patching tool complete on Tue May 30 12:28:58 2023
```

Evidência final:

```
SQL> select instance_name, host_name, version, status, open_mode, database_role, switchover_status from gv$instance, v$database;
```

INSTANCE_NAME	HOST_NAME	VERSION	STATUS	OPEN_MODE	DATABASE_ROLE	SWITCHOVER_STATUS
CONTROLM1	GNCASHPL08052	19.0.0.0.0	OPEN	READ WRITE	PRIMARY	NOT ALLOWED
CONTROLM2	GNCASHPL08053	19.0.0.0.0	OPEN	READ WRITE	PRIMARY	NOT ALLOWED

```
SQL> select comp_name, version, status, modified from dba_registry;
```

COMP_NAME	VERSION	STATUS	MODIFIED
Oracle Database Catalog Views	19.0.0.0.0	VALID	29-MAY-2023 23:53:32
Oracle Database Packages and Types	19.0.0.0.0	VALID	29-MAY-2023 23:53:32
Oracle Real Application Clusters	19.0.0.0.0	VALID	29-MAY-2023 23:53:33
JServer JAVA Virtual Machine	19.0.0.0.0	VALID	30-MAY-2023 12:28:58
Oracle XDK	19.0.0.0.0	VALID	29-MAY-2023 23:53:34
Oracle Database Java Packages	19.0.0.0.0	VALID	29-MAY-2023 23:53:34
OLAP Analytic Workspace	19.0.0.0.0	VALID	29-MAY-2023 23:53:34
Oracle XML Database	19.0.0.0.0	VALID	29-MAY-2023 23:53:32
Oracle Workspace Manager	19.0.0.0.0	VALID	29-MAY-2023 23:53:34
Oracle Text	19.0.0.0.0	VALID	29-MAY-2023 23:53:34
Oracle Multimedia	19.0.0.0.0	VALID	29-MAY-2023 23:53:34
Spatial	19.0.0.0.0	VALID	30-MAY-2023 12:29:44
Oracle OLAP API	19.0.0.0.0	VALID	30-MAY-2023 11:50:15
Oracle Label Security	19.0.0.0.0	VALID	29-MAY-2023 23:53:35
Oracle Database Vault	19.0.0.0.0	VALID	29-MAY-2023 23:53:35

15 rows selected.

```
SQL> select PATCH_ID, ACTION, STATUS, ACTION_TIME, DESCRIPTION from dba_registry_sqlpatch;
```

PATCH_ID	ACTION	STATUS	ACTION_TIME	DESCRIPTION
29517242	APPLY	SUCCESS	29-MAY-23 11.50.45.187413 PM	Database Release Update : 19.3.0.0.190416 (29517242)
34765931	APPLY	SUCCESS	30-MAY-23 11.51.12.696385 AM	DATABASE RELEASE UPDATE : 19.18.0.0.230117 (REL-JAN230131) (34765931)
34786990	APPLY	SUCCESS	30-MAY-23 12.28.58.862468 PM	OJVM RELEASE UPDATE: 19.18.0.0.230117 (34786990)

Teste de Stop/Start de um dos nós:

```
oracle@GNCASHPL08053 OPatch]$ srvctl stop instance -d CONTROLM -node GNCASHPL08053
[oracle@GNCASHPL08053 OPatch]$ exit
logout
[root@GNCASHPL08053 OPatch]# . /home/grid/grid_profile
[root@GNCASHPL08053 OPatch]# crsctl stop has -f
CRS-2791: Starting shutdown of Oracle High Availability Services-managed resources on 'gncashpl08053'
CRS-2673: Attempting to stop 'ora.crsd' on 'gncashpl08053'
CRS-2790: Starting shutdown of Cluster Ready Services-managed resources on server 'gncashpl08053'
CRS-2673: Attempting to stop 'ora.LISTENER_SCAN2.lsnr' on 'gncashpl08053'
CRS-2673: Attempting to stop 'ora.LISTENER.lsnr' on 'gncashpl08053'
CRS-2673: Attempting to stop 'ora.LISTENER_SCAN3.lsnr' on 'gncashpl08053'
CRS-2673: Attempting to stop 'ora.cvu' on 'gncashpl08053'
CRS-2673: Attempting to stop 'ora.chad' on 'gncashpl08053'
CRS-2673: Attempting to stop 'ora.qosmserver' on 'gncashpl08053'
CRS-33673: Attempting to stop resource group 'ora.asmgrou' on server 'gncashpl08053'
CRS-2673: Attempting to stop 'ora.DATA.dg' on 'gncashpl08053'
CRS-2677: Stop of 'ora.DATA.dg' on 'gncashpl08053' succeeded
CRS-2673: Attempting to stop 'ora.asm' on 'gncashpl08053'
CRS-2677: Stop of 'ora.LISTENER_SCAN2.lsnr' on 'gncashpl08053' succeeded
CRS-2673: Attempting to stop 'ora.scan2.vip' on 'gncashpl08053'
CRS-2677: Stop of 'ora.LISTENER_SCAN3.lsnr' on 'gncashpl08053' succeeded
CRS-2673: Attempting to stop 'ora.scan3.vip' on 'gncashpl08053'
CRS-2677: Stop of 'ora.cvu' on 'gncashpl08053' succeeded
CRS-2677: Stop of 'ora.LISTENER.lsnr' on 'gncashpl08053' succeeded
CRS-2673: Attempting to stop 'ora.gncashpl08053.vip' on 'gncashpl08053'
CRS-2677: Stop of 'ora.scan2.vip' on 'gncashpl08053' succeeded
CRS-2677: Stop of 'ora.scan3.vip' on 'gncashpl08053' succeeded
```

```

CRS-2677: Stop of 'ora.gncashpl08053.vip' on 'gncashpl08053' succeeded
CRS-2677: Stop of 'ora.asm' on 'gncashpl08053' succeeded
CRS-2673: Attempting to stop 'ora.ASMNET1LSNR_ASM.lsnr' on 'gncashpl08053'
CRS-2677: Stop of 'ora.qosmserver' on 'gncashpl08053' succeeded
CRS-2677: Stop of 'ora.ASMNET1LSNR_ASM.lsnr' on 'gncashpl08053' succeeded
CRS-2673: Attempting to stop 'ora.asmnet1.asmnetwork' on 'gncashpl08053'
CRS-2677: Stop of 'ora.asmnet1.asmnetwork' on 'gncashpl08053' succeeded
CRS-33677: Stop of resource group 'ora.asmgroupp' on server 'gncashpl08053' succeeded.
CRS-2677: Stop of 'ora.chad' on 'gncashpl08053' succeeded
CRS-2672: Attempting to start 'ora.qosmserver' on 'gncashpl08052'
CRS-2672: Attempting to start 'ora.scan2.vip' on 'gncashpl08052'
CRS-2672: Attempting to start 'ora.scan3.vip' on 'gncashpl08052'
CRS-2672: Attempting to start 'ora.cvu' on 'gncashpl08052'
CRS-2672: Attempting to start 'ora.gncashpl08053.vip' on 'gncashpl08052'
CRS-2676: Start of 'ora.cvu' on 'gncashpl08052' succeeded
CRS-2676: Start of 'ora.gncashpl08053.vip' on 'gncashpl08052' succeeded
CRS-2676: Start of 'ora.scan3.vip' on 'gncashpl08052' succeeded
CRS-2672: Attempting to start 'ora.LISTENER_SCAN3.lsnr' on 'gncashpl08052'
CRS-2676: Start of 'ora.scan2.vip' on 'gncashpl08052' succeeded
CRS-2672: Attempting to start 'ora.LISTENER_SCAN2.lsnr' on 'gncashpl08052'
CRS-2676: Start of 'ora.LISTENER_SCAN3.lsnr' on 'gncashpl08052' succeeded
CRS-2676: Start of 'ora.LISTENER_SCAN2.lsnr' on 'gncashpl08052' succeeded
CRS-2676: Start of 'ora.qosmserver' on 'gncashpl08052' succeeded
CRS-2673: Attempting to stop 'ora.ons' on 'gncashpl08053'
CRS-2677: Stop of 'ora.ons' on 'gncashpl08053' succeeded
CRS-2673: Attempting to stop 'ora.net1.network' on 'gncashpl08053'
CRS-2677: Stop of 'ora.net1.network' on 'gncashpl08053' succeeded
CRS-2792: Shutdown of Cluster Ready Services-managed resources on 'gncashpl08053' has completed
CRS-2677: Stop of 'ora.crsd' on 'gncashpl08053' succeeded
CRS-2673: Attempting to stop 'ora.storage' on 'gncashpl08053'
CRS-2673: Attempting to stop 'ora.crf' on 'gncashpl08053'
CRS-2673: Attempting to stop 'ora.mdnsd' on 'gncashpl08053'
CRS-2677: Stop of 'ora.crf' on 'gncashpl08053' succeeded
CRS-2677: Stop of 'ora.storage' on 'gncashpl08053' succeeded
CRS-2673: Attempting to stop 'ora.asm' on 'gncashpl08053'
CRS-2677: Stop of 'ora.mdnsd' on 'gncashpl08053' succeeded
CRS-2677: Stop of 'ora.asm' on 'gncashpl08053' succeeded
CRS-2673: Attempting to stop 'ora.cluster_interconnect.haip' on 'gncashpl08053'
CRS-2677: Stop of 'ora.cluster_interconnect.haip' on 'gncashpl08053' succeeded
CRS-2673: Attempting to stop 'ora.ctssd' on 'gncashpl08053'
CRS-2673: Attempting to stop 'ora.evmd' on 'gncashpl08053'
CRS-2677: Stop of 'ora.evmd' on 'gncashpl08053' succeeded
CRS-2677: Stop of 'ora.ctssd' on 'gncashpl08053' succeeded
CRS-2673: Attempting to stop 'ora.cssd' on 'gncashpl08053'
CRS-2677: Stop of 'ora.cssd' on 'gncashpl08053' succeeded
CRS-2673: Attempting to stop 'ora.gipcd' on 'gncashpl08053'
CRS-2673: Attempting to stop 'ora.gpnpd' on 'gncashpl08053'
CRS-2677: Stop of 'ora.gipcd' on 'gncashpl08053' succeeded
CRS-2677: Stop of 'ora.gpnpd' on 'gncashpl08053' succeeded
CRS-2793: Shutdown of Oracle High Availability Services-managed resources on 'gncashpl08053' has completed
CRS-4133: Oracle High Availability Services has been stopped.
[root@GNCASHPL08053 OPatch]# shutdown -r now
Connection to gncashpl08053 closed by remote host.
Connection to gncashpl08053 closed.

```

NOTA: Subiu o grid automaticamente:

```

[adm.as58172.GNCASNPW01298] ➤ ssh adm.as58172@GNCASHPL08053
Activate the web console with: systemctl enable --now cockpit.socket

```

Last login: Tue May 30 09:39:06 2023 from gncasnpw01298.getnet.local

```

[adm.as58172@GNCASHPL08053 ~]$ sudo su -

```

```

[sudo] password for adm.as58172:

```

Last login: Tue May 30 12:23:27 -03 2023

```

[root@GNCASHPL08053 ~]# ./home/grid/grid_profile

```

```

[root@GNCASHPL08053 ~]# crsctl status res -t

```

Name	Target	State	Server	State details
------	--------	-------	--------	---------------

Local Resources

```

ora.LISTENER.lsnr
    ONLINE ONLINE gncashpl08052 STABLE
    ONLINE ONLINE gncashpl08053 STABLE
ora.chad
    ONLINE ONLINE gncashpl08052 STABLE
    ONLINE ONLINE gncashpl08053 STABLE
ora.net1.network
    ONLINE ONLINE gncashpl08052 STABLE
    ONLINE ONLINE gncashpl08053 STABLE
ora.ons
    ONLINE ONLINE gncashpl08052 STABLE
    ONLINE ONLINE gncashpl08053 STABLE

```

Cluster Resources

```

ora.ASMNET1LSNR_ASM.lsnr(ora.asmgroup)
  1 ONLINE ONLINE gncashpl08052 STABLE
  2 ONLINE ONLINE gncashpl08053 STABLE
  3 ONLINE OFFLINE STABLE
ora.DATA.dg(ora.asmgroup)
  1 ONLINE ONLINE gncashpl08052 STABLE
  2 OFFLINE OFFLINE STABLE
  3 OFFLINE OFFLINE STABLE
ora.LISTENER_SCAN1.lsnr
  1 ONLINE ONLINE gncashpl08053 STABLE
ora.LISTENER_SCAN2.lsnr
  1 ONLINE ONLINE gncashpl08052 STABLE
ora.LISTENER_SCAN3.lsnr
  1 ONLINE ONLINE gncashpl08052 STABLE
ora.asm(ora.asmgroup)
  1 ONLINE ONLINE gncashpl08052 Started,STABLE
  2 ONLINE OFFLINE gncashpl08053 Instance Shutdown,ST
    ARTING
  3 OFFLINE OFFLINE STABLE
ora.asmnet1.asmnetwork(ora.asmgroup)
  1 ONLINE ONLINE gncashpl08052 STABLE
  2 ONLINE ONLINE gncashpl08053 STABLE
  3 OFFLINE OFFLINE STABLE
ora.controlm.db
  1 ONLINE ONLINE gncashpl08052 Open,HOME=/u01/app/o
    racle/product/19.18.
    0/dbhome_1,STABLE
  2 OFFLINE OFFLINE Instance Shutdown,ST
    ALE
ora.cvu
  1 ONLINE ONLINE gncashpl08052 STABLE
ora.gncashpl08052.vip
  1 ONLINE ONLINE gncashpl08052 STABLE
ora.gncashpl08053.vip
  1 ONLINE ONLINE gncashpl08053 STABLE
ora.qosmserver
  1 ONLINE ONLINE gncashpl08052 STABLE
ora.scan1.vip
  1 ONLINE ONLINE gncashpl08053 STABLE
ora.scan2.vip
  1 ONLINE ONLINE gncashpl08052 STABLE
ora.scan3.vip
  1 ONLINE ONLINE gncashpl08052 STABLE

```

[root@GNCASHPL08053 ~]#