


Procedimento para Stop de um node Always on


1

Connect no servidor alvo de Stop .

2 Acesse o SSMS e logue na instancia com privilégios SYSADMIN.

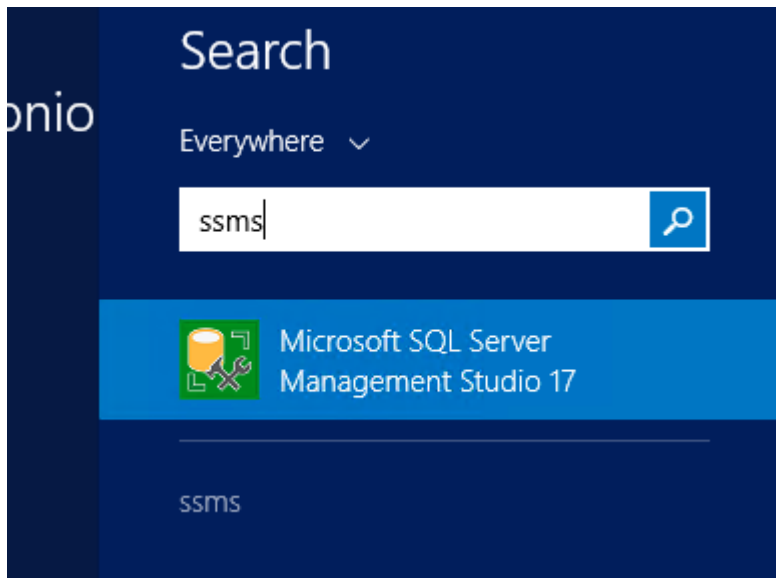

2 Va no menu AlwaysOn High Availability, acesse os availability Groups e clique em "show dashboard".

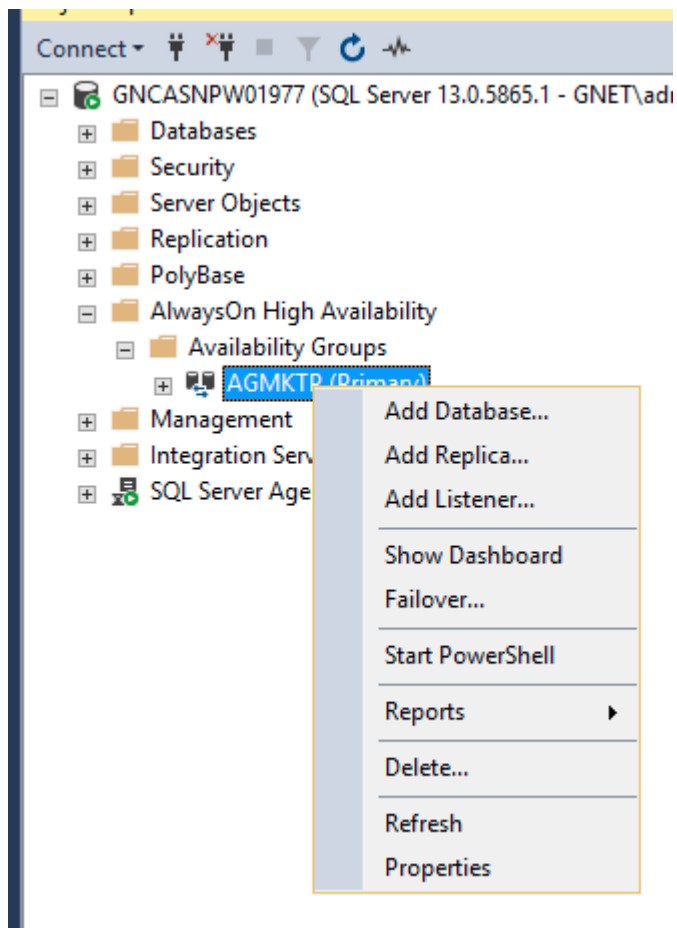

3 verifique o seu Estado no cluster


AGMKTP: hosted by GNCASNPW01977 (Replica role: Primary)

Availability group state:  Healthy
 Primary instance: GNCASNPW01977
 Failover mode: Manual
 Cluster state: W2KCLSPMKT (Normal Quorum)



Availability replica:

Name	Role	Failover Mode	Synchronization State	Issues
 GNCASNPW01977	Primary	Manual	Synchronized	
 GNCASSPW01978	Secondary	Manual	Synchronizing	


Group by ▼

Name	Replica	Synchronization State	Failover Read...	Issues
GNCASNPW01977				
 ARP	GNCASNPW01977	Synchronized	No Data Loss	
 CE_Clear	GNCASNPW01977	Synchronized	No Data Loss	
 CE_Email	GNCASNPW01977	Synchronized	No Data Loss	
 CE_EXPURGO	GNCASNPW01977	Synchronized	No Data Loss	
 CE_HistMarketplace	GNCASNPW01977	Synchronized	No Data Loss	
 CE_Marketplace	GNCASNPW01977	Synchronized	No Data Loss	
 CE_MarketplaceAudit	GNCASNPW01977	Synchronized	No Data Loss	
GNCASSPW01978				
 ARP	GNCASSPW01978	Synchronizing	Data Loss	
 CE_Clear	GNCASSPW01978	Synchronizing	Data Loss	
 CE_Email	GNCASSPW01978	Synchronizing	Data Loss	
 CE_EXPURGO	GNCASSPW01978	Synchronizing	Data Loss	
 CE_HistMarketplace	GNCASSPW01978	Synchronizing	Data Loss	
 CE_Marketplace	GNCASSPW01978	Synchronizing	Data Loss	
 CE_MarketplaceAudit	GNCASSPW01978	Synchronizing	Data Loss	

4 Se a instancia alvo de stop for Secundário, siga para o passo de stop da Instancia . Caso contrário avalie o tipo de sincronismo clicando com o botao direito no availability Group e indo em Propriedades

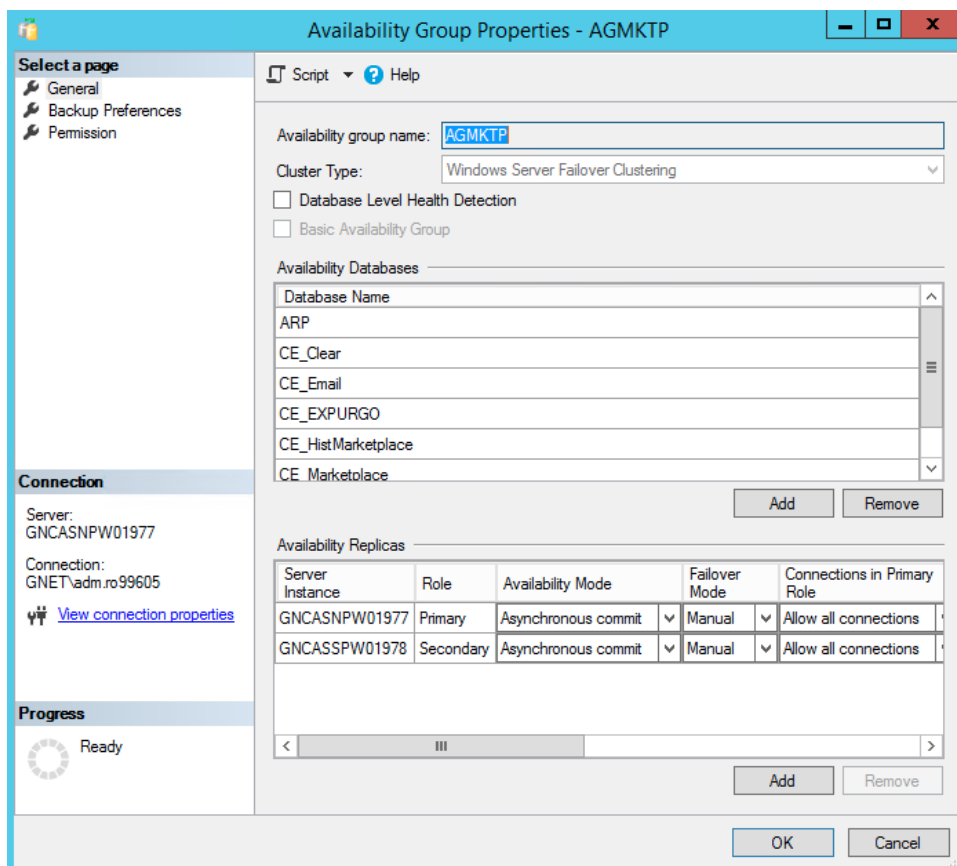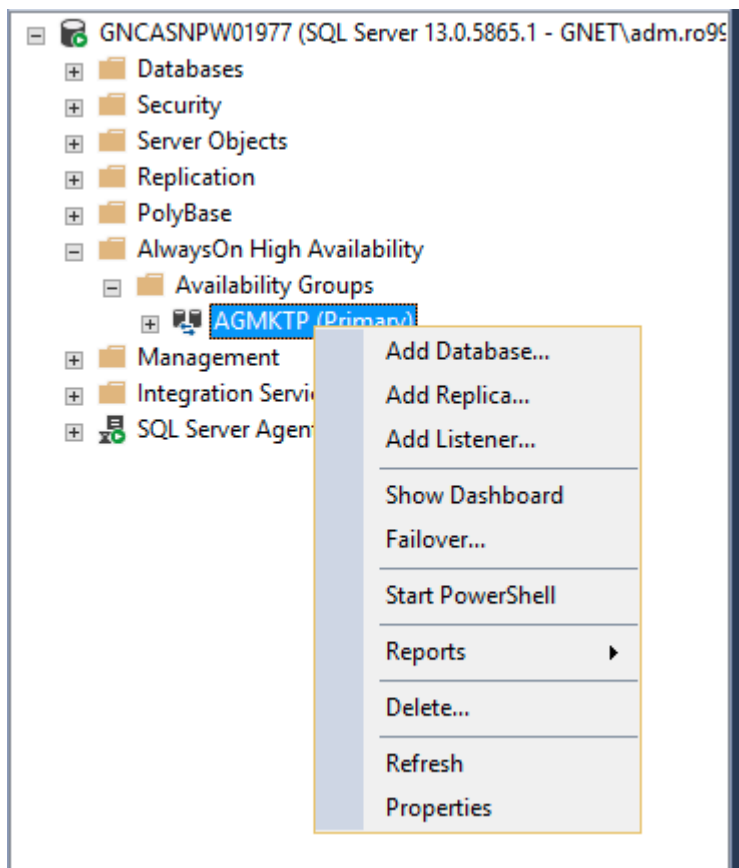

Caso o Availability mode Estiver Asynchronous , você deve altera-lo para Synchronous, garantindo assim que os dados no primário estão fielmente no secundário.

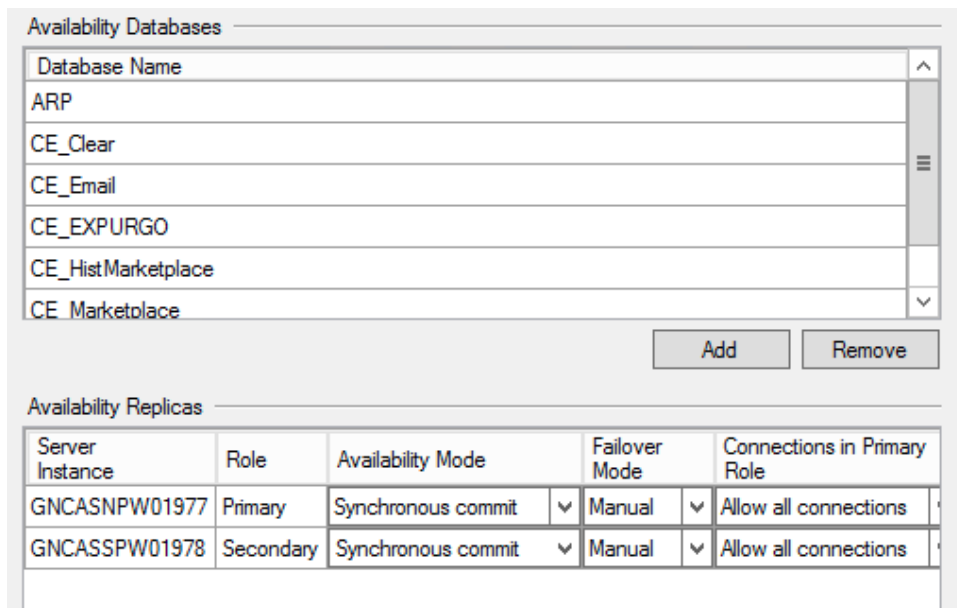

Atenção: Para certos ambientes o modo Sincrono pode provocar problemas de lentidão portando não esqueça de voltar para Assincrono após a Gmud.

4 após garantir o modo Assynchronous, inicie o processo de failover :



Atenção:

Failover em modo assincrono figura nos warnings abaixo (data loss):

Select the new primary replica for this availability group.


Current Primary Replica: GNCASNPW01977
 Primary Replica Status: Asynchronous commit and Online
 Quorum Status: Normal Quorum

Choose new primary replica:


	Server Instance	Availability Mode	Failover Mode	Failover Readiness
 ☒	GNCASSPW01978	Asynchronous co...	Manual	Data loss, Warnings(1)


Somente dê sequencia no failover com o modo síncrono.

5 após garantir o modo síncrono e o Failover tornar o outro nodo Primario, abra o Configuration manager

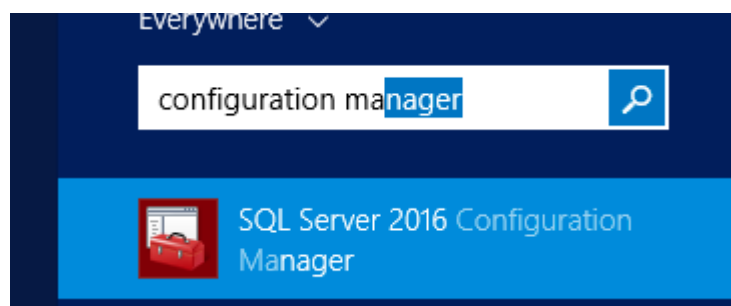

Dê Stop nos serviços SQL Server

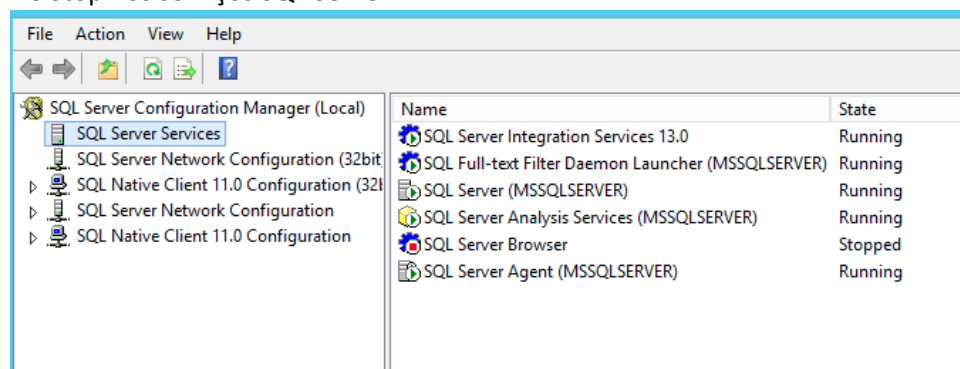

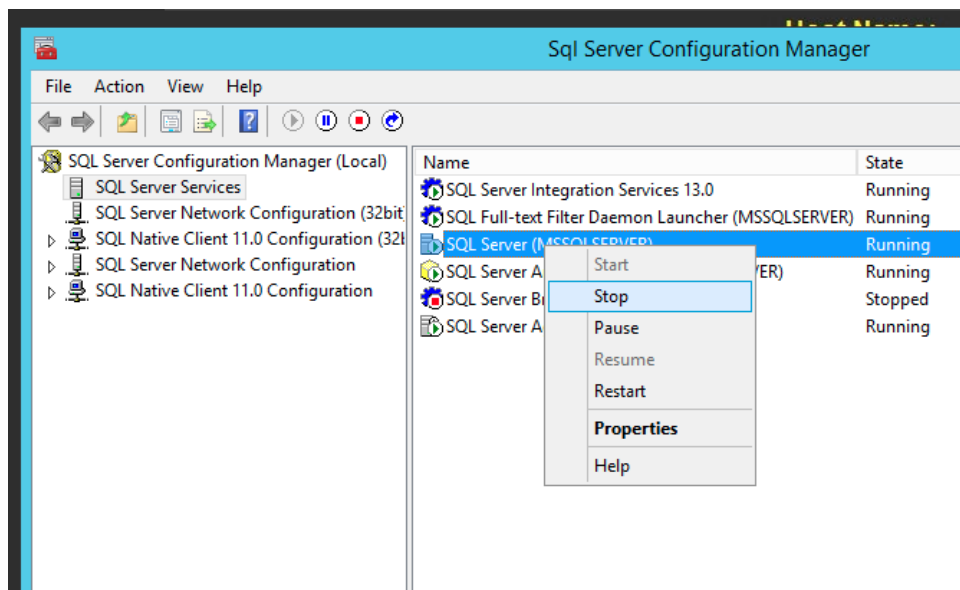

Após finalizar o stop, proceda com as ações de restart do servidor e caso queira faça o reverso do failover após reestabelecer o servidor.