
MLP Coursework 4: Project Final Report

Transfer learning and dataset size

Group G74

s1700260, s1457374, s1784849

Abstract

Write This Last.

1. Introduction

Large-scale neural networks have become increasingly prevalent in artificial intelligence (Krizhevsky et al., 2012). Such architectures effectively solve computer vision problems that were previously considered difficult to address using traditional symbolic manipulation (Dinsmore, 2014). One concern with modern neural networks is that their performance scales with the quantity of data used to train them, as demonstrated in our previous piece of research (s1700260, 2018). This concern is a problem for individuals or institutions with small amounts of data that want to implement these architectures as solutions, or for research purposes.

Data-driven techniques exist, such as data augmentation (Krizhevsky et al., 2012), which help solve this problem. However, to draw from our previous research (s1700260, 2018) we investigate alternative, machine learning based approaches. Specifically, transfer learning (Oquab et al., 2014), (Ng et al., 2015) and deep features extraction (Chen et al., 2016) as methods to improve the performance of neural network architectures that utilise small amounts of data. These techniques allow us to use the knowledge that a given (pre-trained) network already has and adapt the architecture to suit our requirements.

The objective of transfer learning is to use the knowledge acquired by an existing network that was built to solve a similar task to improve the generalisation of a novel task. A significant advantage of utilising this technique is that the neural network model does not have to learn from scratch. Prior learning (computational work) can be re-utilised which is essential when the resources are limited, which is significant for convolutional neural networks, which, depending on the size of the architecture, can require a considerable amount of computational power.

Numerous pre-trained neural networks to solve classification tasks exist in the field of computer vision. One of them is the Visual Geometry Group network (VGG net) (Simonyan & Zisserman, 2014). This network implements a simple yet deep architecture with several convolutional layers. There are several configurations that vary the number of convolutional layers among 11, 13, 16, and 19. In every

configuration the architecture includes maximum pooling layers of dimensions 2x2 and stride 1. The convolutions are performed using 3x3 filters with stride and pad of 1. Finally, ReLU activations after each convolution are utilised.

VGG net was first used in the ImageNet Challenge 2014 (Simonyan & Zisserman, 2014), which means that it was originally trained using the Imagenet dataset (Deng et al., 2009). However, the network has also been trained in other datasets like CIFAR-10 (Krizhevsky et al., 2014) and CIFAR-100 (Alex and Nair, Vinod and Hinton, Geoffrey, 2010). It is important to make this distinction since each dataset has been developed for a different purpose. Therefore, they have specific characteristics. The knowledge learnt from a network depends on the dataset used to train it. Thus, it is critical to know the characteristics of the dataset utilised to train the network since it will play an important role when implementing transfer learning.

ImageNet is a large-scale hierarchical image database (ImageNet, 1996). The structure of this dataset contains 12 main groups or sub-trees. Each sub-tree contains a variable number of categories. The total number of categories is 5247, each one containing on average 600 images, thus, the total number of images in the dataset is 3.2 million. As described, ImageNet is a large and diverse dataset. However, the original version of VGG net was trained on a subset of Imagenet that contains only 1000 categories using 1.3 million images for training, 50K images for validation and 100K images for testing.

1.1. Interim Report Findings

The research questions offered within this report have been drawn from our initial findings, as documented in the interim report (s1700260, 2018). To aid in orientating the reader, we provide a summary of these findings here.

It was possible to demonstrate how the amount of available data impacts the performance of a convolutional neural network. Such impact was observed in the validation stage by analysing the accuracy and error of the network. In the first case, it was evident the reduction of the accuracy as the size of the dataset was reduced. In the second case, the size of the dataset directly affected the error; the smaller the dataset, the bigger the error. In both cases, the ultimate effect of such behaviour was the difficulty of the network to generalize when the amount of data is small.

Furthermore, the usage of two different but comparable databases provided some extra insights about the behaviour of the neural network. In this case, the observed accuracies in the validation stage were different for each dataset in every size used to train the network. Under these circumstances, it was clear that the dataset that allowed a higher accuracy (clothes) was less challenging for the network. This means, that the features extracted by the network were more useful and relevant for one of the datasets. In the other hand, the features learned by the network did not provide enough information to reach better results for the second dataset (expressions).

Finally, we demonstrated that a simple data-driven technique like data augmentation effectively improves the performance of a simple convolutional neural network. However, the benefits of this method have a limit above which no further improvement can be done. All of these findings provided the foundations and motivation for our investigation.

2. Objectives and Research Questions

2.1. Objectives

There are two fundamental objectives. The first one concerns with improving the performance of the image classification task using transfer learning under conditions of small data. The second objective investigates the effects of transfer learning on two distinct but comparable datasets.

Furthermore, we intend to propose and utilise a framework for measuring the similarity between datasets using a modified siamese neural network (Koch & Salakhutdinov, 2015) architecture.

2.2. Research Questions

Following from the conclusions drawn from our interim report, our research questions are listed below.

1. How much the performance for a given classification task can be improved by using transfer learning?
2. How much the application of transfer learning affect two distinct but comparable datasets?

2.3. Hypotheses

- H.1** Transfer learning will provide a performance benefit with respect to the generalisability (measured through validation accuracy) for the given classification task in conditions of small data.
- H.2** Transfer learning will provide a larger performance boost when the size of the dataset used to initially train the model is small rather than large.

Within the remainder of this report a section that outlines the methodologies utilised to conduct our research 3 is

initially given. Thereafter, all experimental results are presented 4 and a review of related work is provided 5. Finally, a set of conclusions are drawn 6.

3. Methodology

3.1. Simple Transfer Learning

3.1.1. CHOSEN MODEL

We decided to select the VGG net configuration with 16 convolutional layers (hereinafter referred as VGG16) to transfer its knowledge into the clothes and expressions datasets. As previously mentioned, this network is quite simple and deep; thus, the expectation is that the knowledge contained in this network will be sufficient to increase the generalisability of the classification tasks using both datasets.

Since the available versions of VGG16 have been trained with different datasets, we decided to use the knowledge obtained from ImageNet rather than other options like CIFAR-100. The main reason for this decision is the number of classes from the subset of ImageNet to train the network (1000) which is much bigger than the number of classes from CIFAR-100 (100). The expectation is that the knowledge from ImageNet is more extensive, therefore, it can provide better results when transferring that knowledge into new datasets.

3.1.2. CONFIGURATION

The configuration to adapt the knowledge from VGG16 into the current task is made of two stages. The first one consists of extracting part of the knowledge from VGG16. One of the primary interests is to extract a sufficient number of relevant features to increase the generalisation for the classification task. This situation can be accomplished by using the knowledge from the convolutional layers. The second part consists in the adaptation of the extracted knowledge. This goal is achieved by discarding the original fully connected layers of VGG16. Then, a new set of fully connected layers adapted for the current task are implemented. Thus, the configuration is made of the convolutional layers from VGG16 connected to custom fully connected layers adapted for the current classification task.

The described configuration has a bottleneck between the convolutional layers and the fully connected ones. This bottleneck is caused by the number of convolutions that has to be done in every layer which requires a considerable amount of computational power. To reduce the impact of the described bottleneck the transfer learning is divided into two phases.

In the first phase, only the convolutional layers are utilised. The knowledge obtained from these layers is not modified. That means that their parameters from those layers are not updated while using the clothes and expressions datasets. Under these circumstances, the images from the datasets are passed through the convolutional layers, and the output

from the last one is stored for the second phase.

This process can be seen as a feature extraction stage. The raw images are converted from their original representation to a new one. The original representation of the images provides information about the pixel intensity. After passing the images through the convolutional layers, the pixel intensity information is converted to other of type of information based on the local spatial correlation of the pixels which is obtained with the convolutions.

The process of converting the images from their original representation to another using convolutional layers is computationally expensive. However, one of the benefits it provides is the dimensionality reduction of the representation of the images. Each input image is converted from a representation of 4096 (64x64) pixel intensities to a representation of 2048 new features. This means a reduction in the dimensionality of the images of 50%.

The process of converting the images from their original representation to another representation using convolutional layers is computationally expensive. However, one of the benefits it provides is the dimensionality reduction of the representation of the images. Each input image is converted from a representation of 4096 (64x64) pixel intensities to a representation of 2048 new features. This means a reduction in the dimensionality of the images of 50%.

In the first option, only one fully connected layer is defined. This option provides 205,607 trainable parameters. The second alternative adds another fully connected layer on top of the one from the first option. The total number of parameters for this alternative 210,307 parameters. For the final alternative, a new fully connected layer is added on top of the previous ones. The final number of parameters for this option is 211,407.

In every set of fully connected layers, an L2 regularisation strategy is used. The primary objective of this strategy is to reduce the chances of overfitting, which is especially crucial for small data. Each layer uses a uniform parameter initialisation strategy. This kind of initialisation allows having the activation done in the plateau region of a sigmoid function. Non-linear activation functions are added following the convolutional layers. For the output layer, a softmax activation with a categorical cross entropy error loss is implemented. The implemented learning rule is Adam.

3.2. One Shot Learning and Transfer Learning by Learning Similarity

3.2.1. SIAMESE NEURAL NETWORK

We are interested in using an alternative transfer learning method to solve the problem of insufficient target data for training. We suggest that this may be accomplished using a methodology inspired by (Koch & Salakhutdinov, 2015)¹

¹We would utilise a Siamese-like network to perform a similar operation to one-shot learning tasks

to learn to distinguish between images (using a similarity metric) from a related training dataset that differs from the target dataset. This methodology differs from the previously proposed method 3.1 since the training data would be different (but related to) the target data, to be classified.

In the original paper, Koch et.al trained using cross-validation on the Omniglot dataset (a character dataset similar to MNIST). Within the paper, the Siamese network consists of numerous convolutional layers that implement the ReLU activation function, followed by max-pooling layers, followed by fully connected layers and an L1 distance layer. This architecture allows for learning of generic features in images and provides a similarity metric between image pairs.

In this project, we propose an augmented version of the Siamese network as is suggested in the original paper. Since training convolutional layers could allow the neural network to learn general features of images, replacing the convolutional layers with part of the VGG16 (transfer) architecture may enable a more accurate similarity metric to be output. We assume a higher accuracy in similarity because VGG16 has already learnt an abundance of knowledge (regarding feature representation). Transferring VGG16 into the Siamese architecture also suggests that there is far less training required, as we would hope it would be easier to tune than train from scratch.

3.2.2. ALGORITHM

[[PLACEHOLDER]]

4. Experiments

4.1. Simple Transfer Learning

4.1.1. MOTIVATION

Transfer learning is a technique that takes advantage of previous work. The objective is to adapt that prior work to the specific circumstances of a similar new problem. As demonstrated in the previous research, the size of the dataset has a direct impact in the performance of a neural network. Therefore, the experiments of this new research are aimed to evaluate the benefits of transfer learning under the conditions of small data.

4.1.2. DESCRIPTION

Based on the prior findings of the existence of a correlation between the available data and the performance of a neural network, the experiments are mainly focused in the behaviour of the proposed approach for different sizes of the datasets. Even though the main focus is over small sizes of datasets, the evaluation of the proposed approach is also done over other sizes in order to get more insights about the performance of the solution. Therefore, each experiment that was conducted used the following dataset sample sizes: 100%, 10%, 1%, 0.1%. In order to make proper comparisons with the validation accuracy, the number of samples

for that stage as kept constant for every experiment as seen in Tables 1 and Table 2.

In order to search for a practical set of system parameters, we decided to also vary the activation functions after every fully connected layers. Each experiment was initially performed using a standard sigmoid function (Hecht-Nielsen, 1992). This function was selected in order to get the benefits of a uniform initialisation strategy. However, we also ran each experiment using exponential linear units (ELU) (Clevert et al., 2015). This activation function enables other kind of non-linearities. The main advantage of ELU is its gradient which is similar to the natural gradient (smooth).

Finally, we also performed a manual sensitivity analysis by varying the learning rate values from the follow pool: 0.01, 0.001, 0.0001.

Based on the description of the components in the methodology for the transfer learning approach, we configured the experiment using three sets of fully connected layers, two different types of activation functions, four dataset subsamples and a pool of three different learning rates.

Combinations of the above result in 72 different experiments for each dataset. Due to the amount of experiments and the limited computational resources, we set a fixed number of epochs for every experiment (20), and a fixed size for the mini-batches used for the stochastic gradient descent calculation (50).

After running the aforementioned experiments, we analysed the results based on the validation accuracy. Then, we selected the configurations that get the highest values for validation accuracy for dataset sizes of 1% and 0.1%. For further investigation we then performed new experiments with higher number of epochs (200) to analyse the behaviour of the fully connected part of the architecture under conditions of small data.

4.1.3. RESULTS

In order to compare the results of the current experiments to the baselines described in the previous report, the analysis of the transfer learning experiments is focused on the validation accuracy. Overall, there is still an evident reduction of the performance of the architecture related to the size of the datasets, as shown in Figure 1 and Figure 2.

Figure 1 shows the effect of the learning rate for every size of the clothes dataset. It is clearly evident how differently that hyper-parameter affects the validation accuracy of the system for each size. While the learning rate reduces, the validation accuracy when the sizes are 0.1% and 1% increases. In the other hand, the increase of the learning rate reduces the validation accuracy when the sizes are 10% and 100%. This behaviour might be an indicator of the relationship between the number of available training samples and the learning rate when the batch size is kept constant.

Figure 2 shows the effect of the learning rate for every size of the expressions dataset. Similarly, the size of the learning

rate has a positive impact for small sizes, and a negative one for bigger sizes. However, the validation accuracy is reduced for small sizes when the learning rates goes from 0.001 to 0.01. This situation might indicate the existence of a peak where the benefits of a large learning for small sizes start to decrease.

For each dataset, the configurations that provide the highest accuracy for the smallest dataset size are quite different, as seen in Table 3. It is specially important to note the activation functions. It is expected that the Sigmoid activation function gives better results since the uniform initialisation strategy is meant to benefit this activation function. However, in the case of expressions dataset, the best result is obtained with ELU, but the best accuracy using Sigmoid activations is not that far (0.30).

As seen in 3, the behaviour of the system for the smallest sizes is more stable for the clothes than for the expressions. In the case of the clothes dataset, for 1% and 0.1% of the original size, the system reaches a point where it starts to overfit. However, it is noticeable how the configuration of the system is robust enough to try to minimise the overfitting. Evidently, the number of available images play an important role in the reduction of the error. The minimum validation error for 0.1% is reached around the epoch number 30. For 1%, the minimum validation error is reached around the epoch number 50.

In the case of the expressions dataset, the behaviour of the system is completely distinct not just compared to the clothes, but between the sizes of the dataset. For 1% of the size, the configuration of the system is not robust enough to minimise the effects of overfitting. Once the overfitting starts, the efforts of the system to reduce it are not enough. However, for the case of 0.1%, the configuration of the system seems to be robust. At first, the overfitting effect is dramatic, then it reaches a point where the system starts to recover from it. The recovery is a long process where the system tries to learn from the training set. Eventually, the system reaches a point where the recovery is stopped and the overfitting starts again.

4.1.4. INTERPRETATION AND DISCUSSION

The proposed system provided some benefits when the number of samples in the datasets is small. Depending on the context of analysis, these benefits can be higher for one dataset or the other. At first, transfer learning seems to be more effective for the clothes dataset than for the expressions dataset as seen in Figure 1 and Figure 2. This information can give some clues about the complexity of the images in every dataset. At a glance, the experimental results allows to say that the features extracted from the clothes are less challenging to learn than those extracted from the expressions.

A further analysis makes possible to say that the knowledge

²RG for Relative gain.

³DA for data augmentation.

⁴AG for absolute gain.

Size	Training samples	Training samples per class	Validation samples	Validation samples per class
100%	42000	6000	7000	1000
10%	4200	600	7000	1000
1%	420	60	7000	1000
0.1%	42	6	7000	1000

Table 1. Number of samples for each size of the clothes dataset.

Size	Training samples	Training samples per class	Validation samples	Validation samples per class
100%	42000	6000	6300	900
10%	4200	600	6300	900
1%	420	60	6300	900
0.1%	42	6	6300	900

Table 2. Number of samples for each size of the expressions dataset.

Dataset	Validation accuracy	Fully connected layers	Activation	Learning rates
Clothes	0.64	2	Sigmoid	0.01
Expressions	0.31	3	ELU	0.001

Table 3. Configuration that allows the highest accuracy for size of 0.1% for clothes and expressions datasets

Dataset	Size	Baseline	Data Augmentation	Transfer learning
Clothes	1%	0.50	0.76	0.75
Clothes	100%	0.51	0.76	0.78
Expressions	1%	0.32	0.44	0.50
Expressions	100%	0.34	0.49	0.50

Table 4. Validation accuracy for baseline system, data augmentation, and transfer learning when dataset sizes are 1% and 100%

Dataset	Size	RG ² wrt baseline	RG wrt DA ³	AG ⁴ wrt baseline	AG wrt DA
Clothes	1%	1.5	0.99	0.25	-0.01
Clothes	100%	1.52	1.02	0.27	0.02
Expressions	1%	1.56	1.13	0.18	0.06
Expressions	100%	1.47	1.02	0.16	0.01

Table 5. Comparison of performance of transfer learning with respect to baseline system and data augmentation when dataset sizes are 1% and 100%. Relative gain is the ratio of the validation accuracies. Absolute gain is the difference of the validation accuracies.

obtained by VGG16 from the ImageNet dataset was more beneficial for the expressions dataset in terms of relative gain. The validation accuracy ratios between the transfer learning and the baseline experiments are 1.5 and 1.56 for the clothes and expressions dataset respectively. This might indicate that VGG16 extracted features that were more relevant for expressions than for clothes.

In absolute values, the knowledge from VGG16 in terms of validation accuracy was more beneficial for the clothes dataset. The additional validation accuracies obtained from transfer learning compared to the baseline system were 0.25 and 0.18 for the clothes and expressions dataset, respectively, as seen in 5. Even though the extracted features from VGG16 could have been more relevant for expressions, they were good enough to increase the performance of the system for clothes.

However, the additional validation accuracies compared to the data augmentation experiments are -0.01 and 0.06. Therefore, the benefits of data augmentation are compara-

ble to the benefits of transfer learning for the clothes dataset. One possible explanation is in the kind of information obtained from images.

Convolutional layers extract information about the local spatial correlation of images. The result of this process is the detection of edges, shapes, patterns and other geometric information. The baseline system was shallow and only contained one convolutional layer. Thus, the geometric information extracted from this single layer along with data augmentation provided enough elements to increase the performance in the classification task in a way that it was comparable to the benefits obtained from transfer learning.

When comparing the benefits of transfer learning under the conditions of low and high number of samples, the results are dis-pair. First, the benefits are higher when the number of clothes samples is higher as seen in 5. The relative and absolute gains are higher when using 100% of the clothes dataset. In the other hands, the benefits are higher when the number of expressions samples is lower. The relative

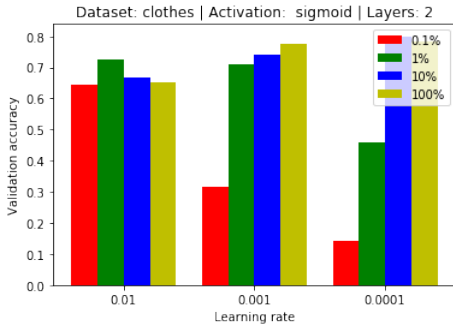


Figure 1. Validation accuracy comparison for the clothes dataset. The configuration with two fully connected layers and Sigmoid activations allows the highest accuracy for the smallest size of the dataset.

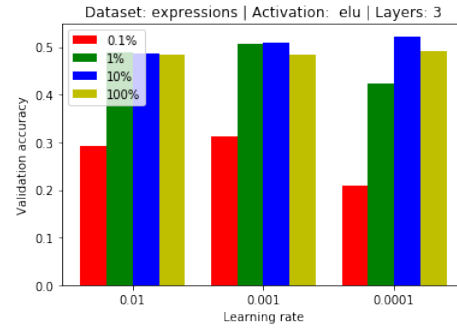


Figure 2. Validation accuracy comparison for the expression dataset. The configuration with three fully connected layers and ELU activations allows the highest accuracy for the smallest size of the dataset.

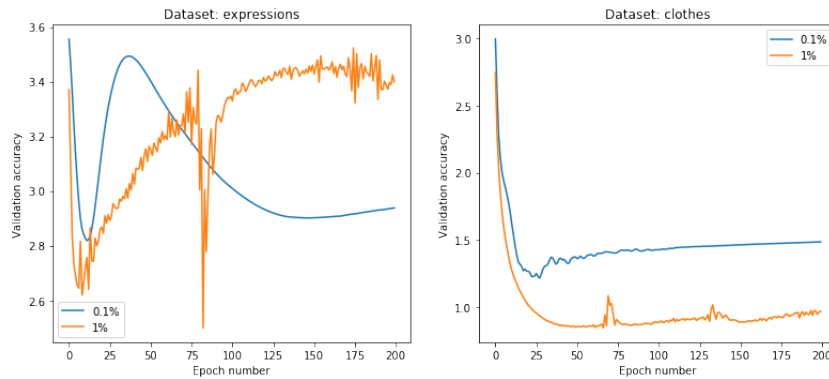


Figure 3. Comparison of the evolution of the validation error when the sizes of the datasets are 1% and 0.1%. The effects of over-fitting are clearly more dramatic for expressions than for clothes. The system presents a better behaviour when classifying clothes.

and absolute gains are higher when using only 1% of the expressions dataset.

4.2. Siamese Neural Network

4.2.1. DESCRIPTION AND MOTIVATION

Our model consists of first 19 layers in VGG16 followed by a flatten layer which converts all features from the previous layers to an equivalent n -dimensional matrix (n), in python. These vectors are then passed to a fully connected layer with sigmoid activation which outputs 4096 vectors. Next, we pass these vectors to our defined L1 distance layer which calculates the L1 distance between pairs of input images as a number. Finally, we output the probability of each pair of images being in the same class based on a last fully connected layer, also with a sigmoid activation. Binary cross-entropy is therefore used as the loss function.

To avoid overfitting, we utilise L2 regularization with $\lambda = 0.0001$. Since the original paper used different and decaying learning rates in each layer, adopting such approach on VGG16 would be difficult. We therefore simplified to use the Adam learning rule with a learning rate 0.001 as we have observed that choices of learning rate doesn't seem to affect much on the prediction accuracy.

4.2.2. EXPERIMENTAL SETUP

The goal is to train our VGG16-augmented Siamese Network to classify unseen classes of images by learning to distinguish similarity between images. The input is in terms of N pairs of image each having $(64,64,3)$ matrix encoded as pixels. As in the original paper, each of the two twin images in every pairs of images are passed to the model separately with weight sharing. This is to ensure symmetric invariance in model, that is to ensure that L1 distance layer output the same distance when the order of the two twins inputted is changed. This is done by defining the L1 distance layer $|x[first_win] - x[second_win]|$ where x is the flattened output from VGG16 and input of the entire network takes the form $pairs = [first_win, second_win]$. First twin and second twin has input shape (batch size, 64, 64, 3). The batch size determines no. of pairs to be trained during each epoch. As suggested in the original paper, we also ensure 50% of same and different class are used in pairs and randomly sampled among k available images in each classes. For the training data, we used first three categories of animated facial expression dataset (42k images in 7 classes) and Japanese female facial expression dataset (203 in 7 classes) in two separate runs. Both of the dataset also contains 7 classes of expression.

In the first approach, both training and test data are animated facial expression dataset. However, we only included the first three categories during training and the 4 unseen class during test time. This is to test the effectiveness of the proposed model on predicting unseen images but with a softer restriction. The model is allowed to learn representation on subset of classes of the target dataset but tested on other unseen classes of the same dataset. Note that this approach is still distinct from standard machine learning procedure as training is not directly on same kind of target dataset. Among the three categories, we randomly sampled 36 pairs of images randomly sampled from 900x3 available images from 3 classes in each epoch training. It is also ensured that 50% same and different classes are drawn.

In the second approach, restriction is increased and allow only related but entirely different dataset (Japanese female dataset) for training. There are in total 29x7 images in 7 categories. Apparently, the size of dataset is so few comparing to dataset in first approach. The reason of using this dataset is due to limited availability of grayscale facial expression dataset from internet and this is the only dataset that shares most geometric similarity with the target set (animated facial expression), as location, classes and placement angles are most similar comparing to other datasets such as extended cohn-kanade facial dataset.

[[PLACEHOLDER]]

4.2.3. RESULTS

In the first approach, training accuracy increases for first 50 epoch training ranging from 49 – 68% which proves that the model is in fact learning. During test time, 320 one shot learning tasks is performed after epochs of training. In each one shot learning task, 6 different and 1 same class pairs of image is randomly drawn from 6000x4 images. If the model successfully predicts the pair, we add one to accuracy, the overall accuracy is then calculated in terms of $100.0 * n_{correct} / 320$. At 1st epoch, accuracy is around 28% which is close to random guessing. At 20th epoch, accuracy reaches 40 – 49% and doesn't improve further for more epochs. In second approach, we used 96 and 198 batch size in training to allow more learning and test if overfitting would occur. Moreover, similar 320 one shot learning tasks are performed to classify 7 unseen categories from pairs randomly drawn from 6000x7 images. For 96 batch size after 50th epoch of training. Test accuracy ranges from 22.8125 – 28.4375%. For 198 batch size, test accuracy falls in range of 20 – 30%.

4.2.4. INTERPRETATION AND DISCUSSION

For the first approach, we achieved best test accuracy of 50%. This might be because training set shares generic features on hairstyle, shape of face, sexuality of characters with target set. However, the result also showed effectiveness of using similarity differences to classify unseen images as we have not trained the network to learn about the other 4 expressions.

Note that in both of the approaches, test accuracy is better than random guessing by 100% which suggests our model is in fact working. In the second approach, test accuracy drops significantly which is probably due to insufficient training set. Moreover, there are greater differences between training and target set than in first approach. Given more available dataset and time, it is expected that the second approach would perform better. Another reason of the performances could be attributed to use of grayscale images. Since VGG16 trained on RGB images, weights in the network are trained to learn colorful images. Using grayscale images would alter performances of VGG16. Overall, results have shown that our model demonstrated the ability to predict unseen images by transferring representation of related but different images to solve one shot learning tasks, to preliminary extent.

5. Related work

In order to place our research in a wider context, we offer a brief review of published work that has been foundational in our efforts to explore the implications of using small data on convolutional neural networks. Initially, our research associated with small data was inspired by a quote from Andrew Ng from an article on nanonets ([Sarthak Jain, 2017](#)).

I think AI is akin to building a rocket ship. You need a huge engine and a lot of fuel. If you have a large engine and a tiny amount of fuel, you won't make it to orbit. If you have a tiny engine and a ton of fuel, you can't even lift off. To build a rocket you need a huge engine and a lot of fuel. The analogy to deep learning is that the rocket engine is the deep learning models and the fuel is the huge amounts of data we can feed to these algorithms.

Further, understanding how much data one may require to obtain a satisfactory level of performance on image classification problems seemed to be an interesting proposition ([Jason Brownlee, 2017](#)). Additional motivation for investigating transfer learning was to take advantage of previous work (training), one of the benefits of this approach is saving of computational resources. The available pre-trained networks for computer vision tasks were developed by feeding them with several million of images and using a considerable amount of computational resources. Both components, large amounts of data and a highly demanding pool of computational resources are not available for every organization, institution or individual. Therefore, transfer learning provides a way to obtain the benefits of neural networks under the aforementioned circumstances.

Previous work that took advantage of transfer learning in the context of small data includes ([Ng et al., 2015](#)). This project tried to adapt the knowledge from a convolutional neural network trained on ImageNet to a classification task related to the recognition of facial expressions using two

new datasets. The approach implemented by the authors included a cascade fine-tuning methodology where the pre-trained network was first adapted to one dataset, then a further adaptation was performed using the second dataset. The best validation accuracy in their experiments was 0.49, close to 0.50 presented in this report. This result could confirm the level of complexity to classify facial expressions.

An additional overview of this technique (transfer learning) is provided within the introduction to this report 1, however we reviewed other papers such as (Yosinski et al., 2014) and (Oquab et al., 2014). We found that transfer learning is a fairly versatile method to reduce training time and data required, as stated above, especially when dealing with low level representations (Yosinski et al., 2014). As we can demonstrate that small data may be an issue in image classification tasks that utilise convolutional neural networks (s1700260, 2018). Other experiments on small dataset have made comparisons between shallow and deep architectures to minimize the effects of overfitting (Pasupa & Sunhem, 2016). The results of these experiments statistically demonstrated that shallow models did perform better than deep ones with no regularization. However, a combination of various regularization techniques increased the performance of the deep models. As described in the configuration of the simple transfer learning in this report, the use of regularization techniques did provide some robustness to cope with overfitting as seen in Figure 3.

In addition, we thought it would be interesting to investigate how distinctly different (but comparable) datasets (with a large difference between the degrees of perceived visual similarity between classes) perform against one another in image classification tasks that utilise transfer learning. This in and of itself is an interesting research domain because the notion of perceived visual similarity has only recently began being explored within the literature. Consequently, we decided to consider methods by which we could compute similarity metrics for measuring the difference between classes and datasets. As one-shot learning tasks, such as person re-identification (Ahmed et al., 2015) performs similar roles (by passing some similarity metric through a threshold function), we began to explore the literature related to siamese convolutional networks (Koch & Salakhutdinov, 2015).

Further work can be aimed to investigate the effects of transfer learning in combination with data augmentation for small data. As seen in Table 4, the accuracy gain of transfer learning and data augmentation are comparable, especially for clothes. A combination of both approaches could potentially increase the performance of the model more than using them independently. Additional future work could build upon the aforementioned approach to measuring perceived visual similarity between datasets and the effect that this has on positive and negative transfer.

6. Conclusions

6.1. Transfer Learning

As per the results of the experiments presented previously, there are two main conclusions in regards to transfer learning and small data. First, it is clearly evident that the use of transfer learning improved the performance of the classification task under conditions of small data for both datasets, which proves the first of the hypotheses.

The increase of the performance in terms of validation accuracy not only depends on the simple use of transfer learning. Hyper-parameters like the learning rate are still critical in the behaviour of the system. Moreover, an improper value for such hyper-parameter can not even make any improvement compared to random choice.

Another thing to note is the loss of flexibility in the management of the images. The raw images provide information about the pixel intensity. This type of information can be processed in several ways. One of the options is to perform affine transformations, a technique that was previously utilised to implement data augmentation.

However, once the images were passed through the convolutional layers of VGG16, the pixel intensity information was transformed to another representation space. This new representation of the information might not be as easy to understand as pixel intensities. It is known that this information represents the local spatial correlation of the images. However, modifying it in a similar way raw images are modified might not provide similar results.

Since, the transfer learning technique was also utilised for bigger sizes of the dataset, it was possible to compare the effects of this technique when more data is available. It was clear, that the benefits of transfer learning were more evident for small data when using the expressions dataset, which partially proves the second hypothesis. However, this does not mean that transfer learning can be discarded when the amount of data is sufficiently big. It is worth to remember that transfer learning is also a way to work when the computational resources are limited.

The benefits of transfer learning in terms of the target dataset depends on the context of analysis. As discussed previously, in relative values, the use of transfer learning was more beneficial for the expressions dataset. However, the absolute increment of the validation accuracy was higher for the clothes dataset. This analysis gives more insight about the relationship between the datasets used to pre-train a network and the datasets used during transfer learning.

Evidently, the benefits of transfer learning depend on the characteristics of the target dataset. It follows that some expertise is needed in order to understand the differences and similarities of the source dataset (used to pretrain the network) and the target dataset (used to apply transfer learning). This way the benefits of transfer learning can be maximized while the risks are minimized.

6.2. SS-N

Overall, the results demonstrated the capability of our model on classifying unseen classes (one shot learning) to a certain extent using learnt representations from related data to distinguish similarity.

This is particularly important as a lot of data (e.g. minorities language, images of rare disease)are insufficient for training in reality. These experiment motivated the use of transfer learning on solving insufficient training set and provided some preliminary

results of transfer learning on image recognition. Moreover, these research questions could support more advanced researches.

[[PLACEHOLDER FOR ONE SHOT]]

References

- Ahmed, Ejaz, Jones, Michael, and Marks, Tim K. An improved deep learning architecture for person re-identification. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 3908–3916, 2015.
- Alex and Nair, Vinod and Hinton, Geoffrey. Cifar-10 and cifar-100. <https://www.cs.toronto.edu/~kriz/cifar.html>, 2010.
- Chen, Yushi, Jiang, Hanlu, Li, Chunyang, Jia, Xiuping, and Ghamisi, Pedram. Deep feature extraction and classification of hyperspectral images based on convolutional neural networks. *IEEE Transactions on Geoscience and Remote Sensing*, 54(10):6232–6251, 2016.
- Clevert, Djork-Arné, Unterthiner, Thomas, and Hochreiter, Sepp. Fast and accurate deep network learning by exponential linear units (elus). *arXiv preprint arXiv:1511.07289*, 2015.
- Deng, Jia, Dong, Wei, Socher, Richard, Li, Li-Jia, Li, Kai, and Fei-Fei, Li. Imagenet: A large-scale hierarchical image database. In *Computer Vision and Pattern Recognition, 2009. CVPR 2009. IEEE Conference on*, pp. 248–255. IEEE, 2009.
- Dinsmore, John. *The symbolic and connectionist paradigms: closing the gap*. Psychology Press, 2014.
- Hecht-Nielsen, Robert. Theory of the backpropagation neural network. In *Neural networks for perception*, pp. 65–93. Elsevier, 1992.
- ImageNet. Imagenet. <http://www.image-net.org/>, 1996.
- Jason Brownlee. How much training data is required for machine learning? <https://machinelearningmastery.com/much-training-data-required-machine-learning/>, 2017.
- Koch, Zemel and Salakhutdinov. Siamese neural networks for one-shot image recognition. In *PhD thesis*, 2015.
- Krizhevsky, Alex, Sutskever, Ilya, and Hinton, Geoffrey E. Imagenet classification with deep convolutional neural networks. In *Advances in neural information processing systems*, pp. 1097–1105, 2012.
- Krizhevsky, Alex, Nair, Vinod, and Hinton, Geoffrey. The cifar-10 dataset. online: <http://www.cs.toronto.edu/kriz/cifar.html>, 2014.
- Ng, Hong-Wei, Nguyen, Viet Dung, Vonikakis, Vassilios, and Winkler, Stefan. Deep learning for emotion recognition on small datasets using transfer learning. In *Proceedings of the 2015 ACM on international conference on multimodal interaction*, pp. 443–449. ACM, 2015.
- Oquab, Maxime, Bottou, Leon, Laptev, Ivan, and Sivic, Josef. Learning and transferring mid-level image representations using convolutional neural networks. In *Computer Vision and Pattern Recognition (CVPR), 2014 IEEE Conference on*, pp. 1717–1724. IEEE, 2014.
- Pasupa, Kitsuchart and Sunhem, Wisuwat. A comparison between shallow and deep architecture classifiers on small dataset. In *Information Technology and Electrical Engineering (ICITEE), 2016 8th International Conference on*, pp. 1–6. IEEE, 2016.
- s1700260, s1457374, s1784849. Mlp coursework 3: Interim report. *UoE*, 2018.
- Sarthak Jain. Nanonets : How to use deep learning when you have limited data. <https://medium.com/nanonets/nanonets-how-to-use-deep-learning-when-you-have-limited-data-f68c>, 2017.
- Simonyan, Karen and Zisserman, Andrew. Very deep convolutional networks for large-scale image recognition. *CoRR*, abs/1409.1556, 2014. URL <http://arxiv.org/abs/1409.1556>.
- Yosinski, Jason, Clune, Jeff, Bengio, Yoshua, and Lipson, Hod. How transferable are features in deep neural networks? In Ghahramani, Z., Welling, M., Cortes, C., Lawrence, N. D., and Weinberger, K. Q. (eds.), *Advances in Neural Information Processing Systems 27*, pp. 3320–3328. Curran Associates, Inc., 2014. URL <http://papers.nips.cc/paper/5347-how-transferable-are-features-in-deep-neural-networks.pdf>.