

Material Parameters

To use query these Parameters simply use them on a part utilizing the material an precede them with _M:

Example _M:DZ

Banding Materials

DZ

Specifies the Banding Thickness.

Applies To:	Banding
Valid Range:	Unlimited
Values:	Numeric (Measurement)

TRIM

Specifies the Banding Length Trim.

Applies To:	Banding
Valid Range:	Unlimited
Values:	Numeric (Measurement)

Wire Basket

DEPTH

Specifies the Wire basket Depth.

Applies To:	Wire Basket
Valid Range:	Unlimited
Values:	Numeric (Measurement)

DZ

Specifies the Wire Basket Height.

Applies To:	Wire Basket
Valid Range:	Unlimited
Values:	Numeric (Measurement)

GT

Specifies the Wire Basket Type.

Applies To:	Wire Basket
Valid Range:	1 = Side Mount

	2 = Top Mount 3 = Bottom Mount
Values:	Numeric (Integer)

MH1P

Specifies the Wire basket First Hole Offset.

Applies To:	Wire Basket
Valid Range:	Unlimited
Values:	Numeric (Measurement)

WIDTH

Specifies the Wire Basket Width.

Applies To:	Wire Basket
Valid Range:	Unlimited
Values:	Numeric (Measurement)

Board Stock

DZ

Specifies the Board Stock Thickness

Applies To:	Board Stock
Valid Range:	Unlimited
Values:	Numeric (Measurement)

RT

Specifies the Board Stock Rough Thickness.

Applies To:	Board Stock
Valid Range:	Unlimited
Values:	Numeric (Measurement)

Connectors

Fastenlink

_FLPLUNGEDEPTH - Depth of tool at initial plunge before the ramp down

_FLRAMPDEPTH - Depth of tool at bottom of the ramp down

_FLGLUEDEPTH - Depth of tool at top of the glue pocket


_FLFULLDEPTH - Depth of tool at bottom of cut

_FLRAMPSPAN - Span from entry of fastenlink to bottom of ramp

_FLFLATSPAN - Span from entry of fastenlink to start of start glue pocket

_FLGLUESPAN - Span from entry of fastenlink to start of end glue pocket

_FLFULLSPAN - Span from entry of fastenlink to its assembled position

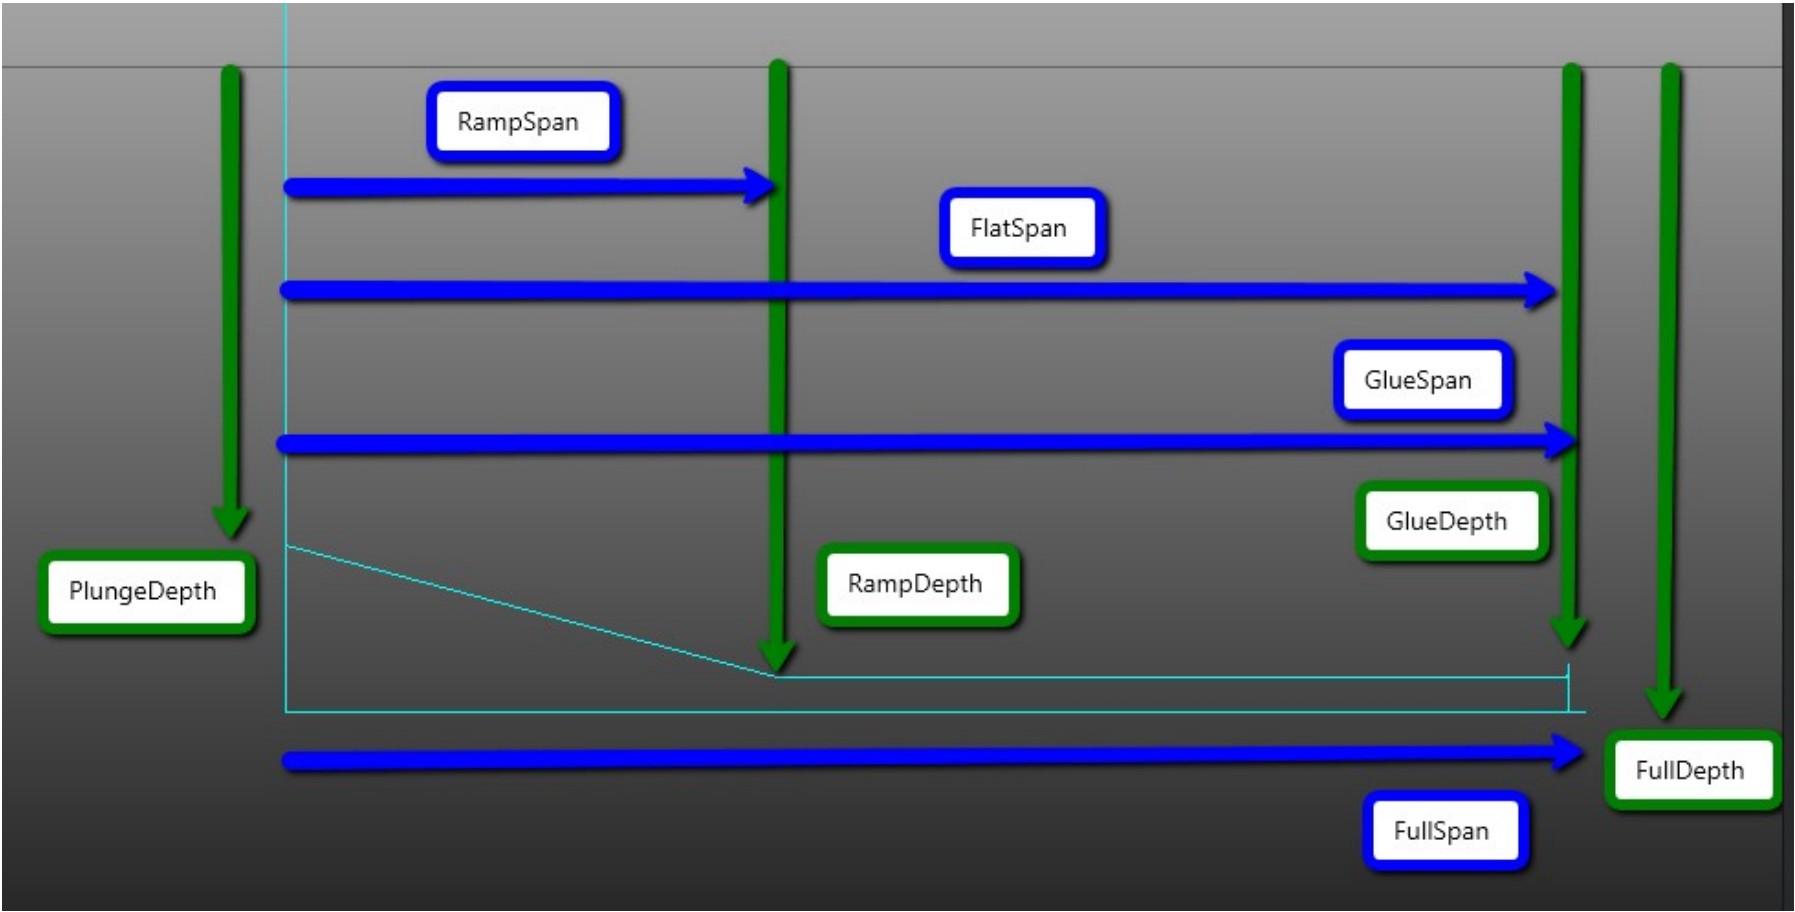

Caster

Height

Specifies the Caster Height.

Applies To:	Caster
Valid Range:	Unlimited
Values:	Numeric (Measurement)

Clearance (Drawer Guides, Wire Baskets)

MAB

Specifies the Guide Minimum Above Box Clearance.

Applies To:	Drawer Guides, Wire Baskets
Valid Range:	Unlimited
Values:	Numeric (Measurement)

MBB

Specifies the Guide Minimum Below Box Clearance.

Applies To:	Drawer Guides, Wire Baskets
Valid Range:	Unlimited
Values:	Numeric (Measurement)

SC

Specifies the Guide Side Clearance.

Applies To:	Drawer Guides, Wire Baskets
Valid Range:	Unlimited
Values:	Numeric (Measurement)

CNC

CNCCC

Specifies a Climb Cut.

Applies To:	Board Stock, Composite, Laminate, Panel Stock
Valid Range:	0 = No 1 = Yes
Values:	Boolean

CNCDL

Specifies the Drop Length.

Applies To:	Board Stock, Composite, Laminate, Panel Stock
Valid Range:	Unlimited
Values:	Numeric (Measurement)

CNCDW

Specifies the Drop Width.

Applies To:	Board Stock, Composite, Laminate, Panel Stock
Valid Range:	Unlimited
Values:	Numeric (Measurement)

CNCFRP

Specifies the Feedrate Percent.

Applies To:	Board Stock, Composite, Laminate, Panel Stock
Valid Range:	0-100
Values:	Numeric (Percentage)

CNCGD

Specifies Grain Dependency.

Applies To:	Board Stock, Composite, Laminate, Panel Stock
Valid Range:	0 = No 1 = Yes
Values:	Boolean

CNCMBC

Specifies minimize back chip.

Applies To:	Board Stock, Composite, Laminate, Panel Stock
Valid Range:	0 = No 1 = Yes
Values:	Boolean

CNCMDPP

Specifies maximum depth per pass.

Applies To:	Board Stock, Composite, Laminate, Panel Stock
Valid Range:	Unlimited
Values:	Numeric (Measurement)

CNCMFC

Specifies minimize face chip.

Applies To:	Board Stock, Composite, Laminate, Panel Stock
Valid Range:	0 = No 1 = Yes
Values:	Boolean

CNCOPT

Specifies optimizable.

Applies To:	Board Stock, Composite, Laminate, Panel Stock
Valid Range:	0 = No 1 = Yes
Values:	Boolean

CNCSSP

Specifies spindle speed percent.

Applies To:	Board Stock, Composite, Laminate, Panel Stock
Valid Range:	0-100
Values:	Numeric (Percentage)

Composite

_PREASM

Specifies pre-assembly.

Applies To:	Composite
Valid Range:	0 = No 1 = Yes
Values:	Boolean

Connector

CONT

Specifies the Connector Type.

Applies To:	Connector
Valid Range:	1 = Rafx 2 = Clamex P-10 3 = Clamex p-15 4 = Clamex P Medius 15/10 5 = Tenso P-14 6 = Connector
Values:	Numeric (Integer)

Drawer Guide

BKNHGT

Specifies the Drawer Guide Back Notch Height.

Applies To:	Drawer Guide
Valid Range:	Unlimited
Values:	Numeric (Measurement)

BKNLEN

Specifies the Drawer Guide Back Notch Length.

Applies To:	Drawer Guide
Valid Range:	Unlimited
Values:	Numeric (Measurement)

BKNOFF

Specifies the Drawer Guide Back Notch Offset.

Applies To:	Drawer Guide
Valid Range:	Unlimited
Values:	Numeric (Measurement)

DEPTH

Specifies the Drawer Guide Depth (Length).

Applies To:	Drawer Guide
Valid Range:	Unlimited
Values:	Numeric (Measurement)

EXT

Specifies the Drawer Guide Extension.

Applies To:	Drawer Guide
Valid Range:	Unlimited
Values:	Numeric (Measurement)

GT

Specifies the Drawer Guide Type.

Applies To:	Drawer Guide
Valid Range:	1 = Side Mount 2 = Bottom Mount 3 = Top Mount 4 = System
Values:	Numeric (Integer)

HEIGHT

Specifies the Drawer Guide Height.

Applies To:	Drawer Guide

Valid Range:	Unlimited
Values:	Numeric (Measurement)

MH1P

Specifies the Drawer Guide First Hole Offset.

Applies To:	Drawer Guide
Valid Range:	Unlimited
Values:	Numeric (Measurement)

SCREF

Specifies the Drawer Guide Screw Center Reference.

Applies To:	Drawer Guide
Valid Range:	0 = Top 1 = Bottom
Values:	Boolean

SCTBB

Specifies the Drawer Guide Screw Center to Box Bottom dimension.

Applies To:	Drawer Guide
Valid Range:	Unlimited
Values:	Numeric (Measurement)

Hinge

DBE

Specifies the Hinge Door Edge to Reference Point.

Applies To:	Hinge
Valid Range:	Unlimited
Values:	Numeric (Measurement)

HT

Specifies the Hinge Type.

Applies To:	Hinge
Valid Range:	1 = Concealed 2 = Exposed

	3 = Double Door
Values:	Numeric (Integer)

INSET

Specifies the Hinge Inset.

Applies To:	Hinge
Valid Range:	Unlimited
Values:	Numeric (Measurement)

MDETH

Specifies the Hinge Door End to Hinge Center.

Applies To:	Hinge
Valid Range:	Unlimited
Values:	Numeric (Measurement)

MHS

Specifies the Hinge Maximum Hinge Spacing.

Applies To:	Hinge
Valid Range:	Unlimited
Values:	Numeric (Measurement)

OA

Specifies the Hinge Opening Angle.

Applies To:	Hinge
Valid Range:	Unlimited
Values:	Numeric (Measurement)

ROCLR

Specifies the Hinge Roll Out Clearance.

Applies To:	Hinge
Valid Range:	Unlimited
Values:	Numeric (Measurement)

SOLAY

Specifies the Hinge Horizontal Overlay.

Applies To:	Hinge
Valid Range:	Unlimited
Values:	Numeric (Measurement)

TBOLAY

Specifies the Hinge Vertical Overlay.

Applies To:	Hinge
Valid Range:	Unlimited
Values:	Numeric (Measurement)

Hinge Plate

PHOFF

Specifies the Hinge Plate Hole Offset.

Applies To:	Hinge Plate
Valid Range:	Unlimited
Values:	Numeric (Measurement)

Laminate

TRIM

Specifies the Laminate Oversize value.

Applies To:	Laminate
Valid Range:	Unlimited
Values:	Numeric (Measurement)

Leg

Height

Specifies the Height of the Leg.

Applies To:	Leg
Valid Range:	Unlimited
Values:	Numeric (Measurement)

Leg Leveler

Height

Specifies the Height of the Leg Leveler.

Applies To:	Leg Leveler
Valid Range:	Unlimited
Values:	Numeric (Measurement)

Miscellaneous

DZ

Specifies the Miscellaneous Thickness.

Applies To:	Miscellaneous
Valid Range:	Unlimited
Values:	Numeric (Measurement)

MODEL

Specifies if the Miscellaneous Material includes a Model.

Applies To:	Miscellaneous
Valid Range:	0 = No 1 = Yes
Values:	Boolean

Molding

_MJCOST

Specifies the Molding Cost Per Joint.

Applies To:	Molding
Valid Range:	Unlimited
Values:	Numeric (Currency)

_MTRIM

Specifies the Molding Miter Trim.

Applies To:	Molding
Valid Range:	Unlimited

Values:	Numeric (Measurement)
----------------	-----------------------

DY

Specifies the Molding Length.

Applies To:	Molding
Valid Range:	Unlimited
Values:	Numeric (Measurement)

Pull

IH

Specifies the Pull Vertical Inset.

Applies To:	Pull
Valid Range:	Unlimited
Values:	Numeric (Measurement)

IW

Specifies the Pull Horizontal Inset.

Applies To:	Pull
Valid Range:	Unlimited
Values:	Numeric (Measurement)

PT

Specifies the Pull Type.

Applies To:	Pull
Valid Range:	1 = Knob 2 = Pull 3 = Cup
Values:	Numeric (Integer)

Closet Rod

LEN

Specifies the Closet Rod Length.

Applies To:	Banding

Valid Range:	Unlimited
Values:	Numeric (Measurement)

Size (Laminate, Panel Stock, Composite)

DX

Specifies the Material's Width.

Applies To:	Laminate, Panel Stock, Composite
Valid Range:	Unlimited
Values:	Numeric (Measurement)

DY

Specifies the Material's Length.

Applies To:	Laminate, Panel Stock, Composite
Valid Range:	Unlimited
Values:	Numeric (Measurement)

DZ

Specifies the Material's Thickness.

Applies To:	Laminate, Panel Stock, Composite
Valid Range:	Unlimited
Values:	Numeric (Measurement)

Shadowline Channel

LEN

Specifies the Shadowline Channel Length.

Applies To:	Shadowline Channel
Valid Range:	Unlimited
Values:	Numeric (Measurement)

Sliding Door Rail

LEN

Specifies the Sliding Door Rail Length.

--	--

Applies To:	Sliding Door Rail
Valid Range:	Unlimited
Values:	Numeric (Measurement)

Sliding Door Roller

MNTDADOOFF

Specifies the Sliding Door Roller Dado offset.

Applies To:	Sliding Door Roller
Valid Range:	Unlimited
Values:	Numeric (Measurement)

MNTDADOREF

Specifies the Sliding Door Roller Dado reference.

Applies To:	Sliding Door Roller
Valid Range:	1 = Back 2 = Center 3 = Front
Values:	Numeric (Integer)

MNTPLTPOSSIDE

Specifies the Sliding Door Roller Edge Inset.

Applies To:	Sliding Door Roller
Valid Range:	Unlimited
Values:	Numeric (Measurement)

MNTPLTPOSTOP

Specifies the Sliding Door Roller End Inset.

Applies To:	Sliding Door Roller
Valid Range:	Unlimited
Values:	Numeric (Measurement)

MNTPLTONBACK

Specifies if the Sliding Door Roller Mounts on the Back.

--	--

Applies To:	Sliding Door Roller
Valid Range:	0 = No 1 = Yes
Values:	Boolean

MNTPLTSTL

Specifies the Sliding Door Roller Type.

Applies To:	Sliding Door Roller
Valid Range:	1 = Roller 2 = Slot
Values:	Numeric (Integer)