



Improving User Interface Click System With AI

2024044620 김종진

AD



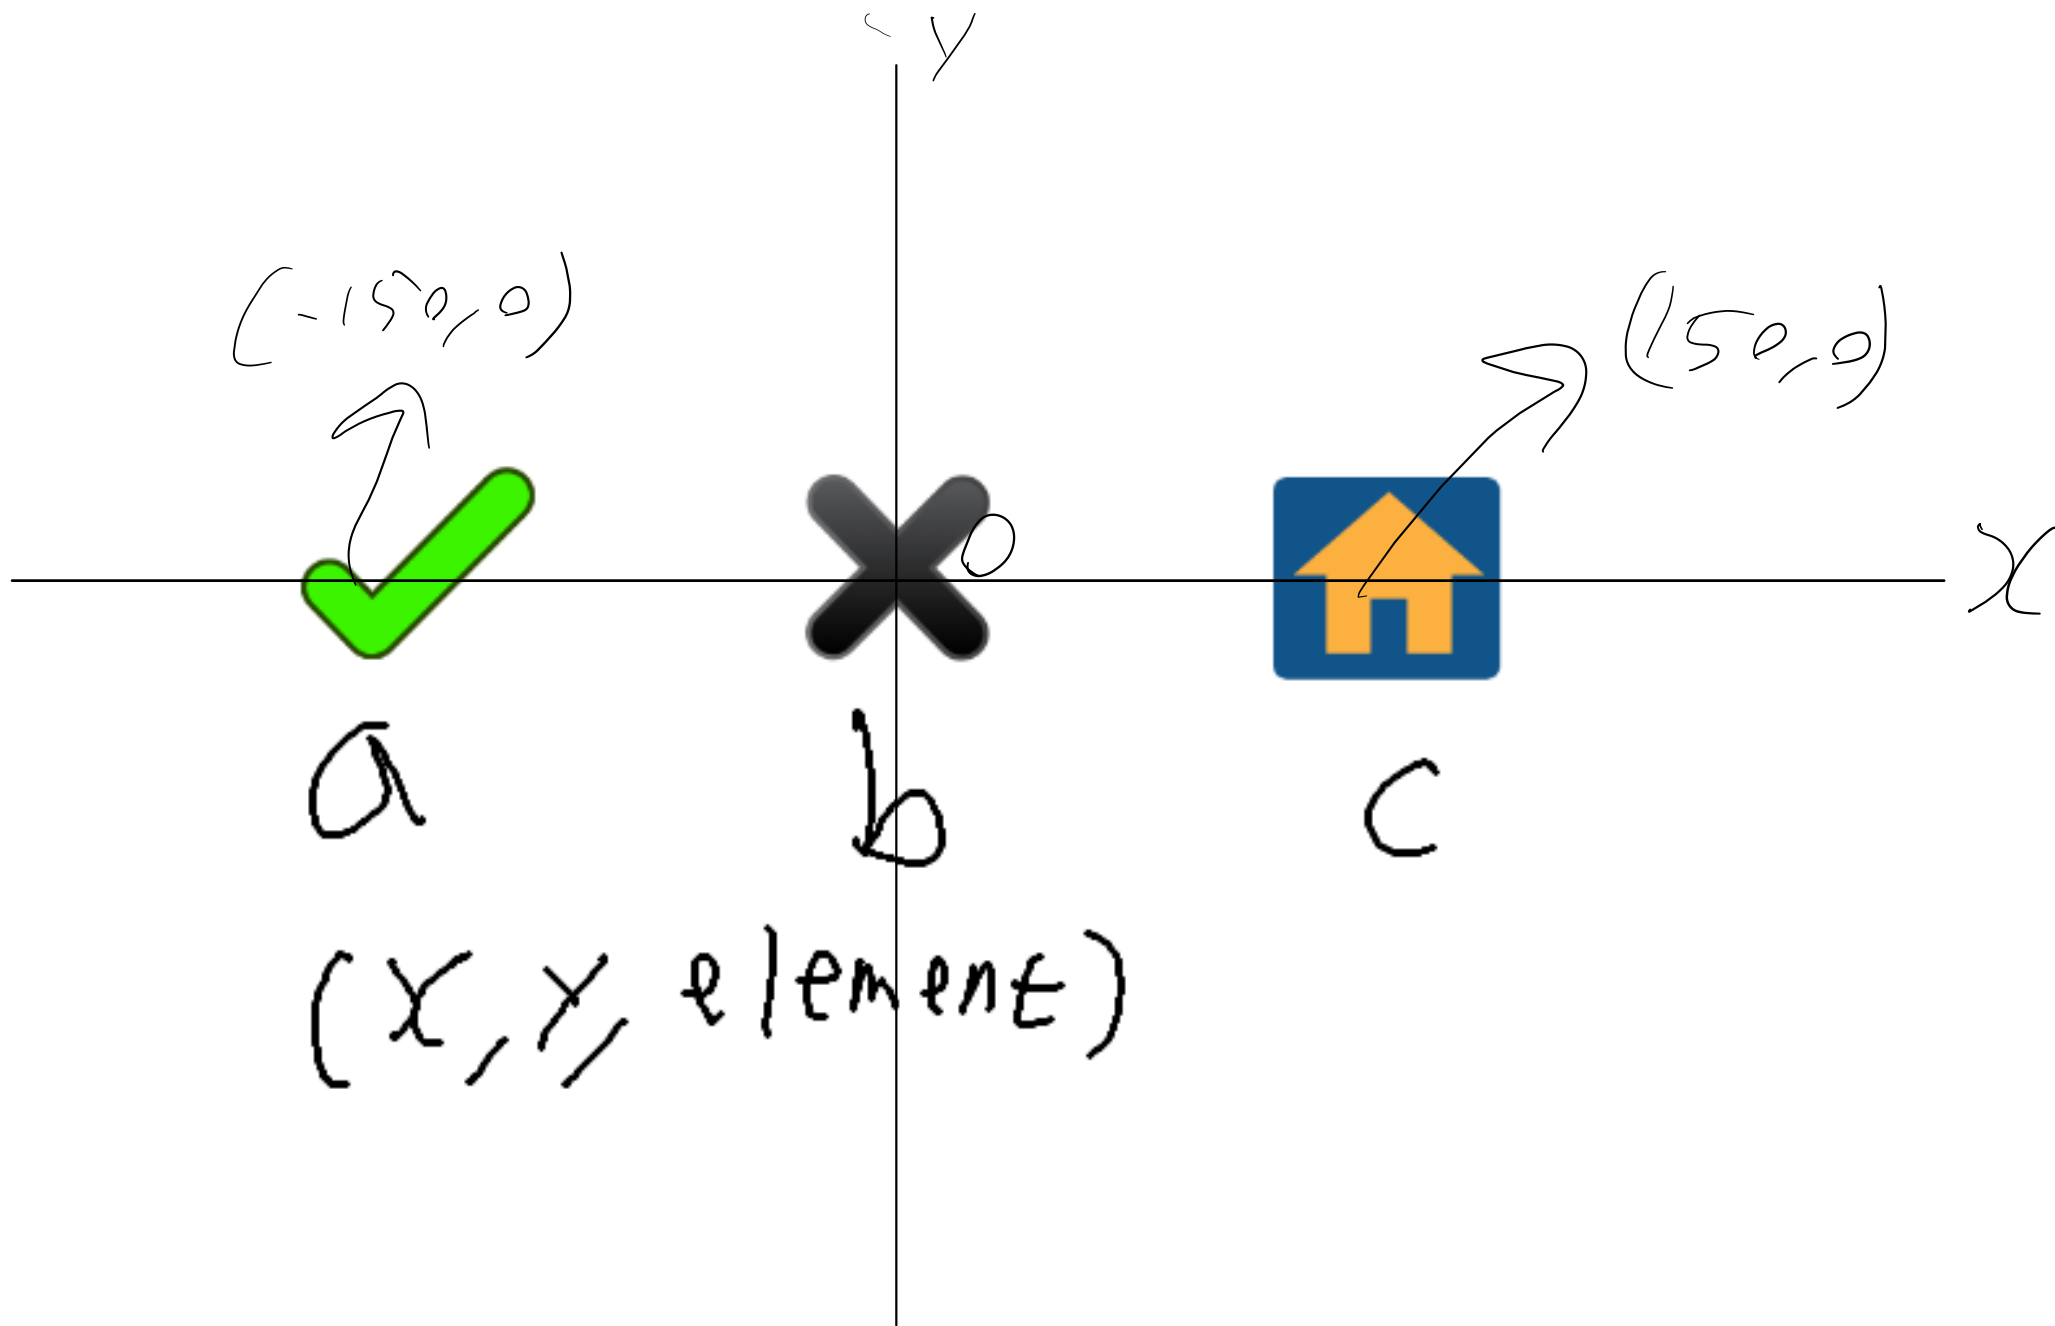

Getting data


classification

(xpos):(ypos):(element)

```
1:-14:b  
-3:-14:b  
-7:-11:b  
-8:-9:b  
-13:-6:b  
-14:-3:b  
-15:-1:b  
-15:0:b  
-13:3:b  
117:29:c  
118:29:c  
133:29:c  
147:29:c  
151:25:c  
162:25:c  
169:20:c  
173:16:c  
174:5:c  
174:-9:c  
174:-19:c  
166:-21:c  
152:-19:c  
133:-19:c  
126:-18:c  
125:-13:c  
125:-5:c
```

Using Machine Learning

- Training Data
- Input : (xpos,ypos) when you click
- Output : (element)
- So AI can distinguish clicking ad itself or ad-dismiss button
- miss-click-free click

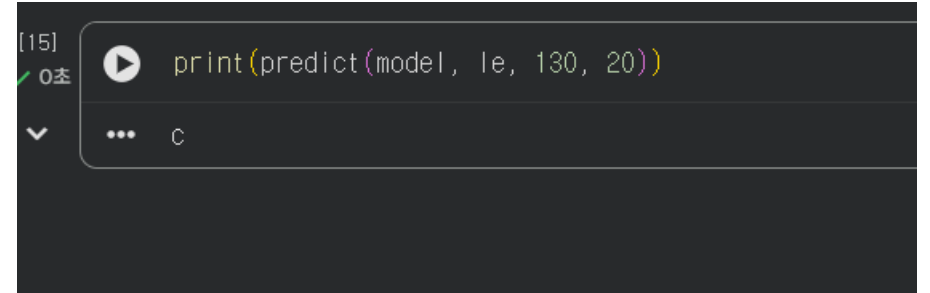

A screenshot of a Jupyter Notebook interface. It shows a code cell with the following Python code: `print(predict(model, 1e, 130, 20))`. The cell is numbered [15] and has a green checkmark and '0초' (0 seconds) indicating it has been executed successfully. Below the code cell, there is a dropdown menu with three dots and the letter 'C'.

<https://github.com/jongjinhy/aiinterfacetest/blob/main/aiinterfacetest.ipynb>