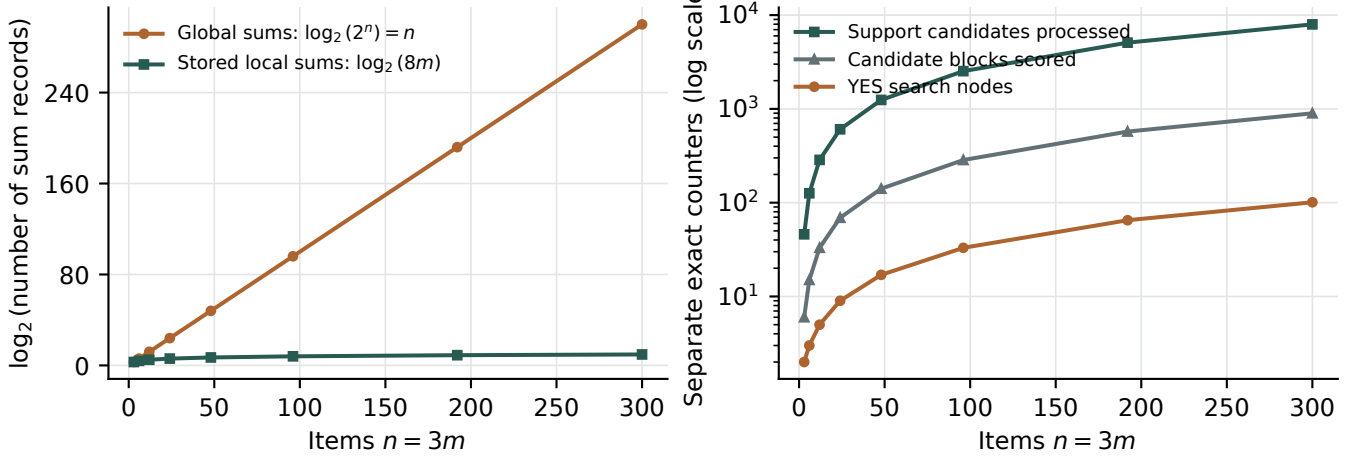
A Exponential support, small dictionaries
Global sums: $\log_2(2^n) = n$
Stored local sums: $\log_2(8m)$
$\log_2$ (number of sum records)
0
80
160
240
0
50
100
150
200
250
300
Items $n = 3m$
B Discovery is charged separately
Support candidates processed
Candidate blocks scored
YES search nodes
Separate exact counters (log scale)
10^1
10^2
10^3
10^4
0
50
100
150
200
250
300
Items $n = 3m$