





```
stdi o
tcp4: I ocal host: 1080
tcp4-listen: 8080
                 # short: tcp-l:...
udp4: host: 2049
                      # -T inactivity timeout
udp4-I:500
exec: /bi n/l s, pty
               Ba 🔊
```

220%


2%-29pp3

fd: 3 (!) ((1) 2 opo

! \$

"! ("2 bP

d

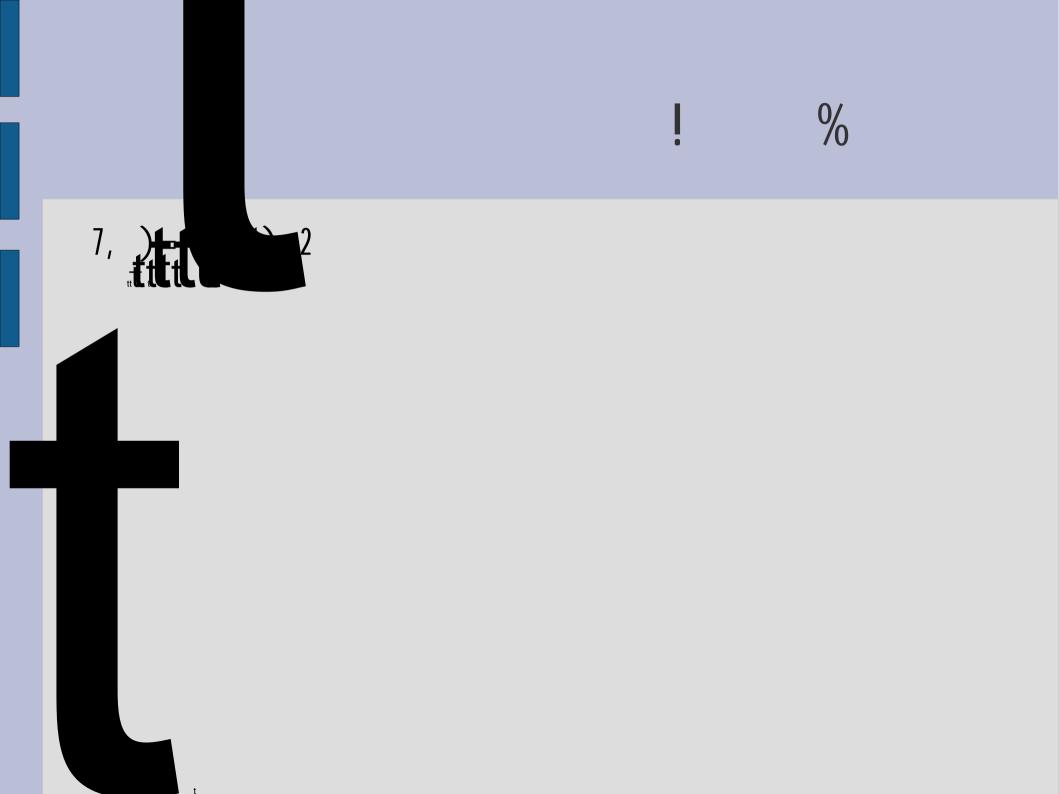

! &

(?!" -87: "2 gopeo o o p

gopeo p p

po

* "







d



" "" (! "("



2! * "

```
( ) (! ) ) *+, / 1110
( " ()! 2

socat \
   tcp-I: 7, fork, tcpwrap=aecho1a \
   exec: /bi n/cat, chroot=/var/sandbox, su-d=nobody, \
```

ctty, setsi d, raw, echo=0

(5; +

```
*-8 *5, 2 ! !? ) " !? " ( ! " " 1
 " " ) ! " "
" "1J! (! ,8$"
  socat tcp-I: 50500 TUN: 192. 168. 10. 2/24, i ff-up=1
  socat tcp: 50500 TUN: 192. 168. 10. 3/24, i ff-up=1
                  * + , 111
```

1 ! < PD

a \$(

898 9"

9" 9"y


12 *2 2

```
FD type device inode mode links uid gid rdev size blksize blocks atime mtime cloexec flags sigown sigio

O: socket 0,4 106115 0140777 1 1000 1000 0,0

1024 0 Thu Jan 1 01:00:00 1970 Thu Jan 1 01:00:00 1970 0 x000002 0

DEBUG=0 REUSEADDRUB®
```

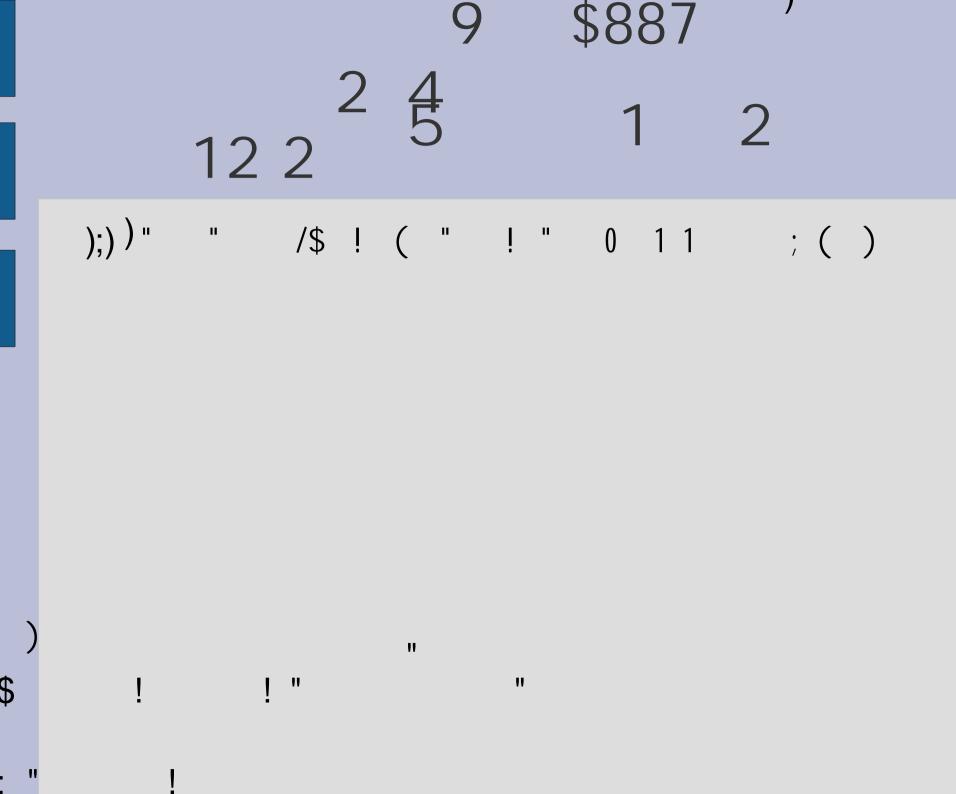

 $12\ 2 \quad 9 \quad >2 \quad = \quad 2$

keyword: param1: param2, opti on1, opti on2, . .



5

```
5!" ")! "! (" $
```

ntoproxy+şÖcanexec socat ± tcp:proxy.domain.com€c socan cp:pr i ±¤i

+ (







```
"!! ( ) (" 4 4-
 socat -u ©stdin© ©gzip|stdout©
 socat -U ©gzip|stdout© ©stdin©
 socat -u ©stdio© \
          ©openssI -client | tcp: 10. 11. 12. 13: 443©
П
```

- 2 ' 9

!\$)\$Ò



ä

