

1. Di Network Configuration Router (Lain)

```
auto eth0
iface eth0 inet dhcp

auto eth1
iface eth1 inet static
    address 10.80.1.1
    netmask 255.255.255.0

auto eth2
iface eth2 inet static
    address 10.80.2.1
    netmask 255.255.255.0

auto eth3
iface eth3 inet static
    address 10.80.3.1
    netmask 255.255.255.0
```

Di Alice

```
auto eth0
iface eth0 inet static
    address 10.80.1.10
    netmask 255.255.255.0
    gateway 10.80.1.1
```

Di Mika

```
auto eth0
iface eth0 inet static
    address 10.80.1.11
    netmask 255.255.255.0
    gateway 10.80.1.1
```

Di Chisa


```
auto eth0
iface eth0 inet static
    address 10.80.2.10
    netmask 255.255.255.0
    gateway 10.80.2.1
```

Di Knights

```
auto eth0
iface eth0 inet static
    address 10.80.3.10
    netmask 255.255.255.0
    gateway 10.80.3.1
```

Di Eiri

```
auto eth0
iface eth0 inet static
    address 10.80.3.11
    netmask 255.255.255.0
    gateway 10.80.3.1
```

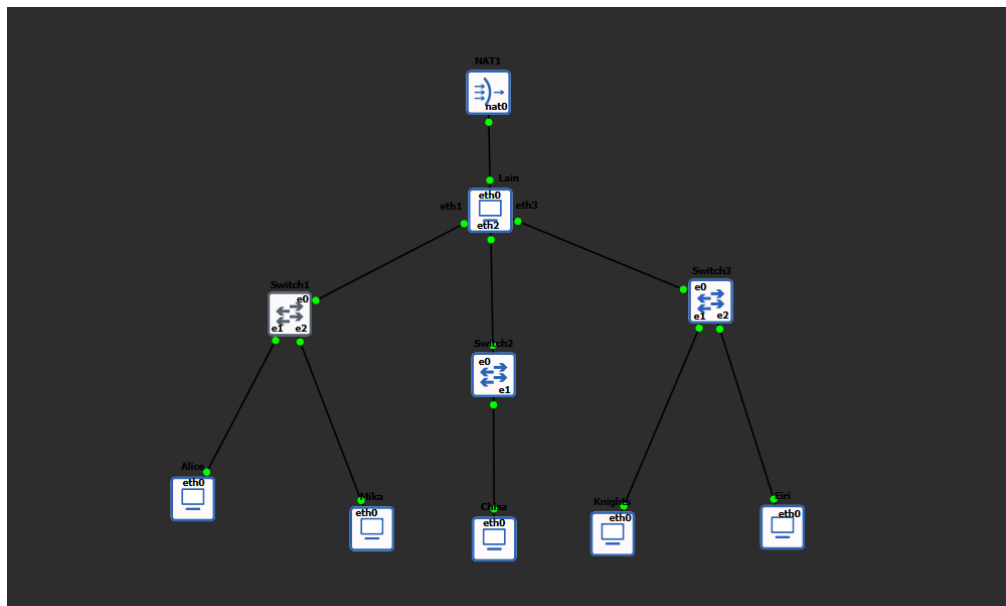

2. Di Console Router

```
ip addr show eth0 — IP eth0 (Yang kehubung ke NAT)
udhcpc -i eth0 ----- IP DHCP
ip route ----- Routing
```

```
Lain:~# ip addr show eth0
16193: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UNK
NOWN group default qlen 1000
    link/ether 02:42:87:ee:0a:00 brd ff:ff:ff:ff:ff:ff
    inet 192.168.122.56/24 brd 192.168.122.255 scope global eth0
        valid_lft forever preferred_lft forever
Lain:~# udhcpc -i eth0
udhcpc: started, v1.37.0
udhcpc: broadcasting discover
udhcpc: broadcasting select for 192.168.122.56, server 192.168.122.1
udhcpc: lease of 192.168.122.56 obtained from 192.168.122.1, lease time 3600
Lain:~# ip route
default via 192.168.122.1 dev eth0 metric 16393
10.80.1.0/24 dev eth1 proto kernel scope link src 10.80.1.1
10.80.2.0/24 dev eth2 proto kernel scope link src 10.80.2.1
10.80.3.0/24 dev eth3 proto kernel scope link src 10.80.3.1
192.168.122.0/24 dev eth0 proto kernel scope link src 192.168.122.56
```

Tes Internet — ping -c 4 8.8.8.8

Tes DNS — ping -c 4 [google.com](https://www.google.com)

```
Lain:~# ping -c 4 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=111 time=19.5 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=111 time=19.3 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=111 time=33.7 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=111 time=19.6 ms

--- 8.8.8.8 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3329ms
rtt min/avg/max/mdev = 19.309/23.018/33.704/6.170 ms
Lain:~# ping -c 4 google.com
PING google.com (74.125.130.100) 56(84) bytes of data.
64 bytes from sb-in-f100.1e100.net (74.125.130.100): icmp_seq=1 ttl=104 time=20.4 ms
64 bytes from sb-in-f100.1e100.net (74.125.130.100): icmp_seq=2 ttl=104 time=20.9 ms
64 bytes from sb-in-f100.1e100.net (74.125.130.100): icmp_seq=3 ttl=104 time=20.6 ms
64 bytes from sb-in-f100.1e100.net (74.125.130.100): icmp_seq=4 ttl=104 time=19.6 ms

--- google.com ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3330ms
rtt min/avg/max/mdev = 19.597/20.364/20.891/0.479 ms
```

3. Stepnya

Aktifkan IP Forwarding — sysctl -w net.ipv4.ip_forward=1

Udah itu doang :) Kalo mau ngetes pake ping -c 4 10.80.x.x

4. Stepnya

iptables -t nat -A POSTROUTING -o eth0 -j MASQUERADE

iptables -A FORWARD -i eth1 -o eth0 -j ACCEPT

iptables -A FORWARD -i eth2 -o eth0 -j ACCEPT

iptables -A FORWARD -i eth3 -o eth0 -j ACCEPT

iptables -A FORWARD -i eth0 -m state --state ESTABLISHED,RELATED
-j ACCEPT

Tesnya — iptables -t nat -L -v -n

Harus muncul MASQUERADE

```
Lain:~# iptables -t nat -L -v -n
Chain PREROUTING (policy ACCEPT 0 packets, 0 bytes)
 pkts bytes target    prot opt in     out     source         destination

Chain INPUT (policy ACCEPT 0 packets, 0 bytes)
 pkts bytes target    prot opt in     out     source         destination

Chain OUTPUT (policy ACCEPT 0 packets, 0 bytes)
 pkts bytes target    prot opt in     out     source         destination

Chain POSTROUTING (policy ACCEPT 20 packets, 1344 bytes)
 pkts bytes target    prot opt in     out     source         destination
  20   3433 MASQUERADE all  --  *      eth0    0.0.0.0/0      0.0.0.0/0
   0     0 MASQUERADE all  --  *      eth0    0.0.0.0/0      0.0.0.0/0
```

5. Cek Interface duls — ip -br a
 > Bikin file cek_status.sh di Console (DIREKTORI ROOT)

```
Lain:~# cat /root/cek_status.sh
#!/bin/sh

echo "---o-o--- Status Interface Lurr ---o-o---"
ip -br a

echo
echo "---o-o--- Yang ini yang NATnya rekk ---o-o---"
iptables -t nat -L -v -n
Lain:~# ip -br a
lo                UNKNOWN          127.0.0.1/8 ::1/128
eth0              UNKNOWN          192.168.122.56/24
eth1              UNKNOWN          10.80.1.1/24 fe80::42:87ff:feee:a01/64
eth2              UNKNOWN          10.80.2.1/24 fe80::42:87ff:feee:a02/64
eth3              UNKNOWN          10.80.3.1/24 fe80::42:87ff:feee:a03/64
```

ISINYA WAJIB

```
#!/bin/sh
```

```
echo "---o-o--- Status Interface Lurr ---o-o---"
```

```
ip -br a
```

```
echo
```

```
echo "---o-o--- Yang ini yang NATnya rekk ---o-o---"
```

```
iptables -t nat -L -v -n
```

Ngetestnya tinggal — /root/cek_status.sh

6. NAMA FILE GENERATORNYA — traffic_protocol7.sh
 DAN INI DI /root NYA SI MIKA


Ngetestnya DI MIKA

```
chmod +x /root/traffic_protocol7.sh
```

Tinggalin consolenya, terus klik kanan kabel yang ngehubungin mika ke switch terus klik START CAPTURE, wireshark bakal muncul di dinding

Balik ke console mika terus jalanin PAKE SH
sh /root/traffic_protocol7.sh


Ntar muncul tuh paketnya di Wireshark yang masih aktif

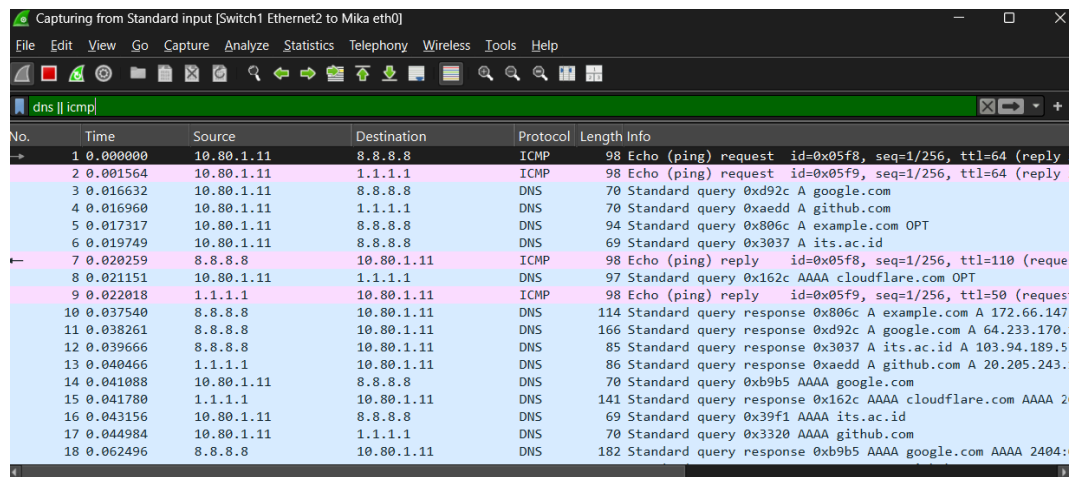

Wireshark interface showing a capture on the 'dns || icmp' filter. The packet list shows various ICMP Echo (ping) requests and DNS queries. The packet details pane shows the structure of an ICMP Echo (ping) request.

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	10.80.1.11	8.8.8.8	ICMP	98	Echo (ping) request id=0x05f8, seq=1/256, ttl=64 (reply
2	0.001564	10.80.1.11	1.1.1.1	ICMP	98	Echo (ping) request id=0x05f9, seq=1/256, ttl=64 (reply
3	0.016632	10.80.1.11	8.8.8.8	DNS	70	Standard query 0xd92c A google.com
4	0.016960	10.80.1.11	1.1.1.1	DNS	70	Standard query 0xaedd A github.com
5	0.017317	10.80.1.11	8.8.8.8	DNS	94	Standard query 0x806c A example.com OPT
6	0.019749	10.80.1.11	8.8.8.8	DNS	69	Standard query 0x3037 A its.ac.id
7	0.020259	8.8.8.8	10.80.1.11	ICMP	98	Echo (ping) reply id=0x05f8, seq=1/256, ttl=110 (reque
8	0.021151	10.80.1.11	1.1.1.1	DNS	97	Standard query 0x162c AAAA cloudflare.com OPT
9	0.022018	1.1.1.1	10.80.1.11	ICMP	98	Echo (ping) reply id=0x05f9, seq=1/256, ttl=50 (reques
10	0.037540	8.8.8.8	10.80.1.11	DNS	114	Standard query response 0x806c A example.com A 172.66.147.
11	0.038261	8.8.8.8	10.80.1.11	DNS	166	Standard query response 0xd92c A google.com A 64.233.170.
12	0.039666	8.8.8.8	10.80.1.11	DNS	85	Standard query response 0x3037 A its.ac.id A 103.94.189.5
13	0.040466	1.1.1.1	10.80.1.11	DNS	86	Standard query response 0xaedd A github.com A 20.205.243.
14	0.041088	10.80.1.11	8.8.8.8	DNS	70	Standard query 0xb9b5 AAAA google.com
15	0.041780	1.1.1.1	10.80.1.11	DNS	141	Standard query response 0x162c AAAA cloudflare.com AAAA 2
16	0.043156	10.80.1.11	8.8.8.8	DNS	69	Standard query 0x39f1 AAAA its.ac.id
17	0.044984	10.80.1.11	1.1.1.1	DNS	70	Standard query 0x3320 AAAA github.com
18	0.062496	8.8.8.8	10.80.1.11	DNS	182	Standard query response 0xb9b5 AAAA google.com AAAA 2404:

7. /root/[setup.sh](#) di CHISA

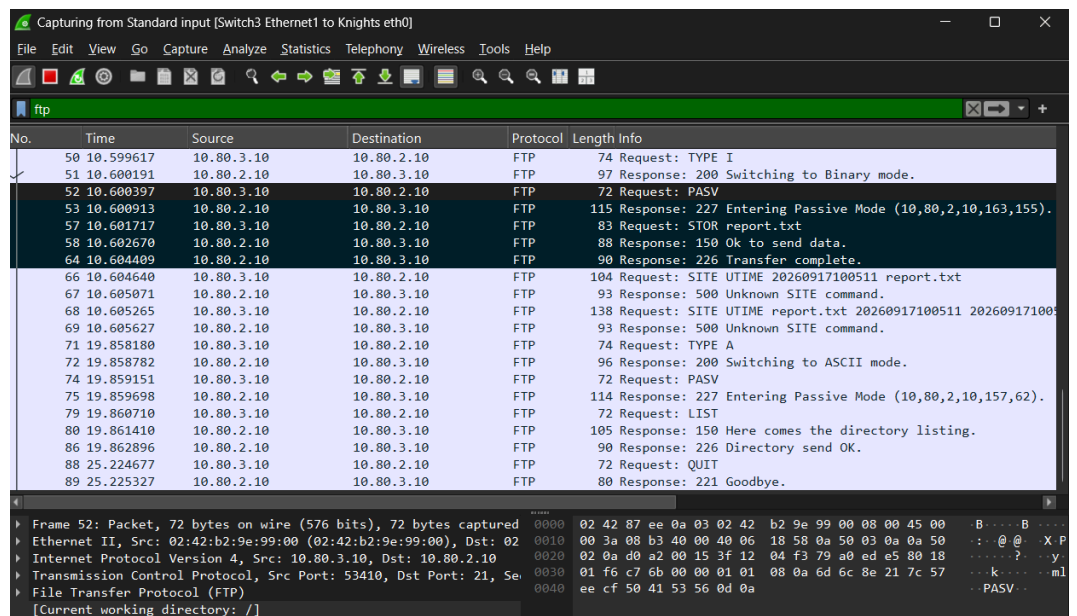

Wireshark interface showing a capture on the 'ftp' filter. The packet list shows various FTP traffic, including requests for PASV, STOR, and LIST. The packet details pane shows the structure of an FTP packet.

No.	Time	Source	Destination	Protocol	Length	Info
50	10.599617	10.80.3.10	10.80.2.10	FTP	74	Request: TYPE I
51	10.600191	10.80.2.10	10.80.3.10	FTP	97	Response: 200 Switching to Binary mode.
52	10.600397	10.80.3.10	10.80.2.10	FTP	72	Request: PASV
53	10.600913	10.80.2.10	10.80.3.10	FTP	115	Response: 227 Entering Passive Mode (10,80,2,10,163,155).
57	10.601717	10.80.3.10	10.80.2.10	FTP	83	Request: STOR report.txt
58	10.602670	10.80.2.10	10.80.3.10	FTP	88	Response: 150 Ok to send data.
64	10.604409	10.80.2.10	10.80.3.10	FTP	90	Response: 226 Transfer complete.
66	10.604640	10.80.3.10	10.80.2.10	FTP	104	Request: SITE UTIME 20260917100511 report.txt
67	10.605071	10.80.2.10	10.80.3.10	FTP	93	Response: 500 Unknown SITE command.
68	10.605265	10.80.3.10	10.80.2.10	FTP	138	Request: SITE UTIME report.txt 20260917100511 20260917100
69	10.605627	10.80.2.10	10.80.3.10	FTP	93	Response: 500 Unknown SITE command.
71	19.858180	10.80.3.10	10.80.2.10	FTP	74	Request: TYPE A
72	19.858782	10.80.2.10	10.80.3.10	FTP	96	Response: 200 Switching to ASCII mode.
74	19.859151	10.80.3.10	10.80.2.10	FTP	72	Request: PASV
75	19.859698	10.80.2.10	10.80.3.10	FTP	114	Response: 227 Entering Passive Mode (10,80,2,10,157,62).
79	19.860710	10.80.3.10	10.80.2.10	FTP	72	Request: LIST
80	19.861410	10.80.2.10	10.80.3.10	FTP	105	Response: 150 Here comes the directory listing.
86	19.862896	10.80.2.10	10.80.3.10	FTP	90	Response: 226 Directory send OK.
88	25.224677	10.80.3.10	10.80.2.10	FTP	72	Request: QUIT
89	25.225327	10.80.2.10	10.80.3.10	FTP	80	Response: 221 Goodbye.

8.

PASV, STOR (Nambah file), dan Transfer Complete

Capturing from Standard input [Switch3 Ethernet1 to Knights eth0]

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

tcp.port==41883

No.	Time	Source	Destination	Protocol	Length	Info
54	10.601145	10.80.3.10	10.80.2.10	TCP	74	54412 → 41883 [SYN] Seq=0 Win=64240 Len=0 MSS=1460 SACK_PER
55	10.601517	10.80.2.10	10.80.3.10	TCP	74	41883 → 54412 [SYN, ACK] Seq=0 Ack=1 Win=65160 Len=0 MSS=14
56	10.601682	10.80.3.10	10.80.2.10	TCP	66	54412 → 41883 [ACK] Seq=1 Ack=1 Win=64256 Len=0 TSval=18358
59	10.602943	10.80.3.10	10.80.2.10	FTP-DA	1176	FTP Data: 1110 bytes (PASV) (STOR report.txt)
60	10.602986	10.80.3.10	10.80.2.10	TCP	66	54412 → 41883 [FIN, ACK] Seq=1111 Ack=1 Win=64256 Len=0 Tsv
61	10.603566	10.80.2.10	10.80.3.10	TCP	66	41883 → 54412 [ACK] Seq=1 Ack=1111 Win=64128 Len=0 TSval=20
62	10.603623	10.80.2.10	10.80.3.10	TCP	66	41883 → 54412 [FIN, ACK] Seq=1 Ack=1112 Win=64128 Len=0 Tsv
63	10.603772	10.80.3.10	10.80.2.10	TCP	66	54412 → 41883 [ACK] Seq=1112 Ack=2 Win=64256 Len=0 TSval=18

Yang itu PORT TCPNyah

```
AlpiNet - Lightweight Alpine-based Networking Toolbox
Type "alpinet-tools" for available utilities
Mika:~# ping -c 4 10.80.2.10
PING 10.80.2.10 (10.80.2.10) 56(84) bytes of data:
64 bytes from 10.80.2.10: icmp_seq=1 ttl=63 time=1.48 ms
64 bytes from 10.80.2.10: icmp_seq=2 ttl=63 time=0.843 ms
64 bytes from 10.80.2.10: icmp_seq=3 ttl=63 time=0.723 ms
64 bytes from 10.80.2.10: icmp_seq=4 ttl=63 time=0.557 ms

--- 10.80.2.10 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3943ms
rtt min/avg/max/mdev = 0.557/0.501/1.484/0.351 ms
Mika:~# nc -vz 10.80.2.10 21
Connection to 10.80.2.10 21 port (tcp/ftp) succeeded!
Mika:~# apk add lftp
WARNING: updating and opening https://dl-cdn.alpinelinux.org/alpine/v3.23/main/x
86_64/APKINDEX.tar.gz: DNS: transient error (try again later)
WARNING: updating and opening https://dl-cdn.alpinelinux.org/alpine/v3.23/commu
nity/x86_64/APKINDEX.tar.gz: DNS: transient error (try again later)
OK: 81.5 MiB in 165 packages
Mika:~# lftp -u mika 10.80.2.10
Password:
lftp mika@10.80.2.10:~> set ftp:passive-mode true
lftp mika@10.80.2.10:~> ls
-rw-r--r-- 1 0 0 1738 Sep 17 12:20 protocol7_manifesto.txt
-rw-r--r-- 1 0 0 1111 Sep 17 12:20 report.txt
lftp mika@10.80.2.10:~> get protocol7_manifesto.txt
1738 bytes transferred
lftp mika@10.80.2.10:~> bye
Mika:~# ls -lh /root/protocol7_manifesto.txt
-rw-r--r-- 1 root root 1.7K Sep 17 12:20 /root/protocol7_manifesto.txt
Mika:~# head /root/protocol7_manifesto.txt
=====
PROTOCOL 7 - THE MANIFESTO
A Declaration of Digital Consciousness
Serial Experiments Lain - Year 2026
=====

ARTICLE I: THE NATURE OF THE WIRED
=====
The Wired is not merely a network of interconnected
machines. It is the collective unconscious of
Mika:~# echo "Mika upload test" > /root/mika_test.txt
Mika:~# cat /root/mika_test.txt
Mika upload test
Mika:~# lftp -u mika 10.80.2.10
Password:
lftp mika@10.80.2.10:~> set ftp:passive-mode true
lftp mika@10.80.2.10:~> put /root/mika_test.txt
put: /root/mika_test.txt: Access failed: 550 Permission denied. (mika_test.txt)
lftp mika@10.80.2.10:~> bye
```

9. << Console Mika, V Con Chisa V

```
Chisa:~# ls -lh /var/wired/data
total 8.0K
-rw-r--r-- 1 root root 1.7K Sep 17 12:20 protocol7_manifesto.txt
-rw-r--r-- 1 root root 1.1K Sep 17 12:20 report.txt
```

Intinya ini tuh buat ngebuksiin apakah benar mika cuma bisa download dan gabisa transfer file ke chisa

10. Ini disuruh ngeping ke Chisa

Proses ngepingnya

Proses ngepingnya

Kiri ICMP request, kanan yang reply (Kabel Knights ke Switch3)

11. Yang ini disuruh ngebikin akun telnet namanya “phantom_user” pwnya “wired_ghost” DI CHISA, terus sebelum masuk akun itu di CONSOLE EIRI harus ngejalanin wireshark dulu (Kabel Eiri ke Switch3).

```

Chisa:~# which telnetd
/usr/sbin/telnetd
Chisa:~# adduser -D -s /bin/ash phantom_user
Chisa:~# echo "phantom_user:wired_ghost" | chpasswd
chpasswd: password for 'phantom_user' changed
Chisa:~# pkill telnetd 2>/dev/null
Chisa:~# /usr/sbin/telnetd -p 23 &
[1] 359
Chisa:~# ss -lntp | grep :23
LISTEN 0      1                *:23              *:                users:((("telnetd",pid=
360,fd=3))
[1]+  Done                  /usr/sbin/telnetd -p 23

```

Cons Chisa bikin akun

```

Eiri:~# hostname Eiri
Eiri:~# hostname
Eiri
Eiri:~# telnet 10.80.2.10
Connected to 10.80.2.10

Entering character mode
Escape character is '^]'.

Chisa login: phantom_user
Password:
Welcome to Alpine!

The Alpine Wiki contains a large amount of how-to guides and general
information about administrating Alpine systems.
See <https://wiki.alpinelinux.org/>.

You can setup the system with the command: setup-alpine


You may change this message by editing /etc/motd.

      .o.      oooo      o8o  ooooo  ooo      .
    .888.    '888      '***' 888b.  '8'      .o8
   .8"888.   888      oo.ooooo. oooo 8 888b. 8 .ooooo. .o888oo
  .8"888.   888      888 888b 888 8 888b. 8 d88' 88b 888
 .88ooo888. 888      888 888 888 8 888b.8 888ooo888 888
  8' 888.   888      888 888 888 8 888 888 .o 888 .
o88o  o8888o o888o  888bod8P' o888o o8o      '8 'Y8bod8P' "888"
      888
      o888o

AlpiNet - Lightweight Alpine-based Networking Toolbox
Type "alpinet-tools" for available utilities
Chisa:~$

```

Terus Eiri masuk

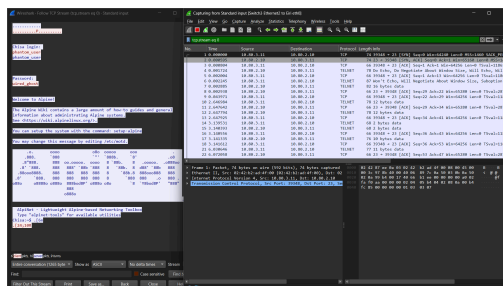

Log yang di mark (paling atas warna item) kalo di klik kanan > follow > TCP Stream bakal nampak user dan passwordnya. (Kerentannya)

```
Knights:~# cat > /root/setup.sh <<'EOF'
#!/bin/sh

echo "=====
echo "  SETUP KNIGHTS
echo "=====

echo "[1] Menyiapkan DNS..."
echo "nameserver 8.8.8.8" > /etc/resolv.conf

echo "[2] Memastikan package tersedia..."

apk update || {
    echo "ERROR: apk update gagal."
    exit 1
}

if ! command -v sshd >/dev/null 2>&1; then
    apk add openssh || {
        echo "ERROR: gagal install openssh."
        exit 1
    }
fi

if ! command -v nc >/dev/null 2>&1; then
    apk add netcat-openbsd || {
        echo "ERROR: gagal install netcat."
        exit 1
    }
fi

echo "[3] Menyiapkan SSH..."

ssh-keygen -A

pkill sshd 2>/dev/null
/usr/sbin/sshd

echo "[4] Menyiapkan HTTP..."

mkdir -p /root/www
echo "Knights Secret HTTP Service" > /root/www/index.html

pkill httpd 2>/dev/null
httpd -f -p 80 -h /root/www &
```

12. Setupnya disimpan di /root/[setup.sh](#)

DI CONSOLE KNIGHTS, terus buka wireshark di kabel antara Router dgn Switch3. Terus lakuin hal dibawah berurutan.


```
Alice:~# nc -vz 10.80.3.10 22
Connection to 10.80.3.10 22 port [tcp/ssh] succeeded!
Alice:~# nc -vz 10.80.3.10 80
Connection to 10.80.3.10 80 port [tcp/http] succeeded!
Alice:~# nc -vz 10.80.3.10 7777
nc: connect to 10.80.3.10 port 7777 (tcp) failed: Connection refused
```

Ini ngetest (berurutan)


22 (SYN → SYN-ACK → ACK), 80 (SYN → SYN-ACK → ACK), 7777 (SYN → RST-ACK)

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	10.80.1.10	10.80.3.10	TCP	74	50892 → 22 [SYN] Seq=0 Win=65536 Len=0 MSS=1460 SACK_PERM TSval=2686511980 TSecr=0 WS=128
2	0.000262	10.80.3.10	10.80.1.10	TCP	74	22 → 50892 [SYN, ACK] Seq=0 Ack=1 Win=65536 Len=0 MSS=1460 SACK_PERM TSval=2109627684 TSecr=2686511980 WS=128
3	0.000781	10.80.1.10	10.80.3.10	TCP	66	50892 → 22 [ACK] Seq=1 Ack=1 Win=64256 Len=0 TSval=2686511981 TSecr=2109627684
4	0.000758	10.80.1.10	10.80.3.10	TCP	66	50892 → 22 [FIN, ACK] Seq=1 Ack=1 Win=64256 Len=0 TSval=2686511981 TSecr=2109627684
5	0.001335	10.80.3.10	10.80.1.10	TCP	66	22 → 50892 [ACK] Seq=1 Ack=2 Win=65280 Len=0 TSval=2109627686 TSecr=2686511981
6	0.012427	10.80.3.10	10.80.1.10	SSH	88	Server: Protocol (SSH-2.0-OpenSSH_8.2)
7	0.012099	10.80.3.10	10.80.1.10	TCP	66	22 → 50892 [FIN, ACK] Seq=2 Ack=2 Win=65280 Len=0 TSval=2109627697 TSecr=2686511981
8	0.012864	10.80.1.10	10.80.3.10	TCP	54	50892 → 22 [RST] Seq=2 Win=0 Len=0
9	0.012972	10.80.1.10	10.80.3.10	TCP	54	50892 → 22 [RST] Seq=2 Win=0 Len=0
10	3.644400	10.80.1.10	10.80.3.10	TCP	74	43336 → 80 [SYN] Seq=0 Win=65536 Len=0 MSS=1460 SACK_PERM TSval=2686515624 TSecr=0 WS=128
11	3.644598	10.80.3.10	10.80.1.10	TCP	74	80 → 43336 [SYN, ACK] Seq=0 Ack=1 Win=65536 Len=0 MSS=1460 SACK_PERM TSval=2109631329 TSecr=2686515624 WS=128
12	3.644939	10.80.1.10	10.80.3.10	TCP	66	43336 → 80 [ACK] Seq=1 Ack=1 Win=64256 Len=0 TSval=2686515625 TSecr=2109631329
13	3.645758	10.80.1.10	10.80.3.10	TCP	66	43336 → 80 [FIN, ACK] Seq=1 Ack=1 Win=64256 Len=0 TSval=2686515625 TSecr=2109631329
14	3.646120	10.80.3.10	10.80.1.10	TCP	66	80 → 43336 [FIN, ACK] Seq=1 Ack=2 Win=65280 Len=0 TSval=2109631330 TSecr=2686515625
15	3.646579	10.80.1.10	10.80.3.10	TCP	66	43336 → 80 [ACK] Seq=2 Ack=2 Win=64256 Len=0 TSval=2686515627 TSecr=2109631330
16	6.333254	10.80.1.10	10.80.3.10	TCP	74	55928 → 7777 [SYN] Seq=0 Win=65536 Len=0 MSS=1460 SACK_PERM TSval=2686518313 TSecr=0 WS=128
17	6.333446	10.80.3.10	10.80.1.10	TCP	54	7777 → 55928 [RST, ACK] Seq=1 Ack=1 Win=0 Len=0

Frame 1: Packet, 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface ..., id 0
 Ethernet II, Src: 02:42:87:ee:0a:03 (02:42:87:ee:0a:03), Dst: 02:42:b2:9e:99:00 (02:42:b2:9e:99:00)
 Internet Protocol Version 4, Src: 10.80.1.10, Dst: 10.80.3.10
 Transmission Control Protocol, Src Port: 50892, Dst Port: 22, Seq: 0, Len: 0

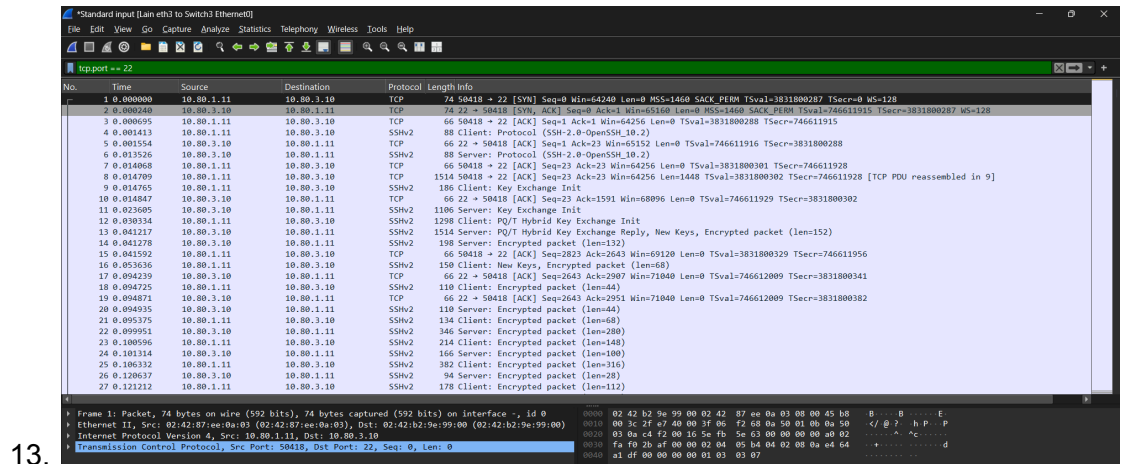

14. http.request.method == "POST"

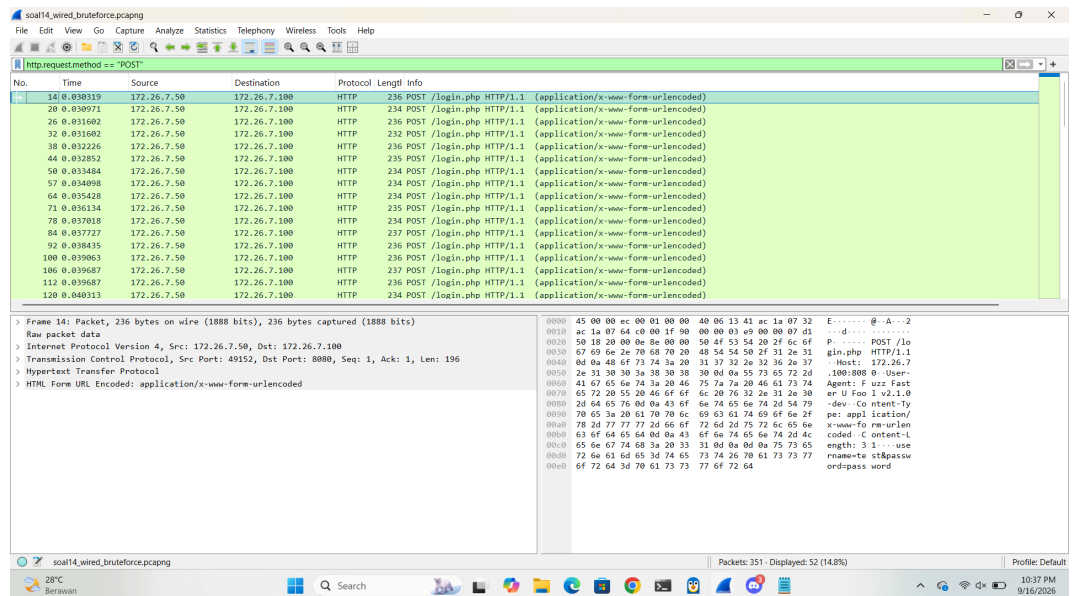

IP Penyerang: 172.26.7.50
 IP Tujuan: 172.26.7.100
 DestinationPort: 8080
 IP:Port = 172.26.7.100:8080

http.response.code == 200

soal14_wired_bruteforce.pcapng

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

http.response.code == 200

No.	Time	Source	Destination	Protocol	Length	Info
6	0.010000	172.26.7.100	172.26.7.60	HTTP	117	HTTP/1.1 200 OK (text/html)
351	0.061507	172.26.7.100	172.26.7.50	HTTP	283	HTTP/1.1 200 OK (text/html)

> Frame 6: Packet, 117 bytes on wire (936 bits), 117 bytes captured (936 bits)

Raw packet data

> Internet Protocol Version 4, Src: 172.26.7.100, Dst: 172.26.7.60

> Transmission Control Protocol, Src Port: 8080, Dst Port: 51000, Seq: 1, Ack: 74, Len: 77

> Hypertext Transfer Protocol

Line-based text data: text/html (1 lines)

```
0000 45 00 00 75 00 01 00 00 40 06 13 ae ac 1a 07 64 E-u...@.....d
0010 ac 1a 07 3c 1f 90 c7 38 00 00 23 29 00 00 04 32 ...<<<0...#)...2
0020 50 10 20 00 36 ed 00 00 40 54 54 50 2f 31 2a 31 P...- HTTP/1.1
0030 20 32 30 30 20 4f 4b 0d 0a 43 6f 6e 74 65 6e 74 200 OK Content
0040 2d 54 79 70 65 3a 20 74 65 78 74 2f 68 74 6d 6c -Type: text/html
0050 0d 0a 43 6f 6e 74 65 6e 74 2d 4c 65 6e 67 74 68 -Content-Length
0060 3a 20 31 33 0d 0a 0a 57 65 6c 63 6f 6d 65 20 : 13... Welcome
0070 41 6c 69 63 65 Alice
```

soal14_wired_bruteforce.pcapng

Packets: 351 - Displayed: 2 (0.6%)

28°C Berawan

10:42 PM 9/16/2025

soal14_wired_bruteforce.pcapng

File Edit View Go Capture Analyze

tcp.stream eq 0

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	172.26.7.6	172.26.7.6	HTTP	117	HTTP/1.1 200 OK
2	0.002000	172.26.7.1	172.26.7.1	Content-Type	13	Content-Type: text/html
3	0.004000	172.26.7.6	172.26.7.6	Content-Length	13	Content-Length: 13
4	0.006000	172.26.7.6	172.26.7.6	Text	13	Welcome Alice
5	0.008000	172.26.7.1	172.26.7.1	Text	13	Welcome Alice
6	0.010000	172.26.7.1	172.26.7.1	Text	13	Welcome Alice
7	0.012000	172.26.7.1	172.26.7.1	Text	13	Welcome Alice
8	0.014001	172.26.7.1	172.26.7.1	Text	13	Welcome Alice
9	0.016001	172.26.7.1	172.26.7.1	Text	13	Welcome Alice
10	0.018001	172.26.7.1	172.26.7.1	Text	13	Welcome Alice

> Frame 6: Packet, 117 bytes on wire (936 bits), 117 bytes captured (936 bits)

Raw packet data

> Internet Protocol Version 4, Src: 172.26.7.1, Dst: 172.26.7.6

> Transmission Control Protocol, Src Port: 51000, Dst Port: 8080, Seq: 1, Ack: 74, Len: 77

> Hypertext Transfer Protocol

Line-based text data: text/html (1 lines)

GET / HTTP/1.1
Host: 172.26.7.100:8080
User-Agent: Mikka-Browser/1.0

HTTP/1.1 200 OK
Content-Type: text/html
Content-Length: 13
Welcome Alice

1 client pkt, 1 server pkt, 1 turn.

Entire conversation (150 bytes)

Show as ASCII

No delta times

Stream 0

Find:

Filter Out This Stream

Print

Save as...

Back


Close

Help

soal14_wired_bruteforce.pcapng


28°C Berawan

10:43 PM 9/16/2025

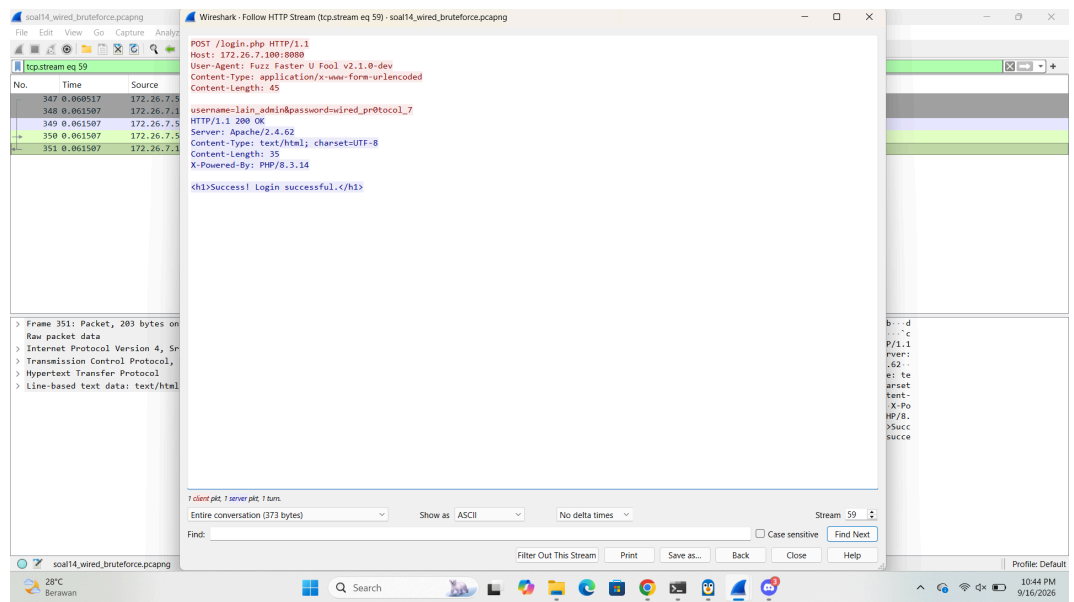

username=lain_admin&password=wired_pr0tocol_7

Server: Apache/2.4.62

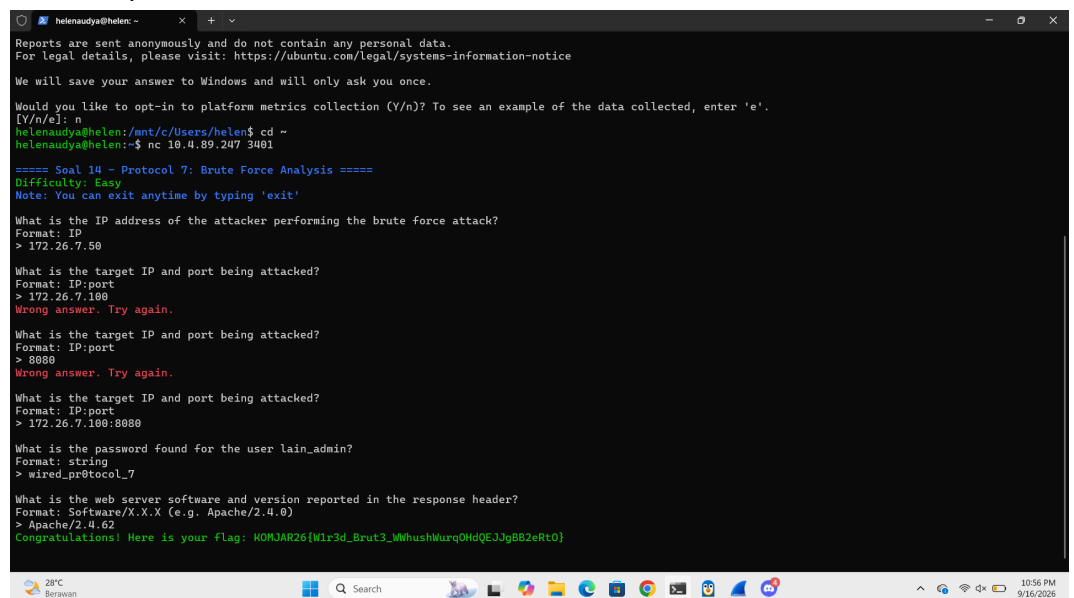


Congratulations! Here is your flag:


KOMJAR26{W1r3d_Brut3_WWhushWurqOHdQEJjgBB2eRtO}

15. GET DESCRIPTOR Response DEVICE

usb.idVendor || usb.idProduct

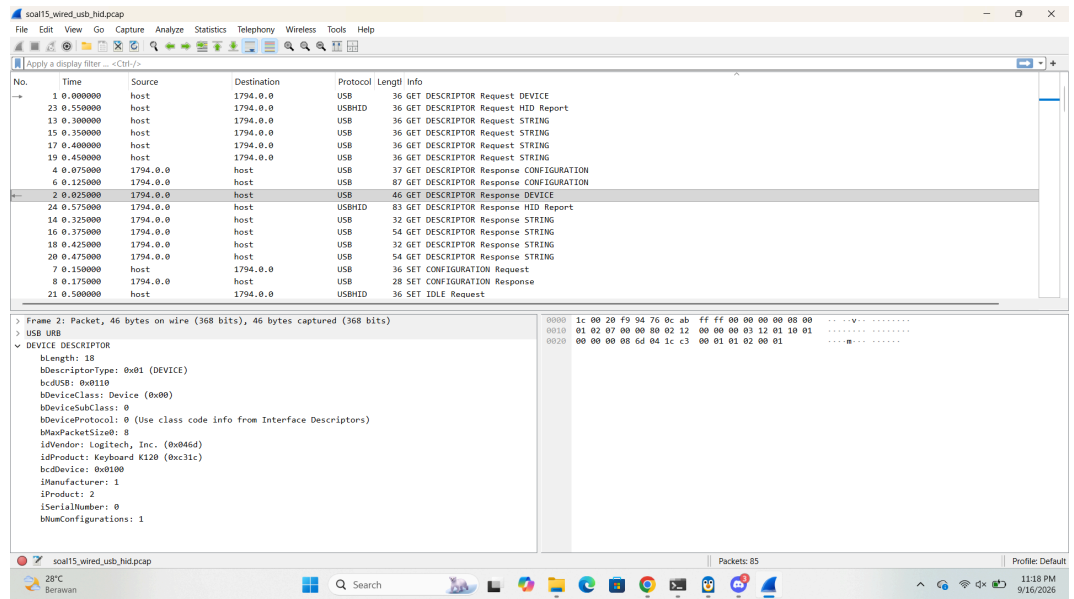

idVendor: Logitech, Inc. (0x046d)
IdProduct: Keyboard K120 (0xc31c)

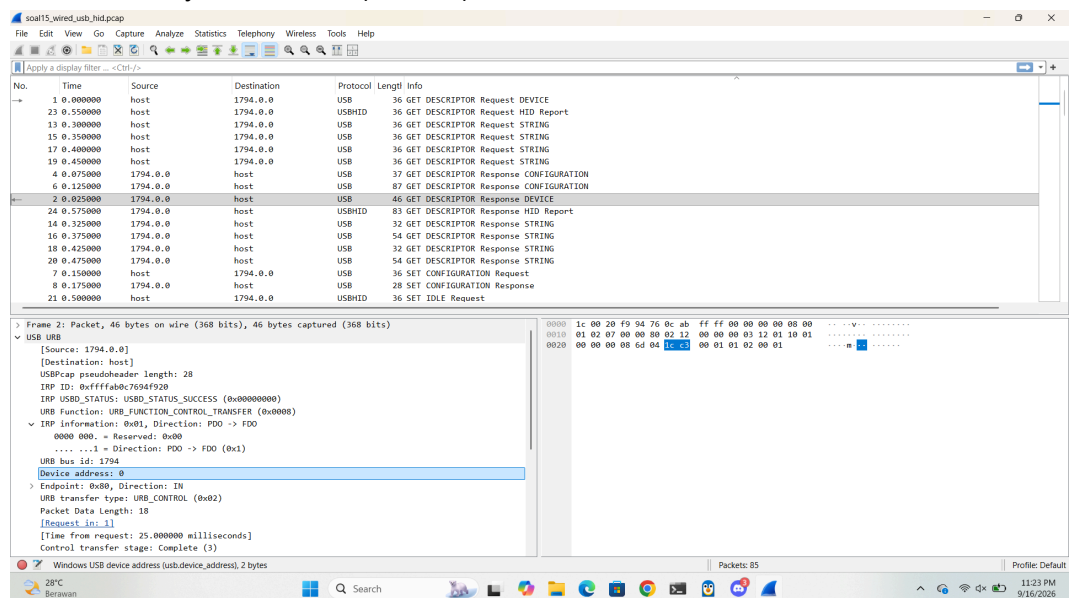

```
helenaudya@helen:/mnt/c/Users/helen/Downloads$ tshark -r soal15_wired_usb_hid.pcap -T fields -e usb.device_address | sort -u
```

Device address: 0

tshark -r /mnt/c/Users/helen/Downloads/soal15_wired_usb_hid.pcap -Y
"usb.capdata" -T fields -e usb.capdata

```
helenaudya@helen: /mnt/C/U
helenaudya@helen: /mnt/c/Users/helen/Downloads$ tshark -r /mnt/c/Users/helen/Downloads/soal15_wired_usb_hid.pcap -Y "usbhid.data" -T fields -e usb.capdata
helenaudya@helen: /mnt/c/Users/helen/Downloads$ tshark -r /mnt/c/Users/helen/Downloads/soal15_wired_usb_hid.pcap -Y "usb.capdata" -T fields -e usb.capdata >
hex.txt
helenaudya@helen: /mnt/c/Users/helen/Downloads$ tshark -r /mnt/c/Users/helen/Downloads/soal15_wired_usb_hid.pcap -Y "usb.capdata" -T fields -e usb.capdata
02001a0000000000
0000000000000000
00000c0000000000
0000000000000000
0000150000000000
0000000000000000
0000000000000000
0000000000000000
0000070000000000
0000000000000000
02002d0000000000
0000000000000000
0200130000000000
0000000000000000
0000150000000000
0000000000000000
0000120000000000
0000000000000000
0000170000000000
0000000000000000
0000120000000000
0000000000000000
00000f0000000000
0000000000000000
02002d0000000000
0000000000000000
00002d0000000000
0000000000000000
02002d0000000000
0000000000000000
00000c0000000000
0000000000000000
00001d0000000000
0000000000000000
02002d0000000000
0000000000000000
0000040000000000
0000000000000000
00000f0000000000
0000000000000000
0000190000000000
0000000000000000
0000000000000000
02002d0000000000
0000000000000000
00001f0000000000
0000000000000000
0000270000000000
0000000000000000
00001f0000000000
0000000000000000
0000230000000000
0000000000000000
helenaudya@helen: /mnt/c/Users/helen/Downloads$ |
```

nano [decode.py](#)
python3 decode.py

```
helenaudy@helen: /mnt/c/Users/helen/Downloads$ cat decode.py
# Script Decode USB HID Keystroke
conv_table = {
    0x04:'a', 0x05:'b', 0x06:'c', 0x07:'d', 0x08:'e', 0x09:'f', 0x0A:'g', 0x0B:'h',
    0x0C:'i', 0x0D:'j', 0x0E:'k', 0x0F:'l', 0x10:'m', 0x11:'n', 0x12:'o', 0x13:'p',
    0x14:'q', 0x15:'r', 0x16:'s', 0x17:'t', 0x18:'u', 0x19:'v', 0x1A:'w', 0x1B:'x',
    0x1C:'y', 0x1D:'z', 0x1E:'.', 0x1F:':', 0x20:' ', 0x21:'.', 0x22:' ', 0x23:' ',
    0x24:' ', 0x25:' ', 0x26:' ', 0x27:' ', 0x28:' ', 0x29:' ', 0x2A:' ', 0x2B:' ',
    0x2C:' ', 0x2D:' ', 0x2E:' ', 0x2F:' ', 0x30:' ', 0x31:' ', 0x32:' ', 0x33:' ', 0x34:' ', 0x35:' ', 0x36:' ', 0x37:' ', 0x38:'/'
}

conv_table_shift = {
    0x04:'A', 0x05:'B', 0x06:'C', 0x07:'D', 0x08:'E', 0x09:'F', 0x0A:'G', 0x0B:'H',
    0x0C:'I', 0x0D:'J', 0x0E:'K', 0x0F:'L', 0x10:'M', 0x11:'N', 0x12:'O', 0x13:'P',
    0x14:'Q', 0x15:'R', 0x16:'S', 0x17:'T', 0x18:'U', 0x19:'V', 0x1A:'W', 0x1B:'X',
    0x1C:'Y', 0x1D:'Z', 0x1E:'.', 0x1F:':', 0x20:' ', 0x21:' ', 0x22:' ', 0x23:' ',
    0x24:' ', 0x25:' ', 0x26:' ', 0x27:' ', 0x28:' ', 0x29:' ', 0x2A:' ', 0x2B:' ',
    0x2C:' ', 0x2D:' ', 0x2E:' ', 0x2F:' ', 0x30:' ', 0x31:' ', 0x32:' ', 0x33:' ', 0x34:' ', 0x35:' ', 0x36:' ', 0x37:' ', 0x38:'/'
}

result = []
with open("hex.txt", "r") as f:
    for line in f:
        line = line.strip().replace(":", "")
        if not line or len(line) < 16:
            continue

        data = bytes.fromhex(line)
        modifier = data[0]
        keycode = data[2]

        if keycode == 0:
            continue

        is_shift = (modifier == 0x02 or modifier == 0x20)

        if is_shift and keycode in conv_table_shift:
            result.append(conv_table_shift[keycode])
        elif not is_shift and keycode in conv_table:
            result.append(conv_table[keycode])

print("\n==== HASIL DECODE KE YBOARD ====")
print("".join(result))
helenaudy@helen: /mnt/c/Users/helen/Downloads$ python3 decode.py
```

=== HASIL DECODE KE YBOARD ===

Wired_Protocol_7_is_alive_2026

nc 10.4.89.247 3402

```
helenaudy@helen: /mnt/c/Users/helen/Downloads$ nc 10.4.89.247 3402

===== Soal 15 - Protocol 7: USB Keystroke Decoding =====
Difficulty: Medium
Note: You can exit anytime by typing 'exit'

What is the Vendor ID of the captured USB HID device?
Format: 0x1234 (or 1234)
> 0x046d

What is the Product ID of the captured USB HID device?
Format: 0x1234 (or 1234)
> 0xc31c


What is the USB device address assigned to the keyboard?
Format: int
> 7

What is the secret message decoded from the captured keystrokes?
Format: string
> Wired_Protocol_7_is_alive_2026
Congratulations! Here is your flag: KOMJAR26{USB_K3ystr0k3_mYabUdIBc1A2CHe51e30G1H4Q}
```


Congratulations! Here is your flag:

KOMJAR26{USB_K3ystr0k3_mYabUdIBc1A2CHe51e3OG1H4Q}

16. ftp contains "knights_payload.exe"

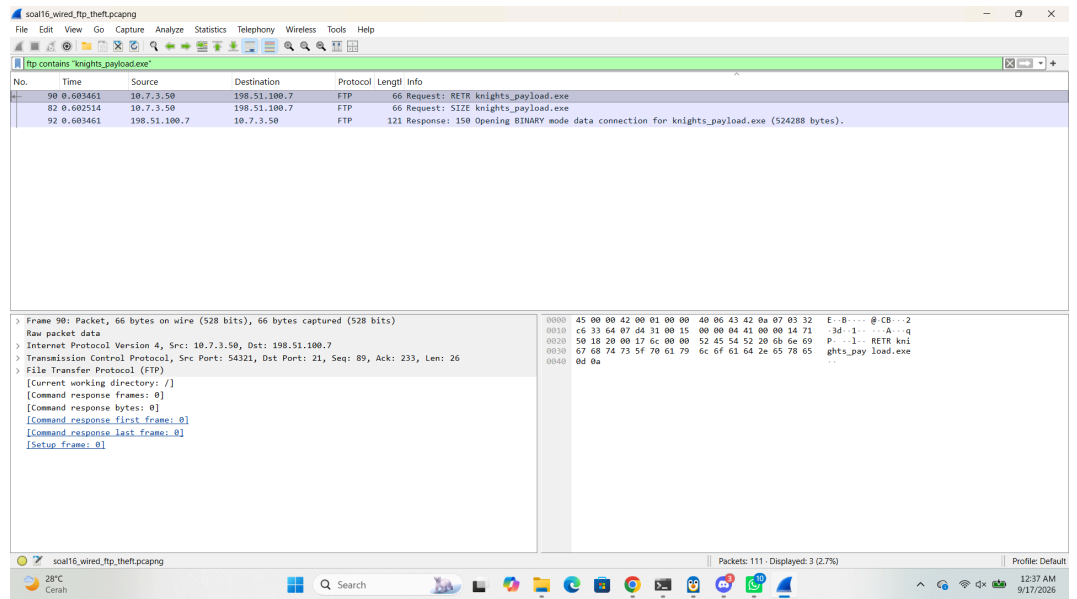

IP Server FTP: 198.51.100.7

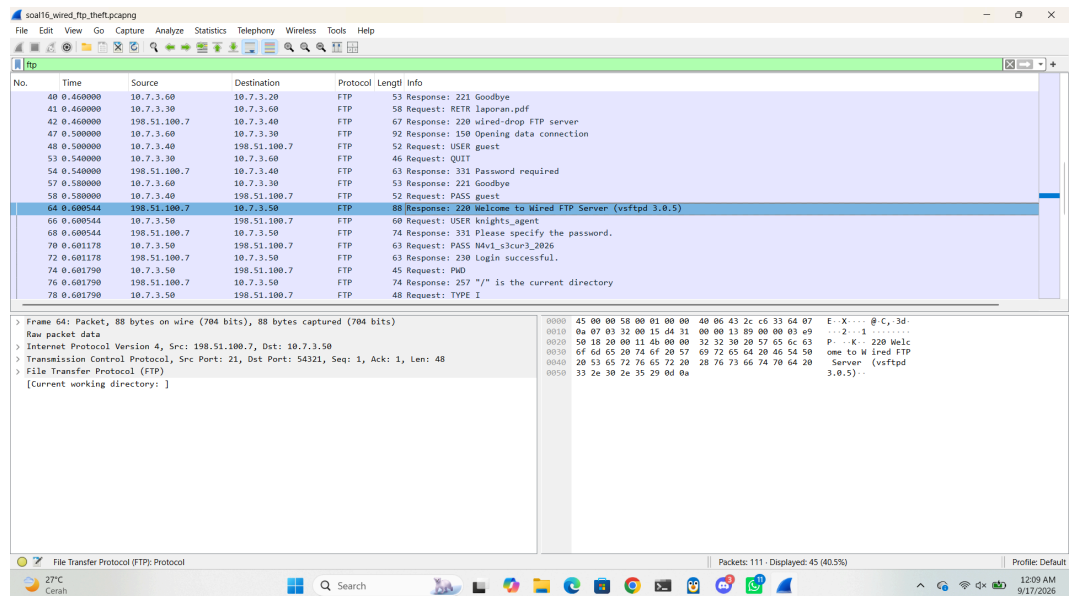

220 Welcome to Wired FTP Server (vsftpd 3.0.5)

6	0.100000	10.7.3.20	10.7.3.60	FTP	52 Request: USER alice
8	0.140000	10.7.3.60	10.7.3.20	FTP	63 Response: 331 Password required
10	0.180000	10.7.3.20	10.7.3.60	FTP	60 Request: PASS alicepass2026

User: alice

Password: alicepass2026

22	0.300000	10.7.3.30	10.7.3.60	FTP	51 Request: USER mika
25	0.340000	10.7.3.20	10.7.3.60	FTP	57 Request: RETR readme.txt
26	0.340000	10.7.3.60	10.7.3.30	FTP	63 Response: 331 Password required
29	0.380000	10.7.3.60	10.7.3.20	FTP	92 Response: 150 Opening data connection
30	0.380000	10.7.3.30	10.7.3.60	FTP	59 Request: PASS mikapass2026

User: mika

Password: mikapass2026

48	0.580000	10.7.3.40	198.51.100.7	FTP	52 Request: USER guest
53	0.540000	10.7.3.30	10.7.3.60	FTP	46 Request: QUIT
54	0.540000	198.51.100.7	10.7.3.40	FTP	63 Response: 331 Password required
57	0.580000	10.7.3.60	10.7.3.30	FTP	53 Response: 221 Goodbye
58	0.580000	10.7.3.40	198.51.100.7	FTP	52 Request: PASS guest


user: guest

Password: guest

66	0.609544	10.7.3.50	198.51.100.7	FTP	60 Request: USER knights_agent
68	0.609544	198.51.100.7	10.7.3.50	FTP	74 Response: 331 Please specify the password.
70	0.601178	10.7.3.50	198.51.100.7	FTP	63 Request: PASS N4v1_s3cur3_2026


User: knights_agent

Password: N4v1_s3cur3_2026

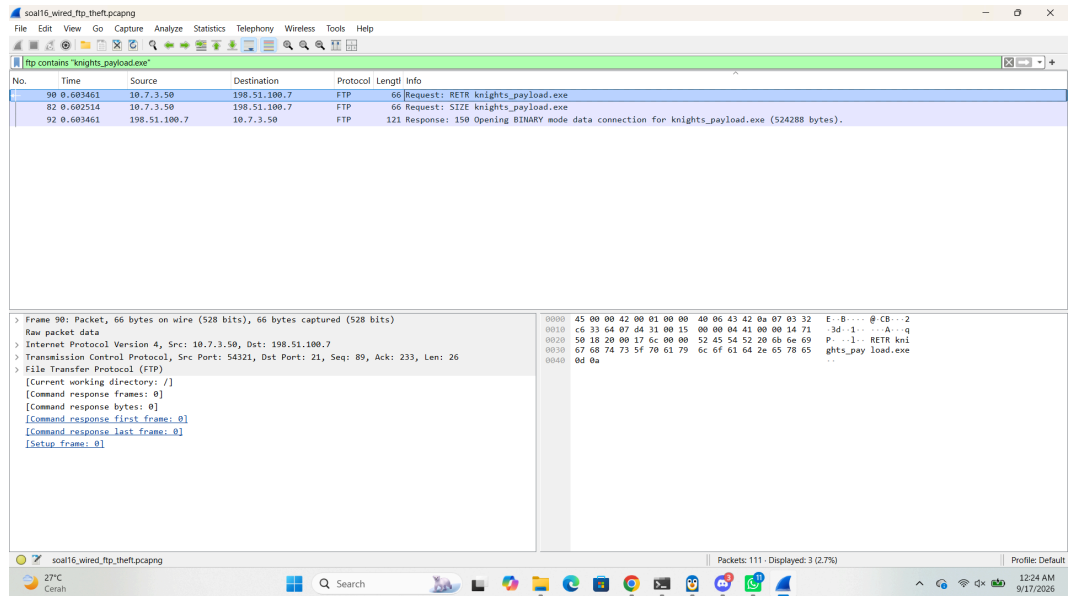

Size: 524288 bits


nc 10.4.89.247 3403

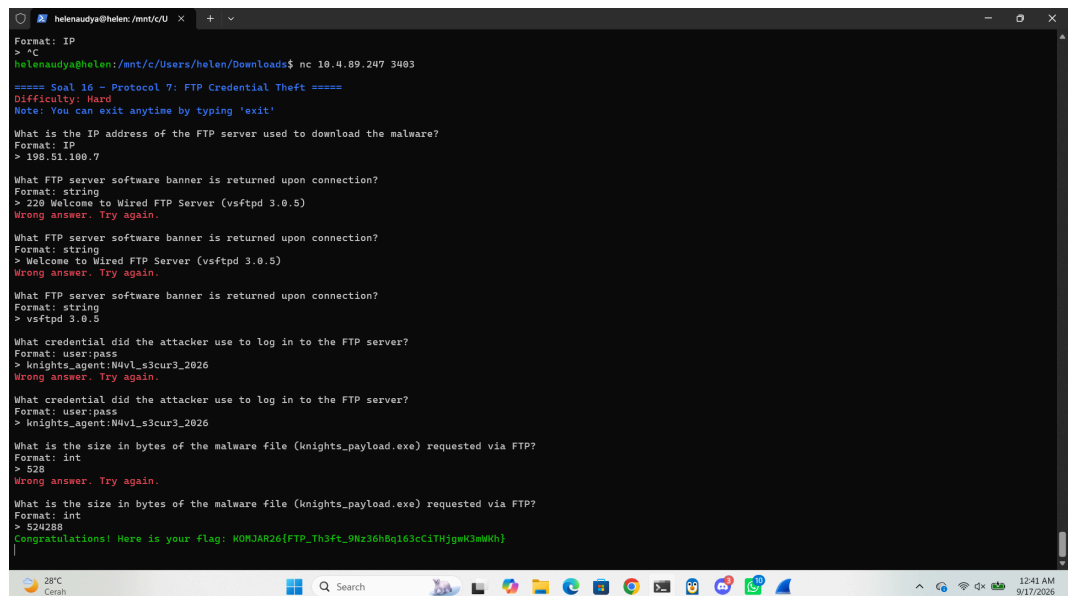

Congratulations! Here is your flag:

KOMJAR26{FTP_Th3ft_9Nz36hBq163cCiThjgwK3mWKH}


17. http.request

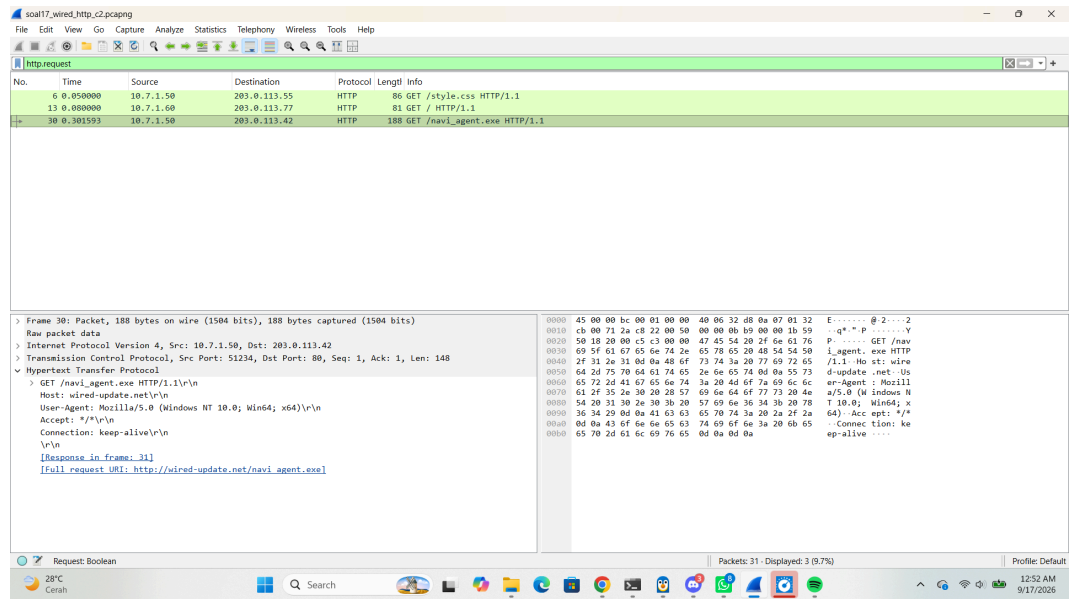

Host: wired-update.net

Request uri: http://wired-update.net/navi_agent.exe

IP server penyerang: 203.0.113.42

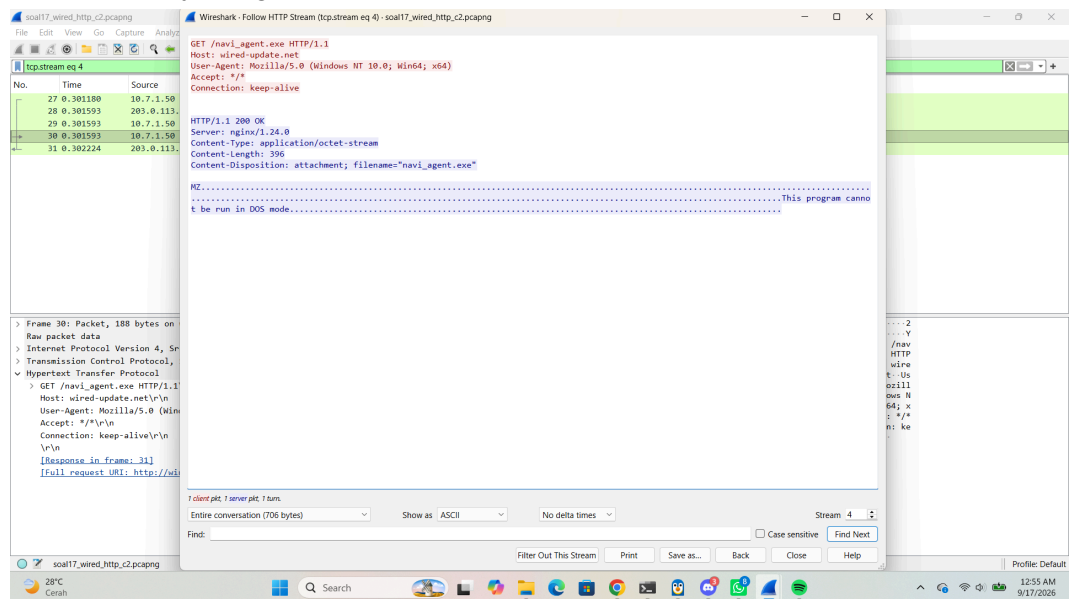

Status code: 200

```

helenaudya@helen:/mnt/c/Users/helen/Downloads$ nc 10.4.89.247 3404

===== Soal 17 - Protocol 7: HTTP Malware Retrieval =====
Difficulty: Hard
Note: You can exit anytime by typing 'exit'

What is the domain name (Host) where the suspicious files were downloaded from?
Format: domain.com
> wired-update.net

What is the IP address of the web server hosting the malicious files?
Format: IP
> 203.0.113.42

What is the filename of the executable malware payload downloaded by the client?
Format: file.exe
> wired-update.net/navi_agent.exe
Wrong answer. Try again.

What is the filename of the executable malware payload downloaded by the client?
Format: file.exe
> navi_agent.exe

What is the HTTP status response code returned when downloading navi_agent.exe?
Format: int
> 200
Congratulations! Here is your flag: KOMJAR26{Navi_C2_D0wnl04d_C53TYxuAheyRSIlN2ofntzcjE}

```

Congratulations! Here is your flag:

KOMJAR26{Navi_C2_D0wnl04d_C53TYxuAheyRSIlN2ofntzcjE}

18. Format protocol sharing: smb2

The image shows a Wireshark capture of SMB2 traffic. The packet list pane displays several SMB2 messages. The selected packet is a Tree Connect Request (SMB2 152) from source IP 10.7.3.100 to destination IP 10.7.1.50. The packet details pane shows the SMB2 header and the Tree Connect Request structure. The raw packet data pane displays the hexadecimal and ASCII representation of the packet data.

No.	Time	Source	Destination	Protocol	Length	Info
4	0.001881	10.7.3.100	10.7.1.50	SMB2	146	Negotiate Protocol Request
6	0.002985	10.7.3.100	10.7.3.100	SMB2	172	Negotiate Protocol Response
8	0.004085	10.7.3.100	10.7.1.50	SMB2	132	Session Setup Request
10	0.004732	10.7.1.50	10.7.3.100	SMB2	116	Session Setup Response
12	0.005330	10.7.3.100	10.7.1.50	SMB2	152	Tree Connect Request, Tree: '\\10.7.1.50\ADMIN\$'
14	0.005330	10.7.3.100	10.7.3.100	SMB2	124	Tree Connect Response, Tree: '\\10.7.1.50\ADMIN\$'
16	0.006049	10.7.3.100	10.7.1.50	SMB2	230	Create Request, File: System32\wired_trojan_payload.exe
18	0.006096	10.7.1.50	10.7.3.100	SMB2	196	Create Response, File: System32\wired_trojan_payload.exe
20	0.007744	10.7.3.100	10.7.1.50	SMB2	1184	Write Request, Len:1028 Off:0, File: System32\wired_trojan_payload.exe
22	0.008575	10.7.1.50	10.7.3.100	SMB2	124	Write Response, File: System32\wired_trojan_payload.exe
24	0.009352	10.7.3.100	10.7.1.50	SMB2	132	Close Request, File: System32\wired_trojan_payload.exe
26	0.009352	10.7.1.50	10.7.3.100	SMB2	168	Close Response, File: System32\wired_trojan_payload.exe

Frame 4: Packet, 146 bytes on wire (1168 bits), 146 bytes captured (1168 bits) on interface 0

Raw packet data

Internet Protocol Version 4, Src: 10.7.3.100, Dst: 10.7.1.50

Transmission Control Protocol, Src Port: 49152, Dst Port: 445, Seq: 1, Ack: 1, Len: 106

NetBIOS Session Service

SMB2 (Server Message Block Protocol version 2), Negotiate Protocol Request, MessageId 0

0000 45 00 00 92 00 01 00 00 40 06 61 c2 0a 07 03 64 E.....@.....

0010 0a 07 01 32 c0 00 01 bd 00 00 27 11 00 00 4e 21 ...2.....!N

0020 50 18 20 00 8c 00 00 00 00 00 00 66 fe 53 dd 42 P.....f.SMB

0030 40 00 00 00 00 00 00 00 00 00 00 00 00 00 00 @.....

0040 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00\$...

0050 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00\$...

0060 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00\$...

0070 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00\$...


0080 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00\$...

0090 02 02 ..

Tree Connect Request


Source IP: 10.7.3.100

Destination IP: 10.7.1.50

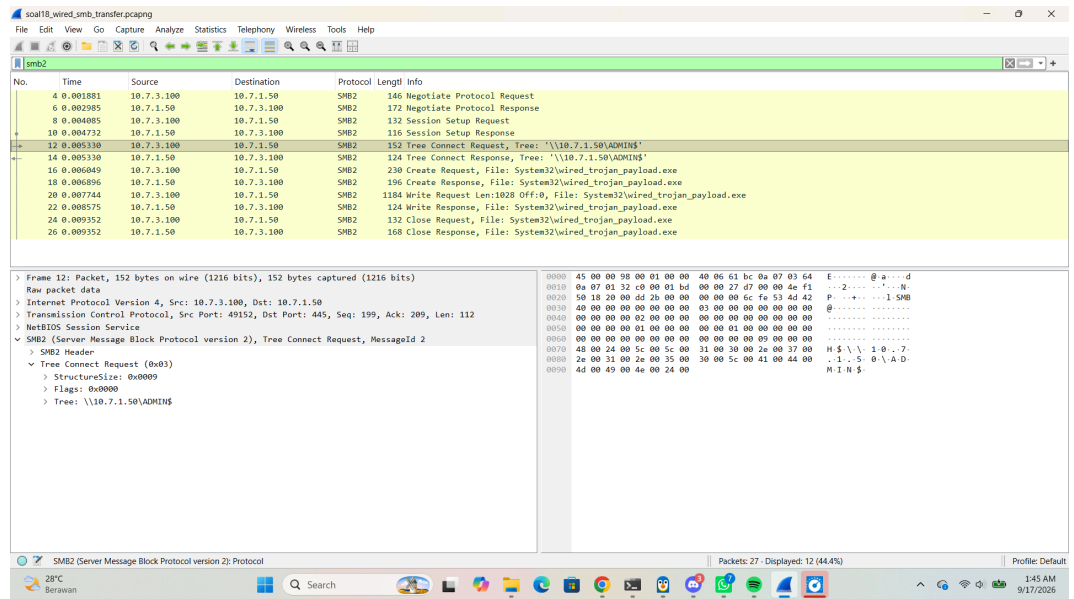

Path: \\10.7.1.50\\ADMIN\$

Smb2.filename

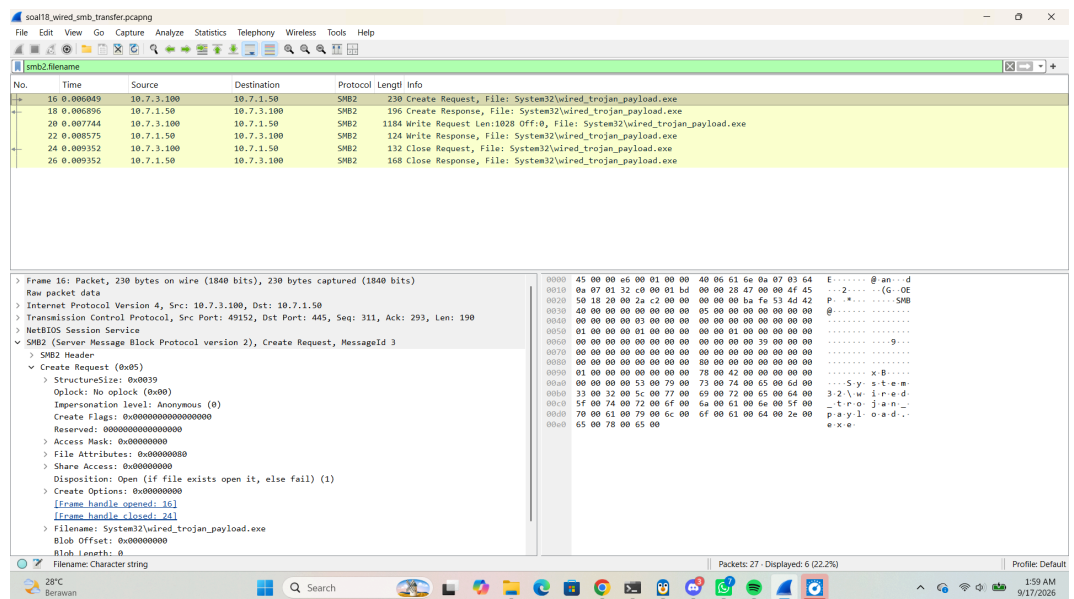

Shared files: wired_trojan_payload.exe

```

helenaudya@helen:/mnt/c/Users/helen/Downloads$ nc 10.4.89.247 3405

===== Soal 18 - Protocol 7: SMB Lateral Transfer =====
Difficulty: Hard
Note: You can exit anytime by typing 'exit'

What network file sharing protocol was used to transfer the malware to the victim?
Format: string
> smb2

What is the IP address of the source host delivering the malware?
Format: IP
> 10.7.3.100

What is the IP address of the victim host receiving the malware?
Format: IP
> 10.7.1.50

What target share or directory on the victim was the malware written to?
Format: string
> \\10.7.1.50\ADMIN$

What is the filename of the executable malware transferred?
Format: file.exe
> wired_trojan_payload.exe
Congratulations! Here is your flag: KOMJAR26{SMB_Tr4nsf3r_B9I9CLCgKxP2F3kJJeP8V36ap}

```

Congratulations! Here is your flag:

KOMJAR26{SMB_Tr4nsf3r_B9I9CLCgKxP2F3kJJeP8V36ap}

19. smtp || tcp.port == 25

soal19_wired_smtp_threat.pcapng

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

smtp || tcp.port == 25

No.	Time	Source	Destination	Protocol	Length	Info
1	0.000000	10.7.2.10	10.7.2.20	TCP	40	53000 → 25 [SYN] Seq=0 Win=8192 Len=0
2	0.000000	10.7.2.20	10.7.2.10	TCP	40	25 → 53000 [SYN, ACK] Seq=0 Ack=1 Win=8192 Len=0
3	0.000000	10.7.2.10	10.7.2.20	TCP	40	53000 → 25 [ACK] Seq=1 Ack=1 Win=8192 Len=0
4	0.000000	10.7.2.20	10.7.2.10	SMTP	77	S: 220 internal-mail.wired.local ESMTP
5	0.150000	10.7.2.10	10.7.2.20	SMTP	57	C: EHLO chisa-node
6	0.180000	10.7.2.20	10.7.2.10	TCP	40	25 → 53000 [ACK] Seq=38 Ack=18 Win=8192 Len=0
7	0.210000	10.7.2.10	10.7.2.20	SMTP	51	S: 250 Hello
8	0.270000	10.7.2.20	10.7.2.10	SMTP	74	C: MAIL FROM:<chisa@internal.wired>
9	0.300000	10.7.2.10	10.7.2.20	TCP	40	25 → 53000 [ACK] Seq=49 Ack=52 Win=8192 Len=0
10	0.330000	10.7.2.20	10.7.2.10	SMTP	48	S: 250 OK
11	0.300000	10.7.2.10	10.7.2.20	SMTP	71	C: RCPT TO:<chisa@internal.wired>
12	0.300000	10.7.2.10	10.7.2.20	TCP	40	53100 → 25 [SYN] Seq=0 Win=8192 Len=0
13	0.400000	10.7.2.20	10.7.2.10	TCP	40	25 → 53000 [ACK] Seq=57 Ack=83 Win=8192 Len=0

Frame 1: Packet, 40 bytes on wire (320 bits), 40 bytes captured (320 bits) on interface 0

Ethernet II, Src: Intel(R) Ethernet Controller (P0-P7), Dst: Intel(R) Ethernet Controller (P0-P7)

Internet Protocol Version 4, Src: 10.7.2.10, Dst: 10.7.2.20

Transmission Control Protocol, Src Port: 53000, Dst Port: 25, Seq: 0, Len: 0

0000 45 00 00 28 00 01 00 00 40 06 62 a4 0a 07 02 0a E:.....@b.....

0010 0a 07 02 14 cf 00 00 19 00 00 03 e8 00 00 00 00 P:.....

0020 50 02 20 00 a4 ad 00 00

Packets: 100 · Displayed: 82 (82.0%)


Profile: Default

27°C Berawan

Search

3:02 AM 9/17/2026

Follow tcp stream

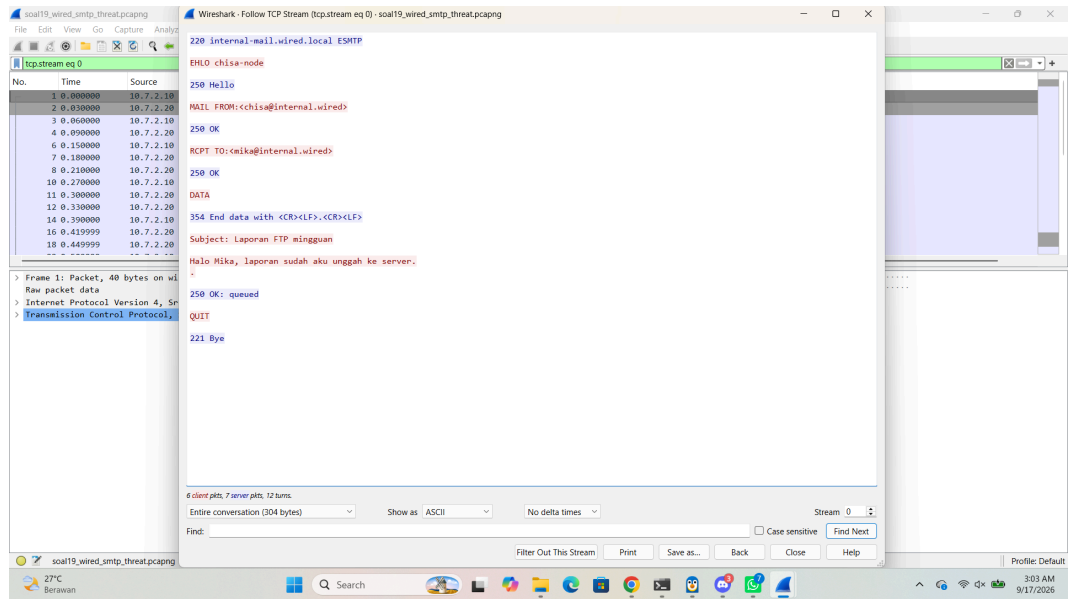


Email korban: mika@internal.wired

Pengirim: chisa@internal.wired

Subjek email: Laporan FTP mingguan

Isi pesan: Halo Mika, laporan sudah aku unggah ke server.

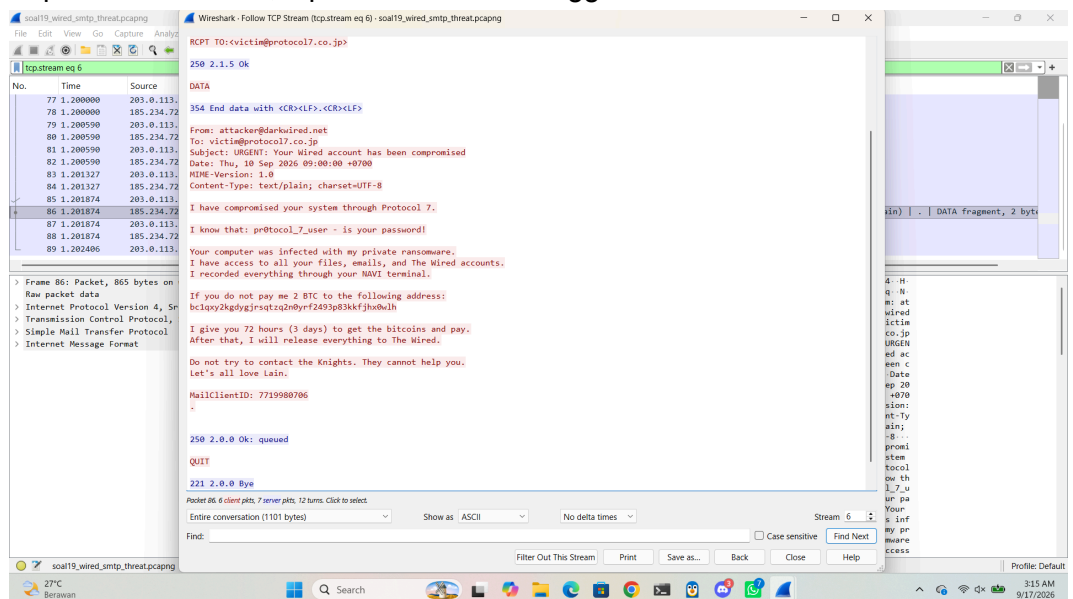

```

helenaudya@helen:/mnt/c/Users/helen/Downloads$ nc 10.4.89.247 3406

===== Soal 19 - Protocol 7: SMTP Threat Inspection =====
Difficulty: Hard
Note: You can exit anytime by typing 'exit'

What is the email address of the victim targeted by the extortionist?
Format: user@domain.com
> victim@protocol7.co.jp

What password did the extortionist claim was stolen from the victim?
Format: string
> pr0tocol_7_user

What type of malware did the attacker claim infected the victim's computer?
Format: string
> ransomware

How many days deadline did the attacker give the victim to pay?
Format: int
> 3


What is the MailClientID specified at the bottom of the extortion email?
Format: int
> 7719980706
Congratulations! Here is your flag: KOMJAR26{SMTP_Ext0rt10n_0r64rNffFpoleFtK5JMdZ0Lul}

```



Congratulations! Here is your flag:

KOMJAR26{SMTP_Ext0rt10n_0r64rNffFpoleFtK5JMdZ0Lul}


20. Edit > Preferences > Protocols > TLS > masukkan keylogs

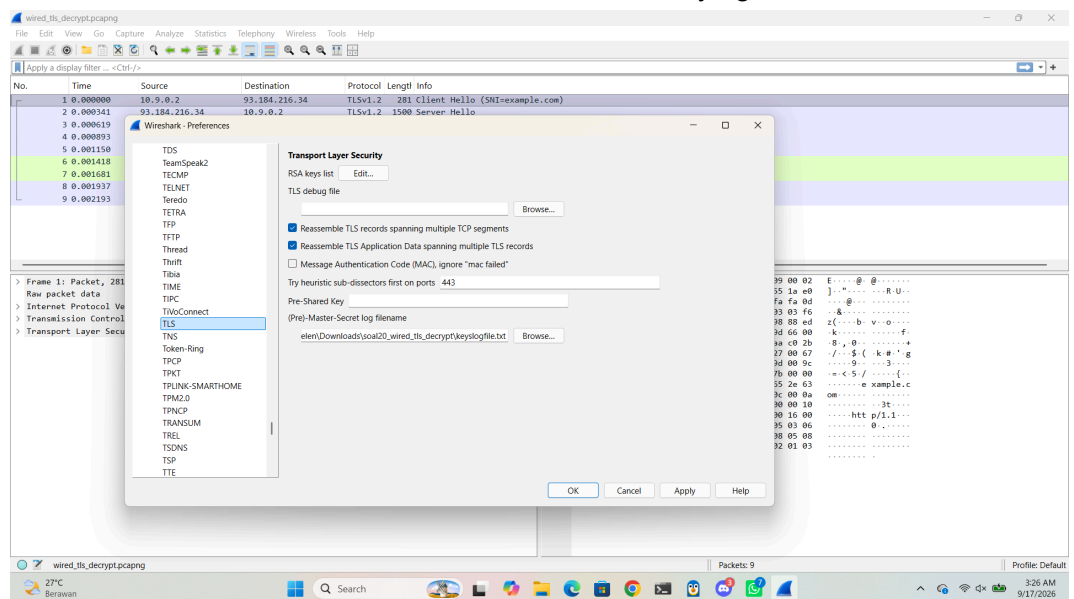


tls.handshake.type == 1

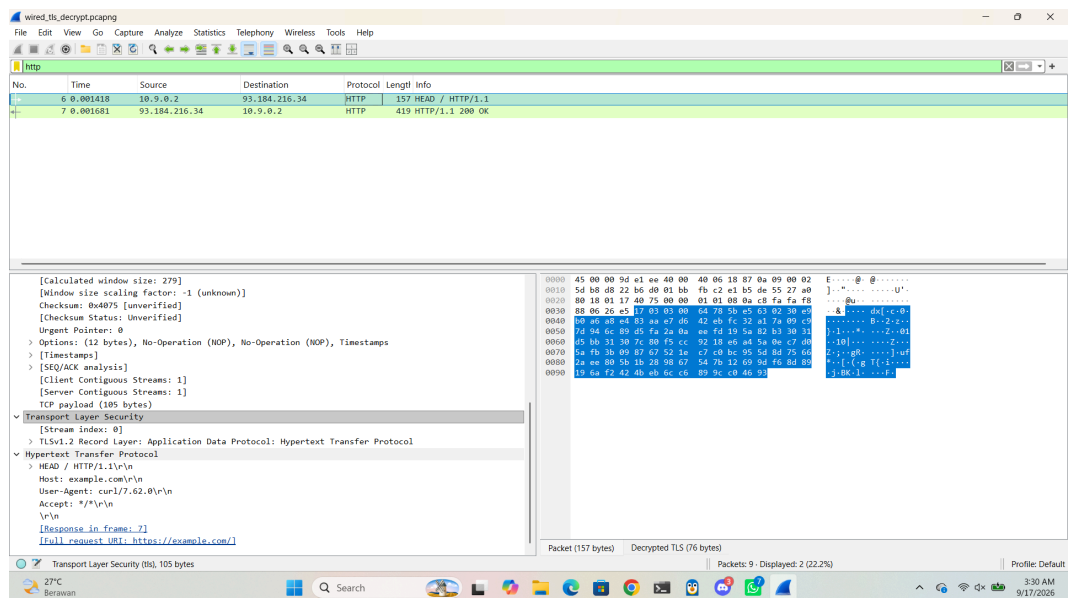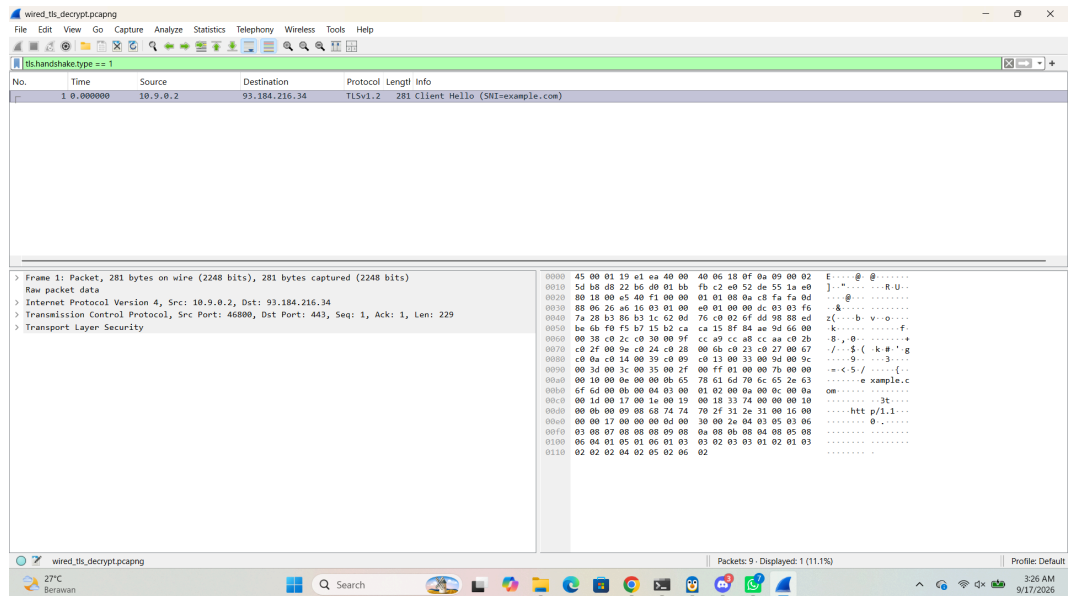

User-Agent: curl/7.62.0\r\n\r\nPath: <https://example.com/>

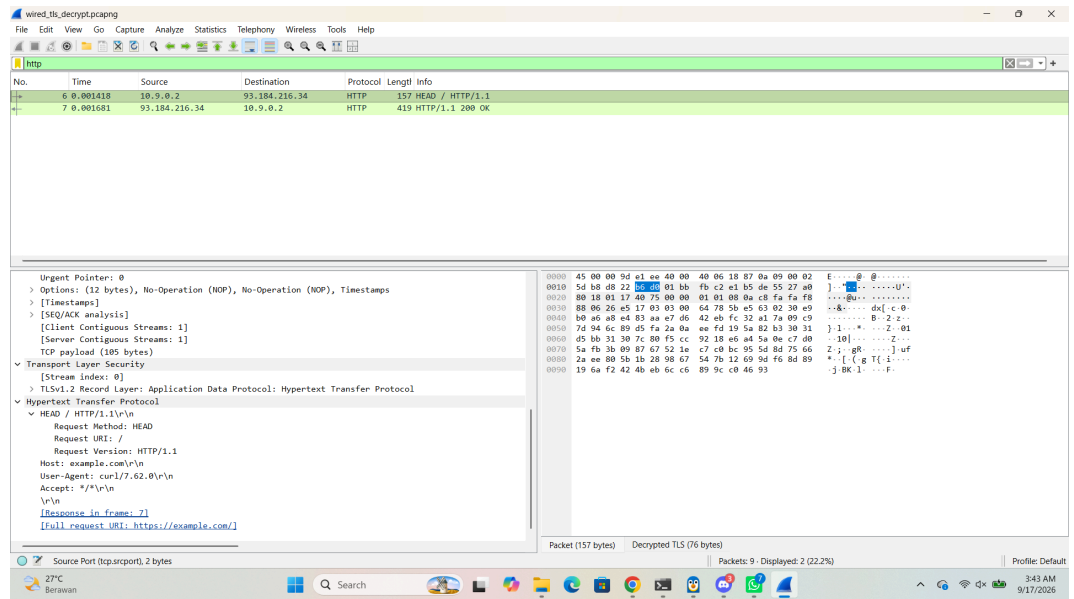

Request METHOD: HEAD
Request URI: /

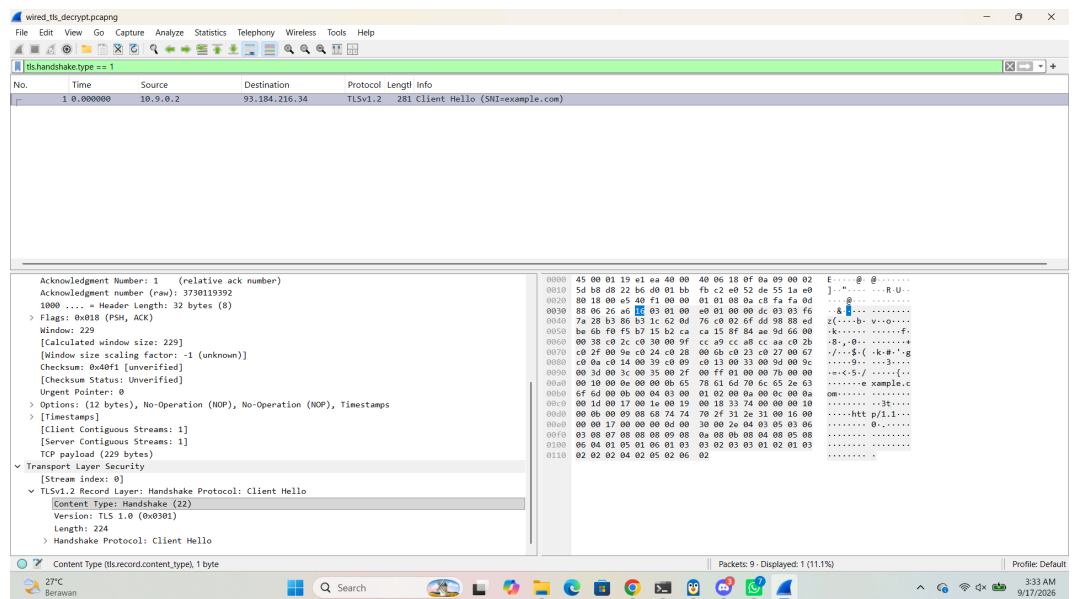

TLS Version: TLSV1.2

```
helenaudya@helen:/mnt/c/Users/helen/Downloads$ nc 10.4.89.247 3407

===== Soal 20 - Protocol 7: TLS Decrypted Stream =====
Difficulty: Hard
Note: You can exit anytime by typing 'exit'

What specific TLS protocol version was negotiated for the encrypted communication?
Format: string (e.g. TLSv1.2)
> TLSv1.2

What domain name (SNI / Host) was requested by the client during the TLS handshake?
Format: domain.com
> example.com

What is the IP address of the HTTPS server?
Format: IP
> 93.184.216.34

What User-Agent string was used by the client during the decrypted HTTP session?
Format: string
> curl/7.62.0

What HTTP request method and path was sent in the decrypted request?
Format: METHOD /path (e.g. GET /index.html)
> HEAD /
Congratulations! Here is your flag: KOMJAR26{TLS_D3crypt_dJhAWIgytZs1jm4DqRKGaKFiG}
```

Congratulations! Here is your flag:

KOMJAR26{TLS_D3crypt_dJhAWIgytZs1jm4DqRKGaKFiG}