




Machine-washable plimsolls — Spring/Summer development

DOCUMENT TP-PLIMS-001	REVISION A · 2026-07-14	STYLES 6 (01–06)	PLATFORM Last PL-01
PREPARED BY LastPro AI	FOR plims / factory	CONSTRUCTION Strobel + foxing	STATUS Sampling

Six plimsoll styles built on **one shared last and one shared outsole platform** — a deliberate cost decision that lets the range launch on a single set of tooling. Every style is engineered to be **machine washable**: cement-free bonds, closed-cell foam, no leather, colourfast trims. The brand signature is a **coloured pinstripe along the sole edge**, recoloured per colourway.

READ ME FIRST

All measurements are for size **UK 7** and are development targets, not final graded specs. Drawings are technical flats (not to scale unless dimensioned). All wash, bond, flex and slip figures are **targets to be confirmed by physical testing** per \$5 before any "machine washable" claim is made.



STYLE 01 • PLM-01

Core

Low slip-on, single elastic gore
— the hero.

STYLE 02 • PLM-02

Lace

4-eyelet low derby for those
who want laces.

STYLE 03 • PLM-03

Slip

Twin-gore full slip-on, cleanest
& most minimal.

STYLE 04 • PLM-04

High

High sock collar for more hold
and warmth.

STYLE 05 • PLM-05

Knit

One-piece seamless knit,
most breathable.

STYLE 06 • PLM-06

Mule

Open-heel backless, desk-to-
door slip.

Common to all six styles. Style sheets list only what differs from this.

LAST & GEOMETRY – PL-01 (UNISEX)

Toe shape	Rounded-square, low toe spring 12 mm
Fitting	Standard / medium volume (D)
Heel height	20 mm stack
Forefoot	16 mm stack
Heel-to-toe drop	4 mm
Foxing height	22 mm at toe / 26 mm at heel
Collar height	Style-dependent (see sheets)
Target weight	230 g ± 15 g per shoe (UK 7)

CONSTRUCTION – ALL STYLES

Method	Strobel lasted, vulcanised rubber foxing to cup outsole
Bonding	Water-based / heat-activated, wash-durable. No solvent cement.
Lasting board	None — strobel sock only (no cellulose board)
Heel counter	Molded TPU, washable
Toe puff	Thermoplastic, low-profile
Stitching	Bonded polyester, 8-9 SPI, colourfast
Washability	Machine wash 30°C validated to \$5

REF	COMPONENT	MATERIAL	SPEC / GRADE	WASH NOTE
M-01	Upper — canvas	Organic cotton canvas	10 oz, pre-shrunk, reactive-dyed	Colourfast ≥ 4
M-02	Upper — knit	Recycled PET engineered knit	Knit-to-shape, 1-piece	Fast-dry
M-03	Lining	Recycled polyester mesh	3 mm spacer at collar	Non-wicking
M-04	Footbed	Molded closed-cell EVA	Asker C 45 ± 5 , arch cradle, removable, anti-microbial	No water-log
M-05	Midsole/strobel	EVA sheet + strobel textile	2 mm strobel, PET thread	Sealed
M-06	Outsole	Vulcanised rubber	Shore A 60 ± 5 , non-marking, siped	Inert
M-07	Foxing tape	Vulcanised rubber	18 mm tape, gum or ink	Inert
M-08	Signature pinstripe	Co-extruded rubber bead	3 mm, colour per colourway	Bonded in vulcanising
M-09	Heel counter	TPU	1.2 mm molded	Washable
M-10	Laces / gore	Recycled PET flat lace / elastic gore	Removable laces; colourfast elastic	Remove laces to wash
M-11	Adhesive	Water-based PU / heat-activated film	Wash-durable	Retains $\geq 80\%$ bond post-wash
M-12	Thread	Bonded polyester	Tex 40, colourfast	Colourfast ≥ 4

CARE CLAIM & WASH PROTOCOL


Cycle	Cold-warm, 30°C, gentle/delicate
Prep	Remove footbed + laces; use a wash bag
Detergent	Mild, non-bleach
Dry	Air dry only, no tumble, no direct heat
Validation	10 cycles, acceptance per §5

On-pack claim

Only after wash validation passes

TOLERANCES


Length	± 3 mm
Girth	± 4 mm
Stack height	± 1.5 mm
Weight (pair)	± 30 g
Shrinkage (post-wash)	≤ 3 %
Colour match	$\Delta E \leq 1.5$ to approved lab-dip

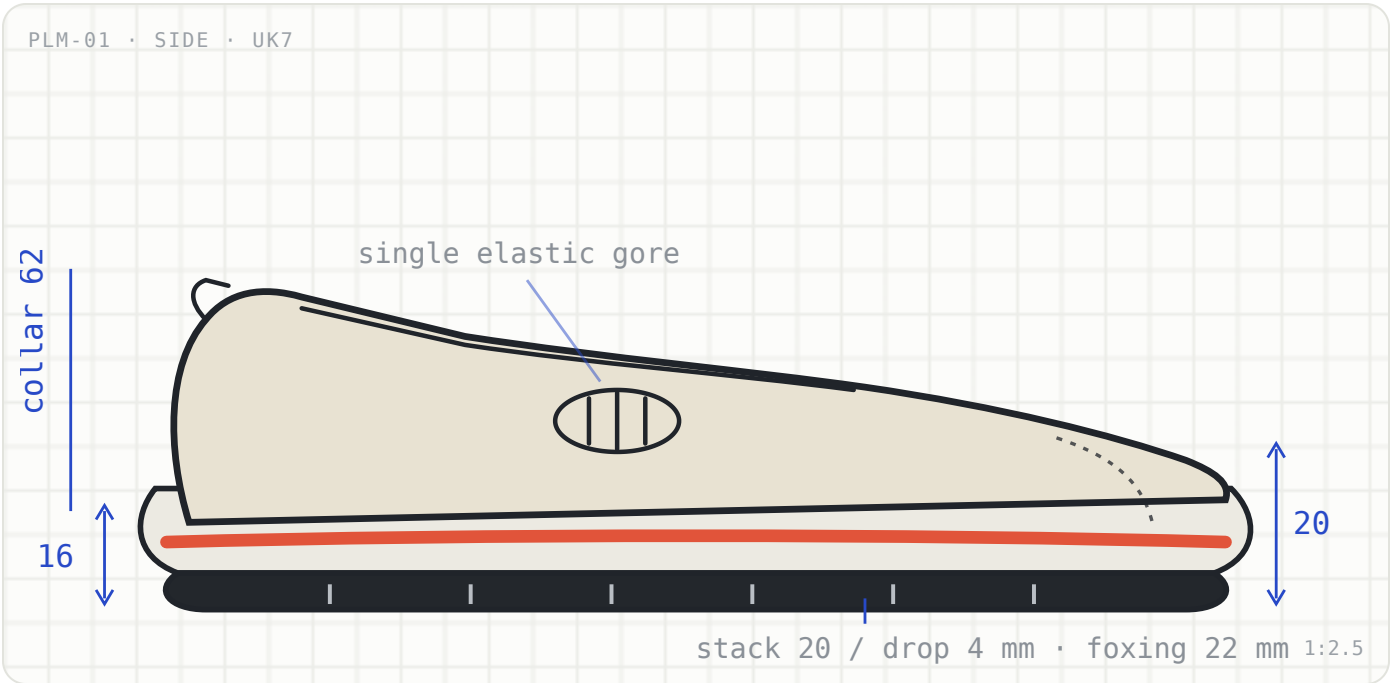


01 **Core** PLM-01

Low slip-on with a single hidden elastic gore and a sock-knit collar. The default plims — most minimal thing that still holds the foot.


Closure	Slip-on, single elastic gore (concealed)
Collar height	62 mm (low)
Upper	M-01 canvas + M-03 mesh collar
Toe cap	Stitched, low-profile
Heel counter	M-09 TPU
Footbed	M-04 EVA, removable
Weight (UK7)	225 g

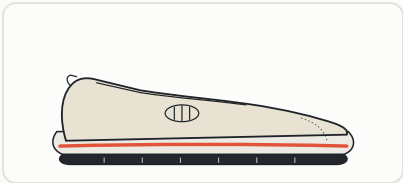

Chalk / Persimmon
E8E2D2 · E1543A

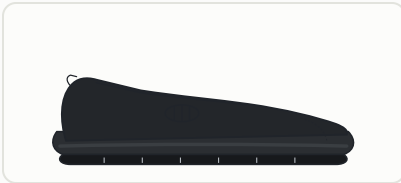

Ink / Ink
23262A · tonal

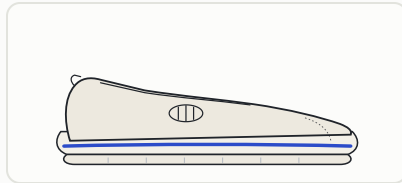

Bone / Cobalt
EDE9DF · 2C4CC9

BILL OF MATERIALS

#	COMPONENT	REF	QTY
1	Upper canvas — vamp/quarters	M-01	1 pr
2	Collar mesh	M-03	1 pr
3	Elastic gore	M-10	2
4	Heel counter	M-09	2
5	Toe puff	—	2
6	Strobel sock	M-05	1 pr
7	Outsole cup	M-06	1 pr
8	Foxing + pinstripe	M-07/08	1 pr
9	EVA footbed	M-04	1 pr

CONSTRUCTION SEQUENCE


- 01 Cut** — die-cut canvas to grain; cut mesh, gore, reinforcements.
- 02 Close upper** — join quarters to vamp, insert gore, bind collar, stitch toe cap (8–9 SPI).
- 03 Strobel** — stitch strobel sock to lasting margin; set TPU counter + toe puff.
- 04 Last & heat-set** — mount PL-01, steam, heat-set profile.
- 05 Prep bond** — rough + water-based primer on margin & outsole.
- 06 Attach sole** — position cup outsole, apply foxing + pinstripe bead, press.

07

Vulcanise — cure foxing bond; chill-set.

08

De-last & finish — insert footbed, clean, QC + lot wash-test, box.

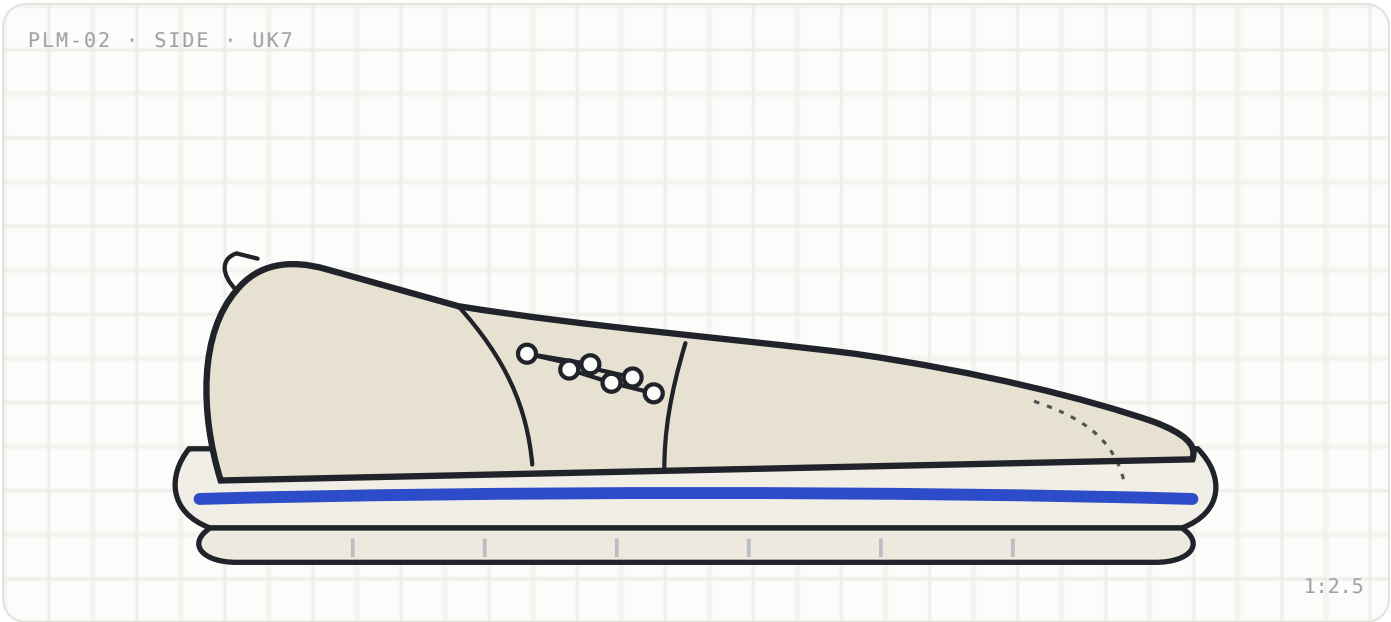

02 **Lace** PLM-02

A minimal 4-eyelet low derby on the same platform, for wearers who want an adjustable fit and a more classic face.

Closure	4 eyelets, removable flat lace (M-10)
Eyelets	Washable, tonal metal-free
Collar height	64 mm
Upper	M-01 canvas + facing reinforcement
Tongue	Gusseted, mesh-lined
Weight (UK7)	238 g

DIFFERS FROM PLATFORM

Adds eyelet facing + gusseted tongue; laces are removed before washing.




BILL OF MATERIALS (DELTA)

#	COMPONENT	REF	QTY
+1	Eyelet facing reinforcement	M-01	2
+2	Eyelets (metal-free)	—	8
+3	Gusseted tongue + mesh	M-01/03	2
+4	Flat lace (removable)	M-10	1 pr
—	Elastic gore (deleted)	M-10	0

CONSTRUCTION — CHANGES

- 01 Cut facing** — add eyelet facings + tongue to the cut plan.
- 02 Punch + set eyelets** — reinforce, punch 4 per side, set metal-free eyelets.
- 03 Attach tongue** — stitch gusseted tongue to throat before closing.
- 04 Then follow Core steps 3-8.**

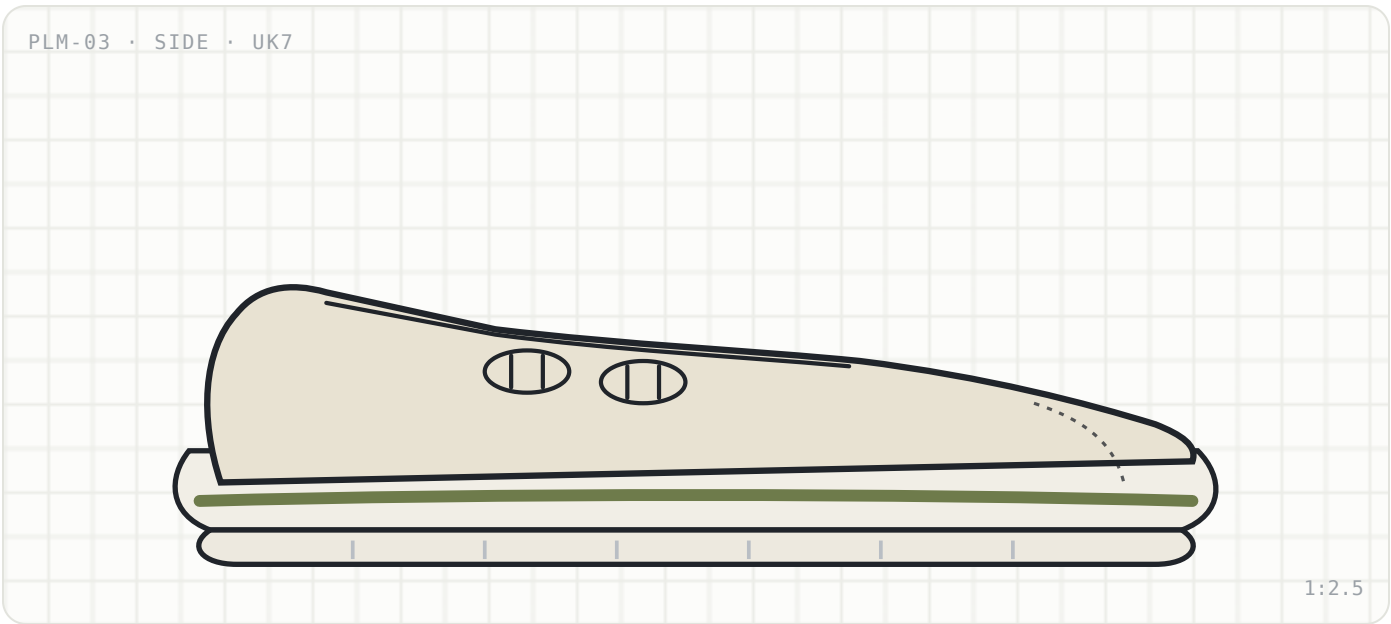


03 **Slip** PLM-03

Twin-gore full slip-on. No laces, no visible closure — the purest, most office-appropriate face in the range and the easiest to kick on/off.

Closure	Twin elastic gore, no laces
Collar height	58 mm (lowest)
Topline	Elasticated binding for grip
Upper	M-01 canvas, seam-minimised
Heel	M-09 TPU + pull loop
Weight (UK7)	218 g (lightest)

COLOURWAYS

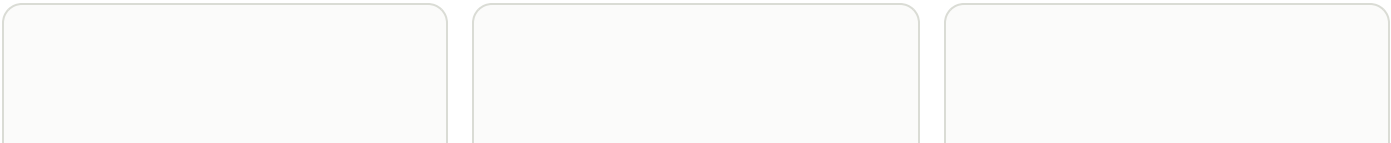




BILL OF MATERIALS (DELTA)

#	COMPONENT	REF	QTY
+1	Twin elastic gore	M-10	4
+2	Elasticated topline binding	M-10	1 pr
+3	Heel pull loop	M-10	2
—	Toe cap seam	—	optional

CONSTRUCTION — CHANGES

- 01 Insert twin gores** — set two elastic panels each side of the throat.
- 02 Elasticate topline** — bind collar with elastic tape for lockdown.
- 03 Add pull loop** — stitch heel loop at counter.
- 04 Then follow Core steps 3-8.**

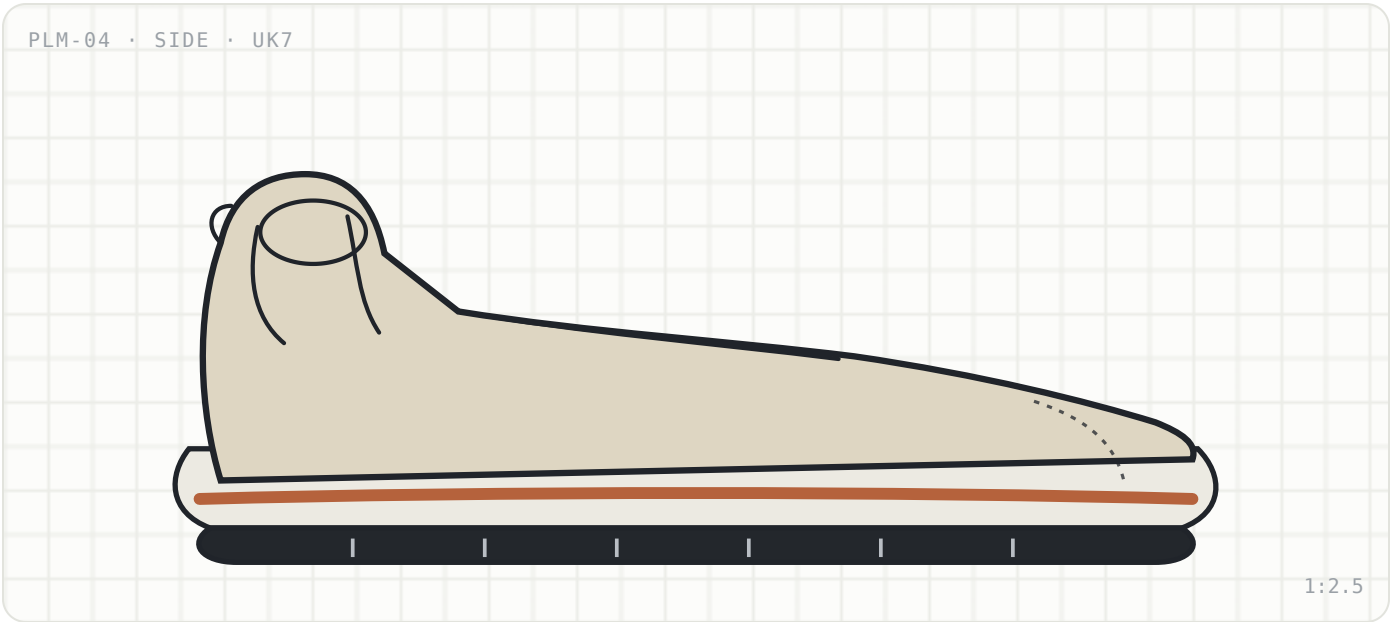

04


High


PLM-04

A high sock collar for more ankle hold and warmth — still indoor weight. The most secure "holds the foot" fit in the range.

Closure	Pull-on high sock, single gore
Collar height	118 mm (mid/high)
Cuff	Ribbed stretch knit, mesh-lined
Upper	M-01 canvas body + M-02 knit cuff
Heel counter	M-09 TPU, extended
Weight (UK7)	252 g

COLOURWAYS

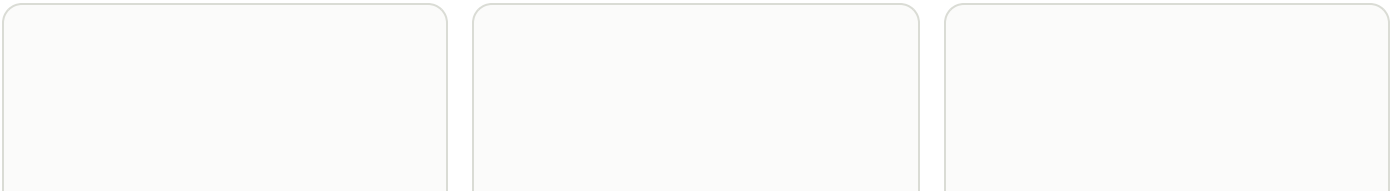


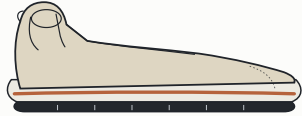

Oat / Clay
DED6C2 · B5623C



Charcoal / Chalk
3B3F44 · E8E2D2

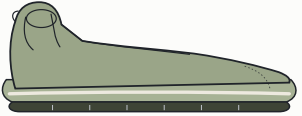


Sage / Bone
9AA588 · EDE9DF

BILL OF MATERIALS (DELTA)

#	COMPONENT	REF	QTY
+1	Ribbed knit cuff	M-02	2
+2	Extended TPU counter	M-09	2
+3	Collar mesh (extended)	M-03	1 pr

CONSTRUCTION — CHANGES

- 01** **Knit cuff** — attach ribbed stretch cuff to the quarter top.
- 02** **Extended counter** — set taller TPU counter for ankle support.
- 03** **Line the collar** — full mesh lining up the cuff.
- 04** **Then follow Core steps 3-8** — note higher last collar clearance.

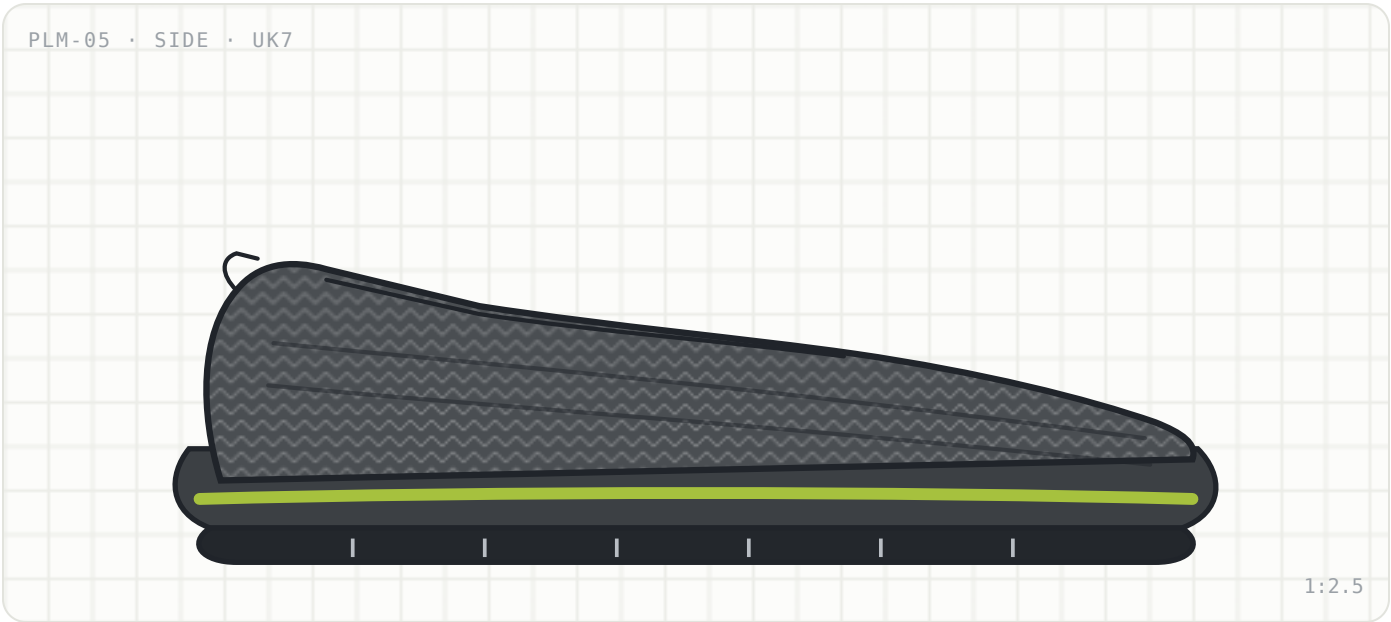

05 **Knit** PLM-05


One-piece engineered knit upper — seamless, sock-like, the most breathable and fastest-drying. Delivers "holds the foot" through the knit itself.

Upper	M-02 recycled knit, knit-to-shape, 1-piece
Seams	Seamless vamp; heel seam only
Closure	Slip-on, integrated stretch collar
Collar height	66 mm
Reinforcement	TPU heel + fused eyestay zones
Weight (UK7)	205 g (lightest upper)


SOURCING NOTE

Requires a flat-knit supplier (Stoll/Shima). Higher upper unit cost, lower cutting/closing labour — nets close to canvas at volume.


COLOURWAYS

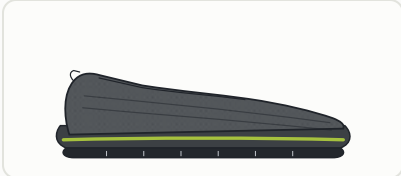

Graphite / Lime
4A4E52 · A6C13E

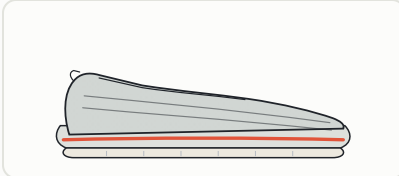

Mist / Persimmon
CFD4D1 · E1543A

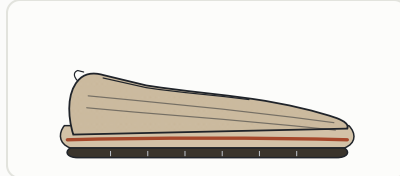

Sand / Rust
C9B79A · A6482B

BILL OF MATERIALS

#	COMPONENT	REF	QTY
1	Knit upper (1-piece)	M-02	1 pr
2	Fused TPU reinforcement film	M-09	1 pr
3	Strobel sock	M-05	1 pr
4	Outsole + foxing + pinstripe	M-06/07/08	1 pr
5	EVA footbed	M-04	1 pr

CONSTRUCTION SEQUENCE

- 01

Knit-to-shape — knit upper with integrated collar & reinforcement zones.
- 02


Heat-fuse — laminate TPU film to heel/eyestay; close heel seam.
- 03

Strobel — stitch strobel; set TPU heel counter.
- 04

Last & heat-set — mount PL-01, heat-set knit to shape.
- 05

Attach sole + vulcanise — follow Core steps 5–7.
- 06

De-last & finish — footbed, QC + lot wash-test, box.

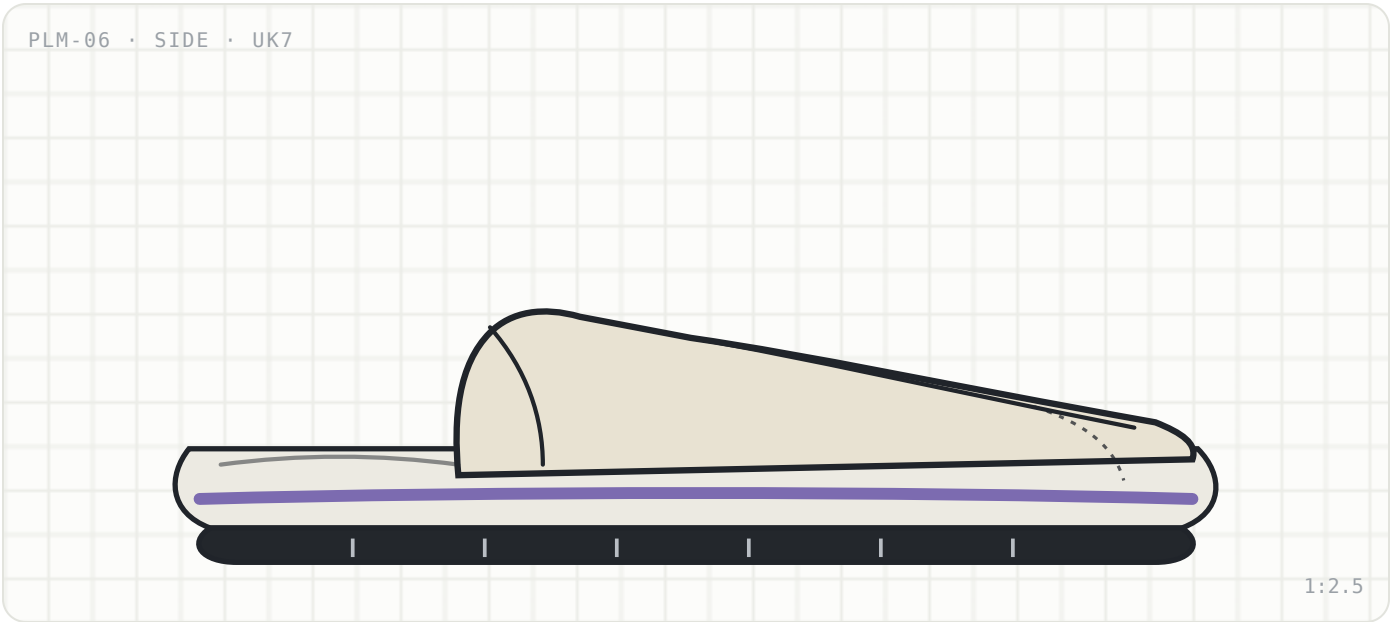

06 **Mule** PLM-06


Open-heel backless plimsoll — steps on/off at a desk in one move. Same sole platform, upper cut away at the heel with a reinforced collar.

Closure	Backless slip, open heel
Collar	Reinforced elastic binding at instep
Upper	M-01 canvas, front-half only
Heel	Open — no counter
Footbed	M-04 EVA + higher-grip top-cloth
Weight (UK7)	190 g (lightest overall)


FIT RISK

Backless = higher heel-slip risk. Requires a snug throat and a grippier footbed top-cloth; wear-trial before sign-off (see §5).


COLOURWAYS

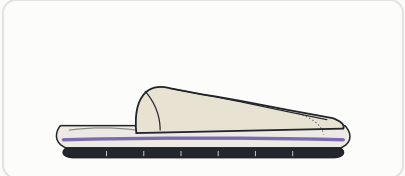

Chalk / Lilac
E8E2D2 · 7C6BB0

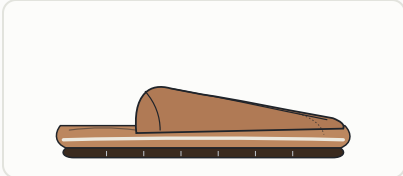

Clay / Bone
B07A55 · EDE9DF

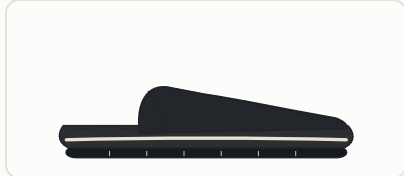

Ink / Chalk
23262A · E8E2D2

BILL OF MATERIALS (DELTA)

#	COMPONENT	REF	QTY
+1	Reinforced instep binding	M-10	1 pr
+2	Grip top-cloth footbed	M-04	1 pr
–	Heel counter (deleted)	M-09	0
–	Quarters/heel panel (deleted)	M-01	0

CONSTRUCTION – CHANGES

- 01

Cut front-half upper — vamp + instep only, no heel panel.
- 02

Reinforce & bind instep — elastic binding for a snug hold.
- 03

Strobel (open heel) — stitch strobel; finish exposed heel edge cleanly.
- 04

Then follow Core steps 4-8 — grip top-cloth on footbed.

No style ships — and no "machine washable" claim is used — until the sample lot passes every row below. Test to recognised methods (SATRA / ISO).

TEST	METHOD	ACCEPTANCE	STAGE
Sole/upper bond strength	SATRA TM411 / ISO 20344	≥ 4.0 N/mm, no substrate failure	Every lot
Bond retention post-wash	Bond after 10× wash	≥ 80 % of initial; no delamination	PP + lot
Whole-shoe flex	SATRA TM60 / ISO 20344	30,000 flexes, no crack/split	PP sample
Colourfastness to washing	ISO 105-C06	Grade ≥ 4 (staining + change)	Per colour
Wash durability (whole shoe)	plims protocol, 10× @30°C	≤ 3 % shrink, no odour, cue retained, footbed intact	PP + lot
Slip resistance (indoor)	SATRA TM144 / ISO 13287	CoF ≥ 0.30 dry hard floor	PP sample
Footbed compression set	ISO 1856	≤ 10 %	Material
Restricted substances	REACH SVHC / azo / PFAS	Compliant + supplier declarations	Material
Fit / heel-slip (wear trial)	8h wear panel, hard floor	No heel slip, no hot-spots (Mule critical)	PP sample

■ PP = pre-production ■ lot = every production lot ■ material = per material approval

Unisex run, UK 3–12 including half sizes. Grade from UK 7 sample size. Forgiving knit/gore uppers reduce size-driven returns — publish a clear fit guide.

UK	EU	US M	US W	LAST LENGTH (MM)	INSOLE (MM)
3	36	4	5	237	231
4	37	5	6	245	239
5	38	6	7	254	248
6	39–40	7	8	262	256
7	41	8	9	271	265
8	42	9	10	279	273
9	43	10	11	288	282
10	44	11	12	296	290
11	45–46	12	13	305	299
12	47	13	14	313	307

Half sizes (3.5–11.5) graded at the midpoint. Grade increment ≈ 8.5 mm/full size (2⁄3 length, 1⁄3 girth split).

PACKAGING & LABELLING

Box	Recycled kraft, mono-material, no lamination
Infill	Recycled tissue; no plastic wrap
Care label	Wash symbols + "remove footbed & laces"
Composition	Upper / lining / sole per market law
Origin	Country-of-origin marking
Claims	"Machine washable" only post-\$5 pass

COMPLIANCE FLAGS – CONFIRM WITH SPECIALIST

EU/UK	REACH restricted substances; labelling; EPR
US	CPSIA where relevant; CA Prop 65
Vegan	Verify adhesives/finishes are animal-free before claim
Recycled %	Match verified BOM + supplier declarations

LastPro AI flags law & claims; a compliance specialist verifies before market.

REVISION HISTORY

REV	DATE	CHANGE	BY
A	2026-07-14	Initial 6-style development pack, shared PL-01 platform	LastPro AI

