Step 4

Separate

context

data by

Step 4

Separate data by context

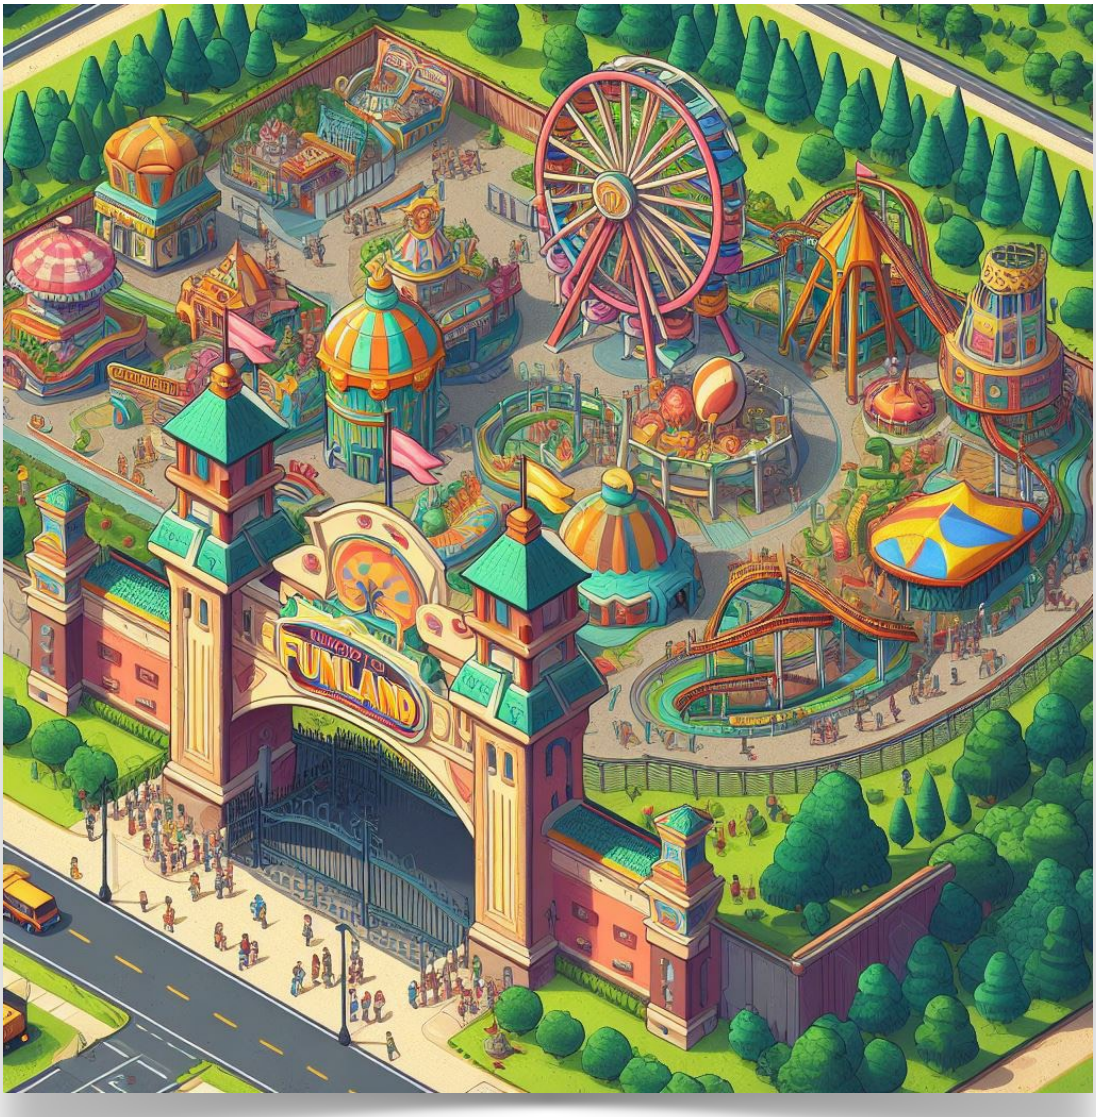
FUNLAND

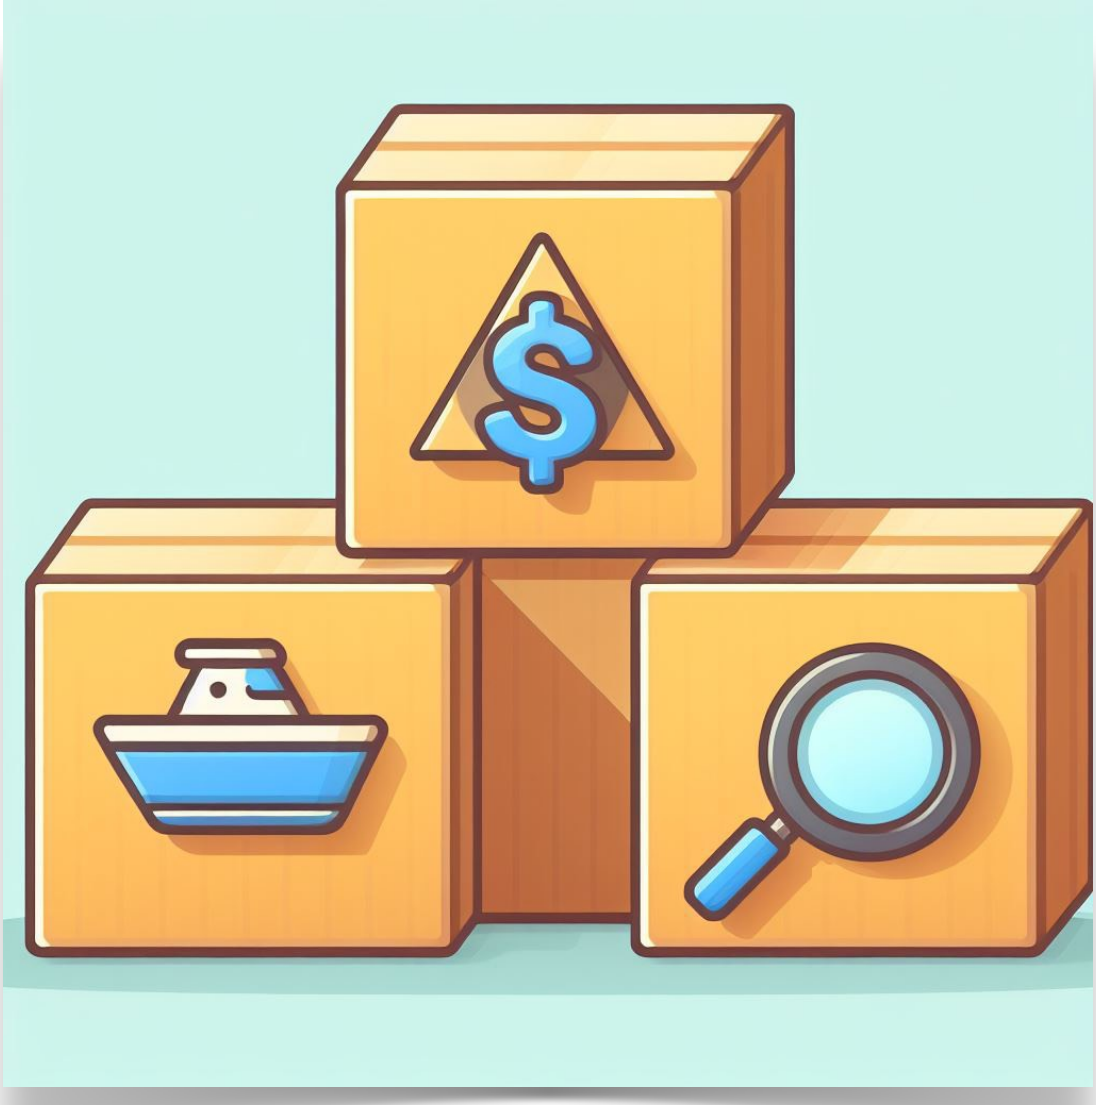

avoids race condition

respect data ownership
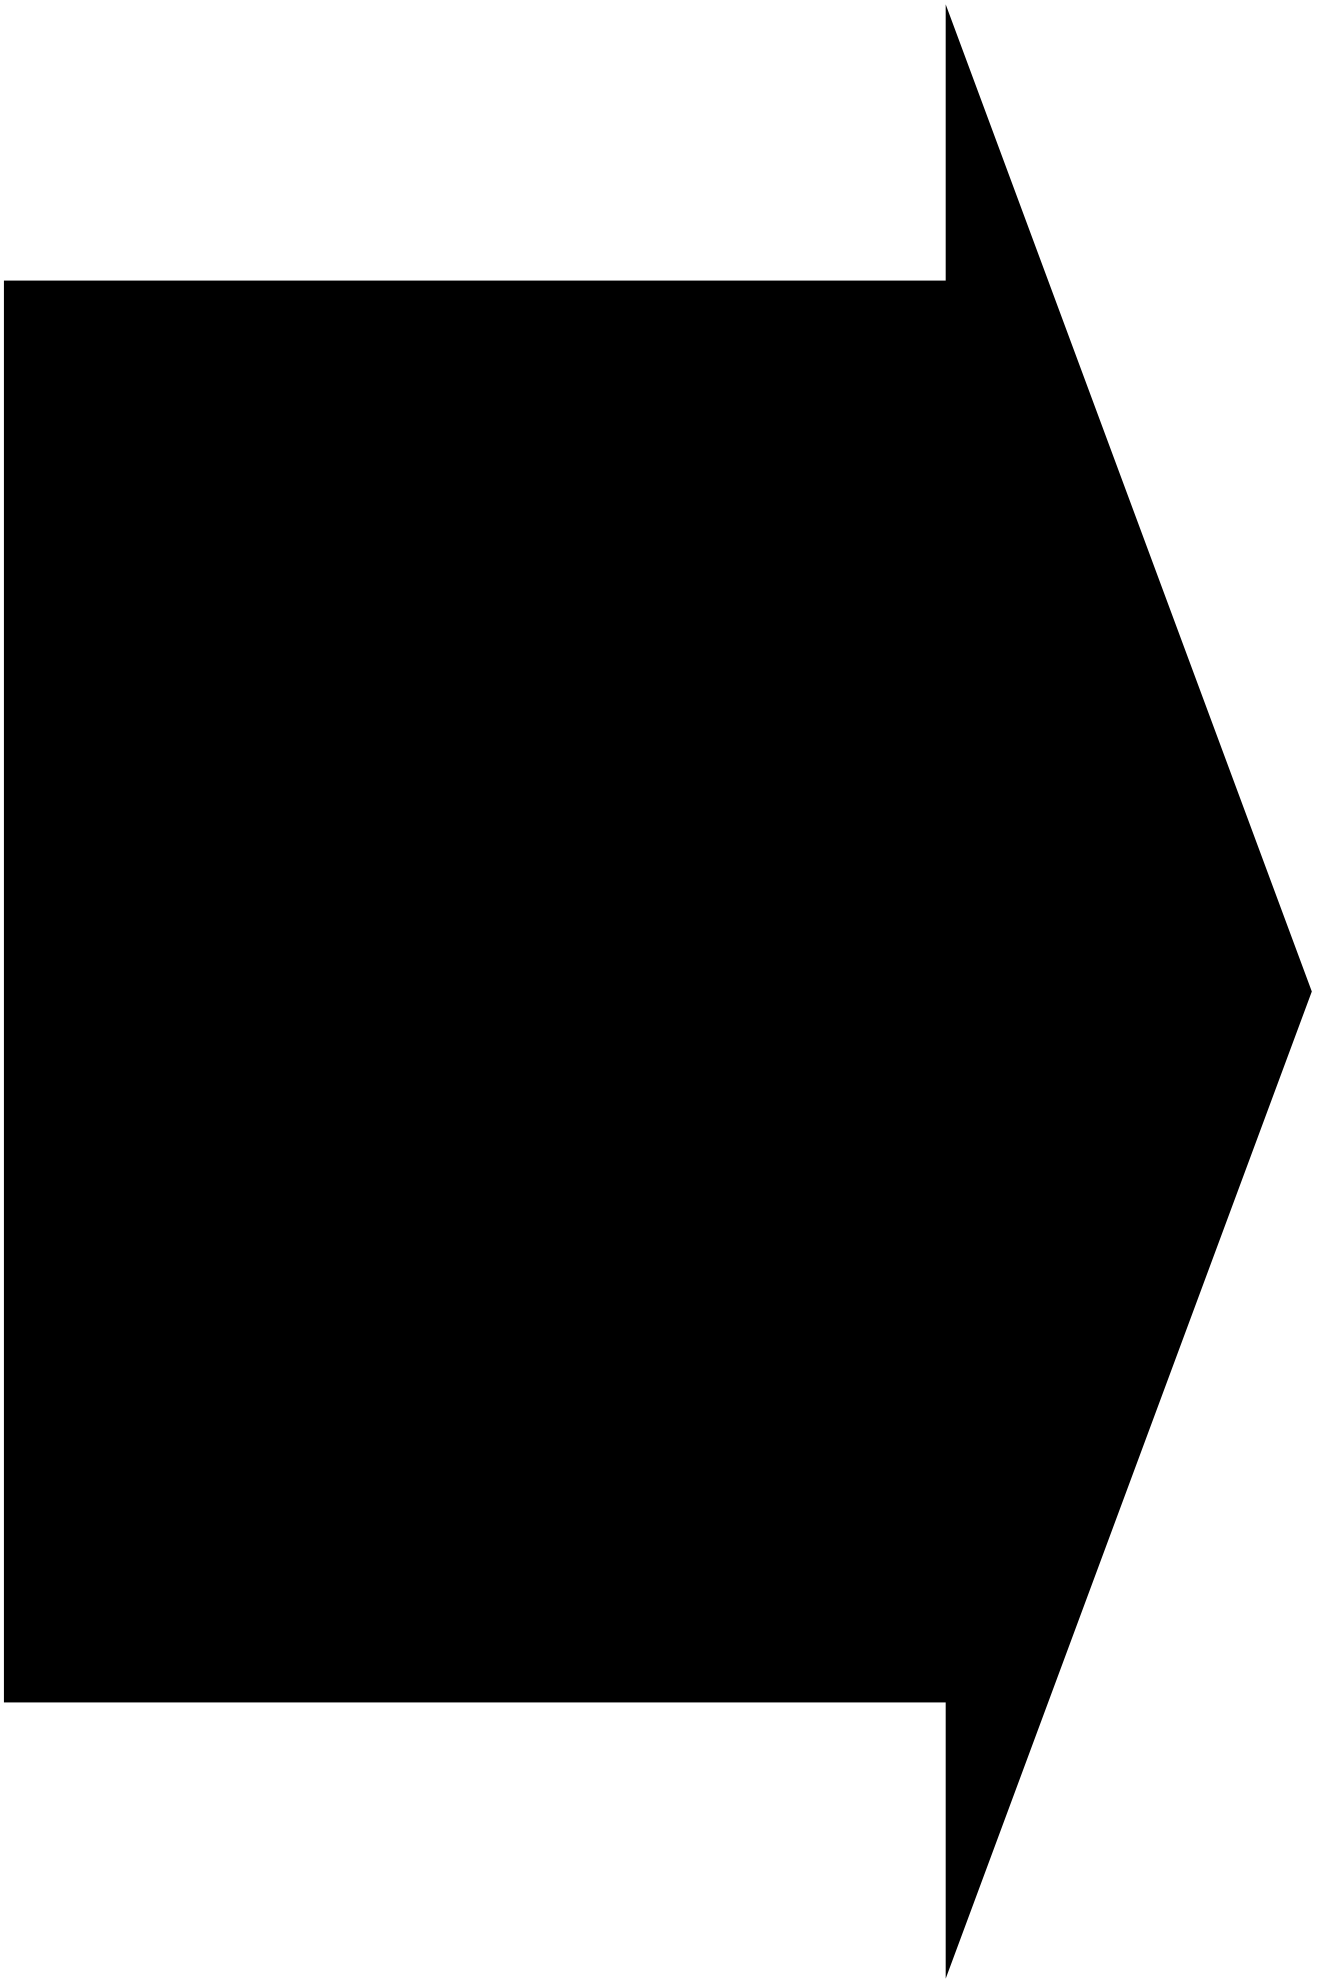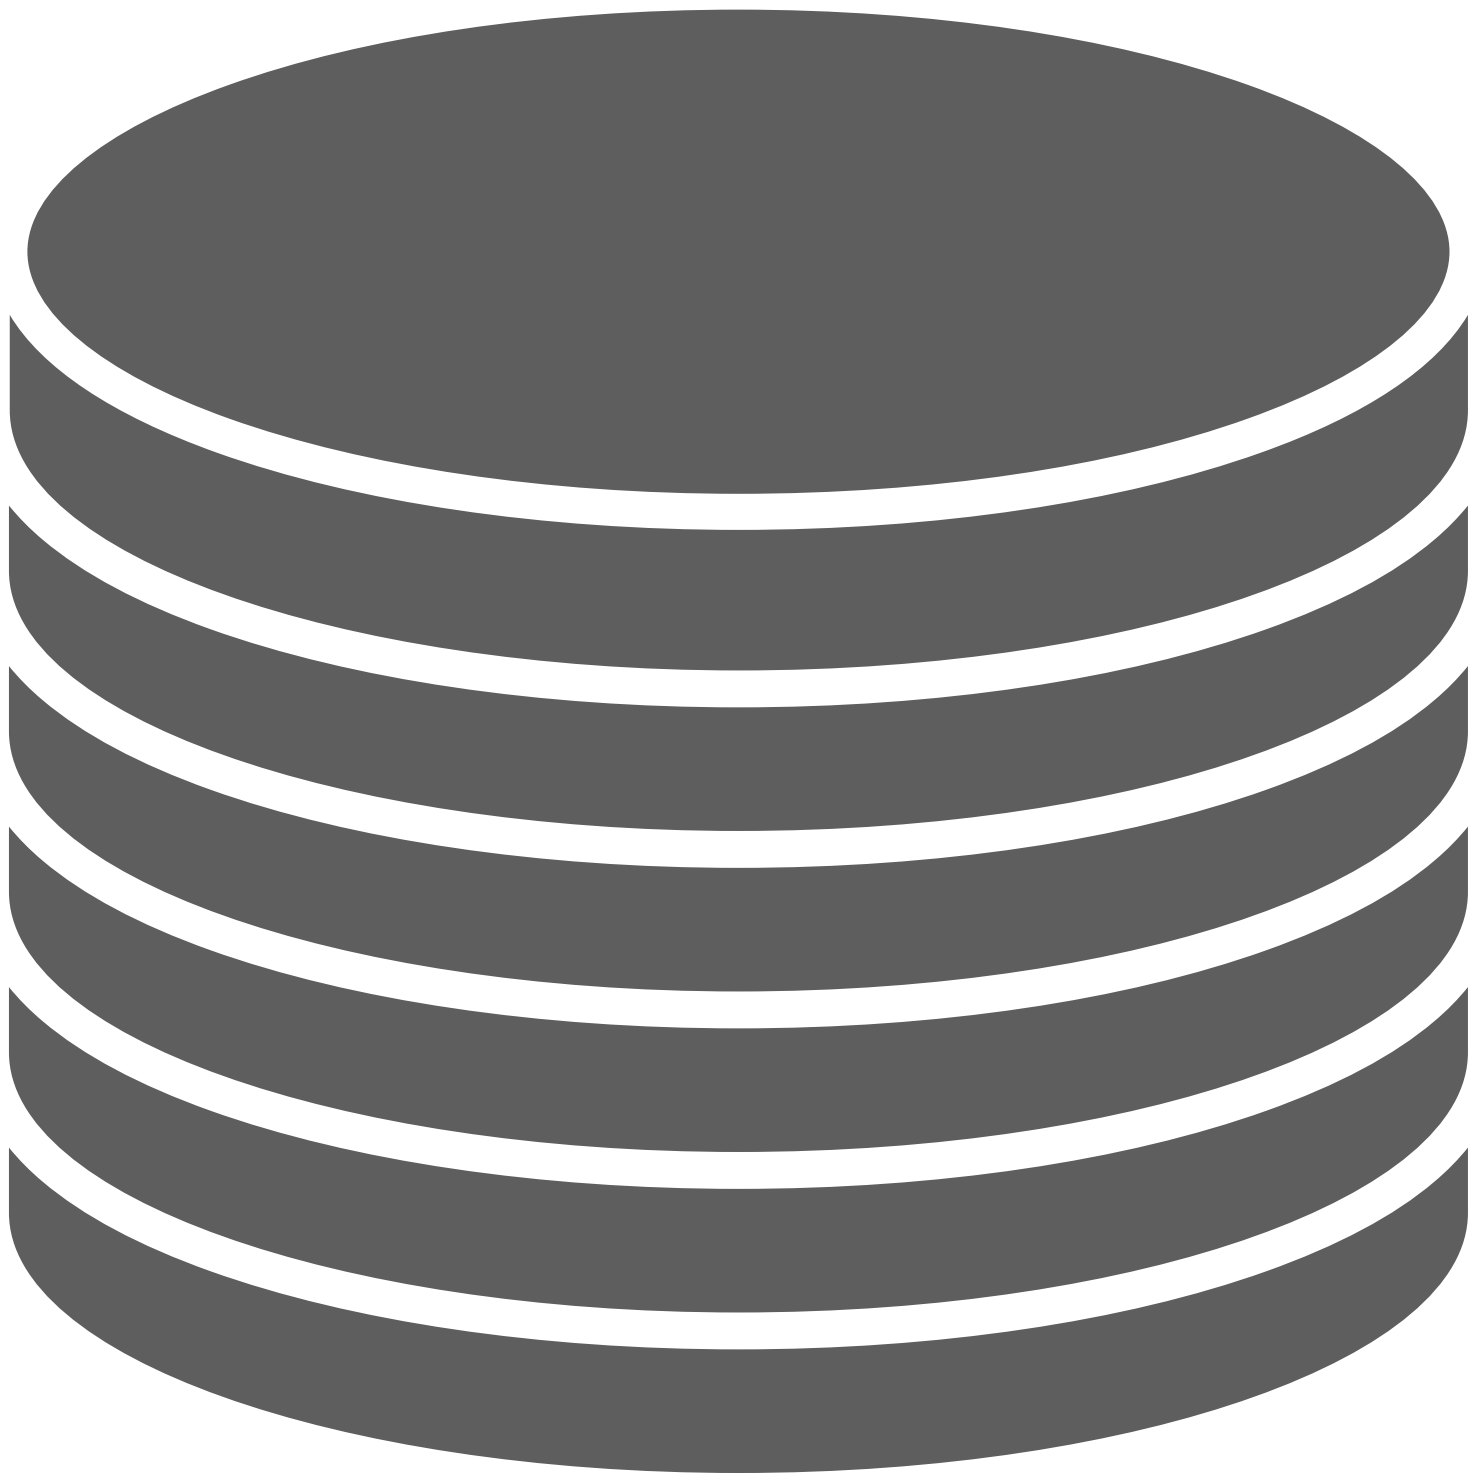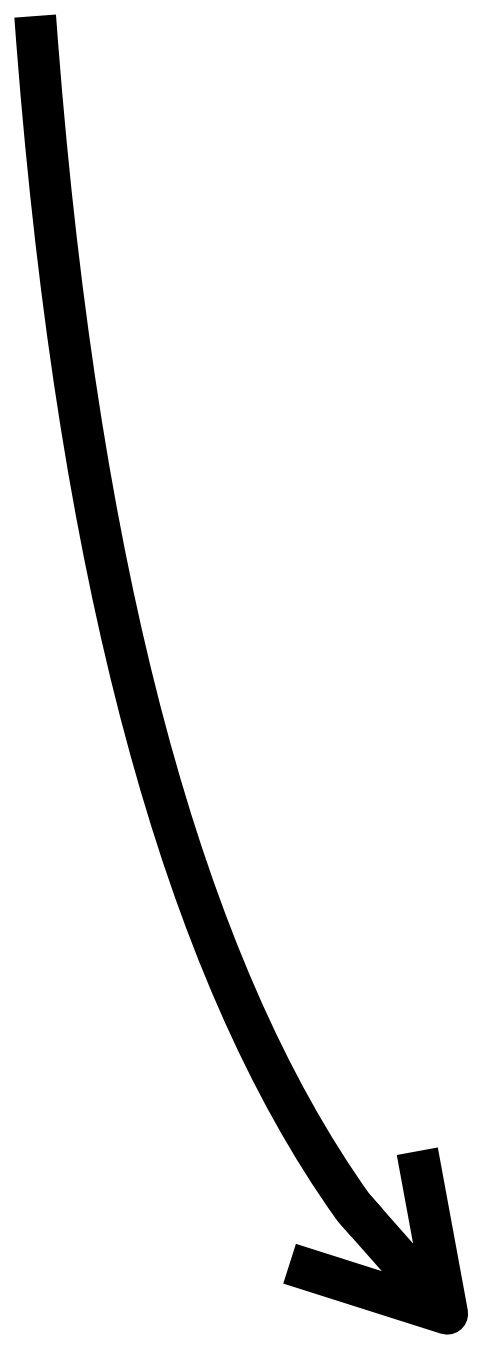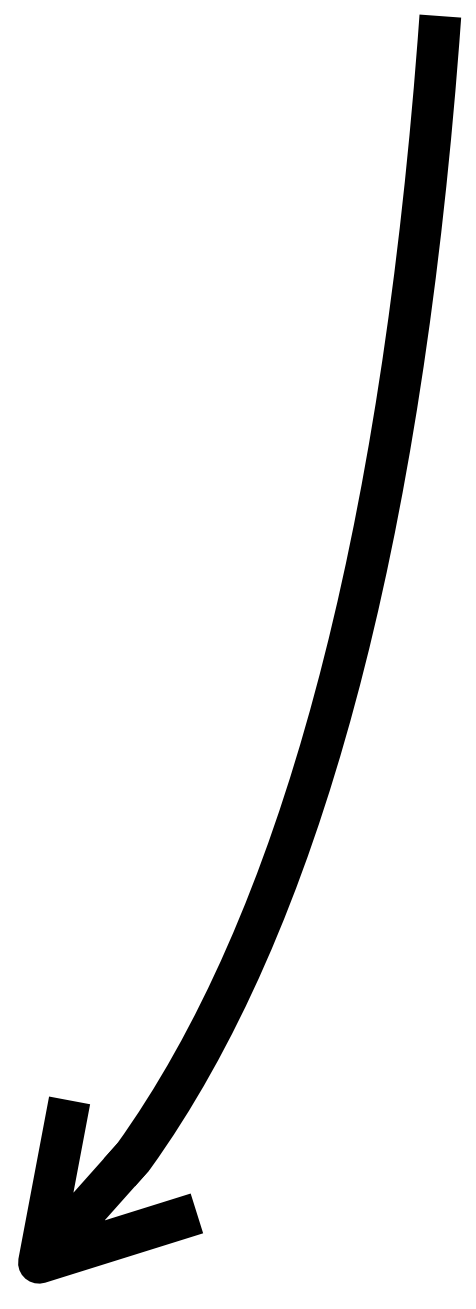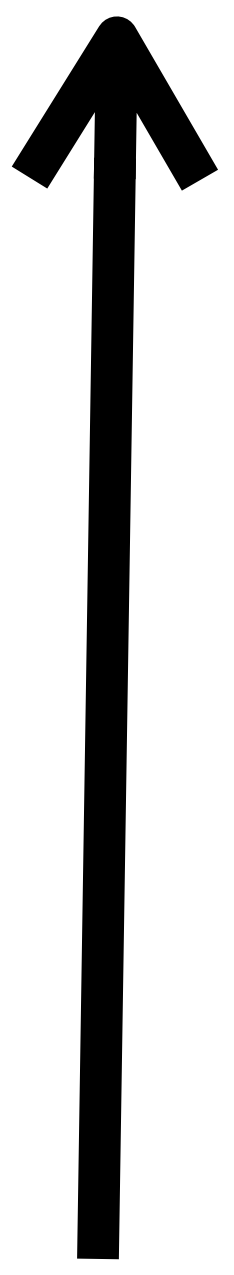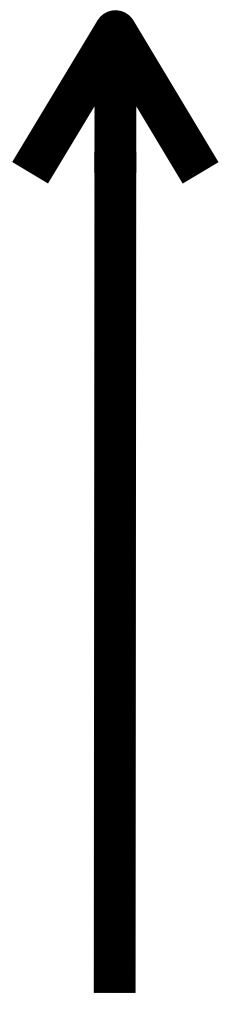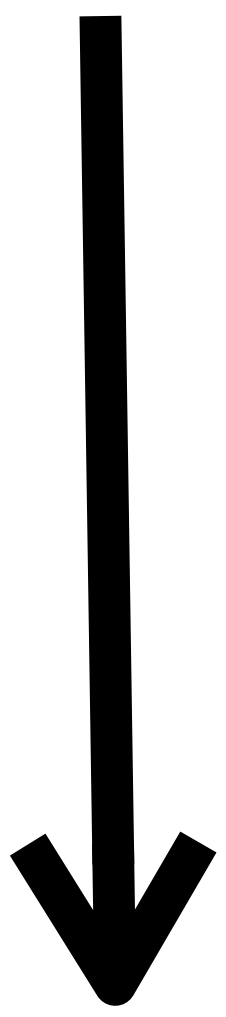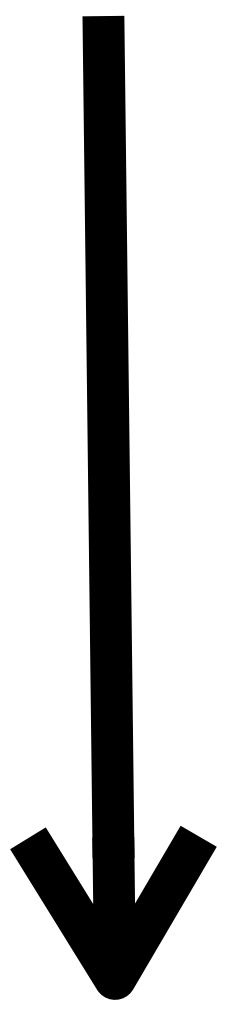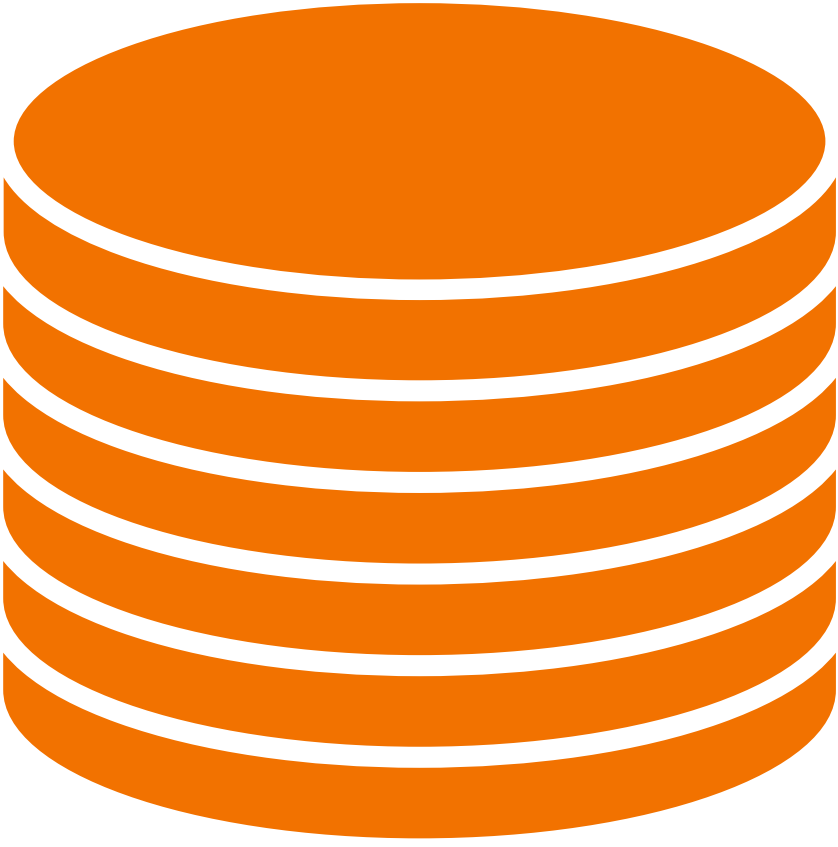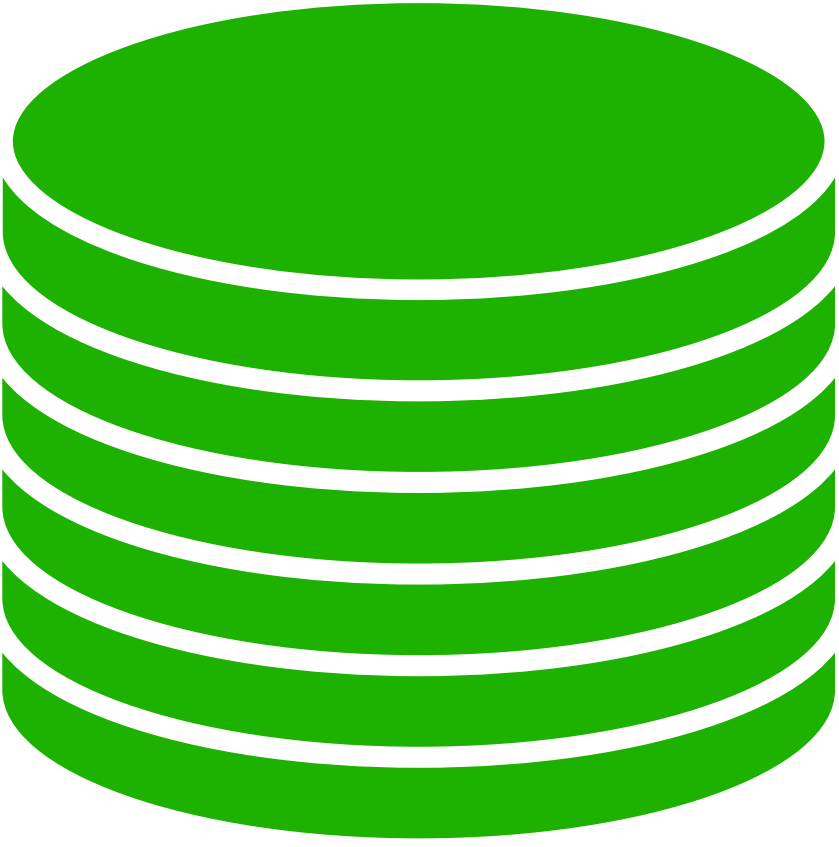
enables polyglot persistence