CODE CHALLENGE
CHAMPIONSHIP

Mission 3

CodeChamps - Online

Python Junior Category

2026

BurgerX Cashier App

Overview:

A new burger restaurant named **"BurgerX"** wants to help its cashier staff by building an app that quickly calculates order price. The restaurant offers different chicken and beef burgers, along with optional meal combos.

Mission:

1- Create a function named **calculate_order()** that:

- Accepts **2** parameters:
  1. **burger** → A **string** representing the selected burger.
  2. **combo** → A **string** representing the selected combo.
- Uses these prices:

Chicken Burgers	Beef Burgers	Combos
Chicken Classic – 120 EGP	Beef Classic - 150 EGP	Fries & Cola - 65 EGP
Chicken Ranch - 140 EGP	Beef BBQ - 170 EGP	Fries & Juice - 75 EGP
Chicken Cheese - 155 EGP	Beef Cheese - 185 EGP	None - 0 EGP

- Returns **1** value → The **final price** of the customer's order.

2- Create the app UI using **Streamlit**:

- Put this **title** → "🍔 **BurgerX Cashier System** 🍔"
- Display the menu in **2 columns** as shown in the output section.
- Add a **slider** to let the cashier control the **number of burgers in the order**.
- Add **2 select boxes** to allow the cashier to choose the **burger type** and **combo option** for **each burger** as well as displaying the **subtotal.**
- Add a **button** that's when clicked, will **call the function** created and display the **total price** as shown in the output section.

3- Create a **sidebar** for taking **customer information** containing:

- **2** input fields to take **customer name** and **phone number.**
- A **selectbox** to know from where they know us that has **4 options** (Social media – Friend – AI suggestion – Other)
- A **text area** to take customer suggestions or special requests.

Bonus Part:


Extend the function to check if the order total is **greater than 250 EGP,** apply a **10% discount** and return a **second value**; the price after discount too.


Useful Hints:

- Use a **for loop** to **repeat** the burger-order section.
- To add a **border** for the columns, use **st.columns(2, border=True)**
- To make **centered** (title, header, or subheader), add the **text_alignment** parameter inside them with the value **'center'**.


Expected Output:

- The **main app** layout:

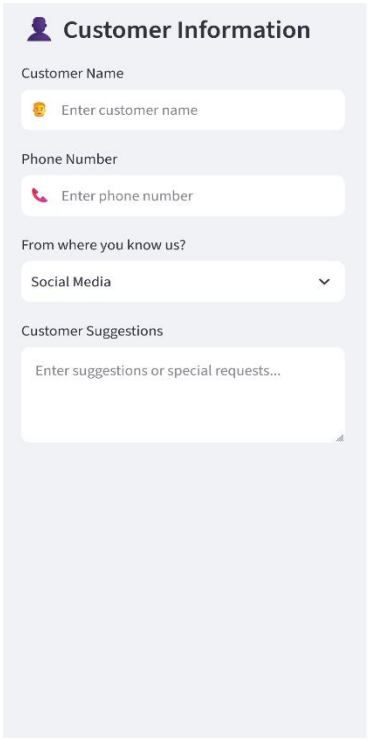

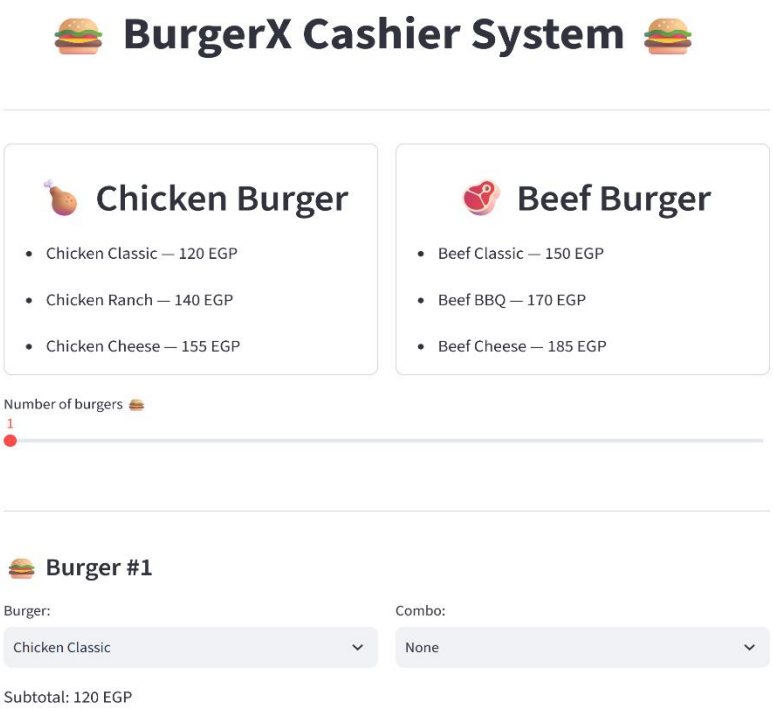

- Ordering **2 burgers** and showing final price with **no discount:**

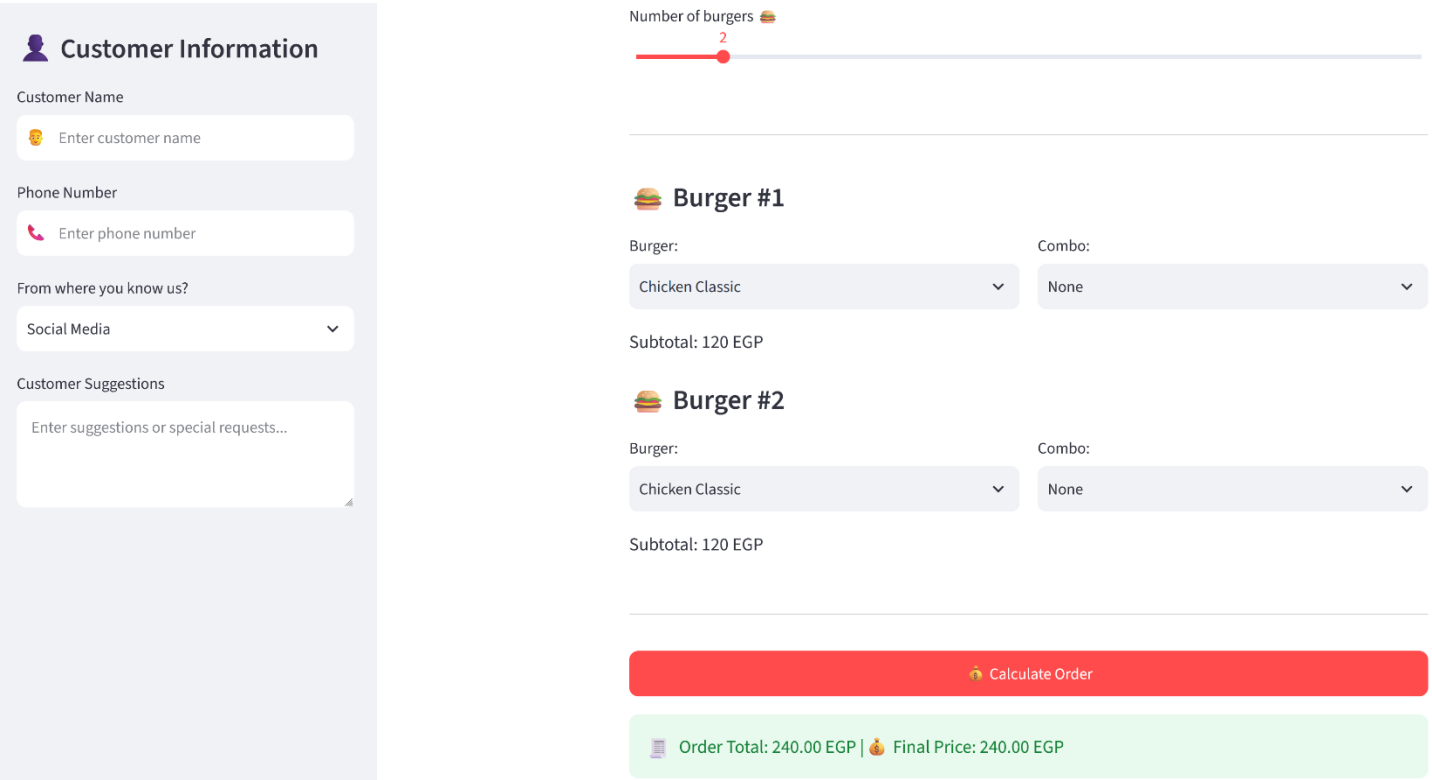

- Ordering **2 burgers** and showing final price **with 10% discount:**

