

Machine Learning  
Stanford University  
Professor Andrew Ng

Jordan Hong

May 29, 2020

## Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
1.1	What is Machine Learning . . . . .	2
1.2	Supervised Learning . . . . .	2
1.3	Unsupervised Learning . . . . .	3
<b>2</b>	<b>Linear Regression with One Variable</b>	<b>3</b>
2.1	Model Representation . . . . .	3
2.1.1	Notations . . . . .	3
2.1.2	Hypothesis Function . . . . .	4
2.2	Cost Function . . . . .	4
2.3	Gradient Descent . . . . .	4
2.3.1	Intuition . . . . .	4
2.3.2	Gradient Descent Algorithm . . . . .	4
2.3.3	Gradient Descent with Linear Regression . . . . .	5
<b>3</b>	<b>Review of Linear Algebra</b>	<b>5</b>
<b>4</b>	<b>Linear Regression with Multiple Variables</b>	<b>6</b>
4.1	Multiple features . . . . .	6
4.1.1	Notation . . . . .	6
4.1.2	Hypothesis . . . . .	6
4.2	Gradient Descent for Multiple Variables . . . . .	7
4.2.1	Algorithm . . . . .	7
4.2.2	Vectorized Implementation . . . . .	8
4.3	Gradient Descent in Practise I: Feature Scaling . . . . .	8
4.4	Gradient Descent in Practise II: Learning Rate . . . . .	8
4.5	Features and Polynomial Regression . . . . .	8
4.6	Normal Equation . . . . .	9
4.7	Normal Equation and Non-invertibility . . . . .	9

# 1 Introduction

## 1.1 What is Machine Learning

### 1. Machine Learning

- Grew out of work in Artificial Intelligence (AI)
- New capabilities for computers

### 2. Examples:

- database mining
- applications can't program by hand (handwriting recognition, Natural Language Processing (NLP), Computer Vision)
- Neuromorphic applications

### 3. Definition

- Arthur Samuel(1959)

Machine Learning: Field of study that gives computers the ability to learn without being explicitly programmed.

- Tom Mitchell(1998)

Well-posed Learning Problem: A computer program is said to learn from experience  $E$  with respect to some task  $T$  and some performance measure  $P$ , if its performance on  $T$ , as measured by  $P$ , improves with experience  $E$ .

### 4. Machine Learning in this course:

- (a) Supervised Learning
- (b) Unsupervised Learning
- (c) Others: reinforcement learning, recommender systems
- (d) Practical application techniques

## 1.2 Supervised Learning

In supervised learning, the *the right answer* is given. For example:

1. Regression: predict real-valued output.
2. Classification: predict discrete-valued output.

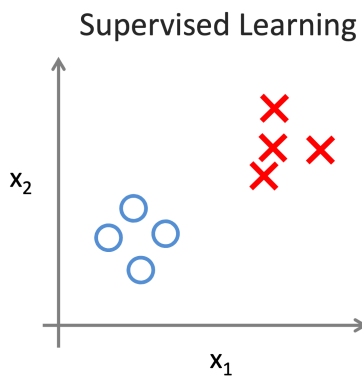


Figure 1: Supervised Learning

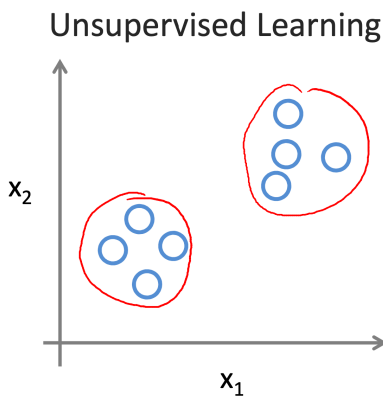


Figure 2: Unsupervised learning

### 1.3 Unsupervised Learning

The right answer is not given, e.g. cocktail problem (distinguishing two voices from an audio file.)

## 2 Linear Regression with One Variable

### 2.1 Model Representation

#### 2.1.1 Notations

For a training set:

- $\mathbf{m}$  = Number of training examples.
- $\mathbf{x}$  = “input” variable / features.

- $y$  = “output” variables / “target” variable.
- $(x,y)$  - one training example.
- $(x^i,y^i)$  denotes the  $i^{\text{th}}$  training example

### 2.1.2 Hypothesis Function

A hypothesis function ( $h$ ) maps input ( $x$ ) to estimated output ( $y$ ). How do we represent  $h$ ?

<b>Hypothesis Function</b> $h_{\theta}(x) = \theta_0 + \theta_1 x$	(1)
--	-----

We can apply *Univariate linear regression* with respect to  $x$ .

## 2.2 Cost Function

Recall 1. The  $\theta_i$ s are parameters we have to choose. The intuition is is that we want to choose  $\theta_i$  s such that  $h_{\theta}$  is closest to  $y$  for our training examples  $(x,y)$ .

<b>Cost Function</b> $J(\theta_0, \theta_1) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2$	(2)
--	-----

### Summary

1. **Hypothesis**  $h_{\theta}(x) = \theta_0 + \theta_1 x$
2. **Parameters**  $\theta_0, \theta_1$
3. **Cost Function**  $J(\theta_0, \theta_1) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2$
4. **Goal**  $\min_{\theta_0, \theta_1} J(\theta_0, \theta_1)$

## 2.3 Gradient Descent

### 2.3.1 Intuition

1. We have some function  $J(\theta_0, \theta_1)$ , we want to  $\min_{\theta_0, \theta_1} J(\theta_0, \theta_1)$
2. Outline: start with some  $\theta_0, \theta_1$ , keep changing  $\theta_0, \theta_1$  to reduce  $J(\theta_0, \theta_1)$  until we end up at a minimum.

### 2.3.2 Gradient Descent Algorithm

#### Algorithm

repeat until convergence{

$$\theta_j := \theta_j - \alpha \frac{\partial}{\partial \theta_j} J(\theta_0, \theta_1) \quad (\text{for } j=0 \text{ and } j=1).$$

}

### Notes

1. the  $:=$  denotes non-blocking assignment, i.e. simultaneously updates  $\theta_0$  and  $\theta_1$
2. We use the derivative to find a local minimum.
3.  $\alpha$  denotes the learning rate. Gradient descent can converge to a local minimum even when the learning rate  $\alpha$  is fixed. As we approach a local minimum, gradient descent will automatically take smaller steps. Therefore it is not needed to decrease  $\alpha$  over time.

### 2.3.3 Gradient Descent with Linear Regression

Recall, we have:

1. Gradient Descent Algorithm:

repeat until convergence{

$$\theta_j := \theta_j - \alpha \frac{\partial}{\partial \theta_j} J(\theta_0, \theta_1) \quad (\text{for } j=0 \text{ and } j=1).$$

}

2. Linear Regression Model:

$$h_{\theta}(x) = \theta_0 + \theta_1 x$$

$$J(\theta_0, \theta_1) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2$$

We can substitute the above equations, which gives us:

$$\theta_0 := \theta_0 - \alpha \frac{1}{m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})$$

$$\theta_1 := \theta_1 - \alpha \frac{1}{m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)}) \cdot x^{(i)}$$

## 3 Review of Linear Algebra

This section is a basic review of linear algebra. I have skipped this section for now and will come back to it if time permits.

## 4 Linear Regression with Multiple Variables

### 4.1 Multiple features

Recall in the single variable case, we have a single input ( $x$ ), two parameters( $\theta_0, \theta_1$ ). The hypothesis can be expressed as:

$$h_{\theta}(x) = \theta_0 + \theta_1 x.$$

Now, consider a generalized case where there are multiple features:  $X_1, X_2, X_3$ . The information can be organized in a table with example numerical values:

Sample Number (i)	$X_1$	$X_2$	$y$
1	6	87837	787
2	7	78	5415
3	545	778	7507
4	545	18744	7560
5	88	788	6344

Table 1: Sample Table

From Table 1, one can see that each row is a sample a feature on each column.

#### 4.1.1 Notation

1.  $n$ : number of features.
2.  $\mathbf{x}^{(i)}$ : (row vector) input features of the  $i^{\text{th}}$  training example.  $i = 1, 2, \dots, m$ .
3.  $\mathbf{x}^{(i)}_j$ : value of feature  $j$  in the  $i^{\text{th}}$  training example.  $j = 1, 2, \dots, n$ .

#### 4.1.2 Hypothesis

Previously,

$$h_{\theta}(x) = \theta_0 + \theta_1 \cdot x$$

Now, we can extend the hypothesis to :

$$h_{\theta}(x) = \theta_0 \cdot 1 + \theta_1 \cdot x_1 + \theta_2 \cdot x_2$$

For convenience of notation, let's define  $x_0=1$ , i.e.  $x_0^i=1 \forall i$ .

Therefore, we have:  $\mathbf{x} = \begin{bmatrix} x_0 \\ x_1 \\ x_2 \\ \vdots \\ x_n \end{bmatrix}$  and  $\theta = \begin{bmatrix} \theta_0 \\ \theta_1 \\ \theta_2 \\ \vdots \\ \theta_n \end{bmatrix}$ . Then, the hypothesis function can be written as:

$$h_{\theta}(x) = \begin{bmatrix} \theta_0 & \theta_1 & \theta_2 & \dots & \theta_n \end{bmatrix} \cdot \begin{bmatrix} x_0 \\ x_1 \\ x_2 \\ \vdots \\ x_n \end{bmatrix} \quad (3)$$

$$= \theta^T \cdot \mathbf{x}$$

This is *Multivariate linear regression*.

## 4.2 Gradient Descent for Multiple Variables

### 4.2.1 Algorithm

**Summary for Multivariables**

1. **Hypothesis**  $h_{\theta}(x) = \theta^T \cdot \mathbf{x}$
2. **Parameters**  $\theta$
3. **Cost Function**  $J(\theta) = \frac{1}{2m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)})^2$
4. **Goal**  $\min_{\theta} J(\theta)$

**Gradient Descent for Multiple Variables** repeat until convergence{

$$\theta_j := \theta_j - \alpha \frac{\partial}{\partial \theta_j} J(\theta) \quad (\text{for } j=0, 1, \dots, n)$$

}

$$\theta_j := \theta_j - \alpha \frac{1}{m} \sum_{i=1}^m (h_{\theta}(\mathbf{x}^{(i)}) - y^{(i)}) \cdot x_j^{(i)}$$

Note:  $x_0^{(i)} = 1$ , by definition.

### 4.2.2 Vectorized Implementation

One can work out the linear algebra and arrive at the following simplification using vectorized operations. The cost function  $J$  can be expressed as:

$$J(\theta) = \frac{1}{2m}(\mathbf{X}\theta - \mathbf{y})^T(\mathbf{X}\theta - \mathbf{y}) \quad (4)$$

The MATLAB implementation is as follows:

```
m = length(y); % calculate how many samples
J = 1/(2*m)*((X*theta-y)')*(X*theta-y);
```

Gradient descent can be vectorized in the form:

$$\theta = \theta - \frac{\alpha}{m} \cdot \mathbf{X}^T \cdot (\mathbf{X}\theta - \mathbf{y}) \quad (5)$$

The MATLAB implementation is as follows:

```
m = length(y); % number of training examples
for iter = 1:num_iters
    theta = theta - alpha/m* X.'*(X*theta -y);
```

### 4.3 Gradient Descent in Practise I: Feature Scaling

- Idea: ensure each feature are on a similar scale
- Get every feature into approx.  $-1 \leq x_i \leq 1$  ( $\sim$  order)
- **Mean Normalization:** Replace  $x_i$  with  $\frac{x_i - \mu_i}{s_i}$ , where  $\mu_i$  and  $s_i$  are the sample mean and standard deviation, respectively.

### 4.4 Gradient Descent in Practise II: Learning Rate

- Ensure gradient descent is working: plot  $J_\theta$  over each number of iteration (not over  $\theta$  !)
- Example automatic convergence test: for sufficiently small  $\alpha$   $J_\theta$  should decrease by less than  $10^{-3}$  i one iteration.
- If  $\alpha$  is too small, gradient descent can be slow to converge.
- If  $\alpha$  is too large, gradient descent may not converge.
- To choose  $\alpha$ , try 0.001, 0.003, 0.01, 0.03, 0.1, 0.3, 1... (by 3x)

### 4.5 Features and Polynomial Regression

We can fit into different polynomials by choice, using multivariate regression. Recall

$$h_\theta(x) = \theta_0 + \theta_1 x_1 + \theta_2 x_2 + \theta_3 x_3$$

Let  $x_1$  be  $x^1$ ,  $x_2$  be  $x^2$ ,  $x_3$  be  $x^3$ . Note we should still apply feature scaling to  $x_1$ ,  $x_2$ , and  $x_3$  individually!



## 4.6 Normal Equation

The normal equation provides a method to solve for  $\theta$  analytically. For our data with  $m$  samples,  $n$  features, recall each sample can be written as:

$$\mathbf{x}^{(i)} = \begin{bmatrix} x_0^{(i)} \\ x_1^{(i)} \\ x_2^{(i)} \\ \vdots \\ x_j^{(i)} \\ \vdots \\ x_n^{(i)} \end{bmatrix}$$

We can construct a design matrix:

$$\mathbf{X} = \begin{bmatrix} \text{---} & (x^{(1)})^T & \text{---} \\ \text{---} & (x^{(2)})^T & \text{---} \\ \text{---} & (x^{(3)})^T & \text{---} \\ & \vdots & \\ \text{---} & (x_m^T) & \text{---} \end{bmatrix}$$

Then  $\theta$  can be found by the normal equation:

$$\theta = (\mathbf{X}^T \mathbf{X})^{-1} \mathbf{X}^T \mathbf{y} \quad (6)$$

Normal equation is useful as no  $\alpha$  is required to and we do not need to iterate. However, we do have to compute  $(X^T X)^{-1}$ , which can be computationally expensive when  $n$  is large. The complexity is  $O(n^3)$  for inverse operations. Gradient Descent is useful when  $n$  is large (many features).

## 4.7 Normal Equation and Non-invertibility

What if  $(X^T X)^{-1}$  is non-invertible?

- Redundant features (linearly dependent), i.e. having same information in two different units.
- Too many features (i.e.  $m \leq n$ ). Delete some features or use regularization