



**Utrecht
University**

Computing Science MSc Thesis

Incremental Computation for Regular Datatypes in Haskell

Author

Jort van Gorkum (6142834)

Supervisors

Wouter Swierstra

Trevor McDonell

Faculty of Science

Department of Information and Computing Sciences

Programming Technology

May 19, 2022

Write abstract

Contents

1	Introduction	5
1.1	Motivation	5
1.2	Research Questions	5
1.3	Contributions	5
2	Specific Implementation	6
2.1	Merkle Tree (TreeH)	8
2.2	Zipper	9
2.2.1	Zipper TreeH	10
3	Datatype-Generic Programming	11
3.1	Introduction	11
3.2	Explicit recursion	13
3.3	Sums of Products	14
3.4	Mutually recursive datatypes	15
4	Generic Implementation	16
4.1	Regular	16
4.2	Generic Zipper	19
4.3	Complexity	20
4.4	HashMap vs Trie	20
4.5	Memory Strategies	20
4.6	Pattern Synonyms	20
5	Experiments	21
5.1	Execution Time	21
5.2	Memory Usage	23
5.3	Comparison Memory Strategies	25
6	Conclusion and Future Work	26
6.1	Conclusion	26
A	Generic Programming	27
A.1	Instances Functor for Pattern Functors	27
B	Implementation Memo Cata	28
B.1	Implementation Merkle	28
B.2	Implementation Cata Merkle	28
B.3	Implementation Zipper Merkle	28

C Regular	30
C.1 Zipper	30

Todo list

Write abstract	1
Write a motivation	5
Write the research questions	5
Write the contributions	5
Maybe add the more efficient implementation of merging maps?	7
Compare paper “A Lightweight Approach to Datatype-Generic Rewriting”	11
Use "representation types" instead of "pattern functor" for these datatypes	11
Add a description of what a universe is	14
Write about why Regular is chosen	16
Describe for every function used the complexity and what leads to the complete complexity	20
Write a piece about the comparison of storing it in a HashMap or a Trie datastructure	20
Write about Hdiff and the use of Trie datastructure	20
Describe multiple memory strategies for keeping memory usage and execution time low	20
Write about paper selective memoization	20
Explain Pattern Synonyms	20

1

Introduction

1.1 Motivation

Write a motivation

1.2 Research Questions

Write the research questions

1.3 Contributions

Write the contributions

2

Specific Implementation

```
data Tree a = Leaf a
            | Node (Leaf a) a (Leaf a)

sumTree :: Tree Int -> Int
sumTree (Leaf x)      = x
sumTree (Node l x r) = x + (sumTree l) + (sumTree r)
```

Computing a value of a data structure can easily be defined in Haskell, but every time there is a small change in the `Tree`, the entire `Tree` needs to be recomputed. This is inefficient, because most of the computations have already been performed in the previous computation.

To prevent recomputation of already computed values, the technique memoization is introduced. Memoization is a technique where the results of computational intensive tasks are stored and when the same input occurs, the result is reused.

The comparison of two values in Haskell is done with the `Eq` typeclass, which implements the equality operator `(==)` :: `a -> a -> Bool`. So, an example implementation of the `Eq` typeclass for the `Tree` datatype would be:

```
instance Eq a => Eq (Tree a) where
    Leaf x1      == Leaf x2      = x1 == x2
    Node l1 x1 r1 == Node l2 x2 r2 = x1 == x2 && l1 == l2 && r1 == r2
    _            == _            = False
```

The problem with using this implementation of the `Eq` typeclass for Memoization is that for every comparison of the `Tree` datatype the equality is computed. This is inefficient because the equality implementation has to traverse the complete `Tree` data structure to know if the `Tree`'s are equal.

To efficiently compare the `Tree` datatypes, we need to represent the structure in a manner which does not lead to traversing to the complete `Tree` data structure. This can be accomplished using a `hash` function. A hash function is a process of transforming a data structure into an arbitrary fixed-size value, where the same input always generates the same output.

One of the disadvantages of using hashes is *hash collisions*. Hash collisions happen when two different pieces of data have the same hash. This is because a hash function has a limited amount of bits to represent every possible combination of data. Using the formula $p = \epsilon^{\frac{-k(k-1)}{2N}}$ from *Hash Collision Probabilities*[8], we can calculate a 50% chance of getting a hash collision with a collection of k . The hash function CRC-32 needs a collection of 77163 hash values. The hash function MD5 needs a collection of 5.06×10^9 hash values. And, the hash function SHA-1 needs a collection of 1.42×10^{24} hash values. As a result of, we can say that for most popular hash functions, hash collisions are negligible.

```
class Hashable a where
    hash :: a -> Hash

instance Hashable a => Hashable (Tree a) where
    hash (Leaf x)      = concatHash [hash "Leaf", hash x]
    hash (Node l x r) = concatHash [hash "Node", hash x, hash l, hash r]
```

The hashes can then be used to efficiently compare two `Tree` data structures, without having to traverse the entire `Tree` data structure. To keep track of the intermediate results of the computation, we store the results in a `Map`. A `Map`, also known as a dictionary, is an implementation of mapping a key to a value. In our next example the `Hash` is the key and the value is the intermediate result.

```
sumTreeInc :: Tree Int -> (Int, Map Hash Int)
sumTreeInc l@(Leaf x)      = (x, insert (hash l) x empty)
sumTreeInc n@(Node l x r) = (y, insert (hash n) y (ml <> mr))
    where
        y = x + xl + xr
        (xl, ml) = sumTreeInc l
        (xr, mr) = sumTreeInc r
```

Then after the first computation over the entire `Tree`, we can recompute the `Tree` using the previously created `Map`. Thus, when we recompute the `Tree`, we first look in the `Map` if the computation has already been performed then return the result. Otherwise, compute the result and store it in the `Map`.

Maybe add the more efficient implementation of merging maps?

```
sumTreeIncMap :: Map Hash Int -> Tree Int -> (Int, Map Hash Int)
sumTreeIncMap m l@(Leaf x) = case lookup (hash l) m of
    Just x  -> (x, m)
    Nothing -> (x, insert (hash l) x empty)
sumTreeIncMap m n@(Node l x r) = case lookup (hash n) m of
    Just x  -> (x, m)
    Nothing -> (y, insert (hash n) y (ml <> mr))
```



```

where
    y = x + x1 + xr
    (x1, m1) = sumTreeIncMap m l
    (xr, mr) = sumTreeIncMap m r

```

Generating a hash for every computation over the data structure is time-consuming and unnecessary, because most of the `Tree` data structure stays the same. The work of Miraldo and Swierstra[6] inspired the use of the Merkle Tree. A Merkle Tree is a data structure which integrates the hashes within the data structure.

2.1 Merkle Tree (TreeH)

First we introduce a new datatype `TreeH`, which contains a `Hash` for every constructor in `Tree`. Then to convert the `Tree` datatype into the `TreeH` datatype, the structure of the `Tree` is hashed and stored into the datatype using the `merkle` function.

```

data TreeH a = LeafH Hash a
              | NodeH Hash (Leaf a) a (Leaf a)

merkle :: Tree Int -> TreeH Int
merkle l@(Leaf x) = LeafH (hash l) x
merkle (Node l x r) = NodeH h l' x r'
  where
    h = hash ["Node", x, getHash l', getHash r']
    l' = merkle l
    r' = merkle r

```

The precomputed hashes can then be used to easily create a `Map`, without computing the hashes every time the `sumTreeIncH` function is called.

```

sumTreeIncH :: TreeH Int -> (Int, Map Hash Int)
sumTreeIncH (LeafH h x) = (x, insert h x empty)
sumTreeIncH (NodeH h l x r) = (y, insert h y (m1 <> mr))
  where
    y = x + x1 + xr
    (x1, m1) = sumTreeInc l
    (xr, mr) = sumTreeInc r

```

The problem with this implementation is, that when the `Tree` datatype is updated, the entire `Tree` needs to be converted into a `TreeH`, which is linear in time. This can be done more efficiently, by only updating the hashes which are impacted by the changes. Which means that only the hashes of the change and the parents need to be updated.

The first intuition to fixing this would be using a pointer to the value that needs to be changed. But because Haskell is a functional programming language, there are no pointers. Luckily, there is

a data structure which can be used to efficiently update the data structure, namely the Zipper[4].

2.2 Zipper

The Zipper is a technique of representing a data structure by keeping track of how the data structure is being traversed through. The Zipper was first described by Huet[4] and is a solution for efficiently updating pure recursive data structures in a purely functional programming language (e.g., Haskell). This is accomplished by keeping track of the downward current subtree and the upward path, also known as the *location*.

To keep track of the upward path, we need to store the path we traverse to the current subtree. The traversed path is stored in the `Cxt` datatype. The `Cxt` datatype represents three options the path could be at: the `Top`, the path has traversed to the left (`L`), or the path has traversed to the right (`R`).

```
data Cxt a = Top
          | L (Cxt a) (Tree a) a
          | R (Cxt a) (Tree a) a
```

```
type Loc a = (Tree a, Cxt a)
```

```
enter :: Tree a -> Loc a
enter t = (t, Top)
```

Using the `Loc`, we can define multiple functions on how to traverse through the `Tree`. Then, when we get to the desired location in the `Tree`, we can call the `modify` function to change the `Tree` at the current location.

```
left :: Loc a -> Loc a
left (Node l x r, c) = (l, L c r x)
```

```
right :: Loc a -> Loc a
right (Node l x r, c) = (r, R c l x)
```

```
up :: Loc a -> Loc a
up (t, L c r x) = (Node t x r, c)
up (t, R c l x) = (Node l x t, c)
```

```
modify :: (Tree a -> Tree a) -> Loc a -> Loc a
modify f (t, c) = (f t, c)
```

Eventually, when every value in the `Tree` has been changed, the entire `Tree` can then be rebuilt using the `Cxt`. By recursively calling the `up` function until the top is reached, the current subtree gets rebuilt. And when the top is reached, the entire tree is then returned.

```

leave :: Loc a -> Loc a
leave l@(t, Top) = l
leave l = top (up l)

```

2.2.1 Zipper TreeH

The implementation of the Zipper for the `TreeH` datatype is the same as for the `Tree` datatype. However, the `TreeH` also contains the hash of the current and underlying data structure. Therefore, when a value is modified in the `TreeH`, all the parent nodes of the modified value needs to be updated.

The `updateLoc` function modifies the value at the current location, then checks if the location has any parents. If the location has any parents, go up to that parent, update the hash of that parent and recursively update the parents hashes until we are at the top of the data structure. Otherwise, return the modified locations, because all the other hashes are not affected by the change.

```

updateLoc :: (TreeH a -> TreeH a) -> Loc a -> Loc a
updateLoc f l = if top l' then l' else updateParents (up l')
  where
    l' = modify f l

    updateParents :: Loc a -> Loc a
    updateParents (Loc x Top) = Loc (updateHash x) Top
    updateParents (Loc x cs) = updateParents $ up (Loc (updateHash x) cs)

```

Then, the `update` function can be defined using the `updateLoc` function, by first traversing through the data structure with the given directions. Then modifying the location using the `updateLoc` function and then leave the location and the function results in the updated data structure.

```

update :: (TreeH a -> TreeH a) -> [Loc a -> Loc a] -> TreeH a -> TreeH a
update f dirs t = leave $ updateLoc f l'
  where
    l' = applyDirs dirs (enter t)

```

3

Datatype-Generic Programming

Compare paper “A Lightweight Approach to Datatype-Generic Rewriting”

The implementation in Chapter 2 is an efficient implementation for incrementally computing the summation over a `Tree` datatype. However, when we want to implement this functionality for a different datatype, a lot of code needs to be copied while the process remains the same. This results in poor maintainability, is error-prone and is in general boring work.

An example of reducing manual implementations for datatypes is the *deriving* mechanism in Haskell. The built-in classes of Haskell, such as `Show`, `Ord`, `Read`, can be derived for a large class of datatypes. However, deriving is not supported for custom classes. Therefore, we use *Datatype-Generic Programming*[3] to define functionality for a large class of datatypes.

In this chapter, we introduce Datatype-Generic Programming, also known as *generic programming* or *generics* in Haskell, as a technique that exploits the structure of datatypes to define functions by induction over the type structure. This prevents the need to write the previously defined functionality for every datatype.

3.1 Introduction

There are multiple generic programming libraries, however to demonstrate the workings of generic programming we will be using a single library as inspiration, named `regular`[5]. Here the generic representation of a datatype is called a *pattern functor*. A pattern functor is a stripped-down version of a data type, by only containing the constructor but not the recursive structure. The recursive structure is done explicitly by using a fixed-point operator.

First, the pattern functors defined in `regular` are 5 core pattern functors and 2 meta information pattern functors. The core pattern functors describe the datatypes. The meta information pattern functors only contain information (e.g., constructor name) but not any structural information.

Use "representation types" instead of "pattern functor" for these datatypes

```

data U r      = U                -- Empty constructors
data I r      = I r              -- Recursive call
data K a r    = K a              -- Constants
data (f :+: g) r = L (f r) | R (g r) -- Sums (Choice)
data (f **: g) r = (f r) **: (g r) -- Products (Combine)

```

The conversion from regular datatypes into pattern functors is done by the `Regular` type class. The `Regular` type class has two functions. The `from` function converts the datatype into a pattern functor and the `to` function converts the pattern functor back into a datatype. In `regular`, the pattern functor is represented by a type family. Then using the `Regular` conversion to a pattern functor, we can write the `Tree` datatype from Chapter 2 as:

```

type family PF a :: * -> *

class Regular a where
  from :: a -> PF a a
  to   :: PF a a -> a

type instance PF (Tree a) = K a                -- Leaf
                        :+: (I :+: K a :+: I) -- Node

class Regular (Tree a) where
  from (Leaf x)      = L (K x)
  from (Node l x r) = R (I l :+: K x :+: I r)

  to (L (K x))          = Leaf x
  to (R (I l :+: K x :+: I r)) = Node l x r

```

To demonstrate the workings of generic programming, we are going to implement a simple generic function which determines the length of an arbitrary datatype. First, we define the length function within a type class. The type class is used, to define how to determine the length for every pattern functor `f`.

```

class GLength f where
  glength :: (a -> Int) -> f a -> Int

```

Writing instances for the empty constructor `U` and the constants `K` is simple because both pattern functors return zero. The `U` pattern functor returns zero, because it does not contain any children. The `K` pattern functor returns zero, because we do not count constants for the length.

```

instance GLength U where
  glength _ _ = 0

instance GLength (K a) where

```

```
length _ _ = 0
```

The instances for sums and products pattern functors are quite similar. The sums pattern functor recurses into the specified choice. The product pattern functor recurses in both constructors and combines them.

```
instance (GLength f, GLength g) => GLength (f :+: g) where
  length f (L x) = length f x
  length f (R x) = length f x
```

```
instance (GLength f, GLength g) => GLength (f **: g) where
  length f (x **: y) = length f x + length f y
```

The instance for the recursive call `I` needs an additional argument. Because, we do not know the type of `x`, so an additional function (`f :: a -> Int`) needs to be given which converts `x` into the length for that type.

```
instance GLength I where
  length f (I x) = f x
```

Then using the `GLength` instances for all pattern functors, a function can be defined using the generic length function. By first, converting the datatype into a generic representation, then calling `length` given recursively itself, and for every recursive call increase the length by one.

```
length :: (Regular a, GLength (PF a)) => a -> Int
length = 1 + length length (from x)
```

```
> length [1, 2, 3]
3
> length (Node (Leaf 1) 2 (Leaf 3))
3
> length {"1": 1, "2": 2, "3": 3}
3
```

3.2 Explicit recursion

The previous implementation of the `length` function is implemented for a shallow representation. A shallow representation means that the recursion of the datatype is not explicitly marked. Therefore, we can only convert one layer of the value into a generic representation using the `from` function.

Alternatively, by marking the recursion of the datatype explicitly, also called the deep representation, the entire value can be converted into a generic representation in one go. To mark the recursion, a fixed-point operator (`Fix`) is introduced. Then, using the fixed-point operator we

can define a `from` function that given the pattern functors have an instance of `Functor`¹, return a generic representation of the entire value.

```
data Fix f = In { unFix :: f (Fix f) }

deepFrom :: (Regular a, Functor (PF a)) => a -> Fix (PF a)
deepFrom = In . fmap deepFrom . from
```

Subsequently, we can define a `cata` function which can use the explicitly marked recursion by applying a function at every level of the recursion. Then using the `cata` function we can define the same `length` function as in the previous section, but just in a single line. However, this deep representation does come at the cost that the implementation is less efficient than the shallow representation.

```
cata :: Functor f => (f a -> a) -> Fix f -> a
cata = f . fmap (cata f) . unFix

length' :: (Regular a, GLength (PF a), Functor (PF a), Foldable (PF a))
        => a -> Int
length' = cata ((1+) . sum) . deepFrom
```

3.3 Sums of Products

Add a description of what a universe is

A different way of describing datatypes in a generic representation, besides pattern functors, are *Sums of Products*[9] (SOP). SOP is a generic representation with additional constraints which more faithfully reflects the Haskell datatypes: each datatype is a single n-ary sum, where each component of the sum is a single n-ary product. The SOP universe is described using *codes* of kind `[[*]]`. The outer list describes an n-ary sum, representing the choice between constructors and each inner list an n-ary products, representing the constructor arguments. The code of kind `[[*]]` can then be interpreted to describe Haskell datatypes of kind `*`. To define a code, the tick mark ``` is used to lift the list to a type-level.

```
Code (Tree a) = `[a], `[Tree a, a, Tree a]
```

The usage of SOP has a positive effect on expressing generic functions easily or at all. Additionally, the SOP completely divides the structural representation from the metadata. As a result, you do not have to deal with metadata while writing generic functions. However, the additional constraints on the generic representation makes the SOP universe size comparatively bigger than pattern functors. Therefore, it is more complex to extend the SOP than for pattern functors.

¹The `Functor` instances for the pattern functors can be found in Section A.1

3.4 Mutually recursive datatypes

A large class of datatypes is supported by the previous section, namely *regular* datatypes. Regular datatypes are datatypes in which the recursion only goes into the same datatype. However, if we want to support the abstract syntax tree of many programming languages, we need to support datatypes which can recurse over different datatypes, namely mutually recursive datatypes.

```
data Tree a = Empty
           | Node (a, Forest a)

data Forest a = Nil
             | Cons (Tree a) (Forest a)
```

To support mutually recursive datatypes, we need to keep track of which recursive position points to which datatype. This is accomplished by using *indexed fixed-points*[10]. The indexed fixed-points works by creating a type family φ with n different types, where the types inside the family represent the indices for different kinds ($*_{\varphi}$). Using the limited set of kinds we can determine the type for the recursive positions. Thus, supporting mutually recursive datatypes is possible, but it adds a lot more complexity.

4

Generic Implementation

4.1 Regular

The **regular** generic programming library was chosen, because it has the smallest universe size compared to other libraries. Therefore, implementing the generic implementation is less complex. However, **regular** does not support *Sums of Products* and *mutually recursive datatypes*, but we expect that the results will be meaningful without supporting these features.

Write about why Regular is chosen

The first step of the incremental computation was computing the Merkle Tree. In other terms, we need to store the hash of the data structure inside the data structure. We accomplish this by defining a new type **Merkle** which is a fixed-point over the data structure where each of the recursive positions contains a hash (**K Digest**).

```
type Merkle f = Fix (f :: K Digest)
```

But, before the hash can be stored inside the data structure, the hash needs to be computed from the data structure. For this we need to know how to hash the generic datatypes. We introduce a typeclass named **Hashable** which defines a function **hash**, which converts the **f** datatype into a **Digest** (also known as a *hash value*).

```
class Hashable f where
  hash :: f (Merkle g) -> Digest
```

```
digest :: Show a => a -> Digest
digest = digestStr . show -- converts a string into a hash value
```

The **Hashable** instance of **U** is simple. The **digest** function is used to convert the constructor name **U** into a **Digest**. The **K** also uses the **digest** function to convert the constructor name into a **Digest**, but it also calls **digest** on the constant value of **K**. Therefore, the type of the value of **K** needs an instance for **Show**. Then both digests are combined into a single digest.

```
instance Hashable U where
```

```
hash _ = digest "U"
```

```
instance (Show a) => Hashable (K a) where
  hash (K x) = digestConcat [digest "K", digest x]
```

The instances for `:+:`, `:*` and `C` are quite similar as the instance for the `K` datatype. However, the value inside the constructor are recursively called.

```
instance (Hashable f, Hashable g) => Hashable (f :+: g) where
  hash (L x) = digestConcat [digest "L", hash x]
  hash (R x) = digestConcat [digest "R", hash x]
```

```
instance (Hashable f, Hashable g) => Hashable (f :*: g) where
  hash (x :*: y) = digestConcat [digest "P", hash x, hash y]
```

```
instance (Hashable f) => Hashable (C c f) where
  hash (C x) = digestConcat [digest "C", hash x]
```

The `I` instance is different from the previous instances, because the recursive position is already converted into a Merkle Tree. Thus, we need to get the computed hash from the recursive position, digest the datatype name and combine the digests.

```
instance Hashable I where
  hash (I x) = digestConcat [digest "I", getDigest x]
  where
    getDigest :: Fix (f :*: K Digest) -> Digest
    getDigest (In (_ :*: K h)) = h
```

The `hash` implementation can then be used to define a function `merkleG` which converts from a shallow generic representation, to a generic representation where one layer of recursive positions contains a hash value.

Subsequently, we can define a function `merkle` which converts the entire generic representation, into a generic representation where every recursive position contains a hash value. We can define `merkle` using the same implementation as in Section 3.2, but we add a step where after all the children are recursively called, the `merkleG` function is applied.

```
merkleG :: Hashable f => f (Merkle g) -> (f :*: K Digest) (Merkle g)
merkleG f = f :*: K (hash f)
```

```
merkle :: (Regular a, Hashable (PF a), Functor (PF a))
  => a -> Merkle (PF a)
merkle = In . merkleG . fmap merkle . from
```

The `Merkle` representation can then be used to define a function `cataMerkleState` which given a function `alg :: (f a -> a)` which converts the generic representation `f a` into a value of

type `a` and the `Merkle f` data structure, and returns a `State` of `(Map Digest a) a`. The `cataMerkleState` function starts with retrieving the `State`, which keeps track of the intermediate results and stores them into a `Map Digest a`. Then, given the hash value of the recursive position, we look into the `Map` if the value has been computed. If the value has been computed, then return the value. Otherwise, recursively compute all the children, apply the given function `alg`, insert the new value into the `Map` and return the computed value.

```
cataMerkleState :: (Functor f, Traversable f)
                => (f a -> a) -> Merkle f -> State (Map Digest a) a
cataMerkleState alg (In (x :: K h))
  = do m <- get
      case lookup h m of
        Just a  -> return a
        Nothing -> do y <- mapM (cataMerkleState alg) x
            let r = alg y
                modify (insert h r) >> return r
```

The `cataMerkleState` function can be used, but to execute the function we first need to give the function a `Map Digest a`. To simplify the use of `cataMerkleState`, we define a function `cataMerkle`, which executes the `cataMerkleState` with an empty `Map` and returns the final computed result and the final state as the result.

```
cataMerkle :: (Functor f, Traversable f)
            => (f a -> a) -> Merkle f -> (a, Map Digest a)
cataMerkle alg t = runState (cataMerkleState alg t) empty
```

Finally, we have all the necessary functionality defined to write a function over the generic representation and automatically generate all the intermediate results and the final result. The example below computes the sum over the generic representation of `Tree` by adding all the values of the leaf and nodes.

```
cataSum :: Merkle (PF (Tree Int)) -> (Int, Map Digest Int)
cataSum = cataMerkle
  (\case
    L (C (K x))          -> x
    R (C (I l :: K x :: I r)) -> l + x + r
  )

> cataSum $ merkle $ Node (Leaf 1) 2 (Leaf 3)
(6, {"931090e5": 1, "7d1ef1c9": 3, "ba811ed5": 6})
```

4.2 Generic Zipper

For the implementation of a generic zipper, we need to define (A) a datatype which keeps track of the location inside the data structure, (B) a context which keeps track of the locations which have been traversed through (C) and functions which facilitate traversing through the data structure. The implementation of the general zipper is based on the paper “Generic representations of tree transformations” by Bransen and Magalhaes[1].

- A location is the point currently in focus in the zipper (of type α), and the path to the focal point.
- This path is stored as a stack of one-hole contexts.
- The context is given by the derivative of the pattern functor representing the datatype (McBride 2001).
- This type-indexed datatype is encoded in regular as a data family, indexed over the five representation types.

```
data family Ctx (f :: * -> *) :: * -> *

data instance Ctx (K a)      r
data instance Ctx U          r
data instance Ctx (f :+: g) r = CL (Ctx f r)
                                | CR (Ctx g r)
data instance Ctx (f :*: g) r = C1 (Ctx f r) (g r)
                                | C2 (f r) (Ctx g r)
data instance Ctx I          r = CId
data instance Ctx (C c f)    r = CC (Ctx f r)

data Loc :: * -> * where
  Loc :: (Regular a, Zipper (PF a)) => a -> [Ctx (PF a) a] -> Loc a

type instance PF (Merkle f) = f :*: K Digest
instance Regular (Merkle f) where
  from = out
  to   = In
```

- The cmap function encodes the functorial map over contexts.
- Filling the hole in a context with a specific value is the role of fill, while first, last, next, and prev are primitive navigation operations.

```
class Functor f => Zipper f where
  cmap      :: (a -> b) -> Ctx f a -> Ctx f b
  fill      :: Ctx f a -> a -> f a
```

```

first, last :: f a -> Maybe (a, Ctx f a)
next, prev  :: Ctx f a -> a -> Maybe (a, Ctx f a)

```

4.3 Complexity

Describe for every function used the complexity and what leads to the complete complexity

4.4 HashMap vs Trie

Advanced data structures[2]

Write a piece about the comparison of storing it in a HashMap or a Trie datastructure

Write about Hdiff and the use of Trie datastructure

4.5 Memory Strategies

Describe multiple memory strategies for keeping memory usage and execution time low

Write about paper selective memoization

4.6 Pattern Synonyms

Explain Pattern Synonyms

```

{-# COMPLETE Leaf_, Node_ #-}

pattern Leaf_ :: a -> PF (Tree a) r
pattern Leaf_ x <- L (C (K x)) where
  Leaf_ x = L (C (K x))

pattern Node_ :: r -> a -> r -> PF (Tree a) r
pattern Node_ l x r <- R (C (I l :: K x :: I r)) where
  Node_ l x r = R (C (I l :: K x :: I r))

cataSum :: MerklePF (Tree Int) -> (Int, M.Map Digest Int)
cataSum = cataMerkle
  (\case
    Leaf_ x      -> x
    Node_ l x r  -> l + x + r
  )

```

5

Experiments

5.1 Execution Time

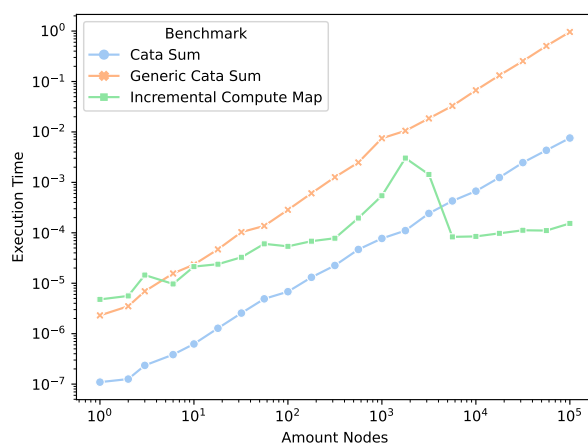


Figure 5.1: Overview execution time

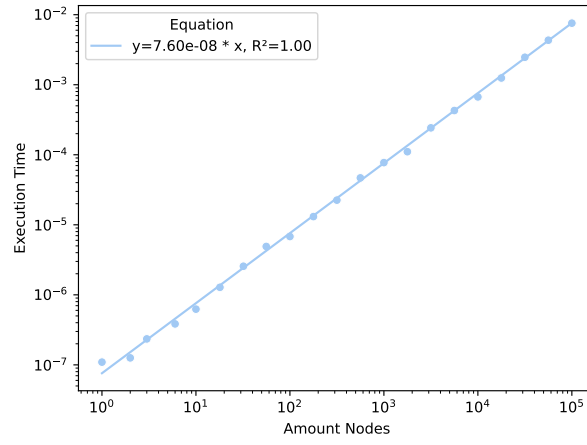


Figure 5.2: Execution time for Cata Sum

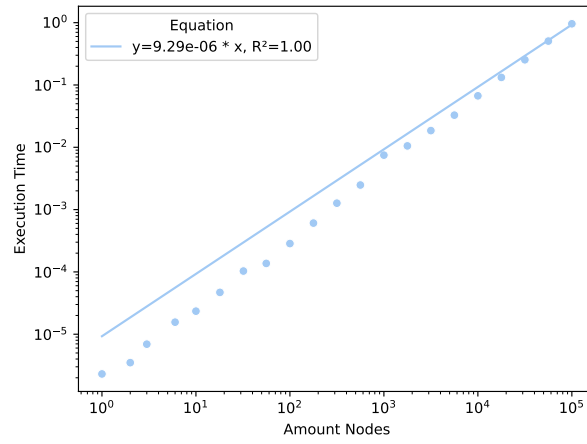


Figure 5.3: Execution time for Generic Cata Sum

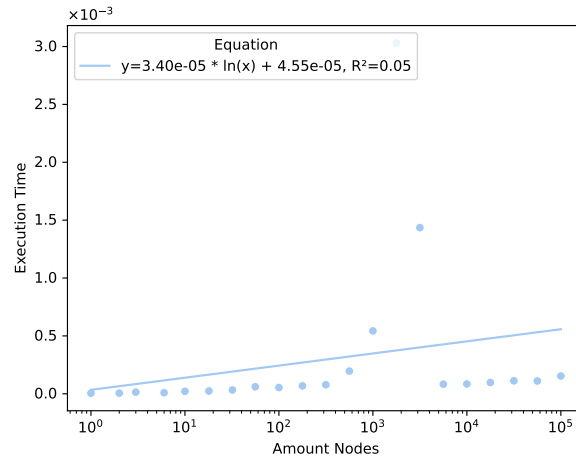


Figure 5.4: Execution time for Incremental Cata Sum

5.2 Memory Usage

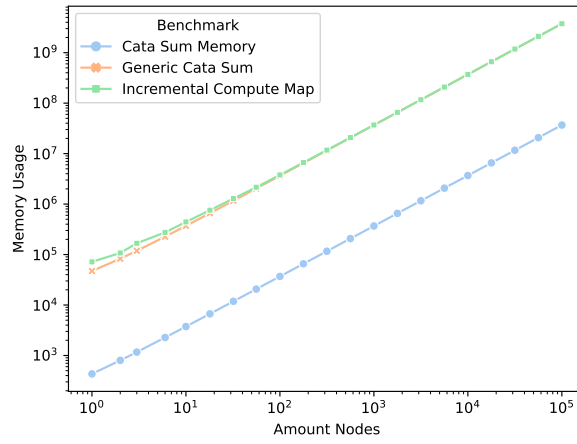


Figure 5.5: Overview memory usage

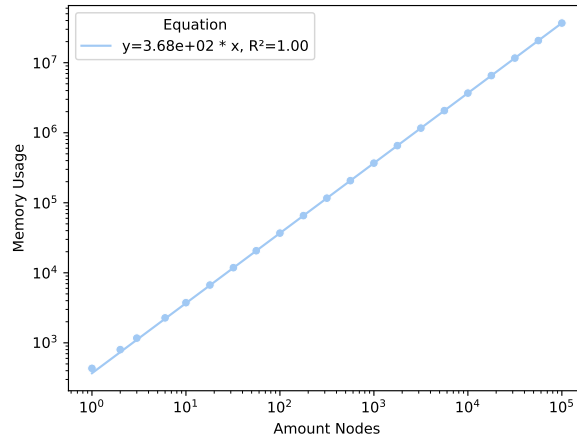


Figure 5.6: Memory usage for Cata Sum

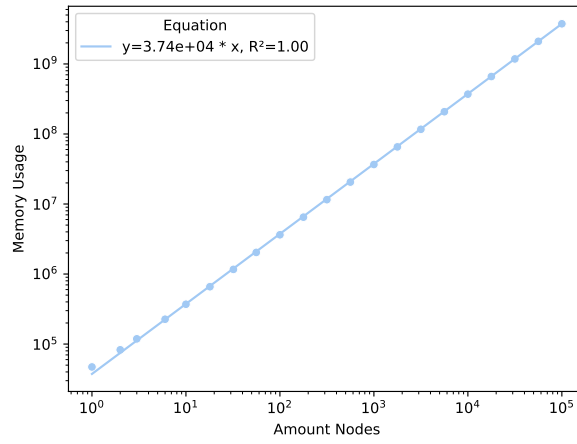


Figure 5.7: Memory usage for Generic Cata Sum

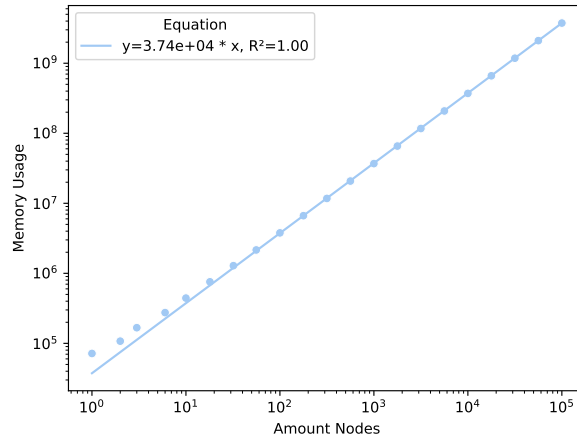


Figure 5.8: Memory usage for Incremental Cata Sum

5.3 Comparison Memory Strategies

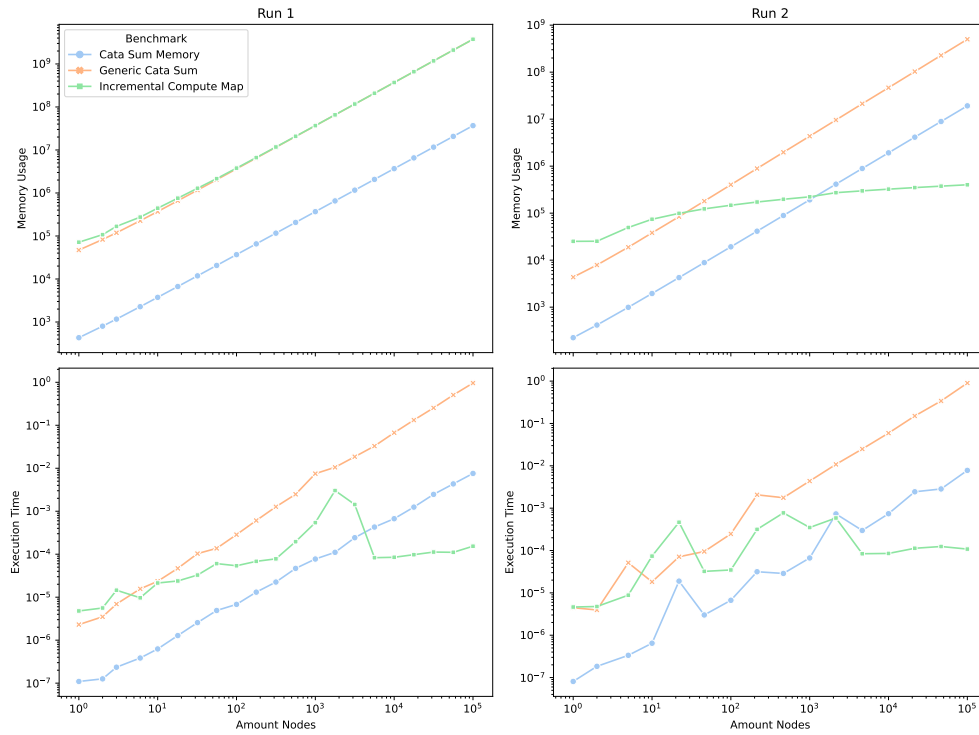


Figure 5.9: Comparison Memory Strategy

6

Conclusion and Future Work

6.1 Conclusion



Generic Programming

A.1 Instances Functor for Pattern Functors

```
instance Functor I where
  fmap f (I r) = I (f r)
```

```
instance Functor (K a) where
  fmap _ (K a) = K a
```

```
instance Functor U where
  fmap _ U = U
```

```
instance (Functor f, Functor g) => Functor (f :+: g) where
  fmap f (L x) = L (fmap f x)
  fmap f (R y) = R (fmap f y)
```

```
instance (Functor f, Functor g) => Functor (f **: g) where
  fmap f (x **: y) = fmap f x **: fmap f y
```

B

Implementation Memo Cata

B.1 Implementation Merkle

```
merkle :: (Regular a, Hashable (PF a), Functor (PF a))
        => a -> Merkle (PF a)
merkle = In . merkleG . fmap merkle . from
```

B.2 Implementation Cata Merkle

```
cataMerkleState :: (Functor f, Traversable f)
                => (f a -> a) -> Fix (f :: K Digest)
                -> State (M.Map Digest a) a
cataMerkleState alg (In (x :: K h)) = do m <- get
  case M.lookup h m of
    Just a -> return a
    Nothing -> do y <- mapM (cataMerkleState alg) x
                  let r = alg y
                  modify (M.insert h r) >> return r

cataMerkle :: (Functor f, Traversable f)
            => (f a -> a) -> Fix (f :: K Digest) -> (a, M.Map Digest a)
cataMerkle alg t = runState (cataMerkleState alg t) M.empty
```

B.3 Implementation Zipper Merkle

```
data Loc :: * -> * where
  Loc :: (Zipper a) => Merkle a
        -> [Ctx (a :: K Digest) (Merkle a)]
        -> Loc (Merkle a)
```

```

modify :: (a -> a) -> Loc a -> Loc a
modify f (Loc x cs) = Loc (f x) cs

updateDigest :: Hashable a => Merkle a -> Merkle a
updateDigest (In (x :: _)) = In (merkleG x)

updateParents :: Hashable a => Loc (Merkle a) -> Loc (Merkle a)
updateParents (Loc x []) = Loc (updateDigest x) []
updateParents (Loc x cs) = updateParents
    $ expectJust "Exception: Cannot go up"
    $ up (Loc (updateDigest x) cs)

updateLoc :: Hashable a => (Merkle a -> Merkle a)
    -> Loc (Merkle a) -> Loc (Merkle a)
updateLoc f loc = if top loc'
    then loc'
    else updateParents
    $ expectJust "Exception: Cannot go up" (up loc')
where
    loc' = modify f loc

```



Regular

C.1 Zipper

```
data instance Ctx (K a) r
data instance Ctx U r
data instance Ctx (f :+: g) r = CL (Ctx f r) | CR (Ctx g r)
data instance Ctx (f :*: g) r = C1 (Ctx f r) (g r) | C2 (f r) (Ctx g r)
data instance Ctx I r = CId
data instance Ctx (C c f) r = CC (Ctx f r)
data instance Ctx (S s f) r = CS (Ctx f r)
```

Bibliography

- [1] Jeroen Bransen and José Pedro Magalhaes. “Generic representations of tree transformations”. In: *Proceedings of the 9th ACM SIGPLAN workshop on Generic programming*. 2013, pp. 73–84.
- [2] Peter Brass. *Advanced data structures*. Vol. 193. 2008, pp. 336–356.
- [3] Jeremy Gibbons. “Datatype-generic programming”. In: *International Spring School on Datatype-Generic Programming*. Springer. 2006, pp. 1–71.
- [4] Gérard Huet. “The zipper”. In: *Journal of functional programming* 7.5 (1997), pp. 549–554.
- [5] Jose Pedro Magalhaes. *Generic programming library for regular datatypes*. URL: <https://hackage.haskell.org/package/regular> (visited on Apr. 28, 2022).
- [6] Victor Cacciari Miraldo and Wouter Swierstra. “An efficient algorithm for type-safe structural diffing”. In: *Proceedings of the ACM on Programming Languages* 3.ICFP (2019), pp. 1–29.
- [7] Thomas van Noort et al. “A Lightweight Approach to Datatype-Generic Rewriting”. In: (2008).
- [8] Jeff Preshing. *Hash Collision Probabilities*. 2011. URL: <https://preshing.com/20110504/hash-collision-probabilities> (visited on May 3, 2022).
- [9] Edsko de Vries and Andres Löb. “True sums of products”. In: *Proceedings of the 10th ACM SIGPLAN workshop on Generic programming*. 2014, pp. 83–94.
- [10] Alexey Rodriguez Yakushev et al. “Generic programming with fixed points for mutually recursive datatypes”. In: *ACM Sigplan Notices* 44.9 (2009), pp. 233–244.