JavaScript Boolean Reference

‹ Previous

Next ›

SHARE

See Also:

Full JavaScript Boolean Tutorial

Complete Boolean reference

Revised July 2025

Name	Description
Boolean()	Returns a boolean
new Boolean()	Returns a boolean object
constructor	Returns the function that created JavaScript's Boolean prototype
prototype	Allows you to add properties and methods to the Boolean prototype
toString()	Converts a boolean value to a string, and returns the result
valueOf()	Returns the primitive value of a boolean

Boolean Use Cases

Boolean values are fundamental for logical operations and control flow in JavaScript programming.

Comparisons

All comparison operators (like ==, !=, <, >) return **true** or **false**.

Given that **x = 5**, the table below explains comparison:

Description	Example	Returns
Not equal to	(x == 8)	**false**
Unequal to	(x != 8)	**true**
Greater than	(x > 8)	**false**
Less than	(x < 8)	**true**

REMOVE ADS

Conditions

Booleans are extensively used in **if statements** to determine the code blocks to executec.

Example	Returns
if (day == "Monday")	**true** or **false**
if (salary > 9000)	**true** or **false**
if (age < 18)	**true** or **false**

Loops

Booleans are extensively used in loops to determine conditions for looping.

Description	Example
For loop	for (i = 0; i < 5; i++)
While loop	while (i < 10)
For in loop	for (x in person)
For of loop	for (x of cars)

‹ Previous

Sign in to track progress

Next ›



REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

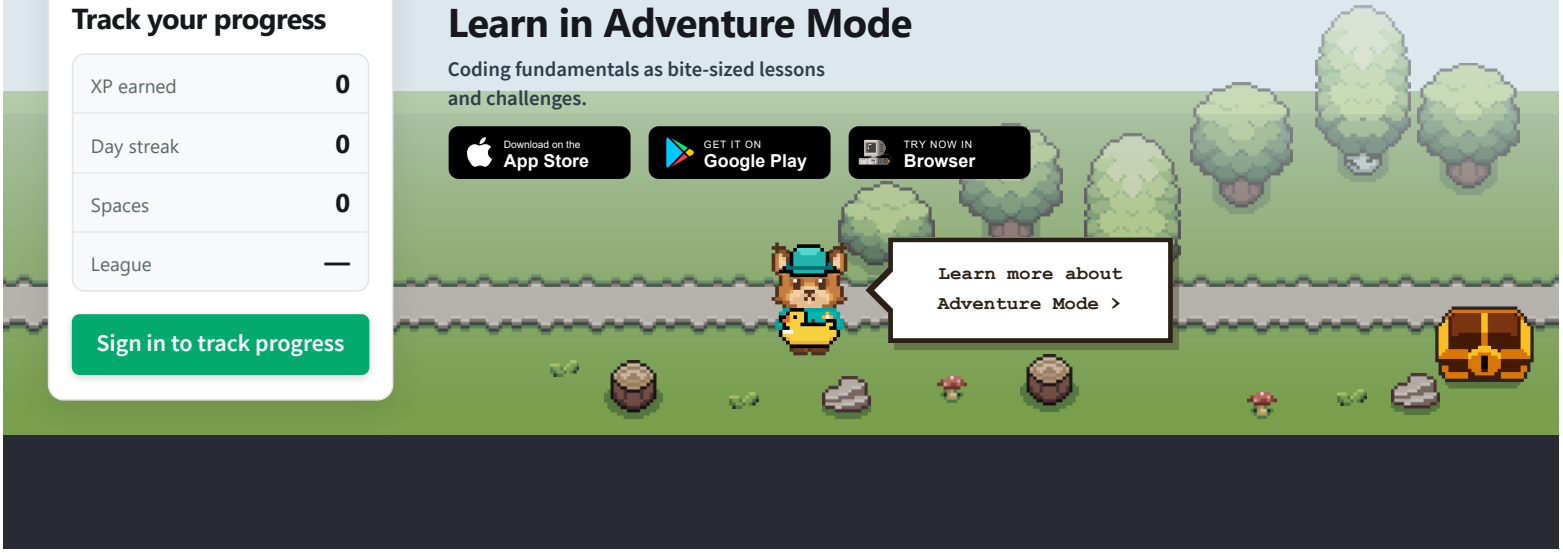

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript BigInt valueOf()

‹ Previous JavaScript BigInt Reference Next ›

Example

```
let x = 123456789123456789n;
let y = x.valueOf();

let text = typeof y + ": " + y;
```

Try it Yourself »

Description

SHARE

The `valueOf()` method returns the primitive value of a bigint.

The `valueOf()` method does not change the original bigint.

See Also:

The toString() Method

Note

The `valueOf()` is used internally by JavaScript.

Normally, you will not use it in your code.

Syntax

```
bigint.valueOf()
```

Parameters

NONE

Return Value

Type	Description
A BigInt	The primitive value of the bigint.

REMOVE ADS

Related Pages:

BigInt Tutorial

JavaScript Data Types

Browser Support

`valueOf()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

‹ Previous JavaScript BigInt Reference Next ›


schools
Your next career move.
Get every certification. One payment.
CERTIFICATE OF COMPLETION
Your Name
Certified Developer
$499
Pay once. Learn for life.
Invest in your future

REMOVE ADS


Python - Global Variables - W3Schools....
Python
Global Variables
Local and Global variables in Python


FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress
NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Boolean()

‹ Previous JavaScript Boolean Reference Next ›

Example

Create a Boolean:

```
let bool = Boolean();
```

Try it Yourself »

More examples below.

Description

SHARE

The `Boolean()` method returns a boolean.

See Also:

The new Boolean() Method

Syntax

```
Boolean(value)
```

Parameters

Parameter	Description
value	Optional Default value is `false`

Return Value

Type	Description
Boolean	`true` or `false`

More Examples

Create Booleans

```
let b1 = Boolean(0);
let b2 = Boolean(1);
let b3 = Boolean(false);
let b4 = Boolean(true);
```

Try it Yourself »

REMOVE ADS

Everything With a value is True

```
100 is true

3.14 is true

-15 is true

"Hello" is true

"false" is true

(7 + 1 + 3.14) is true
```

Try it Yourself »

Everything Without a value is False

```
0 is false

-0 is false

"" is false

undefined is false

null is false

false is false

NaN is false
```

Try it Yourself »

Related Pages:

Boolean Tutorial

JavaScript Data Types

Browser Support

`Boolean()` is an ECMAScript1 (JavaScript 1997) feature.


It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

‹ Previous JavaScript Boolean Reference Next ›



REMOVE ADS

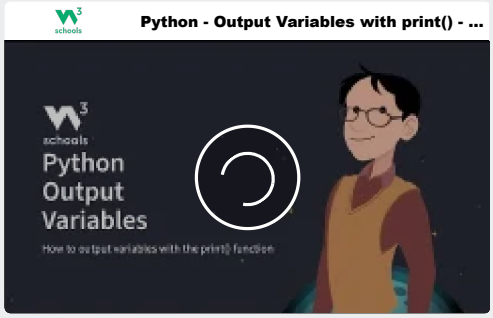

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

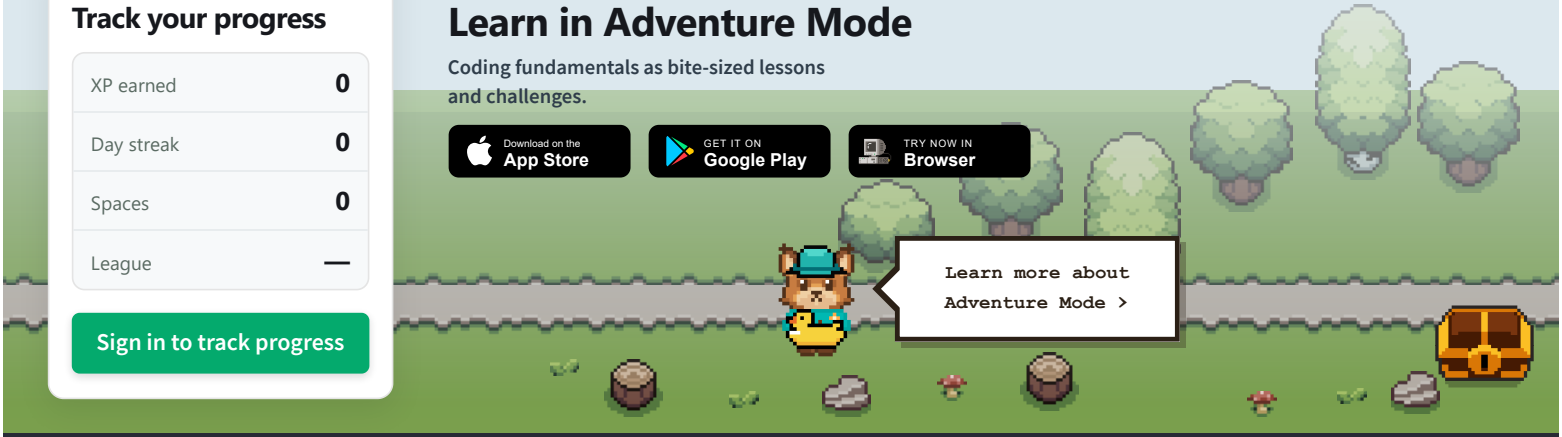

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Boolean()

‹ Previous JavaScript Boolean Reference Next ›

Example

Create a Boolean:

```
let bool = Boolean();
```

Try it Yourself »

More examples below.

Description

SHARE

The `Boolean()` method returns a boolean.

See Also:

The new Boolean() Method

Syntax

```
Boolean(value)
```

Parameters

Parameter	Description
value	Optional Default value is `false`

Return Value

Type	Description
Boolean	`true` or `false`

More Examples

Create Booleans

```
let b1 = Boolean(0);
let b2 = Boolean(1);
let b3 = Boolean(false);
let b4 = Boolean(true);
```

Try it Yourself »

REMOVE ADS

Everything With a value is True

```
100 is true

3.14 is true

-15 is true

"Hello" is true

"false" is true

(7 + 1 + 3.14) is true
```

Try it Yourself »

Everything Without a value is False

```
0 is false

-0 is false

"" is false

undefined is false

null is false

false is false

NaN is false
```

Try it Yourself »

Related Pages:

Boolean Tutorial

JavaScript Data Types

Browser Support

`Boolean()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

‹ Previous JavaScript Boolean Reference Next ›

Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

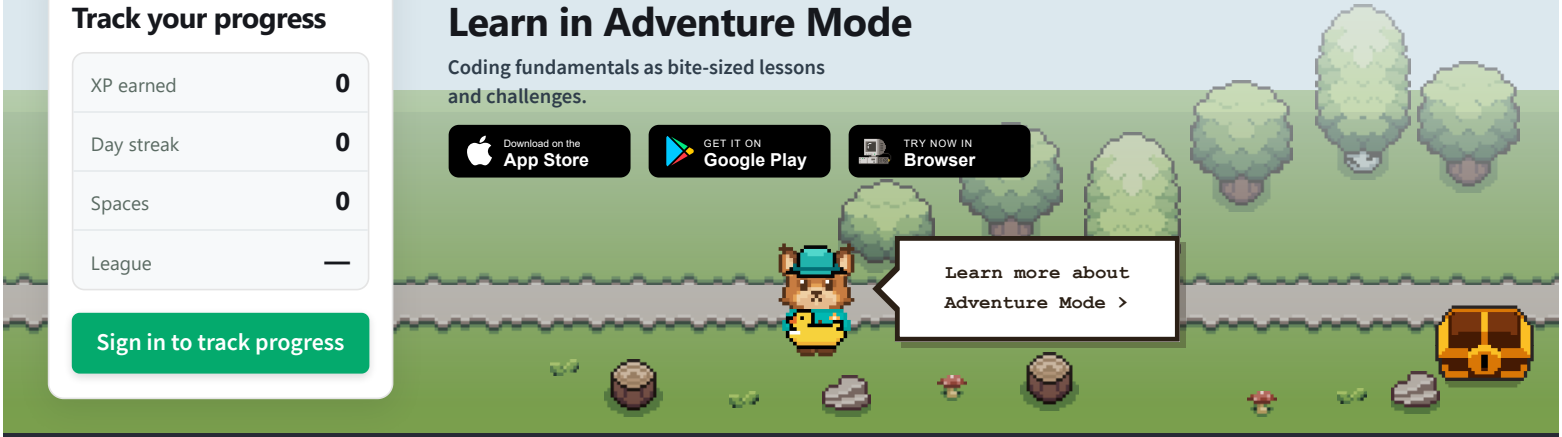

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript new Boolean()

‹ Previous JavaScript Boolean Reference Next ›

Example

Create a Boolean object

```
let bool = new Boolean();
```

Try it Yourself »

Description

SHARE

The `new Boolean()` method returns a new boolean object.

See Also:

The Boolean() Method

Syntax

```
new Boolean(value)
```

Parameters

Parameter	Description
value	Optional Default value is `false`

Return Value

Type	Description
Object	A new boolean object with the value `true` or `false`

REMOVE ADS

Warning

Do not create Boolean objects.

The `new` keyword complicates the code and slows down execution speed.

Boolean objects can produce unexpected results:

Booleans and boolean objects cannot be safely compared:

```
let x = Boolean(false);
let y = new Boolean(false);

(x == Y) returns true
(x === Y) returns false
```

Try it Yourself »

Comparing two JavaScript objects **always** return **false**.

Related Pages:

Boolean Tutorial

JavaScript Data Types

Browser Support

`new Boolean()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

‹ Previous

JavaScript Boolean Reference

Next ›

W3 schools

JS

Get Certified in JavaScript


Boost your career with an official certification

$95

Get certified

REMOVE ADS

Python - Comments - W3Schools.com

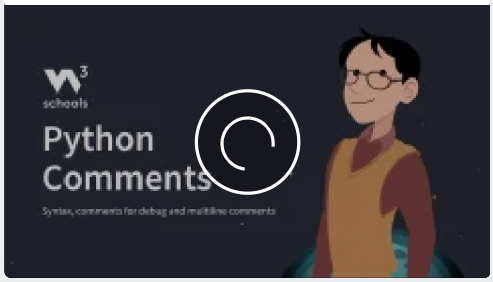

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

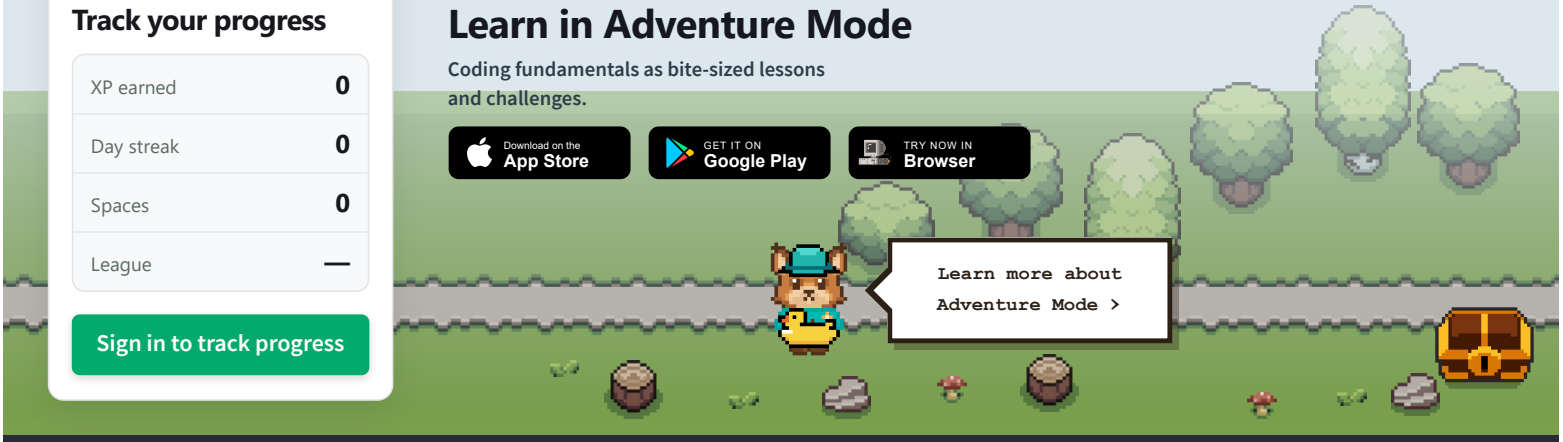

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Boolean constructor

‹ Previous | JavaScript Boolean Reference | Next ›

Example

```
let bool = false;
let text = bool.constructor;
```

Try it Yourself »

Description

SHARE

The `constructor` property returns the function that created the Boolean prototype.

For JavaScript booleans the `constructor` property returns:

function Boolean() { [native code] }

Syntax

```
boolean.constructor
```

Return Value

function Boolean() { [native code] }

Related Pages:

Boolean Tutorial

JavaScript Data Types

Browser Support

`constructor` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

‹ Previous | JavaScript Boolean Reference | Next ›



REMOVE ADS

Python - Syntax - W3Schools.com



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

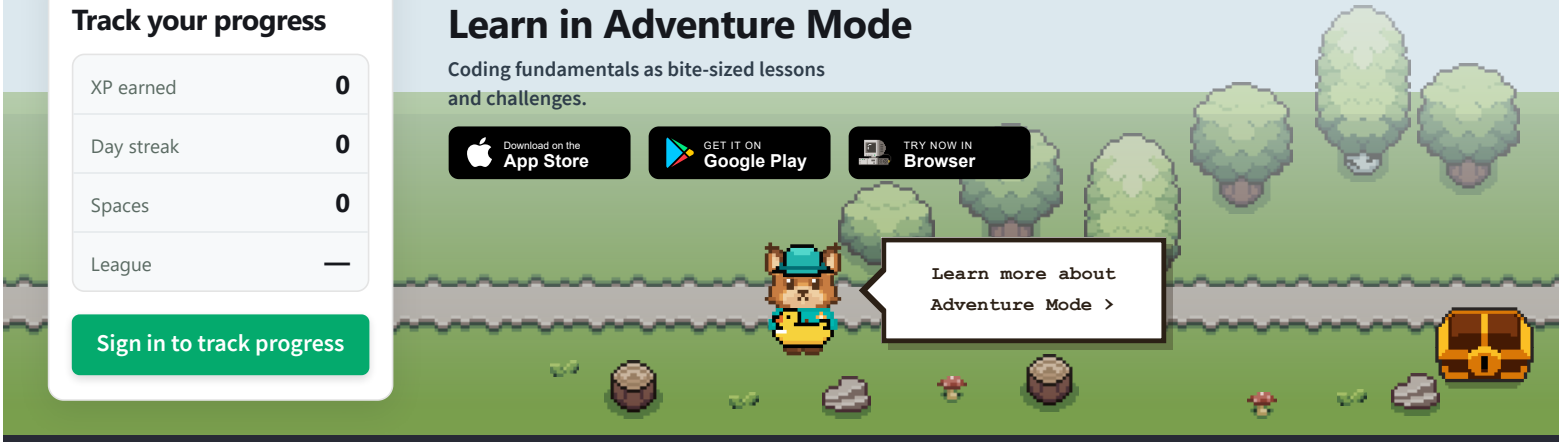

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Boolean prototype

‹ Previous JavaScript Boolean Reference Next ›

Example

Make a new method for JavaScript booleans:

```
Boolean.prototype.myColor = function() {
  if (this.valueOf() == true) {
    return "green";
  } else {
    return = "red";
  }
};
```

Create a boolean, then call myColor():

```
let a = true;
let color = a.myColor();
```

Try it Yourself »

Description

SHARE

`prototype` allows you to add new properties and methods to booleans.

`prototype` is a property available with all JavaScript objects.

Syntax

```
Boolean.prototype.name = value
```

Warning

You are not advised to change the prototype of an object that you do not control.

You should not change the prototype of built in JavaScript datatypes like:

- Numbers
- Strings
- Arrays
- Dates
- Booleans
- Function
- Objects

Only change the prototype of your own objects.

The prototype Property

The JavaScript `prototype` property allows you to add new properties to objects:

Example

```
function Person(first, last, age, eyecolor) {
  this.firstName = first;
  this.lastName = last;
  this.eyeColor = eyecolor;
}

Person.prototype.nationality = "English";
```

Try it Yourself »

Related Pages:

Boolean Tutorial

JavaScript Data Types

Browser Support

`prototype` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

‹ Previous

JavaScript Boolean Reference

Next ›

schools

JS


Get Certified in JavaScript

Boost your career with an official certification

$95


Get certified

REMOVE ADS

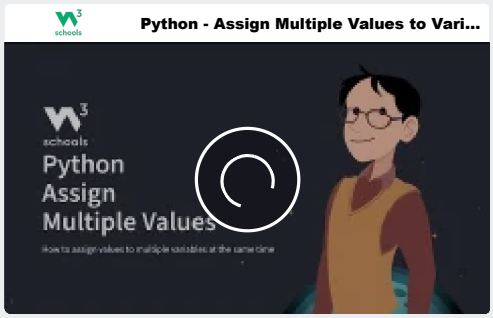

FREE ACCOUNT

NEW

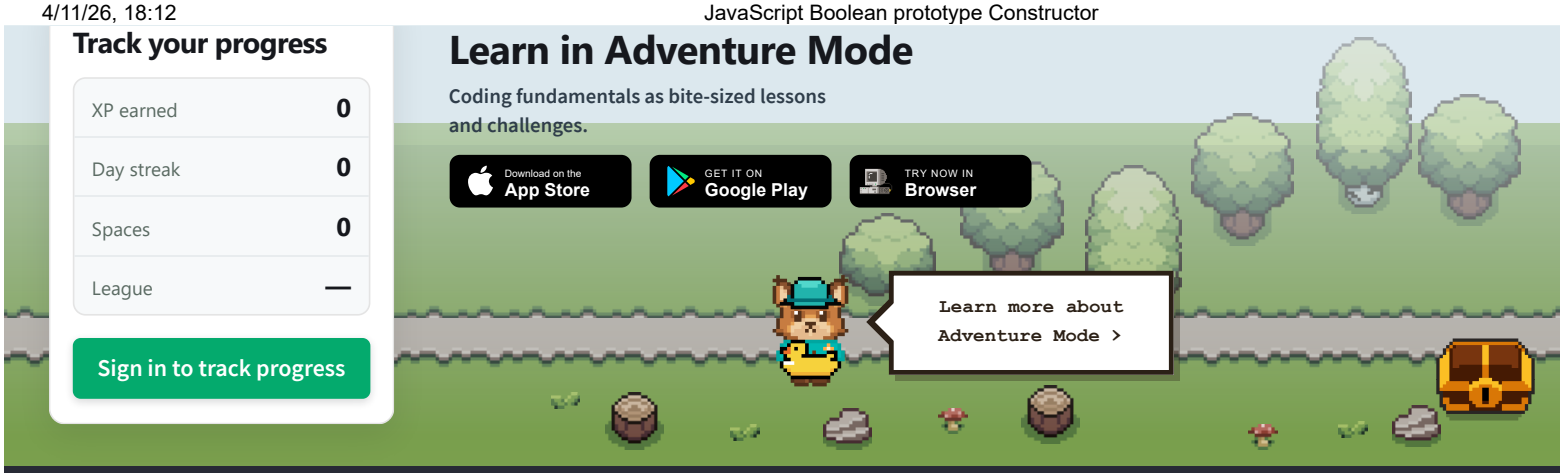

W3schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference

Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Boolean toString()

‹ Previous JavaScript Boolean Reference Next ›

Example

```
let bool = true;
let text = bool.toString();
```

Try it Yourself »

Description

SHARE

The `toString()` method returns a boolean as a string.

Note

Every JavaScript object has a `toString()` method.

The `toString()` method is used by JavaScript when an object needs to be displayed as a text (like in HTML), or when an object needs to be used as a string.

Syntax

```
boolean.toString()
```

Parameters

NONE

Return Value

Type	Description
A string	"true" or "false".

Related Pages:

Boolean Tutorial

JavaScript Data Types

Browser Support

`toString()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

‹ Previous JavaScript Boolean Reference Next ›

schools
Your next career move.
Get every certification. One payment.


$499 Pay once. Learn for life.
Invest in your future

REMOVE ADS

Python - Variable Names - W3Schools.c...


FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser


schools
PLUS
SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Boolean valueOf()

‹ Previous | JavaScript Boolean Reference | Next ›

Example

```
let bool = false;
let value = bool.valueOf();
```

Try it Yourself »

Description

SHARE

`valueOf()` returns the primitive value of a boolean.

`valueOf()` is usually called by JavaScript behind the scenes, and not explicitly in code.

Syntax

```
boolean.valueOf()
```

Return Value

Type	Description
A boolean	`true` or `false`.

Related Pages:

Boolean Tutorial

JavaScript Data Types

Browser Support

`valueOf()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

‹ Previous

JavaScript Boolean Reference

Next ›

Learn it.
Get certified.
Get hired.

$95 per course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

Python - Comments - W3Schools.com



FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

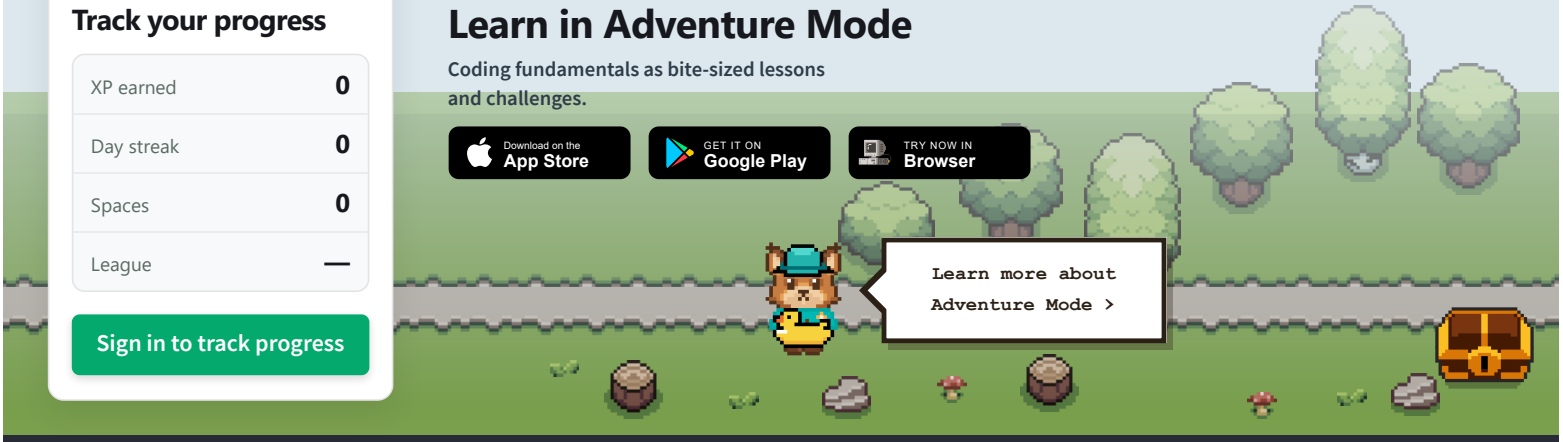

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript BigInt valueOf()

‹ Previous JavaScript BigInt Reference Next ›

Example

```
let x = 123456789123456789n;
let y = x.valueOf();

let text = typeof y + ": " + y;
```

Try it Yourself »

Description

SHARE

The `valueOf()` method returns the primitive value of a bigint.

The `valueOf()` method does not change the original bigint.

See Also:

The toString() Method

Note

The `valueOf()` is used internally by JavaScript.

Normally, you will not use it in your code.

Syntax

```
bigint.valueOf()
```

Parameters

NONE

Return Value

Type	Description
A BigInt	The primitive value of the bigint.

REMOVE ADS

Related Pages:

BigInt Tutorial

JavaScript Data Types

Browser Support

`valueOf()` is an ECMAScript1 (JavaScript 1997) feature.


It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

‹ Previous JavaScript BigInt Reference Next ›



REMOVE ADS

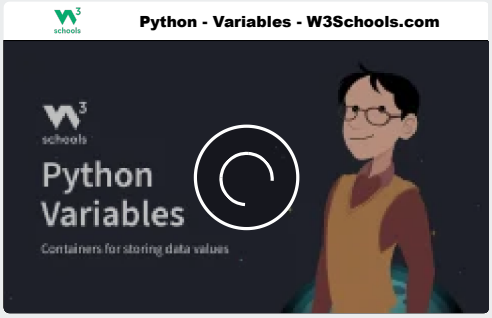

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

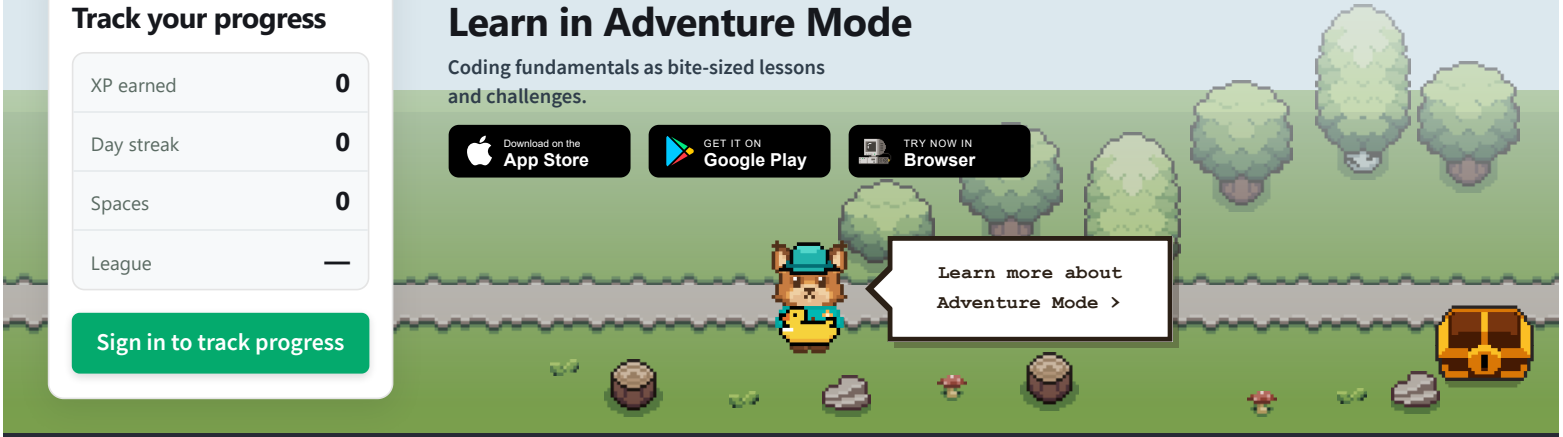

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Boolean()

‹ Previous JavaScript Boolean Reference Next ›

Example

Create a Boolean:

```
let bool = Boolean();
```

Try it Yourself »

More examples below.

Description

SHARE

The `Boolean()` method returns a boolean.

See Also:

The new Boolean() Method

Syntax

```
Boolean(value)
```

Parameters

Parameter	Description
value	Optional Default value is `false`

Return Value

Type	Description
Boolean	`true` or `false`

More Examples

Create Booleans

```
let b1 = Boolean(0);
let b2 = Boolean(1);
let b3 = Boolean(false);
let b4 = Boolean(true);
```

Try it Yourself »

REMOVE ADS

Everything With a value is True

```
100 is true

3.14 is true

-15 is true

"Hello" is true

"false" is true

(7 + 1 + 3.14) is true
```

Try it Yourself »

Everything Without a value is False

```
0 is false

-0 is false

"" is false

undefined is false

null is false

false is false

NaN is false
```

Try it Yourself »

Related Pages:

Boolean Tutorial

JavaScript Data Types

Browser Support

`Boolean()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

‹ Previous JavaScript Boolean Reference Next ›


Build skills.
Get hired.

$95 per paid course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

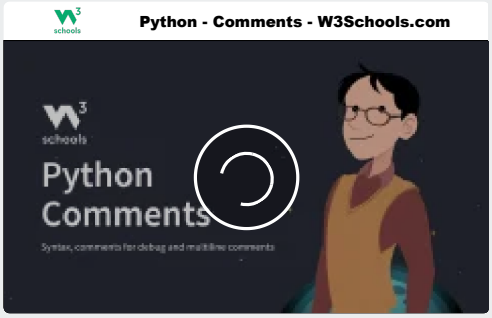

FREE ACCOUNT

Track your progress

XP earned 0
Day streak 0
Spaces 0
League —


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

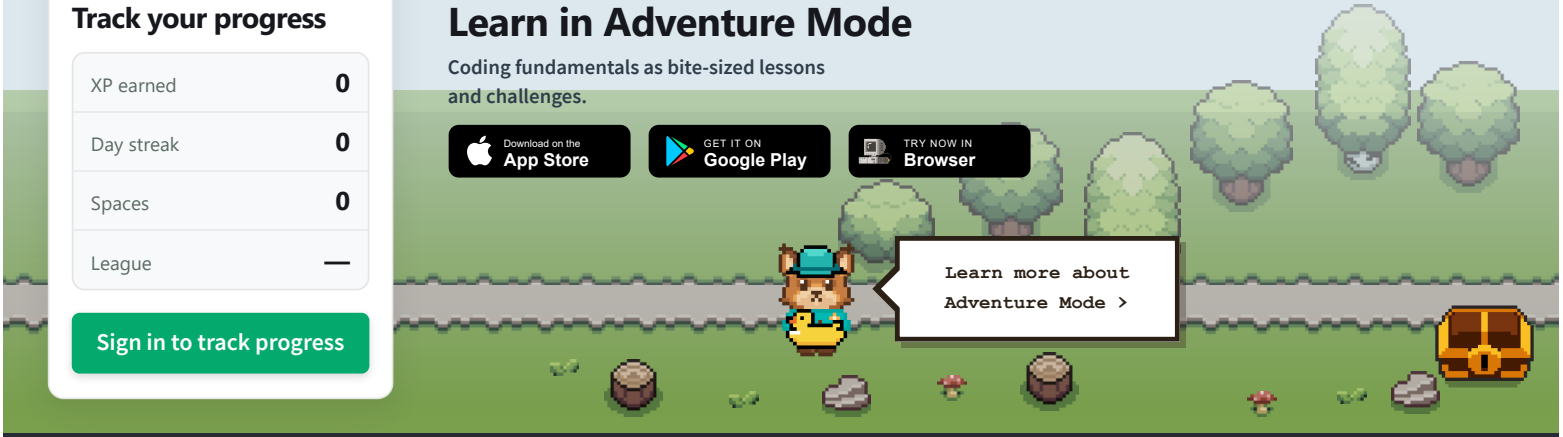

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.