JavaScript Date Reference

‹ Previous

Next ›

New to JavaScript Dates?

SHARE

Visit Our Full JavaScript Dates Tutorial

JavaScript Date Methods and Properties

Revised July 2025

Name	Description
new Date()	Creates a new Date object
constructor	Creates a new Date object
constructor	Returns the function that created the Date prototype
getDate()	Returns the day of the month (from 1-31)
getDay()	Returns the day of the week (from 0-6)
getFullYear()	Returns the year
getHours()	Returns the hour (from 0-23)
getMilliseconds()	Returns the milliseconds (from 0-999)
getMinutes()	Returns the minutes (from 0-59)

getMonth()	Returns the month (from 0-11)
getSeconds()	Returns the seconds (from 0-59)
getTime()	Returns the number of milliseconds since midnight Jan 1 1970, and a specified date
getTimezoneOffset()	Returns the time difference between UTC time and local time, in minutes
getUTCDate()	Returns the day of the month, according to universal time (from 1-31)
getUTCDay()	Returns the day of the week, according to universal time (from 0-6)
getUTCFullYear()	Returns the year, according to universal time
getUTCHours()	Returns the hour, according to universal time (from 0-23)
getUTCMilliseconds()	Returns the milliseconds, according to universal time (from 0-999)
getUTCMinutes()	Returns the minutes, according to universal time (from 0-59)
getUTCMonth()	Returns the month, according to universal time (from 0-11)
getUTCSeconds()	Returns the seconds, according to universal time (from 0-59)
getYear()	Deprecated. Use the getFullYear() method instead
now()	Returns the number of milliseconds since midnight Jan 1, 1970
parse()	Parses a date string and returns the number of milliseconds since January 1, 1970
prototype	Allows you to add properties and methods to an object
setDate()	Sets the day of the month of a date object
setFullYear()	Sets the year of a date object
setHours()	Sets the hour of a date object
setMilliseconds()	Sets the milliseconds of a date object
setMinutes()	Set the minutes of a date object
setMonth()	Sets the month of a date object
setSeconds()	Sets the seconds of a date object
setTime()	Sets a date to a specified number of milliseconds after/before January 1, 1970
setUTCDate()	Sets the day of the month of a date object, according to universal time
setUTCFullYear()	Sets the year of a date object, according to universal time
setUTCHours()	Sets the hour of a date object, according to universal time
setUTCMilliseconds()	Sets the milliseconds of a date object, according to universal time
setUTCMinutes()	Set the minutes of a date object, according to universal time

setUTCMonth()	Sets the month of a date object, according to universal time
setUTCSeconds()	Set the seconds of a date object, according to universal time
setYear()	Deprecated. Use the setFullYear() method instead
toDateString()	Converts the date portion of a Date object into a readable string
toGMTString()	Deprecated. Use the toUTCString() method instead
toISOString()	Returns the date as a string, using the ISO standard
toJSON()	Returns the date as a string, formatted as a JSON date
toLocaleDateString()	Returns the date portion of a Date object as a string, using locale conventions
toLocaleTimeString()	Returns the time portion of a Date object as a string, using locale conventions
toLocaleString()	Converts a Date object to a string, using locale conventions
toString()	Converts a Date object to a string
toTimeString()	Converts the time portion of a Date object to a string
toUTCString()	Converts a Date object to a string, according to universal time
UTC()	Returns the number of milliseconds in a date since midnight of January 1, 1970, according to UTC time
valueOf()	Returns the primitive value of a Date object

REMOVE ADS


‹ Previous

Sign in to track progress

Next ›



REMOVE ADS

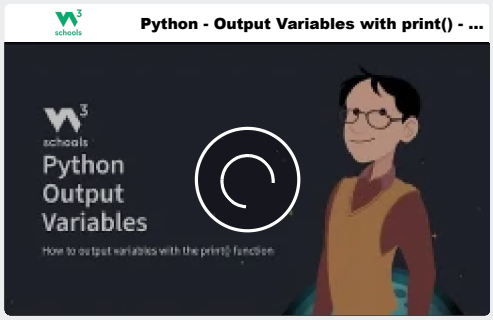

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode


Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial

Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Class super

‹ Previous JavaScript Class Reference Next ›

Description

SHARE

The `super` keyword is used to call the constructor of its parent class to access the parent's properties and methods.

Tip: To understand the "inheritance" concept (parent and child classes) better, read our JavaScript Classes Tutorial.

Example

Create a class named "Model" which will inherit the methods from the "Car" class, by using the `extends` keyword.

By calling the `super()` method in the constructor method, we call the parent's constructor method and gets access to the parent's properties and methods:

```
class Car {
  constructor(brand) {
    this.carname = brand;
  }
  present() {
    return 'I have a ' + this.carname;
  }
}

class Model extends Car {
  constructor(brand, mod) {
    super(brand);
    this.model = mod;
  }
```

```
  show() {
    return this.present() + ', it is a ' + this.model;
  }
}

mycar = new Model("Ford", "Mustang");
document.getElementById("demo").innerHTML = mycar.show();
```

Try it Yourself »

Browser Support

`super` is an ECMAScript6 (ES6 2015) feature.

JavaScript 2015 is supported in all browsers since **June 2017**:

Chrome	Edge	Firefox	Safari	Opera
51	15	54	10	38
May 2016	Apr 2017	Jun 2017	Sep 2016	Jun 2016

Syntax

```
super(arguments);  // calls the parent constructor (only inside the constructor)
super.parentMethod(arguments);  // calls a parent method
```

Technical Details

JavaScript Version:	ECMAScript 2015 (ES6)

REMOVE ADS

Related Pages


JavaScript Tutorial: JavaScript Classes

JavaScript Tutorial: JavaScript ES6 (EcmaScript 2015)

JavaScript Reference: The extends Keyword

JavaScript Reference: The constructor() method

‹ Previous | JavaScript Class Reference | Next ›

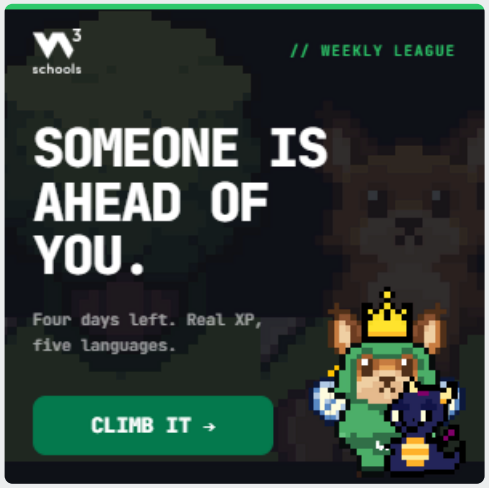

REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript new Date

‹ Previous JavaScript Date Reference Next ›

Example

```
// Create a Date
const time = new Date();
```

Try it Yourself »

More Examples Below !

Description

SHARE

The `new Date()` constructor creates a new Date object.

Syntax

```
new Date(date)
```

Parameters

Parameter	Description

date	Optional. A timestamp (milliseconds) or a date time string.

Return Value

Type	Description
Date	A new Date object.

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

More Examples

There are five ways of instantiating (creating) a new Date:

Example

Create a new date object with the current date and time:

```
// Create a Date
const time = new Date();
```

Try it Yourself »

Example

Create a new date using an ISO notation:

```
const time = new Date(dateString);
```

Try it Yourself »

Example

Create a new date from an existing date:

```
const time2 = new Date(time1);
```

Try it Yourself »

Example

Create a new date using milliseconds from Jan 1, 1970:

```
const time = new Date(milliseconds);
```

Try it Yourself »

Example

Using new Date(7 numbers) creates a date object with the specified date and time:

```
const time = new Date(year, month, day, hours, minutes, seconds, milliseconds);
```

Try it Yourself »

REMOVE ADS

Browser Support

`new Date()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

‹ Previous JavaScript Date Reference Next ›

schools
Your next career move.
Get every certification. One payment.


$499 Pay once. Learn for life.
Invest in your future

REMOVE ADS

Python - Variable Names - W3Schools.c...
Python Variable Names
Rules for Variable Names

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript new Date

‹ Previous JavaScript Date Reference Next ›

Example

```
// Create a Date
const time = new Date();
```

Try it Yourself »

More Examples Below !

Description

SHARE

The `new Date()` constructor creates a new Date object.

Syntax

```
new Date(date)
```

Parameters

Parameter	Description

date	Optional. A timestamp (milliseconds) or a date time string.

Return Value

Type	Description
Date	A new Date object.

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

More Examples

There are five ways of instantiating (creating) a new Date:

Example

Create a new date object with the current date and time:

```
// Create a Date
const time = new Date();
```

Try it Yourself »

Example

Create a new date using an ISO notation:

```
const time = new Date(dateString);
```

Try it Yourself »

Example

Create a new date from an existing date:

```
const time2 = new Date(time1);
```

Try it Yourself »

Example

Create a new date using milliseconds from Jan 1, 1970:

```
const time = new Date(milliseconds);
```

Try it Yourself »

Example

Using new Date(7 numbers) creates a date object with the specified date and time:

```
const time = new Date(year, month, day, hours, minutes, seconds, milliseconds);
```

Try it Yourself »

REMOVE ADS

Browser Support

`new Date()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS





schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date constructor

‹ Previous JavaScript Date Reference Next ›

Example

Get the Date constructor:

```
const d = new Date();
let text = d.constructor;
```

Try it Yourself »

Description

SHARE

The `constructor` property returns the function that created the Date prototype.

For JavaScript dates the `constructor` property returns:

function Date() { [native code] }

Syntax

```
Date.constructor
```

Return Value

```
function Date() { [native code] }
```

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

Browser Support

`constructor` is an ECMAScript1 (JavaScript 1997) feature.


It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

‹ Previous | JavaScript Date Reference | Next ›


W3schools
JS
Get Certified in JavaScript
Boost your career with an official certification
$95
Get certified

REMOVE ADS

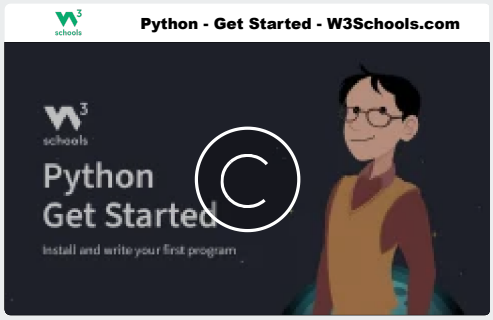

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

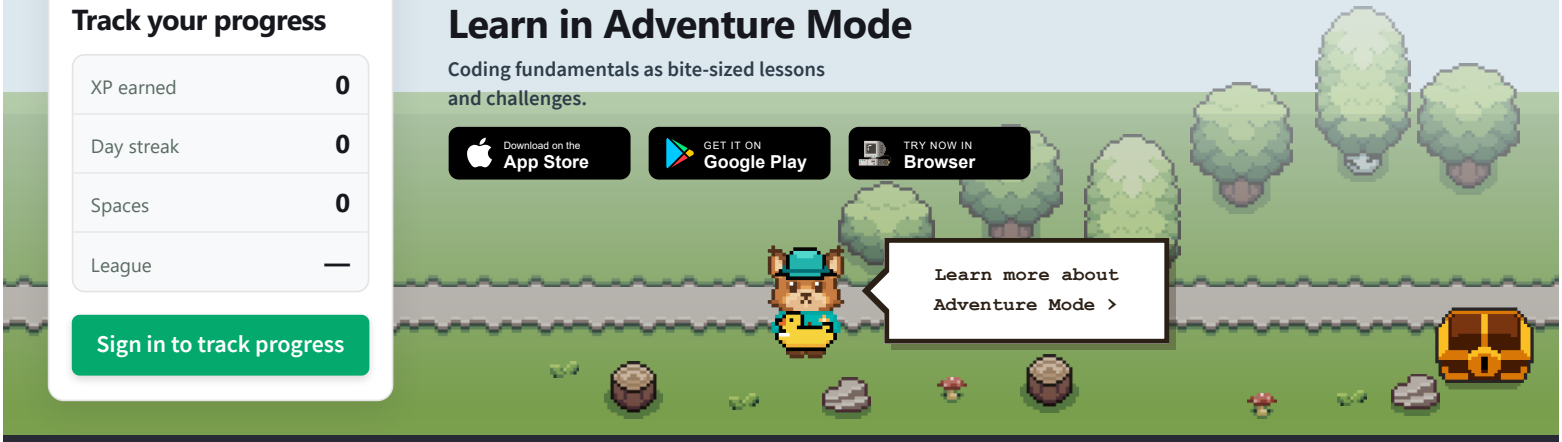

PLUS
SPACES
GET CERTIFIED
FOR TEACHERS
PRACTICE
CONTACT US

Top Tutorials
HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial

W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date constructor

‹ Previous JavaScript Date Reference Next ›

Example

Get the Date constructor:

```
const d = new Date();
let text = d.constructor;
```

Try it Yourself »

Description

SHARE

The `constructor` property returns the function that created the Date prototype.

For JavaScript dates the `constructor` property returns:

function Date() { [native code] }

Syntax

```
Date.constructor
```

Return Value

```
function Date() { [native code] }
```

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

Browser Support

`constructor` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

‹ Previous | JavaScript Date Reference | Next ›

W3schools
JS
Get Certified in JavaScript
Boost your career with an official certification
$95
Get certified

REMOVE ADS

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode


Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

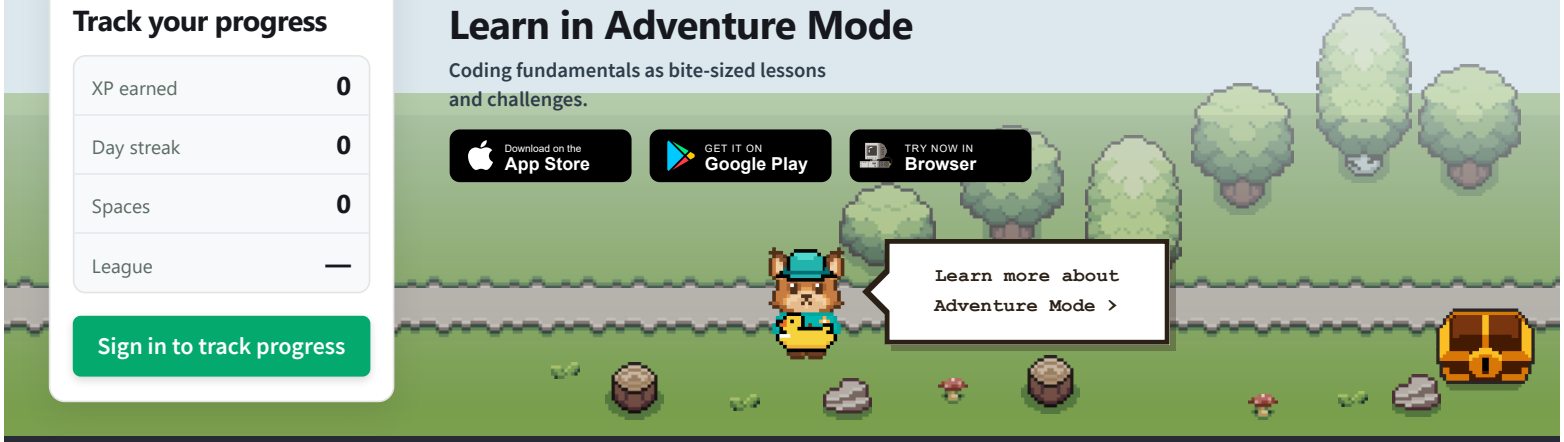

W3schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.



JavaScript Date getDate()

‹ Previous JavaScript Date Reference Next ›

Examples

Get the day of the month:

```
const d = new Date();
let day = d.getDate();
```

Try it Yourself »

Get the day of a specific date:

```
const d = new Date("July 21, 1983 01:15:00");
let day = d.getDate();
```

Try it Yourself »

Description

SHARE

The `getDate()` method returns the day of the month (1 to 31) of a date.

Syntax

```
Date.getDate()
```

Parameters

NONE

Return Value

Type	Description
A number	The day of the month (1 to 31).

REMOVE ADS

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

Browser Support

`getDate()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getDay()

‹ Previous JavaScript Date Reference Next ›

Examples

Get the day of the week:

```
const d = new Date();
let day = d.getDay();
```

Try it Yourself »

Get the day of the week of a specific date:

```
const d = new Date("July 21, 1983 01:15:00");
let day = d.getDay();
```

Try it Yourself »

More examples below.

Description

SHARE

The `getDay()` method returns the day of the week (0 to 6) of a date.

Sunday = 0, Monday = 1, ... (See below):

Syntax

```
Date.getDay()
```

Parameters

NONE

Return Value

Type	Description
A number	The day of the week (0 to 6).

REMOVE ADS

More Examples

Get the name of the weekday (not just a number):

```
const weekday = ["Sunday","Monday","Tuesday","Wednesday","Thursday","Friday","Saturday"];

const d = new Date();
let day = weekday[d.getDay()];
```

Try it Yourself »

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

Browser Support

`getDay()` is an ECMAScript1 (JavaScript 1997) feature.


It is supported in all browsers:


Chrome	Edge	Firefox	Safari	Opera

‹ Previous | JavaScript Date Reference | Next ›



REMOVE ADS

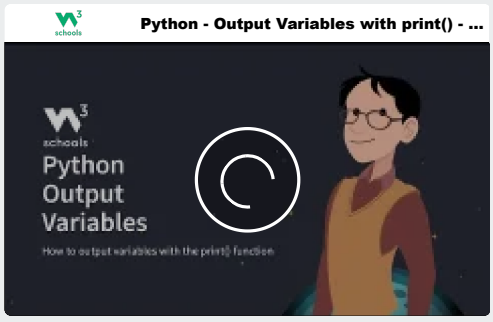

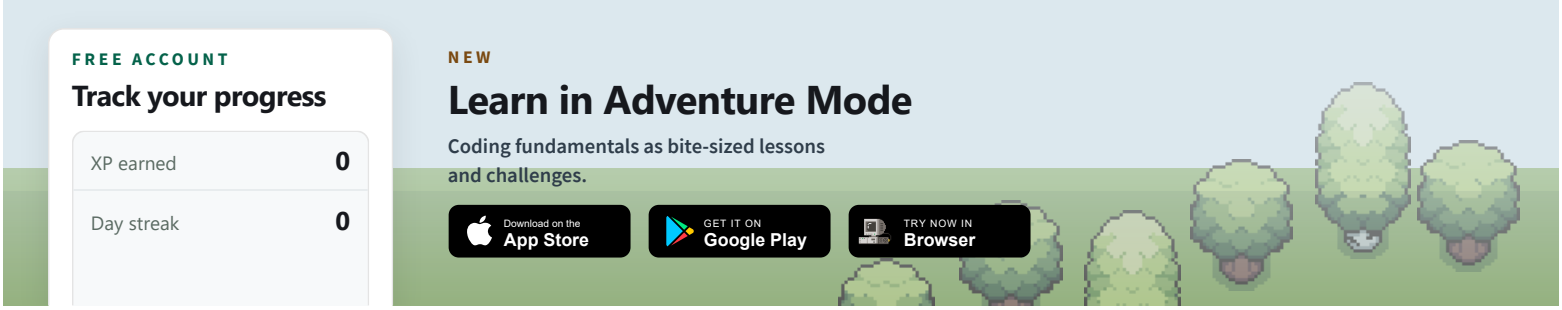



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getFullYear()

‹ Previous JavaScript Date Reference Next ›

Examples

Get the year:

```
const d = new Date();
let year = d.getFullYear();
```

Try it Yourself »

Get the year of a specific date:

```
const d = new Date("July 21, 1983 01:15:00");
let year = d.getFullYear();
```

Try it Yourself »

Description

SHARE

`getFullYear()` returns the full year of a date.

Syntax

```
Date.getFullYear()
```

Parameters

NONE

Return Value

Type	Description
A number	The year of the date. (4 digits for dates between year 1000 and 9999).

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

Browser Support

`getFullYear()` is an ECMAScript1 (JavaScript 1997) feature.


It is supported in all browsers:


				
Chrome	Edge	Firefox	Safari	Opera

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS

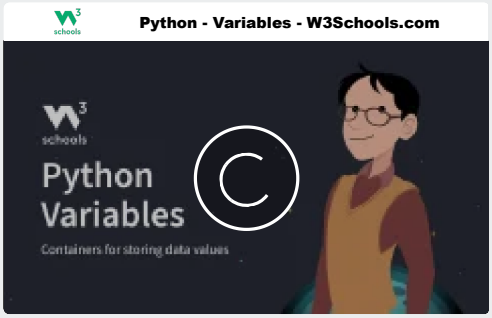

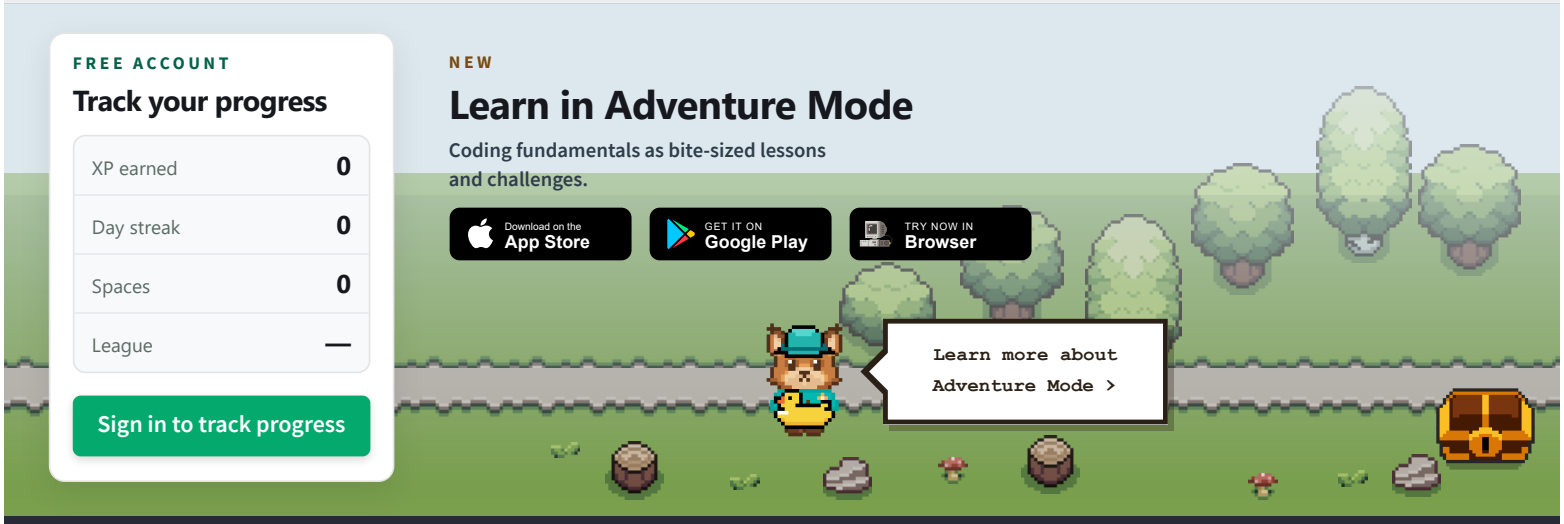

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getHours()

‹ Previous JavaScript Date Reference Next ›

Examples

Get the hours:

```
const d = new Date();
let hour = d.getHours();
```

Try it Yourself »

Get the hours from a specific date:

```
const d = new Date("July 21, 1983 01:15:00");
let hour = d.getHours();
```

Try it Yourself »

More examples below.

Description

SHARE

`getHours()` returns the hour (0 to 23) of a date.

Syntax

```
Date.getHours()
```

Parameters

NONE

Return Value

Type	Description
A number	The local time hour (0 to 23).

REMOVE ADS

Browser Support

`getHours()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

More Examples

Add zeros and colons to display the time:

```
function addZero(i) {
  if (i < 10) {i = "0" + i}
  return i;
}

const d = new Date();
let h = addZero(d.getHours());
let m = addZero(d.getMinutes());
let s = addZero(d.getSeconds());
let time = h + ":" + m + ":" + s;
```

Try it Yourself »

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous

JavaScript Date Reference

Next ›


Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

REMOVE ADS

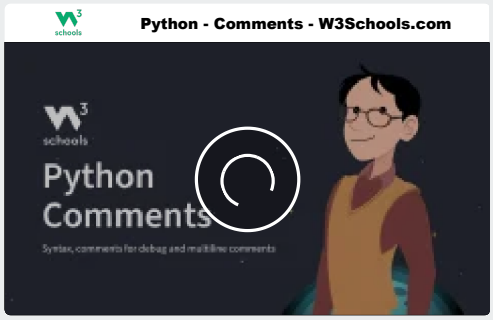

FREE ACCOUNT

Track your progress

XP earned 0

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Day streak 0
Spaces 0
League —
Sign in to track progress

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

Learn more about Adventure Mode >

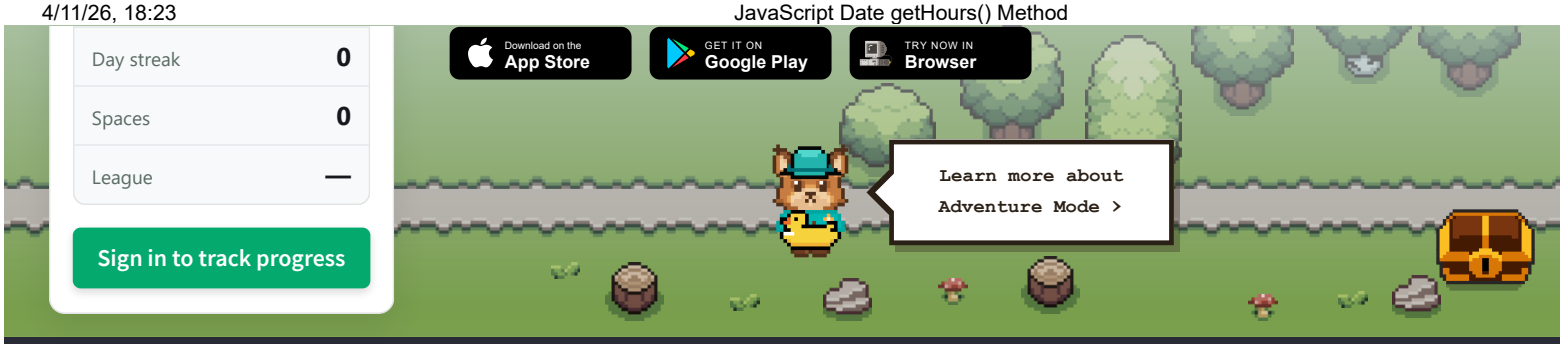

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference

AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getMilliseconds()

‹ Previous | JavaScript Date Reference | Next ›

Examples

Get the milliseconds:

```
const d = new Date();
let ms = d.getMilliseconds();
```

Try it Yourself »

Get the milliseconds of a specific date:

```
const d = new Date("July 21, 1983 01:15:00.250");
let ms = d.getMilliseconds();
```

Try it Yourself »

More examples below.

Description

SHARE

`getMilliseconds()` returns the milliseconds (0 to 999) of a date.

Syntax

```
Date.getMilliseconds()
```

Parameters

NONE

Return Value

Type	Description
A number	The milliseconds of the date (0 to 999).

REMOVE ADS

Browser Support

`getMilliseconds()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

More Examples

Add zeros and colons to display the time:

```
function addZero(x, n) {
  while (x.toString().length < n) {
    x = "0" + x;
  }
  return x;
}

const d = new Date();
let h = addZero(d.getHours(), 2);
let m = addZero(d.getMinutes(), 2);
let s = addZero(d.getSeconds(), 2);
let ms = addZero(d.getMilliseconds(), 3);
let time = h + ":" + m + ":" + s + ":" + ms;
```

Try it Yourself »

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods


‹ Previous

JavaScript Date Reference

Next ›



REMOVE ADS

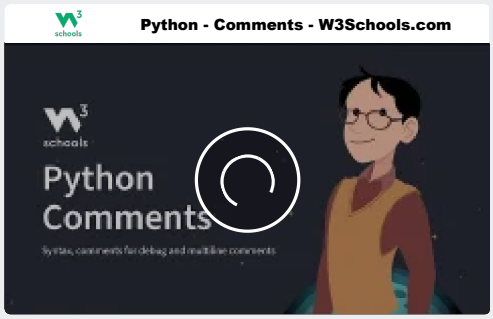


FREE ACCOUNT
Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

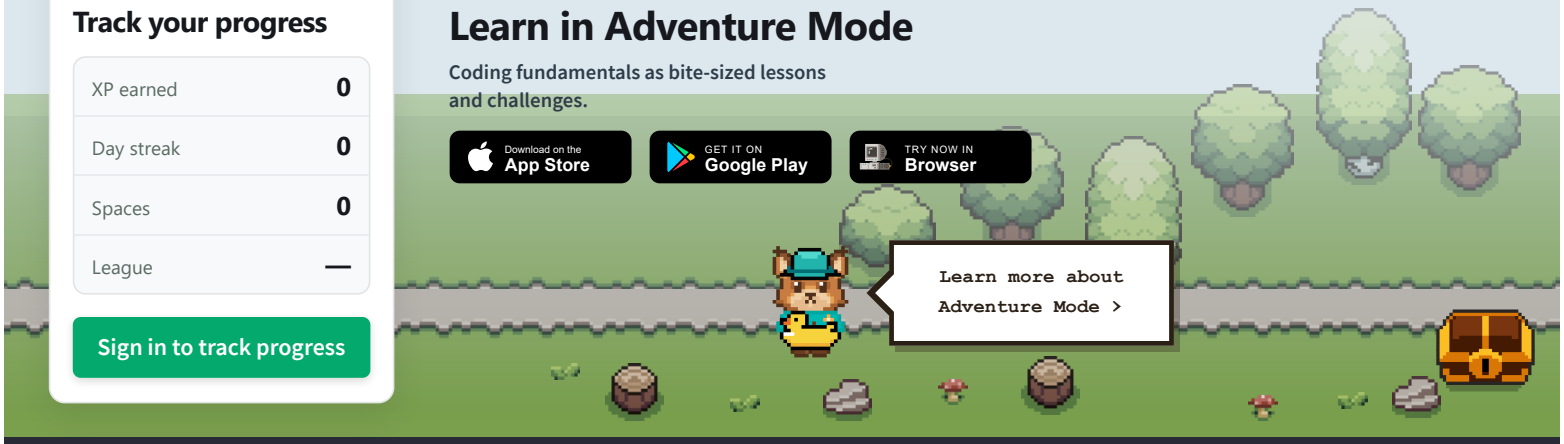

W3schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference

Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getMinutes()

‹ Previous | JavaScript Date Reference | Next ›

Examples

Get the minutes:

```
const d = new Date();
let minutes = d.getMinutes();
```

Try it Yourself »

Get the minutes of a specific date:

```
const d = new Date("July 21, 1983 01:15:00");
let minutes = d.getMinutes();
```

Try it Yourself »

More examples below.

Description

SHARE

`getMinutes()` returns the minutes (0 to 59) of a date.

Syntax

```
Date.getMinutes()
```

Parameters

NONE

Return Value

Type	Description
A number	The minutes of the date (0 to 59).

REMOVE ADS

Browser Support

`getMinutes()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

More Examples

Add zeros and colons to display the time:

```
function addZero(i) {
  if (i < 10) {i = "0" + i}
  return i;
}

const d = new Date();
let h = addZero(d.getHours());
let m = addZero(d.getMinutes());
let s = addZero(d.getSeconds());
let time = h + ":" + m + ":" + s;
```

Try it Yourself »

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous

JavaScript Date Reference

Next ›


Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

REMOVE ADS

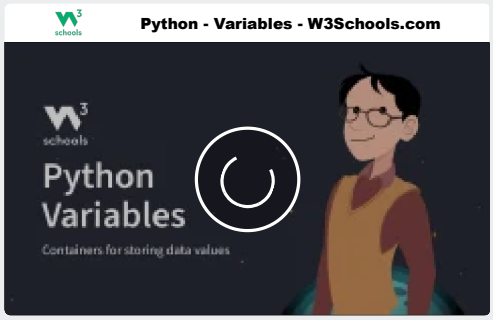

FREE ACCOUNT

Track your progress

XP earned 0

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Day streak 0
Spaces 0
League —
Sign in to track progress



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference

AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getMonth()

‹ Previous JavaScript Date Reference Next ›

Examples

Get the month:

```
const d = new Date();
let month = d.getMonth();
```

Try it Yourself »

Get the name of the month (not just a number):

```
const month =
["January","February","March","April","May","June","July","August","September","October","November","Decem
ber"];

const d = new Date();
let name = month[d.getMonth()];
```

Try it Yourself »

Description

SHARE

`getMonth()` returns the month (0 to 11) of a date.

January =0, February = 1, ... (see below):

Syntax

```
Date.getMonth()
```

Parameters

NONE

Return Value

Type	Description
A number	The month of the date (0 to 11).

REMOVE ADS

Browser Support

`getMonth()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:


JavaScript Dates

JavaScript Date Formats


JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›

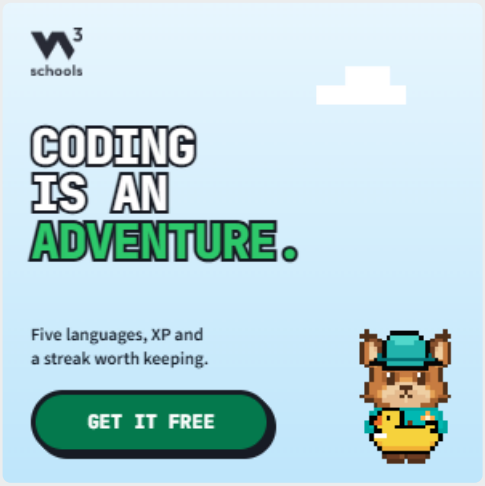

REMOVE ADS

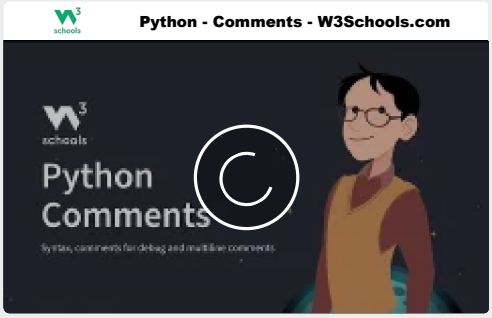



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getSeconds()

‹ Previous JavaScript Date Reference Next ›

Examples

Get the seconds:

```
const d = new Date();
let seconds = d.getSeconds();
```

Try it Yourself »

Add zeros and colons to display the time:

```
function addZero(i) {
  if (i < 10) {i = "0" + i}
  return i;
}

const d = new Date();
let h = addZero(d.getHours());
let m = addZero(d.getMinutes());
let s = addZero(d.getSeconds());
let time = h + ":" + m + ":" + s;
```

Try it Yourself »

Description

SHARE

`getSeconds()` returns the seconds (0 to 59) of a date.

Syntax

```
Date.getSeconds()
```

Parameters

NONE

Return Value

Type	Description
A number	The seconds of the date (0 to 59).

REMOVE ADS

Browser Support

`getSeconds()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

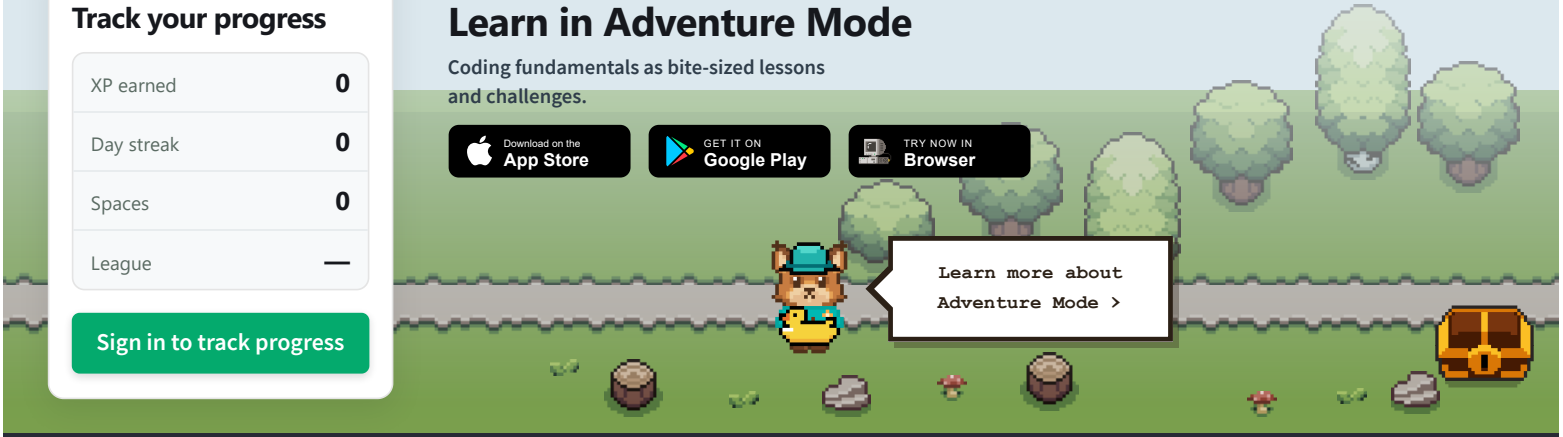

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getTime()

‹ Previous JavaScript Date Reference Next ›

Examples

Get the time:

```
const d = new Date();
let time = d.getTime();
```

Try it Yourself »

Calculate the number of years since January 1, 1970:

```
// Calculate milliseconds in a year
const minute = 1000 * 60;
const hour = minute * 60;
const day = hour * 24;
const year = day * 365;

// Divide Time with a year
const d = new Date();
let years = Math.round(d.getTime() / year);
```

Try it Yourself »

Description

SHARE

`getTime()` returns the number of milliseconds since January 1, 1970 00:00:00.

See Also:

The Date.now() Method

Syntax

```
Date.getTime()
```

Parameters

NONE

Return Value

Type	Description
A number	Number of milliseconds since January 1, 1970 00:00:00.

REMOVE ADS

Browser Support

`getTime()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous

JavaScript Date Reference

Next ›

W3 schools

JS

Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

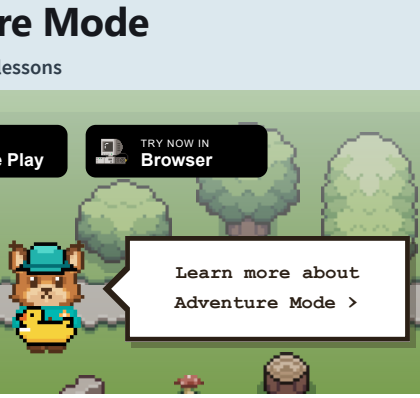

Sign in to track progress

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples

How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getTimezoneOffset()

‹ Previous JavaScript Date Reference Next ›

Example

Get the difference between UTC time and local time:

```
const d = new Date();
let diff = d.getTimezoneOffset();
```

Try it Yourself »

Description

SHARE

`getTimezoneOffset()` returns the difference between UTC time and local time.

`getTimezoneOffset()` returns the difference in minutes.

For example, if your time zone is GMT+2, -120 will be returned.

Notes

The value is not constant because of varying Daylight Saving Time.

The Universal Time Coordinated (UTC) is the time set by the World Time Standard.

UTC time is the same as GMT (Greenwich Mean Time).

Syntax

```
Date.getTimezoneOffset()
```

Parameters

NONE

Return Value

Type	Description
A number	The time difference between UTC and Local Time in minutes.

Browser Support

`getTimezoneOffset()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:


JavaScript Dates

JavaScript Date Formats


JavaScript Date Get Methods


JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›

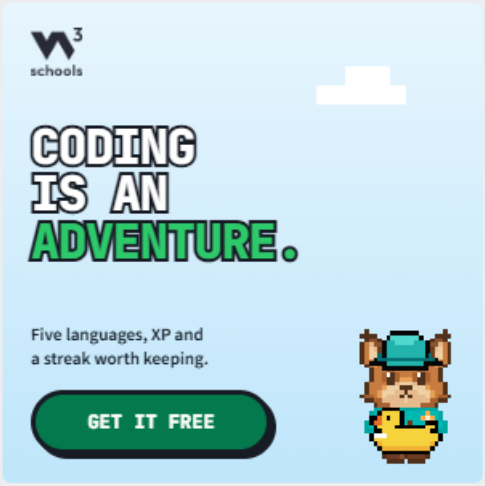

REMOVE ADS

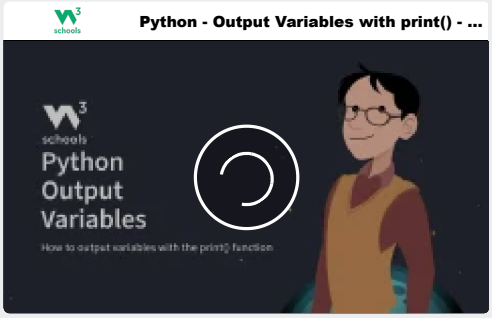

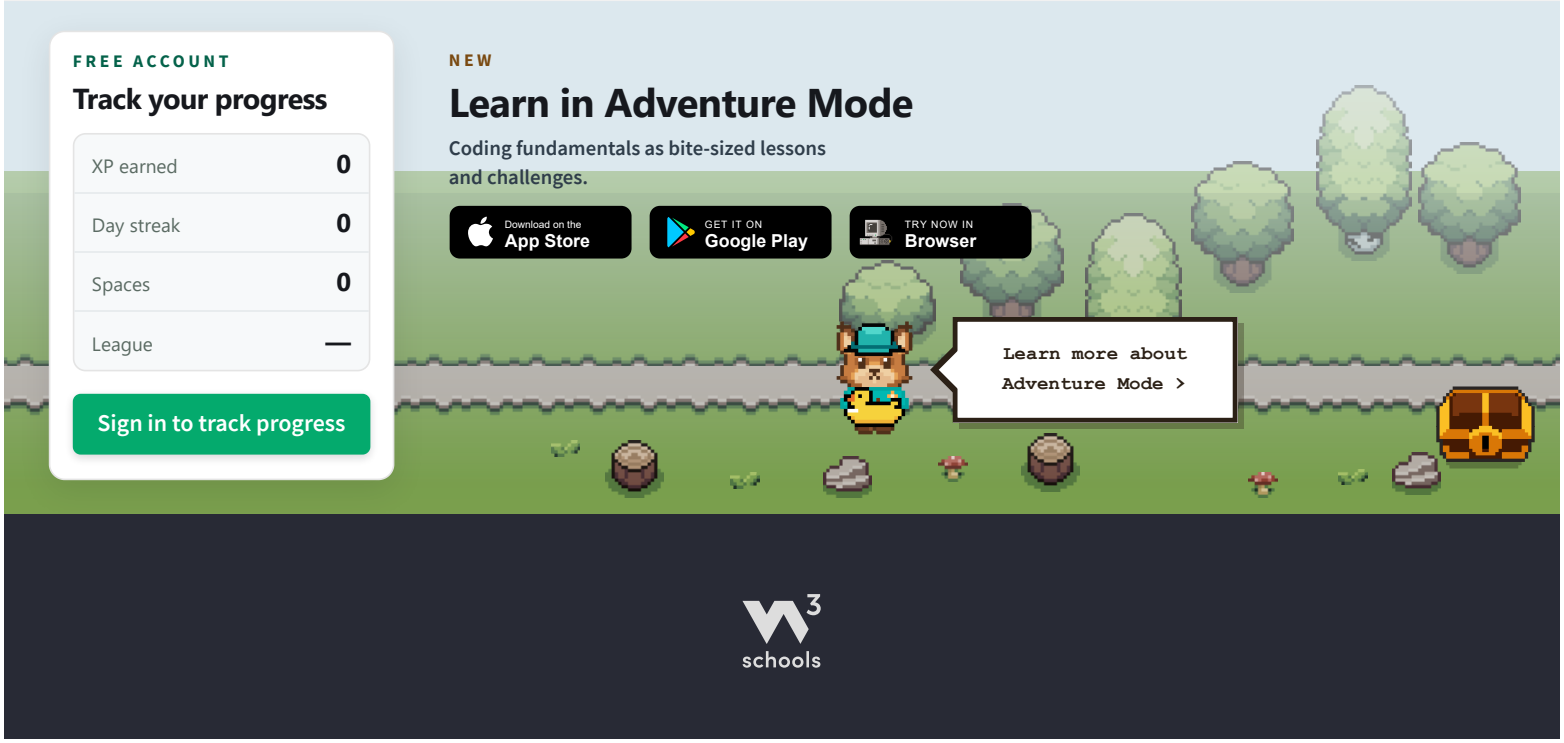

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getUTCDate()

‹ Previous | JavaScript Date Reference | Next ›

Examples

Get the UTC day:

```
const d = new Date();
let day = d.getUTCDate();
```

Try it Yourself »

Get the UTC day of the month from a specific, local date-time:

```
const d = new Date("July 21, 1983 01:15:00");
let day = d.getUTCDate();
```

Try it Yourself »

Description

SHARE

`getUTCDate()` returns the day of the month (1 to 31) of a date object.

`getUTCDate()` returns the day according to UTC.

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

All JavaScript getUTC methods assume that the date is of local time.

Syntax

```
Date.getUTCDate()
```

Parameters

NONE

Return Value

Type	Description
A number	The day of the month (1 to 31) of a date, according to UTC.

REMOVE ADS

Browser Support

`getUTCDate()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous

JavaScript Date Reference

Next ›

Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getUTCDay()

‹ Previous JavaScript Date Reference Next ›

Example

Get the weekday:

```
const d = new Date();
let day = d.getUTCDay();
```

Try it Yourself »

Get the name of the weekday (not just a number):

```
const weekday = ["Sunday","Monday","Tuesday","Wednesday","Thursday","Friday","Saturday"];

const d = new Date();
let day = weekday[d.getUTCDay()];
```

Try it Yourself »

Description

SHARE

`getUTCDay()` returns the day of the week (0 to 6) of a date.

`getUTCDay()` returns the day of the week according to universal time.

Sunday = 0, Monday = 1, ... (See below):

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

All JavaScript getUTC methods assume that the date is of local time.

Syntax

```
Date.getUTCDay()
```

Parameters

NONE

Return Value

Type	Description
A number	The weekday of a date (0 to 6), according to UTC.

REMOVE ADS

Browser Support

`getUTCDay()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous

JavaScript Date Reference

Next ›


Build skills.
Get hired.

$95 per paid course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

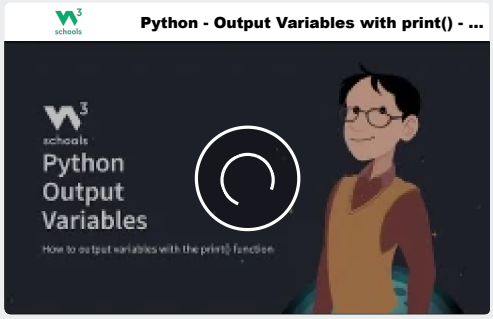

FREE ACCOUNT
Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

Learn more about



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getUTCFullYear()

‹ Previous JavaScript Date Reference Next ›

Examples

```
const d = new Date();
let year = d.getUTCFullYear();
```

Try it Yourself »

Get the full UTC year from a specific date:

```
const d = new Date("July 21, 1983 01:15:00");
let year = d.getUTCFullYear();
```

Try it Yourself »

Description

SHARE

`getUTCFullYear()` returns the year of a date.

`getUTCFullYear()` returns the year according to UTC.

`getUTCFullYear()` returns four digits for years between 1000 and 9999.

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

All JavaScript getUTC methods assume that the date is of local time.

Syntax

```
Date.getUTCFullYear()
```

Parameters

NONE

Return Value

Type	Description
A number	The year of the date.

REMOVE ADS

Browser Support

`getUTCFullYear()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous

JavaScript Date Reference

Next ›


Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

REMOVE ADS

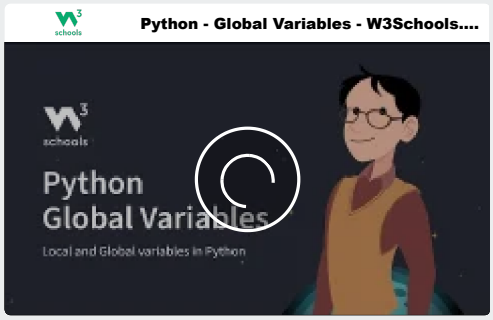

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getUTCHours()

‹ Previous JavaScript Date Reference Next ›

Examples

Get the UTC hours:

```
const d = new Date();
let hour = d.getUTCHours();
```

Try it Yourself »

Get the UTC hours from a specific date:

```
const d = new Date("July 21, 1983 01:15:00");
let hour = d.getUTCHours();
```

Try it Yourself »

More examples below.

Description

SHARE

`getUTCHours()` returns the hour (0 to 23) of a date.

`getUTCHours()` returns the hour according to UTC.

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

All JavaScript getUTC methods assume that the date is of local time.

Syntax

```
Date.getUTCHours()
```

Parameters

NONE

Return Value

A number.

The hour of a date (0 to 23).

REMOVE ADS

Browser Support

`getUTCHours()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

More Examples

Use all getUTC methods to display the universal time:

```
function addZero(i) {
  if (i < 10) {i = "0" + i}
  return i;
}

const d = new Date();
let h = addZero(d.getUTCHours());
let m = addZero(d.getUTCMinutes());
let s = addZero(d.getUTCSeconds());
let time = h + ":" + m + ":" + s;
```

Try it Yourself »

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous

JavaScript Date Reference

Next ›



REMOVE ADS

Python - Get Started - W3Schools.com



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

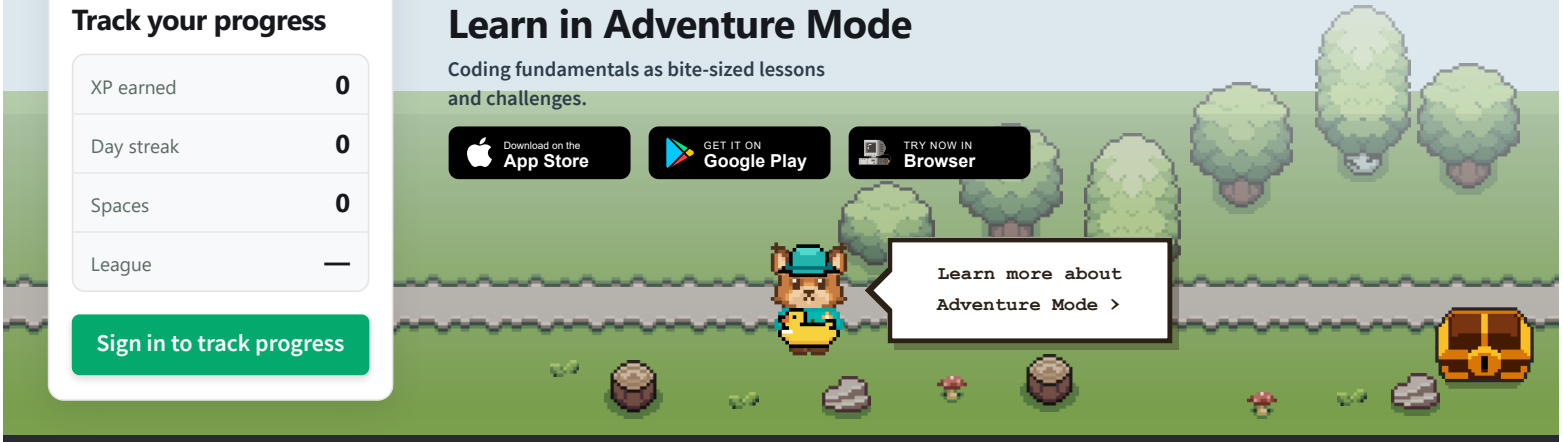

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getUTCMilliseconds()

‹ Previous JavaScript Date Reference Next ›

Examples

Get the UTC milliseconds:

```
const d = new Date();
let ms = d.getUTCMilliseconds();
```

Try it Yourself »

Get the UTC milliseconds from a specific date:

```
const d = new Date("July 21, 1983 01:15:00.250");
let ms = d.getUTCMilliseconds();
```

Try it Yourself »

More examples below.

Description

SHARE

`getUTCMilliseconds()` returns the milliseconds (0 to 999) of a date.

`getUTCMilliseconds()` returns the milliseconds according to UTC.

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

All JavaScript getUTC methods assume that the date is of local time.

Syntax

```
Date.getUTCMilliseconds()
```

Parameters

NONE

Return Value

Type	Description
A number	The milliseconds of the date (0 to 999).

REMOVE ADS

Browser Support

`getUTCMilliseconds()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

More Examples

Use all getUTC methods to display the universal time:

```
function addZero(x, n) {
  while (x.toString().length < n) {
    x = "0" + x;
  }
  return x;
}

const d = new Date();
let h = addZero(d.getUTCHours());
let m = addZero(d.getUTCMinutes());
let s = addZero(d.getUTCSeconds());
let ms = addZero(d.getUTCMilliseconds());
let time = h + ":" + m + ":" + s;
```

Try it Yourself »

Related Pages:

JavaScript Dates

JavaScript Date Formats


JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous | JavaScript Date Reference | Next ›

Learn it.
Get certified.
Get hired.
$95 per course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS

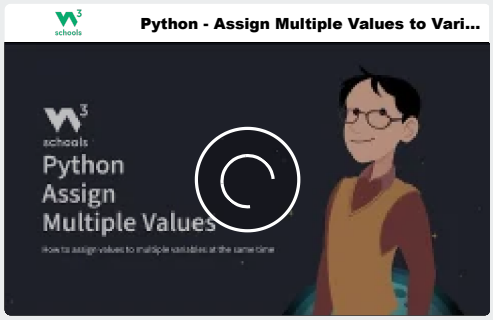

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode


Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

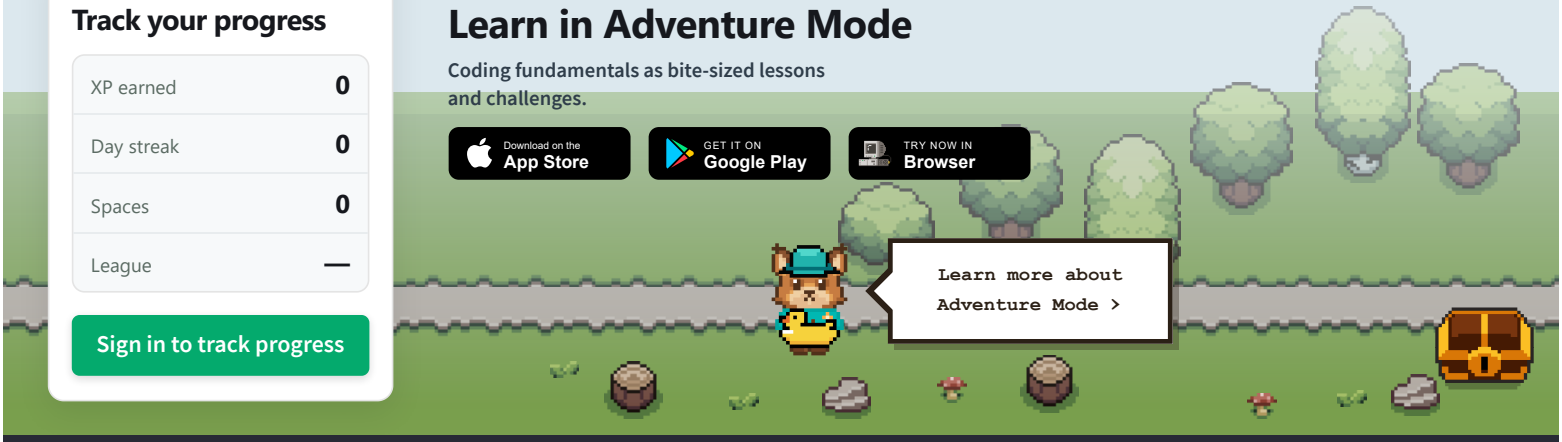

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial

Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getUTCMinutes()

‹ Previous JavaScript Date Reference Next ›

Examples

Get the UTC minutes:

```
const d = new Date();
let minutes = d.getUTCMinutes();
```

Try it Yourself »

Get the UTC minutes from a specific date:

```
const d = new Date("July 21, 1983 01:15:00");
let minutes = d.getUTCMinutes();
```

Try it Yourself »

More examples below.

Description

SHARE

`getUTCMinutes()` returns the minutes (0 to 59) of a date.

`getUTCMinutes()` returns the minutes according to UTC.

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

All JavaScript getUTC methods assume that the date is of local time.

Syntax

```
Date.getUTCMinutes()
```

Parameters

NONE

Return Value

Type	Description
A number	The minutes of a date (0 to 59).

REMOVE ADS

Browser Support

`getUTCMinutes()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

More Examples

Use all getUTC methods to display the universal time:

```
function addZero(i) {
  if (i < 10) {i = "0" + i}
  return i;
}

const d = new Date();
let h = addZero(d.getUTCHours());
let m = addZero(d.getUTCMinutes());
let s = addZero(d.getUTCSeconds());
let time = h + ":" + m + ":" + s;
```

Try it Yourself »

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous | JavaScript Date Reference | Next ›

W3schools
JS
Get Certified in JavaScript
Boost your career with an official certification
$95
Get certified

REMOVE ADS

Python - Comments - W3Schools.com



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

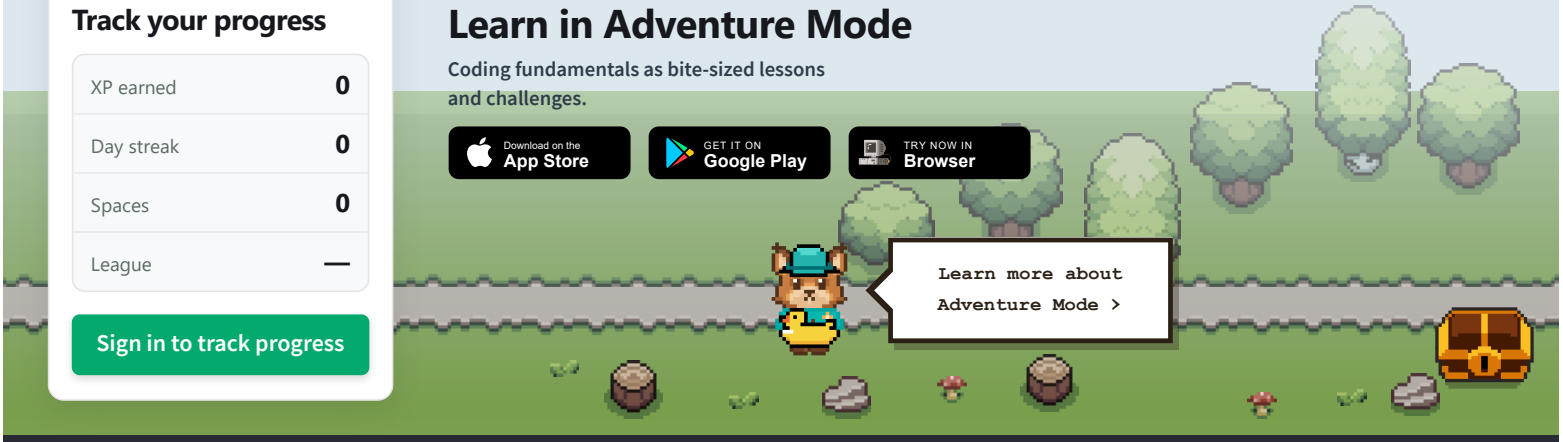

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getUTCMonth()

‹ Previous JavaScript Date Reference Next ›

Examples

Get the month, according to universal time:

```
const d = new Date();
let month = d.getUTCMonth();
```

Try it Yourself »

Get the name of the month (not just a number):

```
const month =
["January","February","March","April","May","June","July","August","September","October","November","Decem
ber"];
const d = new Date()
let month = month[d.getUTCMonth()];
```

Try it Yourself »

Description

SHARE

`getUTCMonth()` returns the month (0 to 11) of a date.

`getUTCMonth()` returns the month according to UTC.

January = 0, February = 1, ... (See below):

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

All JavaScript getUTC methods assume that the date is of local time.

Syntax

```
Date.getUTCMonth()
```

Parameters

NONE

Return Value

Type	Description
A number	The month of the date (0 to 11).

REMOVE ADS

Browser Support

`getUTCMonth()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous

JavaScript Date Reference

Next ›

W3 schools

JS


Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

REMOVE ADS

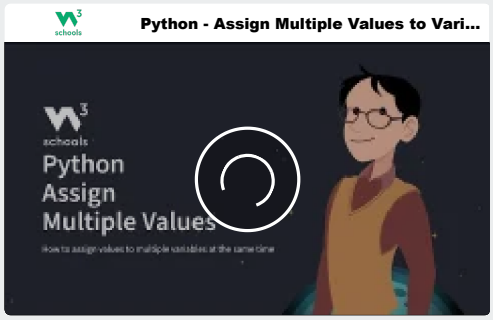

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getUTCSeconds()

‹ Previous JavaScript Date Reference Next ›

Examples

Get UTC seconds:

```
const d = new Date();
let seconds = d.getUTCSeconds();
```

Try it Yourself »

Using getUTC methods to display the universal time:

```
function addZero(i) {
  if (i < 10) {i = "0" + i}
  return i;
}

const d = new Date();
let h = addZero(d.getUTCHours());
let m = addZero(d.getUTCMinutes());
let s = addZero(d.getUTCSeconds());
let time = h + ":" + m + ":" + s;
```

Try it Yourself »

Description

SHARE

`getUTCSeconds()` returns the seconds (0 to 59) of a date.

`getUTCSeconds()` returns the seconds according to UTC.

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

All JavaScript getUTC methods assume that the date is of local time.

Syntax

```
Date.getUTCSeconds()
```

Parameters

NONE

Return Value

Type	Description
A number	The seconds of the date (0 to 59).

REMOVE ADS

Browser Support

`getUTCSeconds()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats


JavaScript Date Get Methods


JavaScript Date Set Methods

‹ Previous | JavaScript Date Reference | Next ›




REMOVE ADS

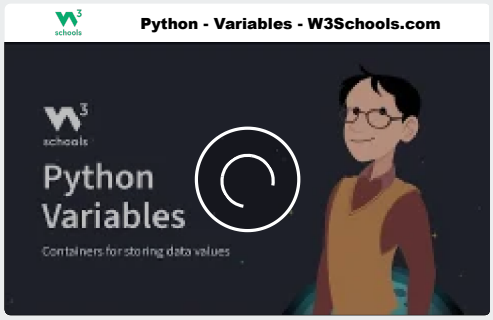

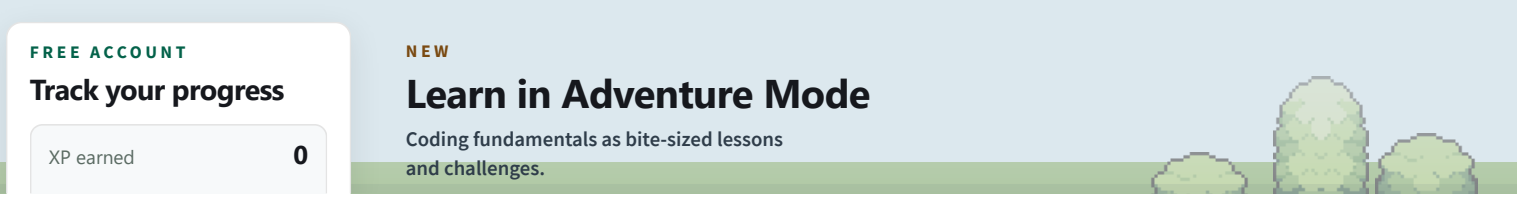

Day streak 0
Spaces 0
League —
Sign in to track progress

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference

AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date getFullYear()

‹ Previous JavaScript Date Reference Next ›

Examples

Get the year:

```
const d = new Date();
let year = d.getFullYear();
```

Try it Yourself »

Get the year of a specific date:

```
const d = new Date("July 21, 1983 01:15:00");
let year = d.getFullYear();
```

Try it Yourself »

Description

SHARE

`getFullYear()` returns the full year of a date.

Syntax

```
Date.getFullYear()
```

Parameters

NONE

Return Value

Type	Description
A number	The year of the date. (4 digits for dates between year 1000 and 9999).

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

Browser Support

`getFullYear()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

‹ Previous JavaScript Date Reference Next ›

Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date.now()

‹ Previous JavaScript Date Reference Next ›

Examples

```
let ms = Date.now();
```

Try it Yourself »

Calculate the number of years since 1970/01/01:

```
const minute = 1000 * 60;
const hour = minute * 60;
const day = hour * 24;
const year = day * 365;

let years = Math.round(Date.now() / year);
```

Try it Yourself »

Description

SHARE

`Date.now()` returns the number of milliseconds since January 1, 1970.

Notes

Date.now() is a static method of the Date object.

You cannot use it on a date like myDate.now()

The syntax is always Date.now().

REMOVE ADS

Syntax

```
Date.now()
```

Parameters

NONE

Return Value

A number.

The number of milliseconds since midnight January 1, 1970 00:00:00 UTC.

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

Browser Support

`Date.now()` is an ECMAScript5 (ES5 2009) feature.

JavaScript 2009 is supported in all browsers since **July 2013**:








Chrome	IE/Edge	Firefox	Safari	Opera
23	11	21	6	15
Sep 2012	Sep 2012	Apr 2013	Jul 2012	Jul 2013

‹ Previous | JavaScript Date Reference | Next ›



REMOVE ADS

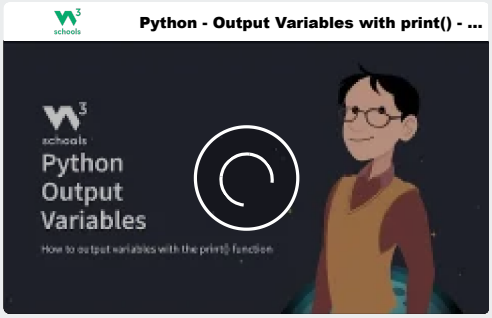

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser
Learn more about

Sign in to track progress



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date parse()

‹ Previous JavaScript Date Reference Next ›

Example 1

```
let ms = Date.parse("March 21, 2012");
```

Try it Yourself »

Description

SHARE

`parse()` parses a date string and returns the time difference since January 1, 1970.

`parse()` returns the time difference in milliseconds.

Example 2

Calculate the number of years between January 1, 1970 to March 21, 2012:

```
// Calculate milliseconds in a year
const minute = 1000 * 60;
const hour = minute * 60;
const day = hour * 24;
const year = day * 365;
```

```
// Compute years
const d = Date.parse("March 21, 2012");
let years = Math.round(d / year);
```

Try it Yourself »

Browser Support

`parse()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

REMOVE ADS

Syntax

```
Date.parse(datestring)
```

Parameters

datestring	Required. A string representing a date.

Return Value

A number.

Milliseconds since January 1, 1970 00:00:00 UTC.

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods


JavaScript Date Set Methods

‹ Previous | JavaScript Date Reference | Next ›



REMOVE ADS



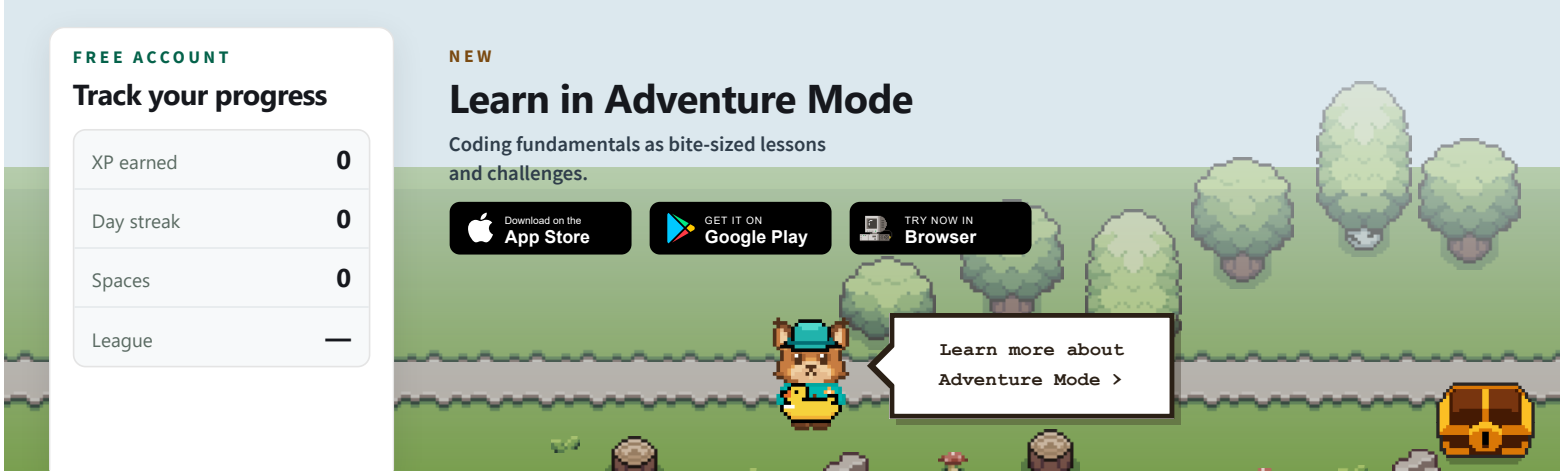

Sign in to track progress

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples

How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date prototype

‹ Previous JavaScript Date Reference Next ›

Example

Make a new date method that gives the date object a month-name property called myMonth:

```
Date.prototype.myMonth = function()
{
if (this.getMonth()==0) {return "January"};
if (this.getMonth()==1) {return "February"};
if (this.getMonth()==2) {return "March"};
if (this.getMonth()==3) {return "April"};
if (this.getMonth()==4) {return "May"};
if (this.getMonth()==5) {return "June"};
if (this.getMonth()==6) {return "July"};
if (this.getMonth()==7) {return "August"};
if (this.getMonth()==8) {return "September"};
if (this.getMonth()==9) {return "October"};
if (this.getMonth()==10) {return "November"};
if (this.getMonth()==11) {return "December"};
}
```

Make a Date object, then call the myMonth method:

```
const d = new Date();
let month = d.myMonth();
```

Try it Yourself »

Description

SHARE

`prototype` allows you to add new properties and methods to dates.

`prototype` is a property available with all JavaScript objects.

Browser Support

`prototype` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Syntax

```
Date.prototype.name = value
```

Warning

You are not advised to change the prototype of an object that you do not control.

You should not change the prototype of built in JavaScript datatypes like:

- Numbers
- Strings
- Arrays
- Dates
- Booleans
- Function
- Objects

Only change the prototype of your own objects.

The prototype Property

The JavaScript `prototype` property allows you to add new properties to objects:

Example

```
function Person(first, last, age, eyecolor) {
  this.firstName = first;
  this.lastName = last;
  this.eyeColor = eyecolor;
}

Person.prototype.nationality = "English";
```

Try it Yourself »

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods


JavaScript Date Set Methods

‹ Previous | JavaScript Date Reference | Next ›



REMOVE ADS

Python - Assign Multiple Values to Vari...

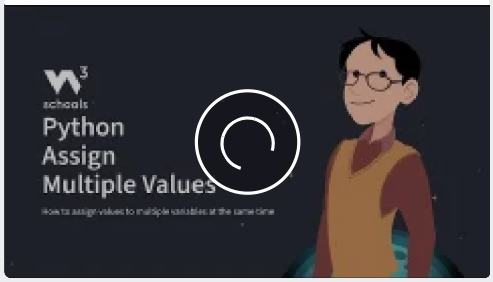

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

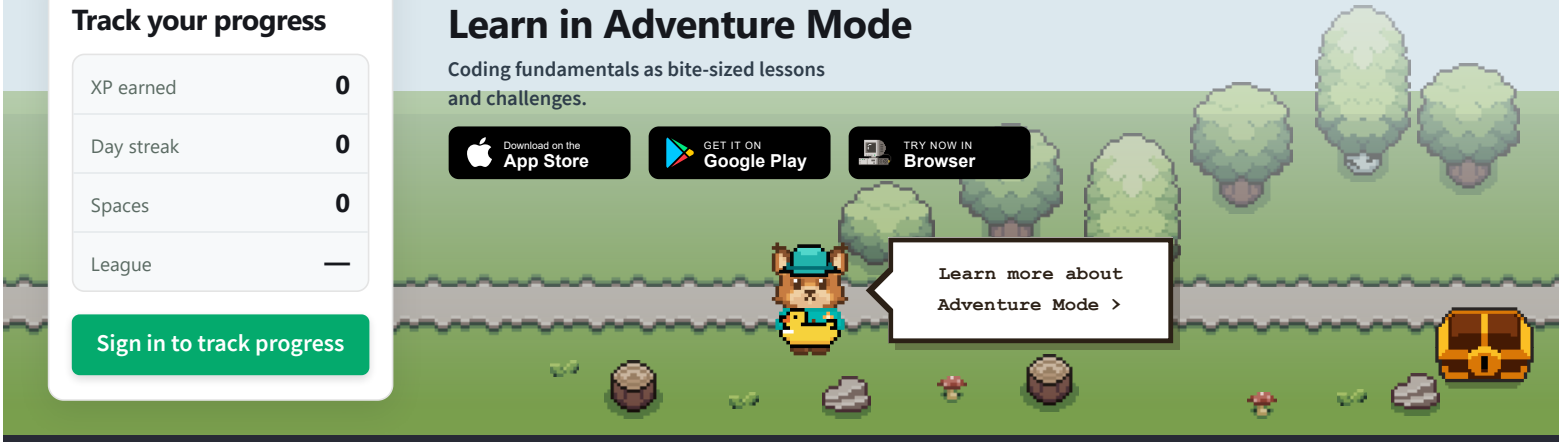

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setDate()

‹ Previous JavaScript Date Reference Next ›

Example 1

Set the day of the month in a specified date:

```
const d = new Date("2025-01-15");
d.setDate(20);
```

Try it Yourself »

Description

SHARE

`setDate()` sets the day of the month of a date.

Example 2

Set the day of the month to the last day of the previous month:

```
const d = new Date("2025-01-15");
d.setDate(0);
```

Try it Yourself »

Example 3

Set the day to the first day in the next month:

```
const d = new Date("2025-01-15");
d.setDate(32);
```

Try it Yourself »

See Also:

setFullYear()

setMonth()

setUTCDate()

setUTCMonth()

setUTCFullYear()

REMOVE ADS

Syntax

```
Date.setDate(day)
```

Parameters

day	An integer representing the day (1 to 31). Higher and lower values are handeled with date maths: • 0 gives the last day of the previous month • -1 gives the day before the last day of the previous month • 32 gives the first day of the next month (if 31 days) • 41 gives the tenth day of the next month (if 31 days)

Return Value

NONE

Changes the Date object in place.

Browser Support

`setDate()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

Related Pages:


JavaScript Dates

JavaScript Date Formats


JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous | JavaScript Date Reference | Next ›

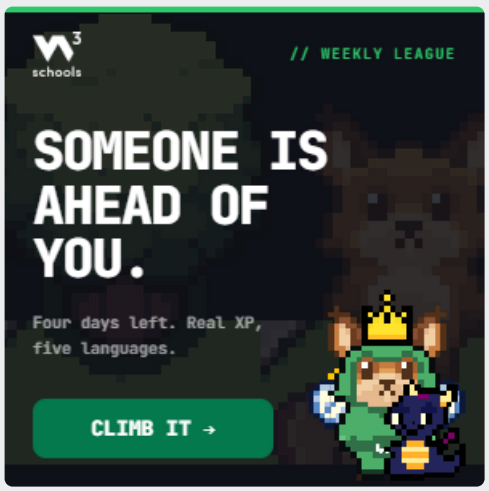

REMOVE ADS

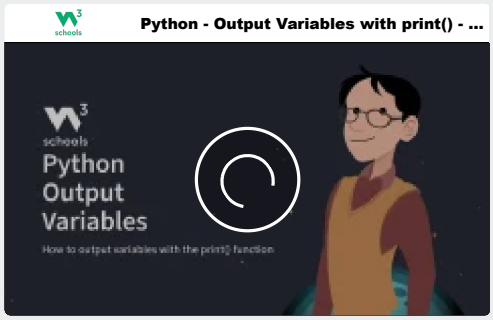

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode


Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

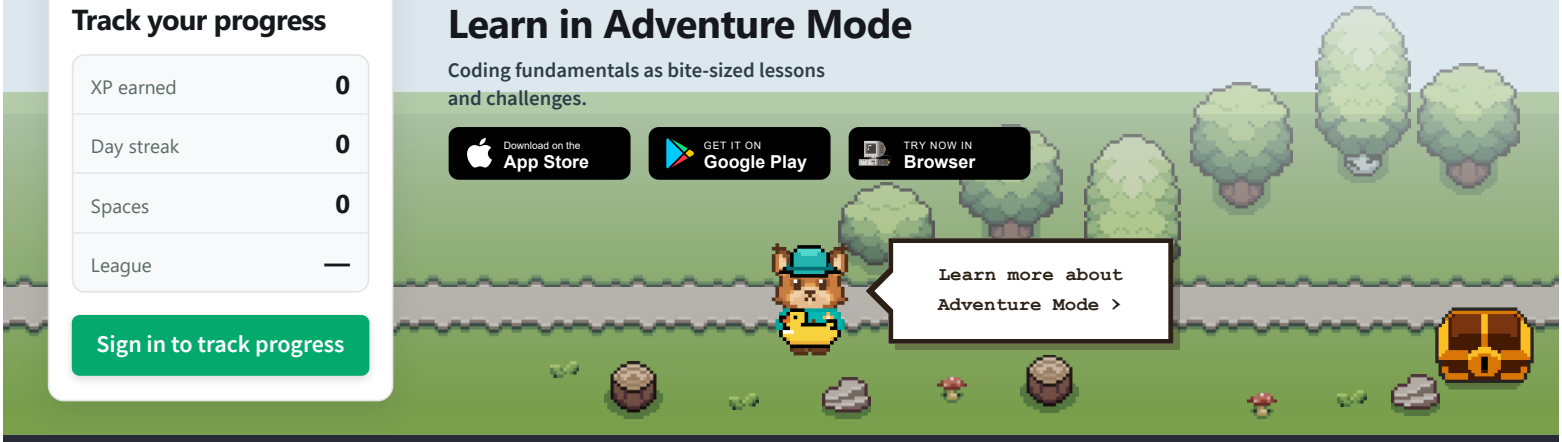

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial

Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setFullYear()

‹ Previous JavaScript Date Reference Next ›

Example 1

```
const d = new Date("2025-01-15");
d.setFullYear(2020);
```

Try it Yourself »

Description

SHARE

`setFullYear()` sets the year of a date.

`setFullYear()` can also set month and day.

Example 2

`setFullYear()` can also set month and day.

```
const d = new Date("2025-01-15");
d.setFullYear(2020, 10, 3);
```

Try it Yourself »

Example 3

Set the date to six months *ago*:

```
const d = new Date();
d.setFullYear(d.getFullYear(), d.getMonth() - 6);
```

Try it Yourself »

See Also:

setDate()

setMonth()

setUTCDate()

setUTCMonth()

setUTCFullYear()

REMOVE ADS

Syntax

```
Date.setFullYear(year, month, day)
```

Parameters

year	Required. The year. Negative values are allowed.
month	Optional. The month (0 to 11). Higher and lower values are handeled with date maths: • -1 will result in the last month of the previous year • 12 will result in the first month of the next year • 13 will result in the second month of the next year

day	Optional. The day (0 to 31). Higher and lower values are handeled with date maths: • 0 gives the last day of the previous month • -1 gives the day before the last day of the previous month • 32 gives the first day of the next month (if 31 days) • 41 gives the tenth day of the next month (if 31 days)

Return Value

NONE

Changes the Date object in place.

Browser Support

`setFullYear()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›


Learn it.
Get certified.
Get hired.

$95 per course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

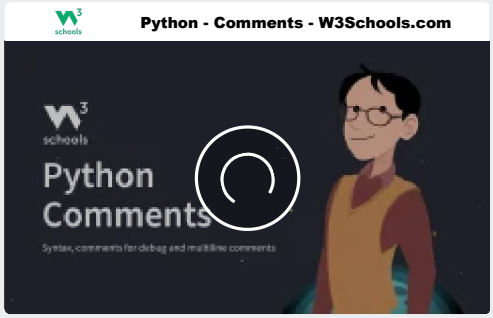

FREE ACCOUNT

Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress


NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

Learn more about Adventure Mode >

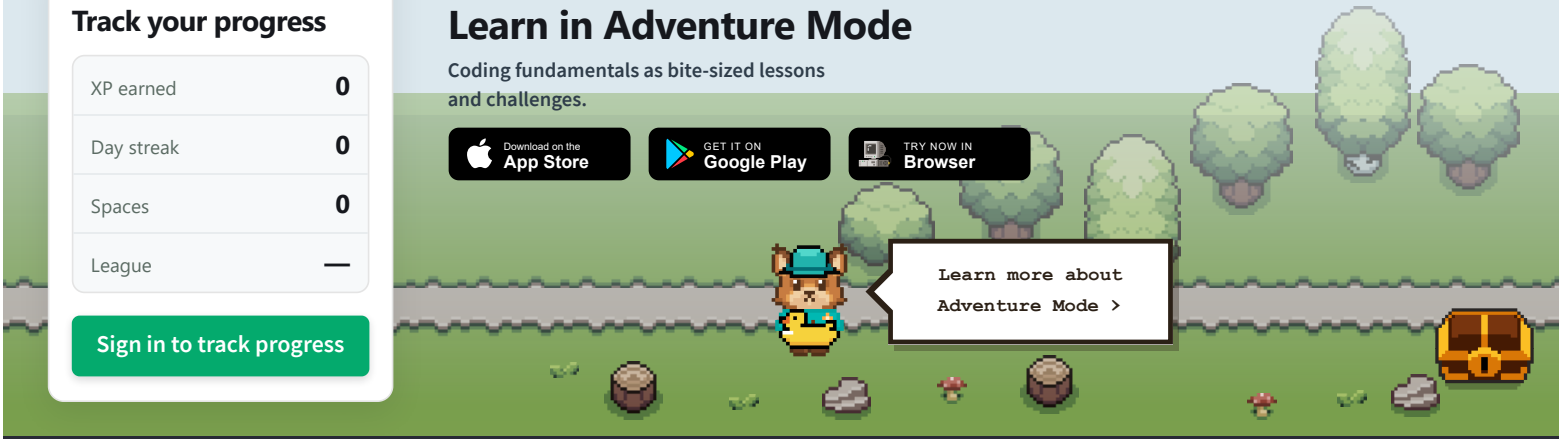

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setHours()

‹ Previous JavaScript Date Reference Next ›

Example 1

```
const d = new Date("2025-01-15");
d.setHours(15);
```

Try it Yourself »

Description

SHARE

`setHours()` sets the hour of a date.

`setHours()` can also set minutes, seconds and milliseconds.

Example 2

Set the time to 15:35:01

```
const d = new Date("2025-01-15");
d.setHours(15, 35, 1);
```

Try it Yourself »

Example 3

Set the time to 48 hours *ago*:

```
const d = new Date();
d.setHours(d.getHours() - 48);
```

Try it Yourself »

See Also:

setMinutes()

setSeconds()

setMilliSeconds()

setUTCHours()

setUTCMinutes()

setUTCSeconds()

setUTCMilliSeconds()

REMOVE ADS

Syntax

```
Date.setHours(hour, min, sec, millisec)
```

Parameters

hour	Required. The Hours. 0 to 23, but other values are allowed: • -1 gives the last hour of the previous day • 24 gives the first hour of the next day
min	Optional. The Minutes.

	0 to 59, but other values are allowed: • -1 gives the last minute of the previous hour • 60 gives the first minute of the next hour
sec	Optional. The seconds. 0 to 59, but other values are allowed: • -1 gives the last second of the previous minute • 60 gives the first second of the next minute
millisec	Optional. The milliseconds. 0 to 999, but other values are allowed: • -1 gives the last millisecond of the previous second • 1000 gives the first millisecond of the next second

Return Value

NONE

Changes the Date object in place.

Browser Support

`setHours()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods


‹ Previous

JavaScript Date Reference

Next ›



REMOVE ADS

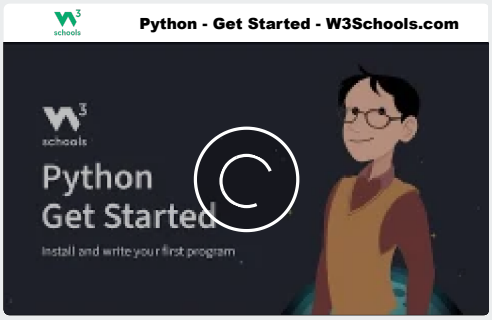

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setMilliseconds()

‹ Previous JavaScript Date Reference Next ›

Example

```
const d = new Date();
d.setMilliseconds(192);
```

Try it Yourself »

Description

SHARE

`setMilliseconds()` sets the milliseconds of a date.

See Also:

setHours()

setMinutes()

setSeconds()

setUTCHours()

setUTCMinutes()

setUTCSeconds()

setUTCMilliSeconds()

Syntax

```
Date.setMilliseconds(millisec)
```

Parameters

millisec	Required. The milliseconds. (0 to 999), but other values are allowed: -1 gives the last millisecond of the previous second 1000 gives first millisecond of the next second 1001 gives the second millisecond of the next second

Return Value

NONE

Changes the Date object in place.

Browser Support

`setMilliseconds()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous


JavaScript Date Reference

Next ›



REMOVE ADS



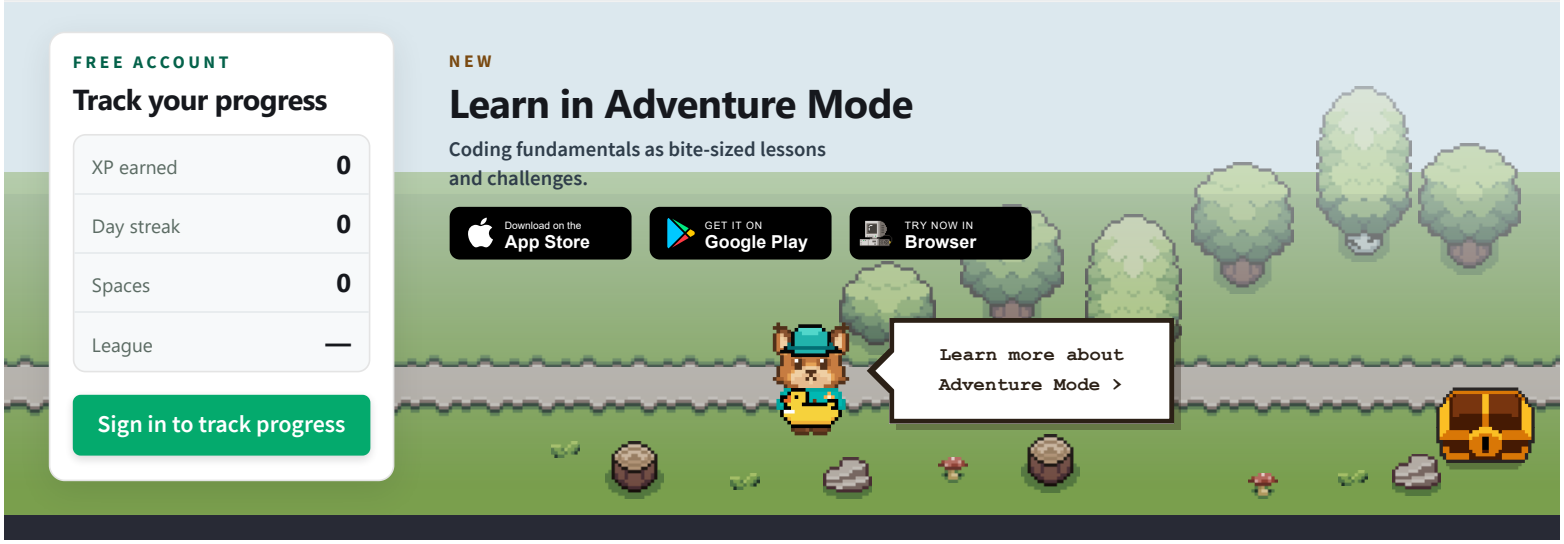

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setMinutes()

‹ Previous JavaScript Date Reference Next ›

Example 1

Set the minutes to 17:

```
const d = new Date("2025-01-15");
d.setMinutes(17);
```

Try it Yourself »

Description

SHARE

`setMinutes()` sets the minutes of a date.

This method can also be used to set the seconds and milliseconds.

Example 2

Set the date time to be 90 minutes *ago*:

```
const d = new Date();
d.setMinutes(d.getMinutes() - 90);
```

Try it Yourself »

See Also:

setHours()

setSeconds()

setMilliSeconds()

setUTCHours()

setUTCMinutes()

setUTCSeconds()

setUTCMilliSeconds()

REMOVE ADS

Syntax

```
Date.setMinutes(min, sec, millisec)
```

Parameters

Parameter	Description
min	Required. An integer representing the minutes. Expected values are 0-59, but other values are allowed: • -1 will result in the last minute of the previous hour • 60 will result in the first minute of the next hour
sec	Optional. An integer representing the seconds Expected values are 0-59, but other values are allowed: • -1 will result in the last second of the previous minute • 60 will result in the first second of the next minute
millisec	Optional. An integer representing the milliseconds

Expected values are 0-999, but other values are allowed:

- -1 will result in the last millisecond of the previous second
- 1000 will result in the first millisecond of the next second

Return Value

NONE

Changes the Date object in place.

Browser Support

`setMinutes()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous | JavaScript Date Reference | Next ›



REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

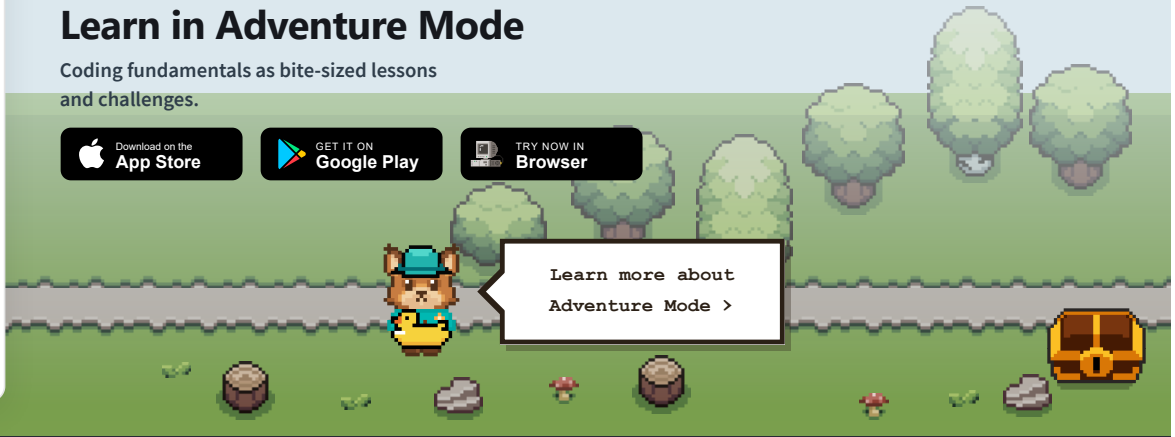

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setMonth()

‹ Previous JavaScript Date Reference Next ›

Example

Set the month to 4 (May):

```
const d = new Date("2025-01-15");
d.setMonth(4);
```

Try it Yourself »

More "Try it Yourself" examples below.

Description

SHARE

The `setMonth()` method sets the month of a date object.

The `setMonth()` method can also be used to set the day of the month.

Note

In JavaScript January is 0, February is 1, ... , December is 11.

See Also:

setFullYear()

setDate()

setUTCDate()

setUTCMonth()

setUTCFullYear()

Syntax

```
Date.setMonth(month, day)
```

Parameter Values

Parameter	Description
month	Required. An integer representing the month Expected values are 0-11, but other values are allowed: • -1 will result in the last month of the previous year • 12 will result in the first month of the next year • 13 will result in the second month of the next year
day	Optional. An integer representing the day of the month If omitted current day is used. Expected values are 1-31, but other values are allowed: • 0 will result in the last day of the previous month • -1 will result in the day before the last day of the previous month If the month has 31 days: • 32 will result in the first day of the next month If the month has 30 days: • 32 will result in the second day of the next month

Return Value

NONE

Changes the Date object in place.

REMOVE ADS

More Examples

Example

Set the month to 4 (May) and the day to 20:

```
const d = new Date("2025-01-15");
d.setMonth(4, 20);
```

Try it Yourself »

Example

Set the date to the last day of last month:

```
const d = new Date();
d.setMonth(d.getMonth(), 0);
```

Try it Yourself »

Browser Support

`setMonth()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous

JavaScript Date Reference

Next ›


Build skills.
Get hired.

$95 per paid course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

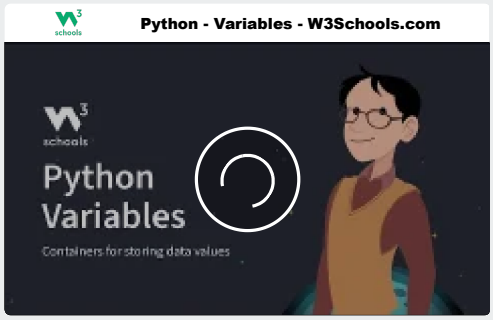


FREE ACCOUNT
Track your progress
XP earned 0

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons
and challenges.

Day streak 0
Spaces 0
League —
Sign in to track progress

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

Learn more about Adventure Mode >

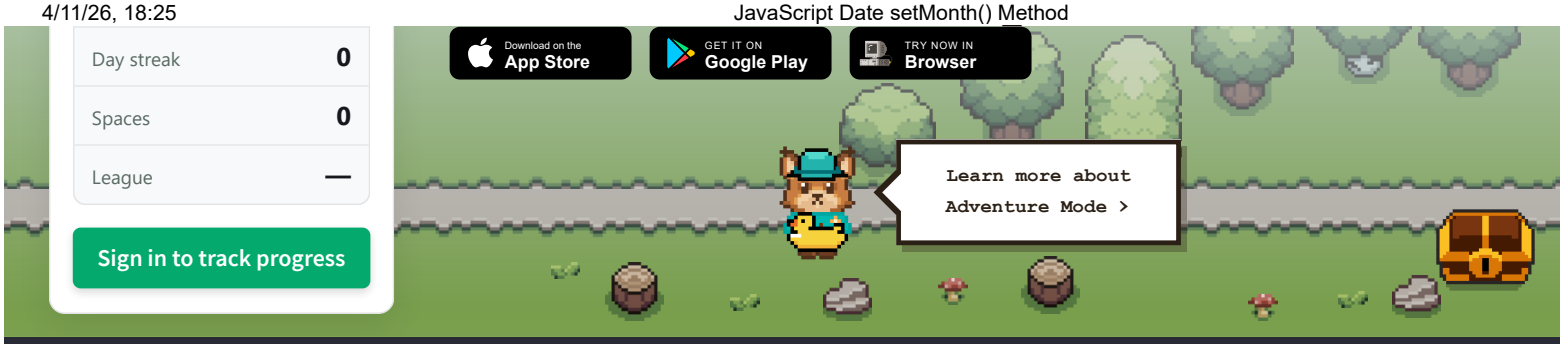

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference

AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setSeconds()

‹ Previous JavaScript Date Reference Next ›

Example

Set the seconds to 35:

```
const d = new Date("2025-01-15");
d.setSeconds(35);
```

Try it Yourself »

More "Try it Yourself" examples below.

Description

SHARE

The `setSeconds()` method sets the seconds of a date object.

The `setSeconds()` method can also be used to set the milliseconds.

See Also:

setHours()

setMinutes()

setMilliSeconds()

setUTCHours()

setUTCMinutes()

setUTCSeconds()

setUTCMilliSeconds()

Syntax

```
Date.setSeconds(sec, millisec)
```

Parameters

Parameter	Description
sec	Required. An integer representing the seconds Expected values are 0-59, but other values are allowed: -1 will result in the last second of the previous minute 60 will result in the first second of the next minute
millisec	Optional. An integer representing the milliseconds Expected values are 0-999, but other values are allowed: -1 will result in the last millisecond of the previous second 1000 will result in the first millisecond of the next second

Return Value

NONE

Changes the Date object in place.

REMOVE ADS

More Examples

Example

Set both the seconds and milliseconds:

```
const d = new Date("2025-01-15");
d.setSeconds(35, 825);
```

Try it Yourself »

Browser Support

`setSeconds()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats


JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS

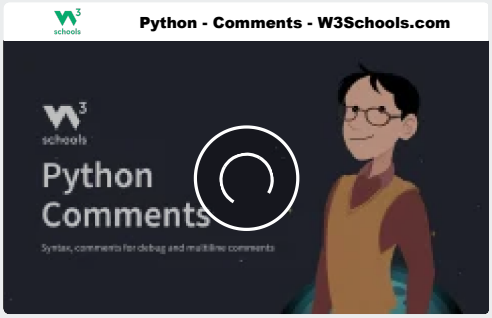

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setTime()

‹ Previous JavaScript Date Reference Next ›

Example

Add 1332403882588 milliseconds to January 1, 1970:

```
const d = new Date();
d.setTime(1332403882588);
```

Try it Yourself »

More "Try it Yourself" examples below.

Description

SHARE

The `setTime()` method sets a date and time by adding or subtracting a specified number of milliseconds to/from midnight January 1, 1970.

Syntax

```
Date.setTime(millisec)
```

Parameter Values

Parameter	Description
millisec	Required. The number of milliseconds to be added to, or subtracted from, midnight January 1, 1970

Return Value

NONE

Changes the Date object in place.

REMOVE ADS

More Examples

Example

Subtract 1332403882588 milliseconds from January 1, 1970:

```
const d = new Date();
d.setTime(-1332403882588);
```

Try it Yourself »

Browser Support

`setTime()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous | JavaScript Date Reference | Next ›


Learn it.
Get certified.
Get hired.

$95 per course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

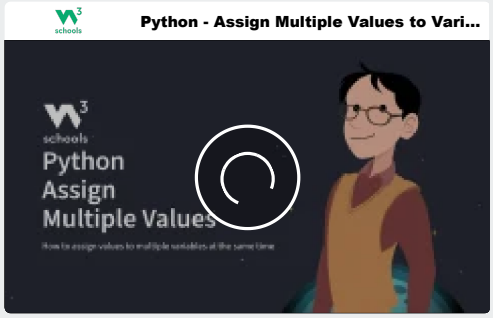

FREE ACCOUNT
Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

Learn more about Adventure Mode ›

Sign in to track progress

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples

How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setUTCDate()

‹ Previous JavaScript Date Reference Next ›

Example

Set the day of the month, according to UTC:

```
const d = new Date("2025-01-15");
d.setUTCDate(25);
```

Try it Yourself »

More "Try it Yourself" examples below.

Description

SHARE

The `setUTCDate()` method sets the day of a Date object, according to UTC.

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

Syntax

```
Date.setUTCDate(day)
```

Parameters

Parameter	Description
day	Required. An integer representing the day of a month. Expected values are 1-31, but other values are allowed: 0 will result in the last day of the previous month -1 will result in the day before the last day of the previous month If the month has 31 days: 32 will result in the first day of the next month If the month has 30 days: 32 will result in the second day of the next month

Return Value

NONE

Changes the Date object in place.

REMOVE ADS

More Examples

Example

Set the day of the month to the last day of the previous month:

```
const d = new Date("2025-01-15");
d.setUTCDate(0);
```

Try it Yourself »

Example

Set the day of the month to a specified date:

```
const d = new Date("July 21, 1983 01:15:00");
d.setUTCDate(15);
```

Try it Yourself »

Browser Support

`setUTCDate()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats


JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS

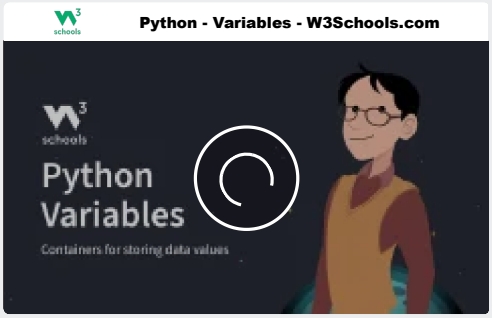

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

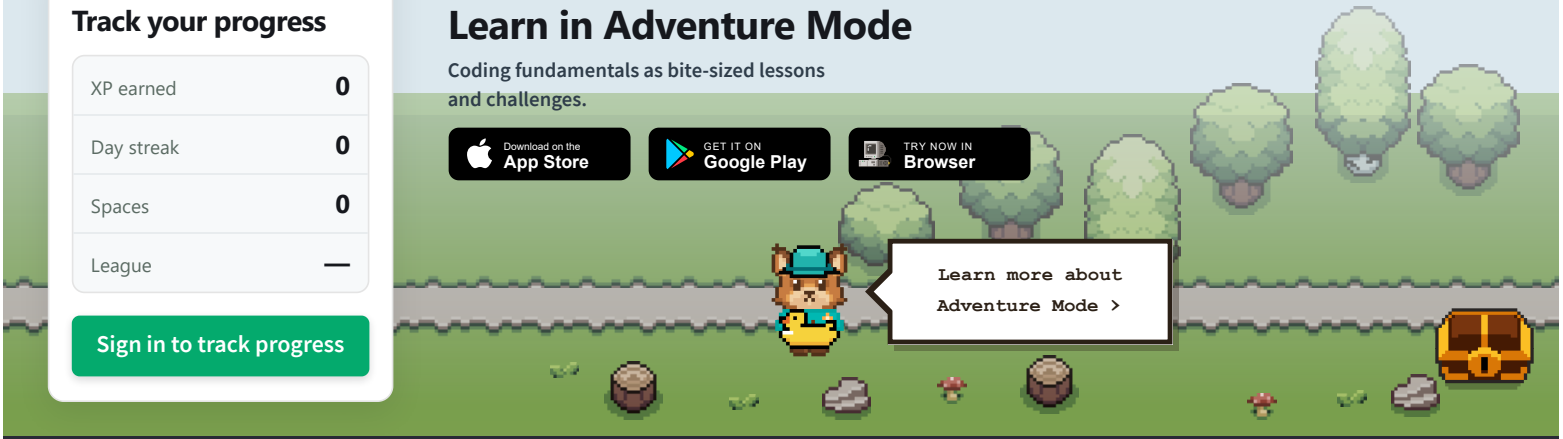

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setUTCFullYear()

‹ Previous JavaScript Date Reference Next ›

Example

Set the year to 2015:

```
const d = new Date("2025-01-15");
d.setUTCFullYear(2015);
```

Try it Yourself »

More "Try it Yourself" examples below.

Description

SHARE

The `setUTCFullYear()` method sets the year of a date object, according to UTC.

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

Syntax

```
Date.setUTCFullYear(year, month, day)
```

Parameter Values

Parameter	Description
year	Required. A value representing the year, negative values are allowed
month	Optional. An integer representing the month Expected values are 0-11, but other values are allowed: • -1 will result in the last month of the previous year • 12 will result in the first month of the next year • 13 will result in the second month of the next year
day	Optional. An integer representing the day of month Expected values are 1-31, but other values are allowed: • 0 will result in the last hour of the previous month • -1 will result in the hour before the last hour of the previous month If the month has 31 days: • 32 will result in the first day of the next month If the month has 30 days: • 32 will result in the second day of the next month

Return Value

NONE

Changes the Date object in place.

REMOVE ADS

More Examples

Example 2

Set the date to November 3, 2020, UTC time:

```
const d = new Date("2025-01-15");
d.setUTCFullYear(2020, 10, 3);
```

Try it Yourself »

Example

Set the date to six months *ago*, UTC time:

```
const d = new Date();
d.setUTCFullYear(d.getUTCFullYear, d.getUTCMonth() - 6);
```

Try it Yourself »

Browser Support

`setUTCFullYear()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats


JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS

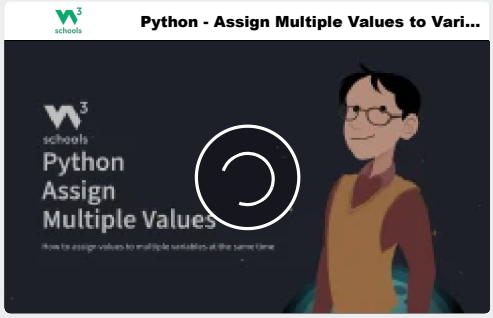



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setUTCHours()

‹ Previous JavaScript Date Reference Next ›

Example

Set the hour to 15, according to UTC time:

```
const d = new Date("2025-01-15");
d.setUTCHours(15);
```

Try it Yourself »

More "Try it Yourself" examples below.

Description

SHARE

The `setUTCHours()` method sets the hour of a date object, according to UTC.

The `setUTCHours()` method can also be used to set the minutes, seconds and milliseconds.

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

Syntax

```
Date.setUTCHours(hour, min, sec, millisec)
```

Parameter Values

Parameter	Description
hour	Required. An integer representing the hour. Expected values are 0-23, but other values are allowed: • -1 will result in the last hour of the previous day • 24 will result in the first hour of the next day
min	Optional. An integer representing the minutes. Expected values are 0-59, but other values are allowed: • -1 will result in the last minute of the previous hour • 60 will result in the first minute of the next hour
sec	Optional. An integer representing the seconds Expected values are 0-59, but other values are allowed: • -1 will result in the last second of the previous minute • 60 will result in the first second of the next minute
millisec	Optional. An integer representing the milliseconds Expected values are 0-999, but other values are allowed: • -1 will result in the last millisecond of the previous second • 1000 will result in the first millisecond of the next second

Return Value

NONE

Changes the Date object in place.

REMOVE ADS

More Examples

Example

Set the time to 15:35:01 UTC time

```
const d = new Date("2025-01-15");
d.setUTCHours(15, 35, 1);
```

Try it Yourself »

Example

Set the time to 48 hours *ago*, using UTC methods:

```
const d = new Date();
d.setUTCHours(d.getUTCHours() - 48);
```

Try it Yourself »

Browser Support

`setUTCHours()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous | JavaScript Date Reference | Next ›


Learn it.
Get certified.
Get hired.

$95 per course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

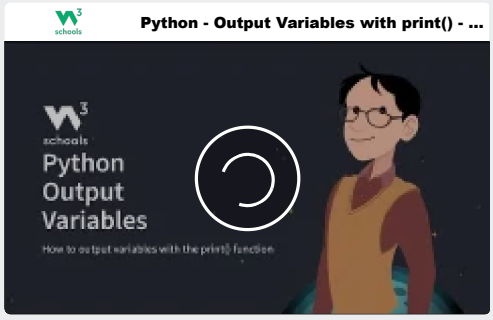

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

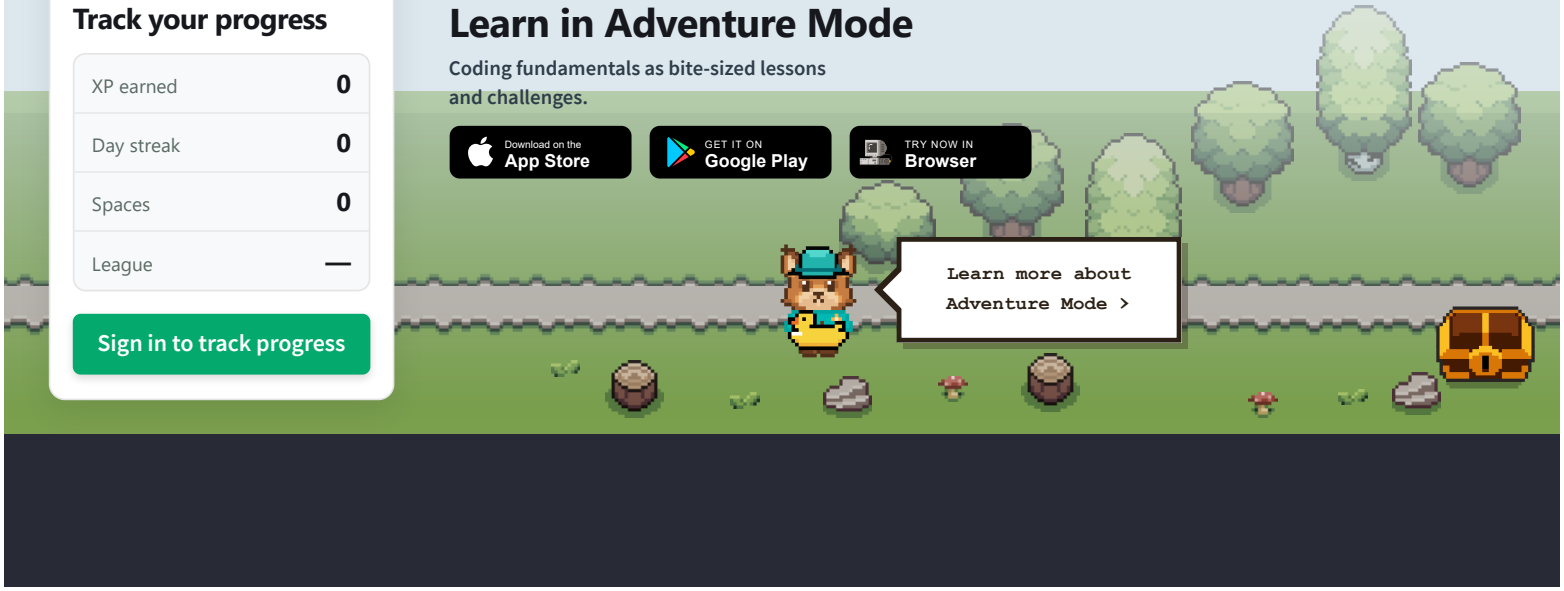

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setUTCMilliseconds()

‹ Previous JavaScript Date Reference Next ›

Example

Set the milliseconds to 192, according to UTC time:

```
const d = new Date();
d.setUTCMilliseconds(192);
```

Try it Yourself »

Description

SHARE

The `setUTCMilliseconds()` method sets the milliseconds (from 0 to 999) of a date object, according to UTC.

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

Syntax

```
Date.setUTCMilliseconds(millisec)
```

Parameter Values

Parameter	Description
millisec	Required. An integer representing the milliseconds Expected values are 0-999, but other values are allowed: • -1 will result in the last millisecond of the previous second • 1000 will result in the first millisecond of the next second • 1001 will result in the second millisecond of the next second

Return Value

NONE

Changes the Date object in place.

Browser Support

`setUTCMilliseconds()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats


JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS

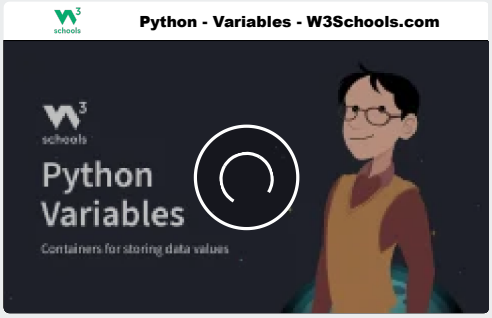

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

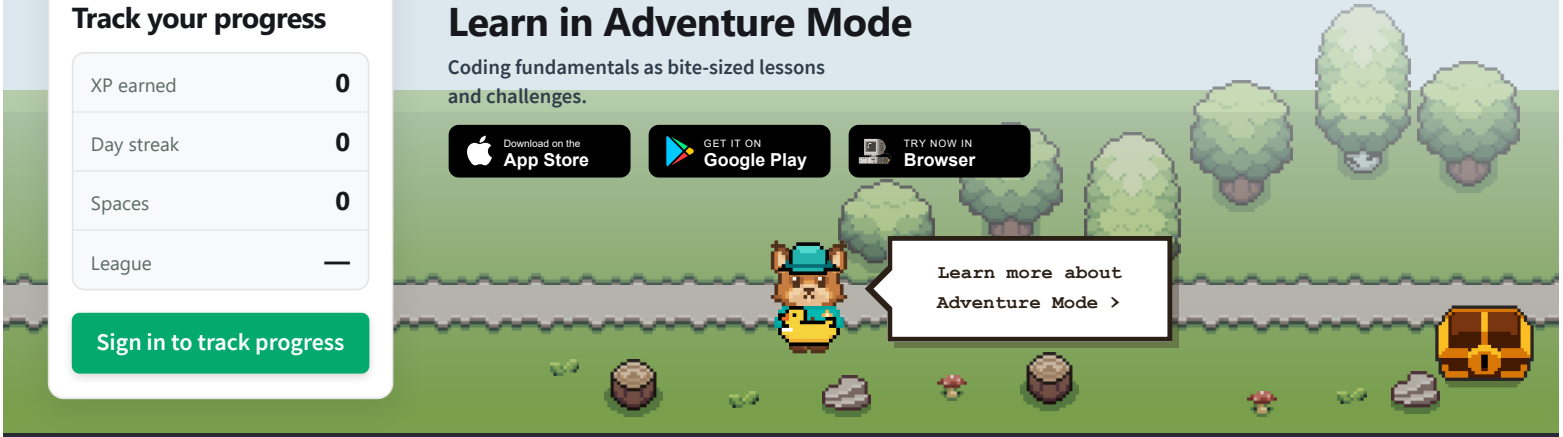

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setUTCMinutes()

‹ Previous JavaScript Date Reference Next ›

Example

Set the minutes to 17, according to UTC time:

```
const d = new Date("2025-01-15");
d.setUTCMinutes(17);
```

Try it Yourself »

More "Try it Yourself" examples below.

Description

SHARE

The `setUTCMinutes()` method sets the minutes of a date object, according to UTC.

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

Syntax

```
Date.setUTCMinutes(min, sec, millisec)
```

Parameter Values

Parameter	Description
min	Required. An integer representing the minutes. Expected values are 0-59, but other values are allowed: • -1 will result in the last minute of the previous hour • 60 will result in the first minute of the next hour
sec	Optional. An integer representing the seconds Expected values are 0-59, but other values are allowed: • -1 will result in the last second of the previous minute • 60 will result in the first second of the next minute
millisec	Optional. An integer representing the milliseconds Expected values are 0-999, but other values are allowed: • -1 will result in the last millisecond of the previous second • 1000 will result in the first millisecond of the next second

Return Value

NONE

Changes the Date object in place.

REMOVE ADS

More Examples

Example

Set the date time to be 90 minutes *ago*, using UTC methods:

```
const d = new Date();
d.setUTCMinutes(d.getUTCMinutes() - 90);
```

Try it Yourself »

Browser Support

`setUTCMinutes()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›

Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

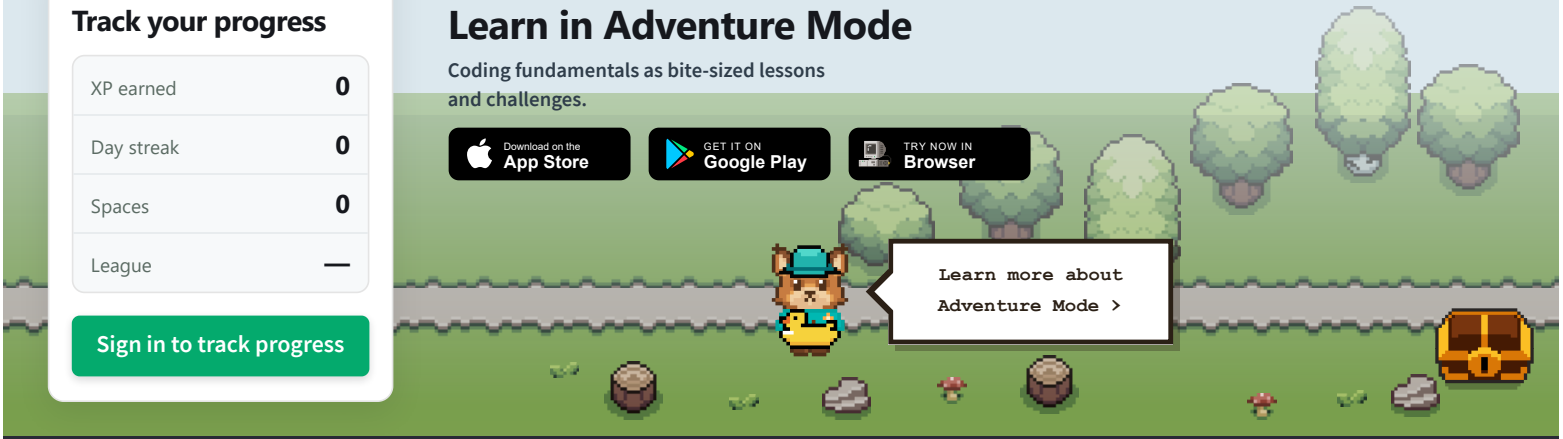

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Class super

‹ Previous JavaScript Class Reference Next ›

Description

SHARE

The `super` keyword is used to call the constructor of its parent class to access the parent's properties and methods.

Tip: To understand the "inheritance" concept (parent and child classes) better, read our JavaScript Classes Tutorial.

Example

Create a class named "Model" which will inherit the methods from the "Car" class, by using the `extends` keyword.

By calling the `super()` method in the constructor method, we call the parent's constructor method and gets access to the parent's properties and methods:

```
class Car {
  constructor(brand) {
    this.carname = brand;
  }
  present() {
    return 'I have a ' + this.carname;
  }
}

class Model extends Car {
  constructor(brand, mod) {
    super(brand);
    this.model = mod;
  }
```

```
  show() {
    return this.present() + ', it is a ' + this.model;
  }
}

mycar = new Model("Ford", "Mustang");
document.getElementById("demo").innerHTML = mycar.show();
```

Try it Yourself »

Browser Support

`super` is an ECMAScript6 (ES6 2015) feature.

JavaScript 2015 is supported in all browsers since **June 2017**:

Chrome	Edge	Firefox	Safari	Opera
51	15	54	10	38
May 2016	Apr 2017	Jun 2017	Sep 2016	Jun 2016

Syntax

```
super(arguments);  // calls the parent constructor (only inside the constructor)
super.parentMethod(arguments);  // calls a parent method
```

Technical Details

JavaScript Version:	ECMAScript 2015 (ES6)

REMOVE ADS

Related Pages

JavaScript Tutorial: JavaScript Classes

JavaScript Tutorial: JavaScript ES6 (EcmaScript 2015)


JavaScript Reference: The extends Keyword


JavaScript Reference: The constructor() method

‹ Previous | JavaScript Class Reference | Next ›



REMOVE ADS

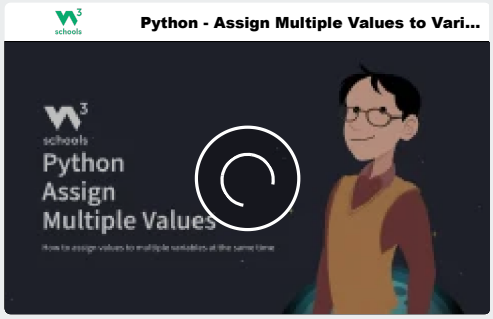

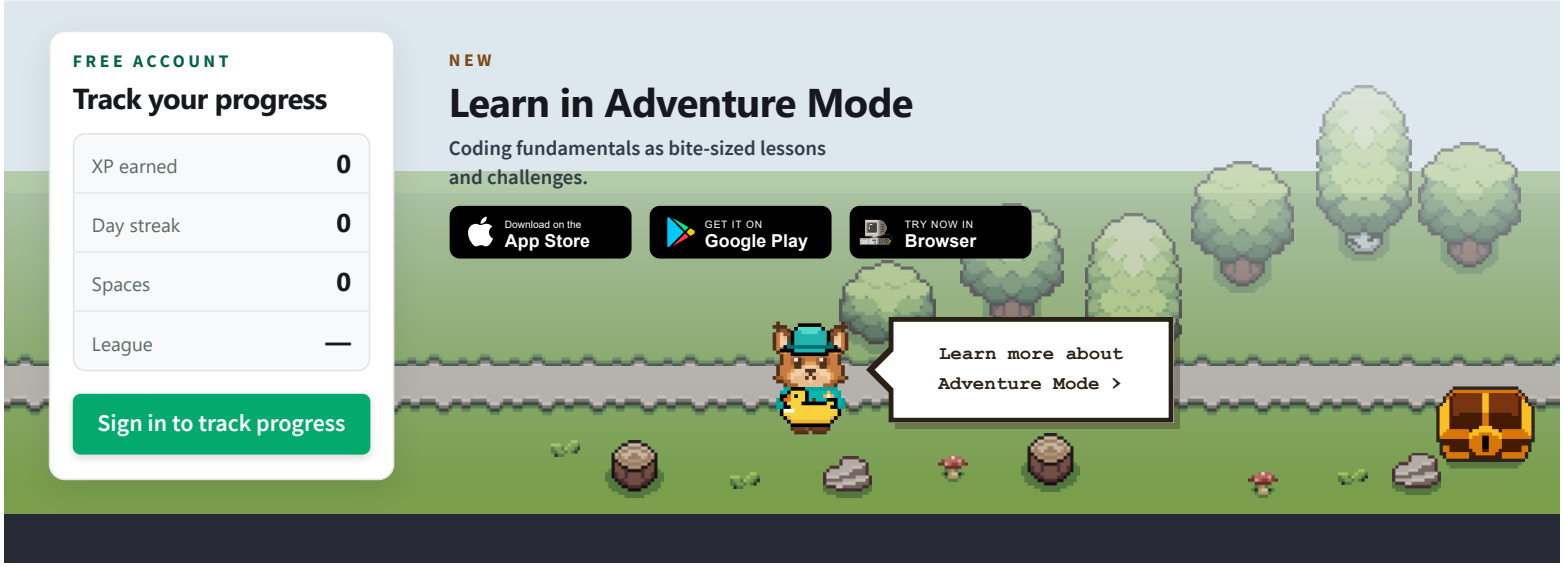

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript new Date

‹ Previous JavaScript Date Reference Next ›

Example

```
// Create a Date
const time = new Date();
```

Try it Yourself »

More Examples Below !

Description

SHARE

The `new Date()` constructor creates a new Date object.

Syntax

```
new Date(date)
```

Parameters

Parameter	Description

date	Optional. A timestamp (milliseconds) or a date time string.

Return Value

Type	Description
Date	A new Date object.

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

More Examples

There are five ways of instantiating (creating) a new Date:

Example

Create a new date object with the current date and time:

```
// Create a Date
const time = new Date();
```

Try it Yourself »

Example

Create a new date using an ISO notation:

```
const time = new Date(dateString);
```

Try it Yourself »

Example

Create a new date from an existing date:

```
const time2 = new Date(time1);
```

Try it Yourself »

Example

Create a new date using milliseconds from Jan 1, 1970:

```
const time = new Date(milliseconds);
```

Try it Yourself »

Example

Using new Date(7 numbers) creates a date object with the specified date and time:

```
const time = new Date(year, month, day, hours, minutes, seconds, milliseconds);
```

Try it Yourself »

REMOVE ADS

Browser Support

`new Date()` is an ECMAScript1 (JavaScript 1997) feature.


It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS

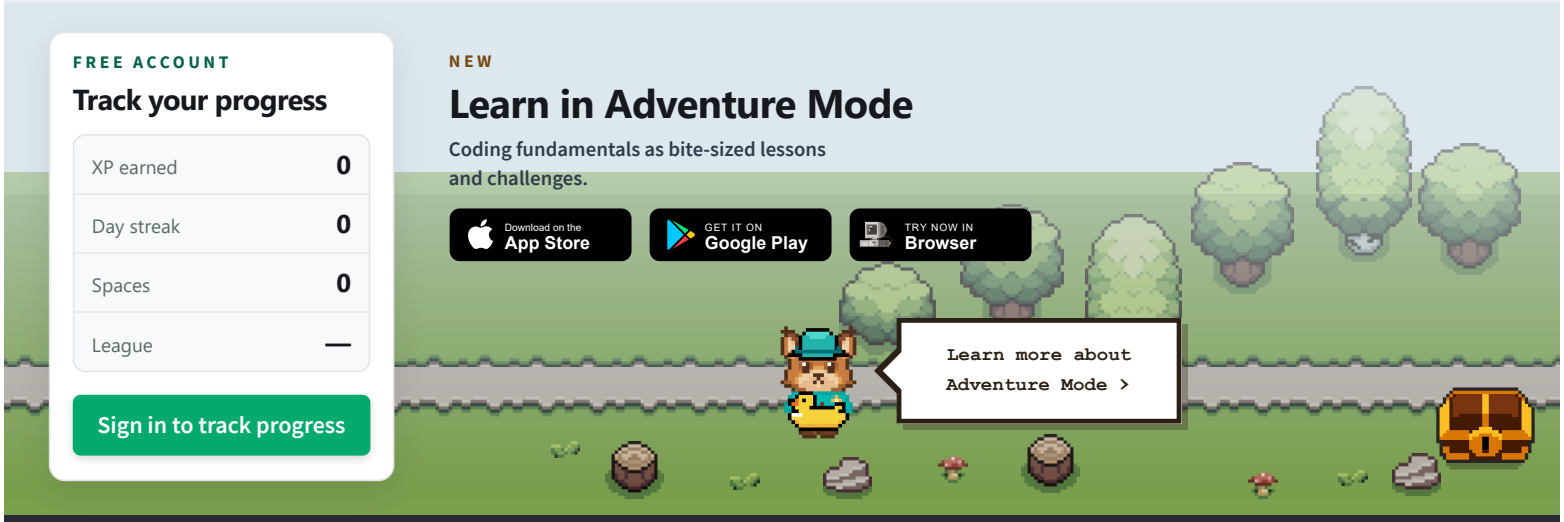

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate

Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setUTCMonth()

‹ Previous JavaScript Date Reference Next ›

Example

Set the month to 4 (May):

```
const d = new Date("2025-01-15");
d.setUTCMonth(4);
```

Try it Yourself »

More "Try it Yourself" examples below.

Description

SHARE

The `setUTCMonth()` method sets the month (from 0 to 11) of a date object, according to UTC.

Note: January is 0, February is 1, and so on.

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

Syntax

```
Date.setUTCMonth(month, day)
```

Parameter Values

Parameter	Description
month	Required. An integer representing the month Expected values are 0-11, but other values are allowed: • -1 will result in the last month of the previous year • 12 will result in the first month of the next year • 13 will result in the second month of the next year
day	Optional. An integer representing the day of month Expected values are 1-31, but other values are allowed: • 0 will result in the last hour of the previous month • -1 will result in the hour before the last hour of the previous month If the month has 31 days: • 32 will result in the first day of the next month If the month has 30 days: • 32 will result in the second day of the next month

Return Value

NONE

Changes the Date object in place.

REMOVE ADS

More Examples

Example

Set the month to 4 (May) and the day to the 20th:

```
const d = new Date("2025-01-15");
d.setUTCMonth(4, 20);
```

Try it Yourself »

Example

Set the date to be the last day of last month:

```
const d = new Date("2025-01-15");
d.setUTCMonth(d.getUTCMonth(), 0);
```

Try it Yourself »

Browser Support

`setUTCMonth()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS





schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setUTCSeconds()

‹ Previous JavaScript Date Reference Next ›

Example

Set the seconds to 35, according to UTC time:

```
const d = new Date("2025-01-15");
d.setUTCSeconds(35);
```

Try it Yourself »

More "Try it Yourself" examples below.

Description

SHARE

The `setUTCSeconds()` method sets the seconds of a date object, according to UTC.

It can also be used to set the milliseconds.

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

Syntax

```
Date.setUTCSeconds(sec, millisec)
```

Parameter Values

Parameter	Description
sec	Required. An integer representing the seconds Expected values are 0-59, but other values are allowed: • -1 will result in the last second of the previous minute • 60 will result in the first second of the next minute
millisec	Optional. An integer representing the milliseconds Expected values are 0-999, but other values are allowed: • -1 will result in the last millisecond of the previous second • 1000 will result in the first millisecond of the next second

Return Value

NONE

Changes the Date object in place.

REMOVE ADS

More Examples

Example

Set both the seconds and milliseconds, according to UTC:

```
const d = new Date();
d.setUTCSeconds(35, 825);
```

Try it Yourself »

Browser Support

`setUTCSeconds()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods


JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›

W3 schools
JS
Get Certified in JavaScript
Boost your career with an official certification
$95
Get certified

REMOVE ADS

Python - Output Variables with print() - ...

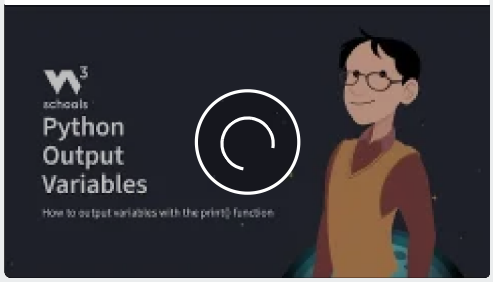

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

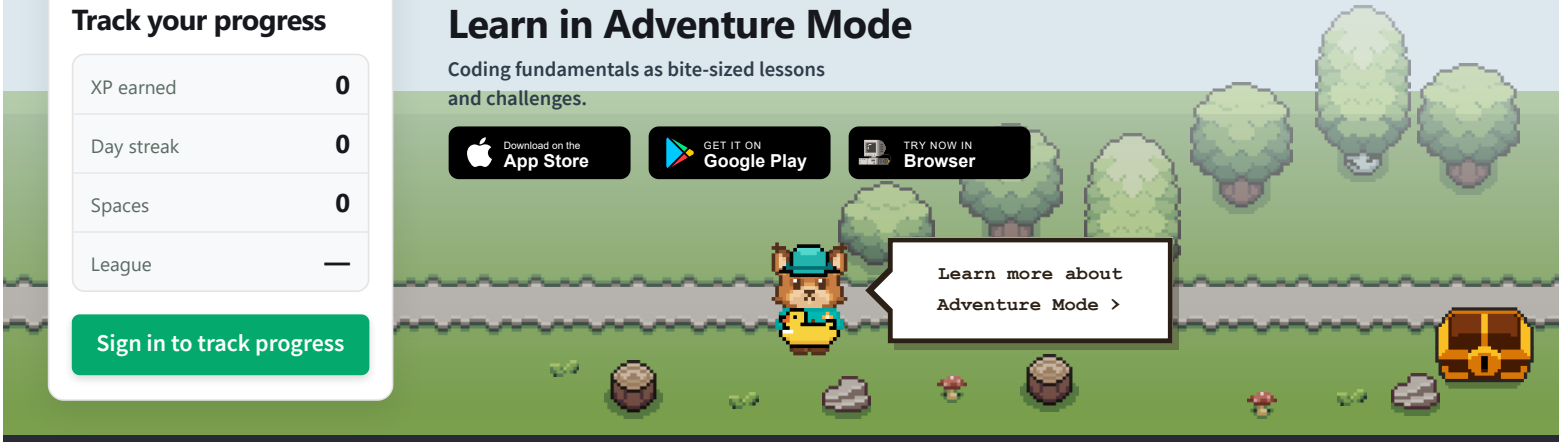

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date setFullYear()

‹ Previous JavaScript Date Reference Next ›

Example 1

```
const d = new Date("2025-01-15");
d.setFullYear(2020);
```

Try it Yourself »

Description

SHARE

`setFullYear()` sets the year of a date.

`setFullYear()` can also set month and day.

Example 2

`setFullYear()` can also set month and day.

```
const d = new Date("2025-01-15");
d.setFullYear(2020, 10, 3);
```

Try it Yourself »

Example 3

Set the date to six months *ago*:

```
const d = new Date();
d.setFullYear(d.getFullYear(), d.getMonth() - 6);
```

Try it Yourself »

See Also:

setDate()

setMonth()

setUTCDate()

setUTCMonth()

setUTCFullYear()

REMOVE ADS

Syntax

```
Date.setFullYear(year, month, day)
```

Parameters

year	Required. The year. Negative values are allowed.
month	Optional. The month (0 to 11). Higher and lower values are handeled with date maths: • -1 will result in the last month of the previous year • 12 will result in the first month of the next year • 13 will result in the second month of the next year

day	Optional. The day (0 to 31). Higher and lower values are handeled with date maths: • 0 gives the last day of the previous month • -1 gives the day before the last day of the previous month • 32 gives the first day of the next month (if 31 days) • 41 gives the tenth day of the next month (if 31 days)

Return Value

NONE

Changes the Date object in place.

Browser Support

`setFullYear()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods


JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS



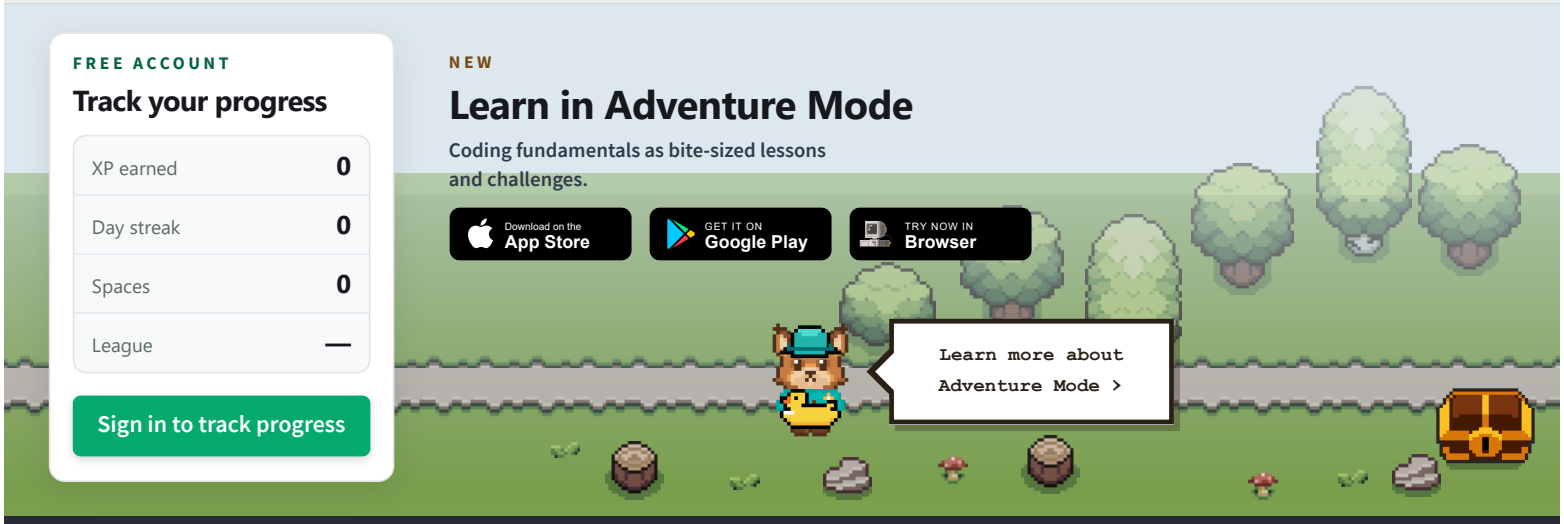

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript toDateString() Method

‹ Previous JavaScript Date Reference Next ›

Example

Get today's date as a readable string:

```
const d = new Date();
let text = d.toDateString();
```

Try it Yourself »

Description

SHARE

The toDateString() method returns the date (not the time) of a date object as a string.

Browser Support

`toDateString()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

Syntax

```
Date.toDateString()
```

Parameters

None

Technical Details

Return Value:	A String, representing the date as a string

Related Pages

JavaScript Tutorial: JavaScript Dates

JavaScript Tutorial: JavaScript Date Formats

JavaScript Tutorial: JavaScript Strings

‹ Previous JavaScript Date Reference Next ›




REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

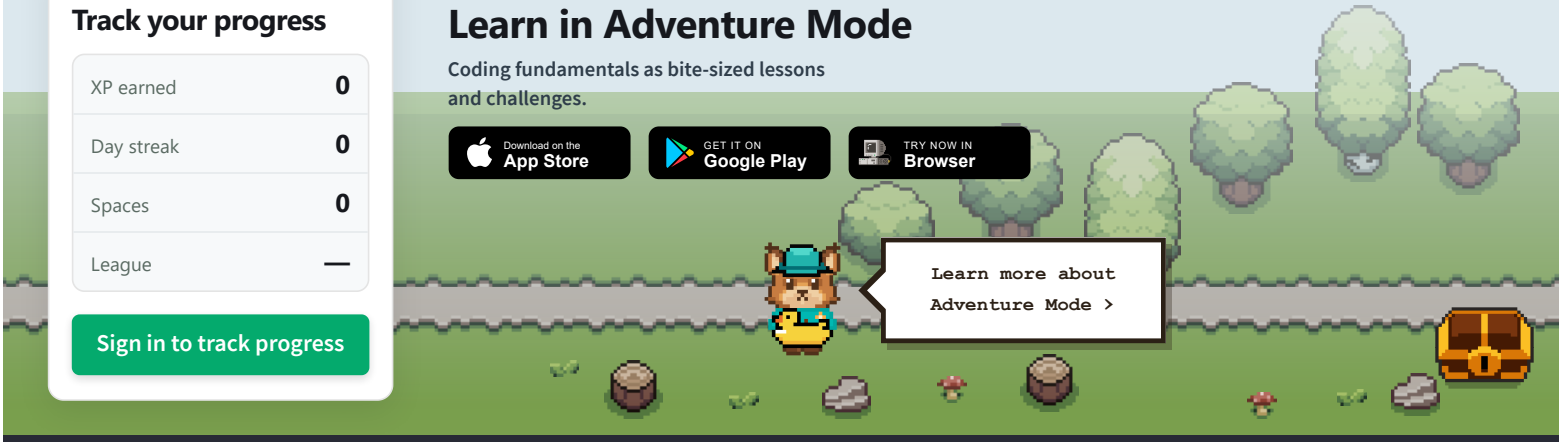

PLUS
SPACES
GET CERTIFIED
FOR TEACHERS
PRACTICE
CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date toUTCString()

‹ Previous JavaScript Date Reference Next ›

Example

Get a date object as a string, according to UTC:

```
const d = new Date();
let text = d.toUTCString();
```

Try it Yourself »

Description

SHARE

The toUTCString() method returns a date object as a string, according to UTC.

Tip: The Universal Coordinated Time (UTC) is the time set by the World Time Standard.

Note: UTC time is the same as GMT time.

Browser Support

`toUTCString()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:







Chrome	Edge	Firefox	Safari	Opera

Syntax

```
Date.toUTCString()
```

Parameters

None

Technical Details

Return Value:	A String, representing the UTC date and time as a string
JavaScript Version:	ECMAScript 1

Related Pages:

JavaScript Dates

JavaScript Date Formats


JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS

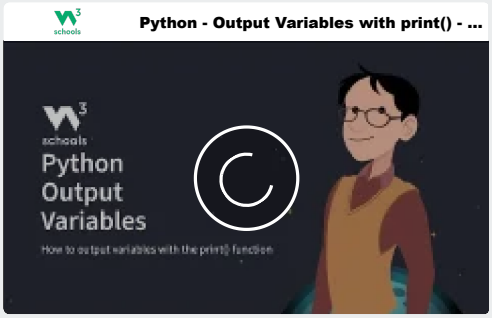

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

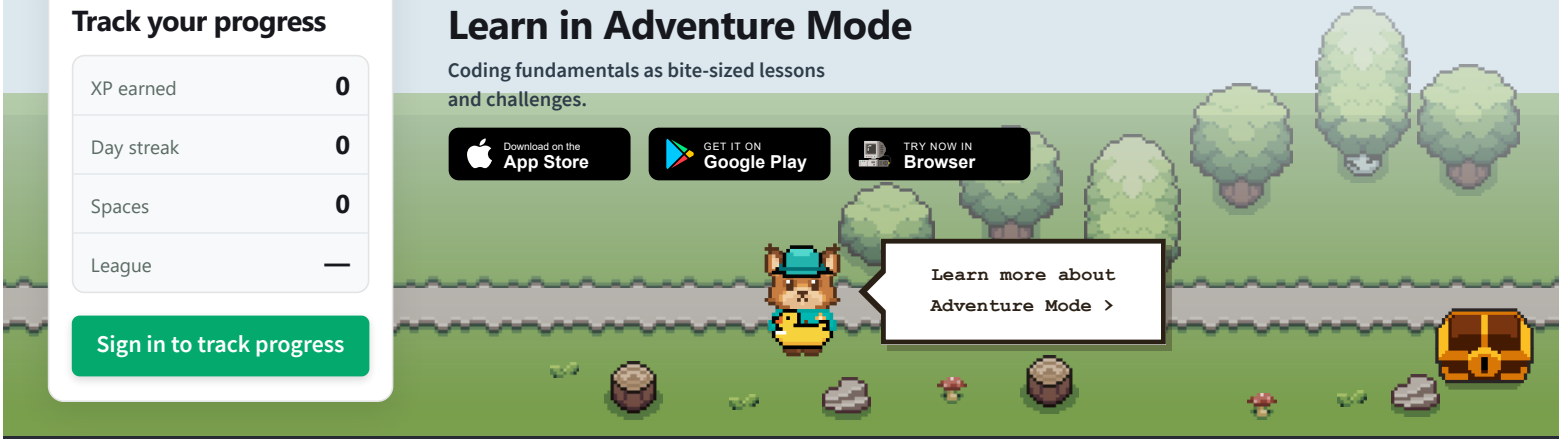

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date toISOString()

‹ Previous JavaScript Date Reference Next ›

Example

Get a date as a string, using the ISO standard:

```
const d = new Date();
let text = d.toISOString();
```

Try it Yourself »

Description

SHARE


The toISOString() method returns a date object as a string, using the ISO standard.

The standard is called ISO-8601 and the format is: YYYY-MM-DDTHH:mm:ss.sssZ

Browser Support

`toISOString()` is an ECMAScript5 (ES5 2009) feature.

JavaScript 2009 is supported in all browsers since **July 2013**:



Chrome 23	IE/Edge 11	Firefox 21	Safari 6	Opera 15
Sep 2012	Sep 2012	Apr 2013	Jul 2012	Jul 2013

Syntax

```
Date.toISOString()
```

Parameters

None

Technical Details

Return Value:	A String, representing the date and time using the ISO standard format
JavaScript Version:	ECMAScript 5

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›

Learn it.
Get certified.
Get hired.

$95 per course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned 0
Day streak 0
Spaces 0
League —


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

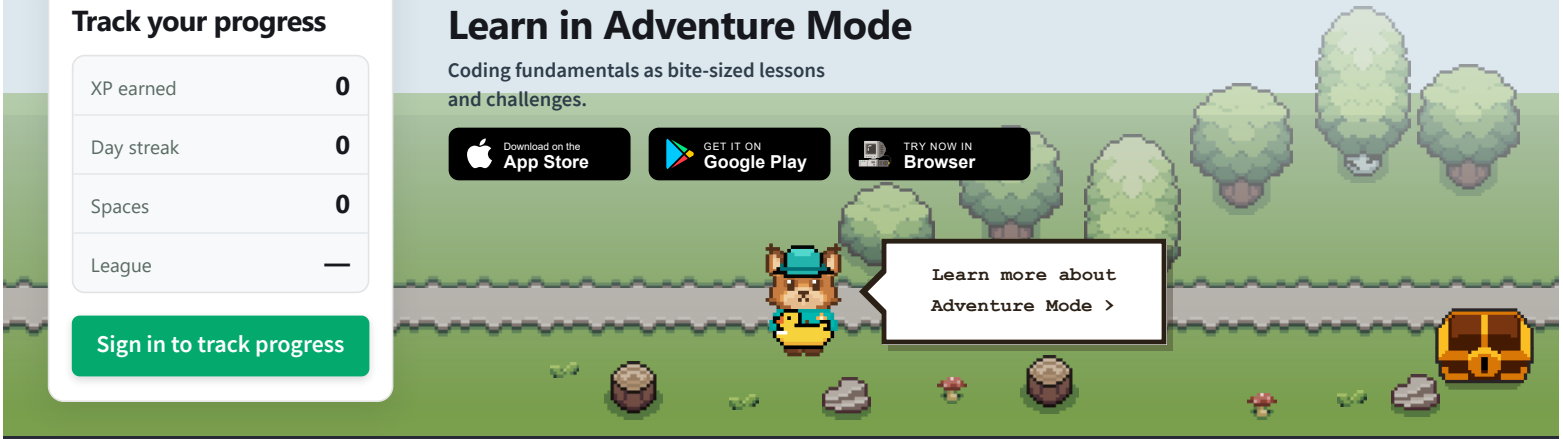

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date toJSON()

‹ Previous JavaScript Date Reference Next ›

Example

Get a date as a string, formatted as a JSON date:

```
const d = new Date();
let text = d.toJSON();
```

Try it Yourself »

Description

SHARE

The toJSON() method returns a date object as a string, formatted as a JSON date.

JSON dates have the same format as the ISO-8601 standard: YYYY-MM-DDTHH:mm:ss.sssZ

Browser Support

`toJSON()` is an ECMAScript5 (ES5 2009) feature.

JavaScript 2009 is supported in all browsers since **July 2013**:

Chrome 23	IE/Edge 11	Firefox 21	Safari 6	Opera 15
Sep 2012	Sep 2012	Apr 2013	Jul 2012	Jul 2013

Syntax

```
Date.toJSON()
```

Parameters

None

Technical Details

Return Value:	A String, representing the date and time formated as a JSON date
JavaScript Version:	ECMAScript 5

Related Pages:

JavaScript Dates

JavaScript Date Formats


JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS

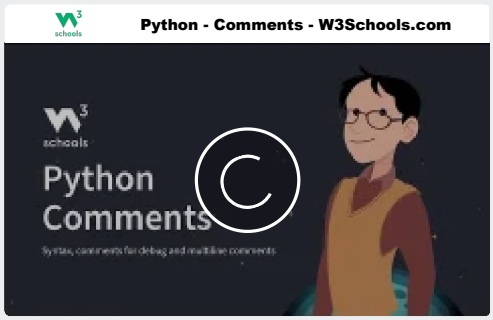

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Date toLocaleDateString()

‹ Previous JavaScript Date Reference Next ›

Example

Get a date as a string, using locale conventions:

```
const d = new Date();
let text = d.toLocaleDateString();
```

Try it Yourself »

Description

SHARE

The `toLocaleDateString()` method returns the date (not the time) of a date object as a string, using locale conventions.

Syntax

```
Date.toLocaleDateString(locales, options)
```

Parameters

Parameter	Description

locales	Optional. Which language specific format to use.
options	Optional. An object where you can set properties to use.

Return Value

Type	Description
String	The date and time.

Legal Locales

Property	**Country**
ar-SA	Arabic (Saudi Arabia)
bn-BD	Bangla (Bangladesh)
bn-IN	Bangla (India)
cs-CZ	Czech (Czech Republic)
da-DK	Danish (Denmark)
de-AT	Austrian German
de-CH	Swiss German
de-DE	Standard German
el-GR	Modern Greek
en-AU	Australian English
en-CA	Canadian English
en-GB	British English
en-IE	Irish English
en-IN	Indian English
en-NZ	New Zealand English
en-US	US English
en-ZA	English (South Africa)
es-AR	Argentine Spanish

es-CL	Chilean Spanish
es-CO	Colombian Spanish
es-ES	Castilian Spanish
es-MX	Mexican Spanish
es-US	American Spanish
fa-IR	Iranian (Iran)
fi-FI	Finnish (Finland)
fr-BE	Belgian French
fr-CA	Canadian French
fr-CH	Swiss French
fr-FR	Standard French (France)
he-IL	Hebrew (Israel)
hi-IN	Hindi (India)
hu-HU	Hungarian (Hungary)
id-ID	Indonesian (Indonesia)
it-CH	Swiss Italian
it-IT	Standard Italian
ja-JP	Japanese (Japan)
ko-KR	Korean (Republic of Korea)
nl-BE	Belgian Dutch
nl-NL	Standard Dutch (Netherlands)
no-NO	Norwegian (Norway)
pl-PL	Polish (Poland)
pt-BR	Brazilian Portuguese
pt-PT	European Portuguese (Portugal)
ro-RO	Romanian (Romania)
ru-RU	Russian (Russian Federation)
sk-SK	Slovak (Slovakia)
sv-SE	Swedish (Sweden)

ta-IN	Indian Tamil
ta-LK	Sri Lankan Tamil
th-TH	Thai (Thailand)
tr-TR	Turkish (Turkey)
zh-CN	Mainland China (simplified)
zh-HK	Hong Kong (traditional)
zh-TW	Taiwan (traditional)

Legal Properties

Property	**Legal Values**
dateStyle	"full" "long" "medium" "short"
timeStyle	"full" "long" "medium" "short"
localeMatcher	"best-fit" (default) "lookup"
timeZone	
hour12	false true
hourCycle	"h11" "h12" "h23" "h24"
formatMatcher	"basic" "best-fit" (default)
weekday	"long" "short" "narrow"
year	"2-digit" "numeric"

month	"2-digit" "long" "narrow" "numeric" "short"
day	"2-digit" "numeric"
hour	"2-digit" "numeric"
minute	"2-digit" "numeric"
second	"2-digit" "numeric"
timeZoneName	"long" "short"

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

Browser Support

`toLocaleDateString()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

‹ Previous | JavaScript Date Reference | Next ›


Learn it.
Get certified.
Get hired.

$95 per course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

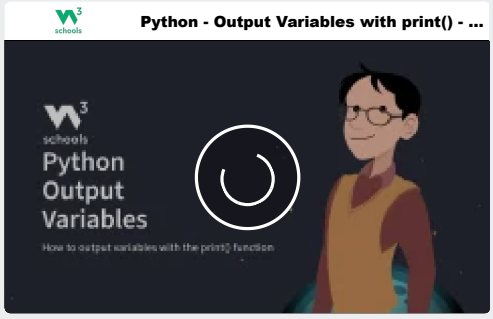

FREE ACCOUNT

Track your progress

XP earned 0
Day streak 0
Spaces 0
League —


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

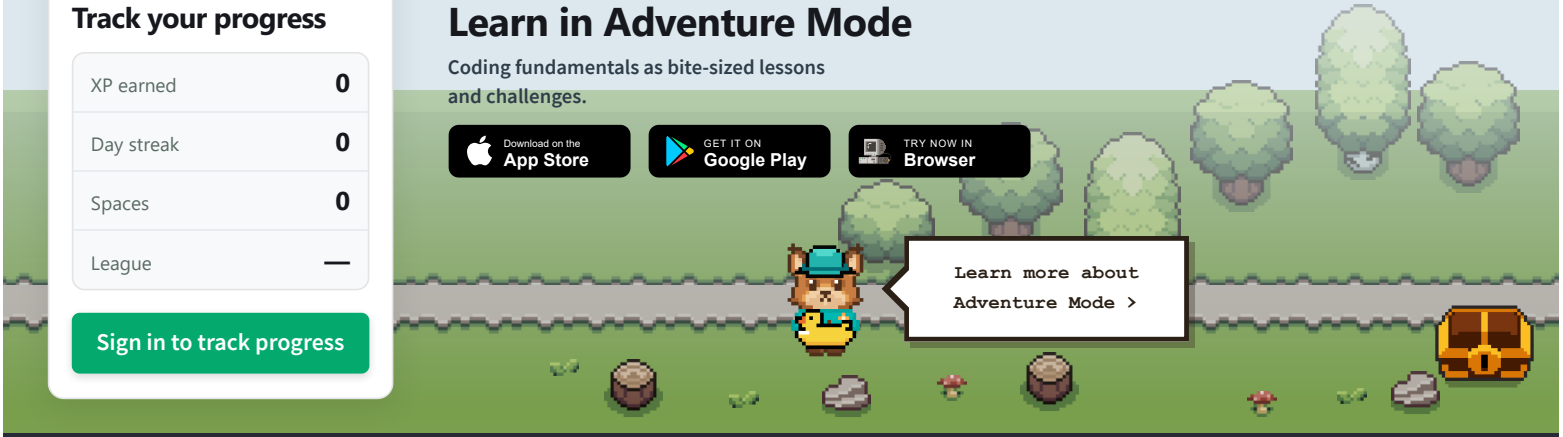

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Date toLocaleTimeString()

‹ Previous JavaScript Date Reference Next ›

Example

Get the time portion of a date as a string, using locale conventions:

```
const d = new Date();
let text = d.toLocaleTimeString();
```

Try it Yourself »

Description

SHARE

The `toLocaleTimeString()` method returns the time portion of a date object as a string, using locale conventions.

Syntax

```
Date.toLocaleTimeString(locales, options)
```

Parameters

Parameter	Description

locales	Optional. Which language specific format to use.
options	Optional. An object where you can set properties to use.

Return Value

Type	Description
String	The date and time.

Legal Locales

Property	**Country**
ar-SA	Arabic (Saudi Arabia)
bn-BD	Bangla (Bangladesh)
bn-IN	Bangla (India)
cs-CZ	Czech (Czech Republic)
da-DK	Danish (Denmark)
de-AT	Austrian German
de-CH	Swiss German
de-DE	Standard German
el-GR	Modern Greek
en-AU	Australian English
en-CA	Canadian English
en-GB	British English
en-IE	Irish English
en-IN	Indian English
en-NZ	New Zealand English
en-US	US English
en-ZA	English (South Africa)
es-AR	Argentine Spanish

es-CL	Chilean Spanish
es-CO	Colombian Spanish
es-ES	Castilian Spanish
es-MX	Mexican Spanish
es-US	American Spanish
fa-IR	Iranian (Iran)
fi-FI	Finnish (Finland)
fr-BE	Belgian French
fr-CA	Canadian French
fr-CH	Swiss French
fr-FR	Standard French (France)
he-IL	Hebrew (Israel)
hi-IN	Hindi (India)
hu-HU	Hungarian (Hungary)
id-ID	Indonesian (Indonesia)
it-CH	Swiss Italian
it-IT	Standard Italian
ja-JP	Japanese (Japan)
ko-KR	Korean (Republic of Korea)
nl-BE	Belgian Dutch
nl-NL	Standard Dutch (Netherlands)
no-NO	Norwegian (Norway)
pl-PL	Polish (Poland)
pt-BR	Brazilian Portuguese
pt-PT	European Portuguese (Portugal)
ro-RO	Romanian (Romania)
ru-RU	Russian (Russian Federation)
sk-SK	Slovak (Slovakia)
sv-SE	Swedish (Sweden)

ta-IN	Indian Tamil
ta-LK	Sri Lankan Tamil
th-TH	Thai (Thailand)
tr-TR	Turkish (Turkey)
zh-CN	Mainland China (simplified)
zh-HK	Hong Kong (traditional)
zh-TW	Taiwan (traditional)

Legal Properties

Property	Legal Values
dateStyle	"full" "long" "medium" "short"
timeStyle	"full" "long" "medium" "short"
localeMatcher	"best-fit" (default) "lookup"
timeZone	
hour12	false true
hourCycle	"h11" "h12" "h23" "h24"
formatMatcher	"basic" "best-fit" (default)
weekday	"long" "short" "narrow"
year	"2-digit" "numeric"

month	"2-digit" "long" "narrow" "numeric" "short"
day	"2-digit" "numeric"
hour	"2-digit" "numeric"
minute	"2-digit" "numeric"
second	"2-digit" "numeric"
timeZoneName	"long" "short"

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

Browser Support

`toLocaleTimeString()` is an ECMAScript1 (JavaScript 1997) feature.


It is supported in all browsers:


				
Chrome	Edge	Firefox	Safari	Opera

‹ Previous | JavaScript Date Reference | Next ›



REMOVE ADS

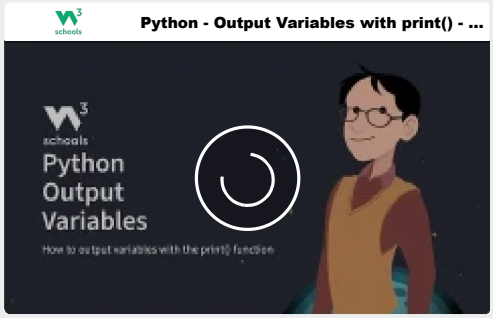

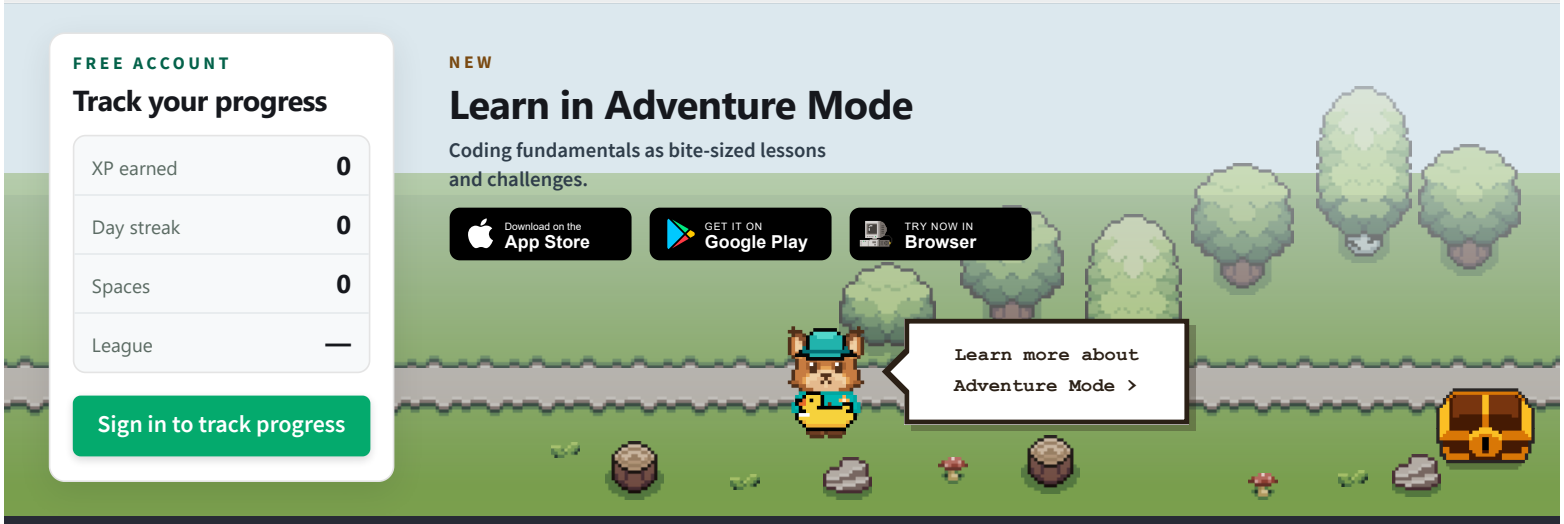

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date toLocaleString()

‹ Previous JavaScript Date Reference Next ›

Example

Get a date as string, using locale conventions:

```
const d = new Date();
let text = d.toLocaleString();
```

Try it Yourself »

Description

SHARE

The `toLocaleString()` method returns a Date object as a string, using locale settings.

The default language depends on the locale setup on your computer.

Syntax

```
Date.toLocaleString(locales, options)
```

Parameters

Parameter	Description

locales	Optional. Which language specific format to use.
options	Optional. An object where you can set properties to use.

Return Value

Type	Description
String	The date and time.

Legal Locales

Property	**Country**
ar-SA	Arabic (Saudi Arabia)
bn-BD	Bangla (Bangladesh)
bn-IN	Bangla (India)
cs-CZ	Czech (Czech Republic)
da-DK	Danish (Denmark)
de-AT	Austrian German
de-CH	Swiss German
de-DE	Standard German
el-GR	Modern Greek
en-AU	Australian English
en-CA	Canadian English
en-GB	British English
en-IE	Irish English
en-IN	Indian English
en-NZ	New Zealand English
en-US	US English
en-ZA	English (South Africa)
es-AR	Argentine Spanish

es-CL	Chilean Spanish
es-CO	Colombian Spanish
es-ES	Castilian Spanish
es-MX	Mexican Spanish
es-US	American Spanish
fa-IR	Iranian (Iran)
fi-FI	Finnish (Finland)
fr-BE	Belgian French
fr-CA	Canadian French
fr-CH	Swiss French
fr-FR	Standard French (France)
he-IL	Hebrew (Israel)
hi-IN	Hindi (India)
hu-HU	Hungarian (Hungary)
id-ID	Indonesian (Indonesia)
it-CH	Swiss Italian
it-IT	Standard Italian
ja-JP	Japanese (Japan)
ko-KR	Korean (Republic of Korea)
nl-BE	Belgian Dutch
nl-NL	Standard Dutch (Netherlands)
no-NO	Norwegian (Norway)
pl-PL	Polish (Poland)
pt-BR	Brazilian Portuguese
pt-PT	European Portuguese (Portugal)
ro-RO	Romanian (Romania)
ru-RU	Russian (Russian Federation)
sk-SK	Slovak (Slovakia)
sv-SE	Swedish (Sweden)

ta-IN	Indian Tamil
ta-LK	Sri Lankan Tamil
th-TH	Thai (Thailand)
tr-TR	Turkish (Turkey)
zh-CN	Mainland China (simplified)
zh-HK	Hong Kong (traditional)
zh-TW	Taiwan (traditional)

Legal Properties

Property	Legal Values
dateStyle	"full" "long" "medium" "short"
timeStyle	"full" "long" "medium" "short"
localeMatcher	"best-fit" (default) "lookup"
timeZone	
hour12	false true
hourCycle	"h11" "h12" "h23" "h24"
formatMatcher	"basic" "best-fit" (default)
weekday	"long" "short" "narrow"
year	"2-digit" "numeric"

month	"2-digit" "long" "narrow" "numeric" "short"
day	"2-digit" "numeric"
hour	"2-digit" "numeric"
minute	"2-digit" "numeric"
second	"2-digit" "numeric"
timeZoneName	"long" "short"

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

Browser Support

`toLocaleString()` is an ECMAScript1 (JavaScript 1997) feature.


It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS

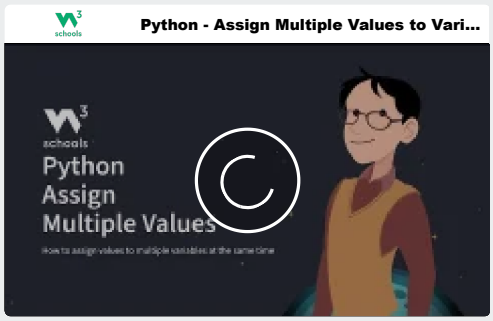



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date toString()

‹ Previous JavaScript Date Reference Next ›

Example

Convert a date object to a string:

```
const d = new Date();
let text = d.toString();
```

Try it Yourself »

Description

SHARE

The `toString()` method returns a date object as a string.

Note

Every JavaScript object has a `toString()` method.

The `toString()` method is used by JavaScript when an object needs to be displayed as a text (like in HTML), or when an object needs to be used as a string.

Browser Support

`toString()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Syntax

```
Date.toString()
```

Parameters

NONE

Return Value

Date and time represented as a string

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date toTimeString()

‹ Previous | JavaScript Date Reference | Next ›

Example

Get the time portion of a date object as a string:

```
const d = new Date();
let text = d.toTimeString();
```

Try it Yourself »

Description

SHARE

The toTimeString() method returns the time portion of a date object as a string.

Browser Support

`toTimeString()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

Syntax

```
Date.toTimeString()
```

Parameters

None

Technical Details

Return Value:	A String, representing the time as a string

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous | JavaScript Date Reference | Next ›




REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

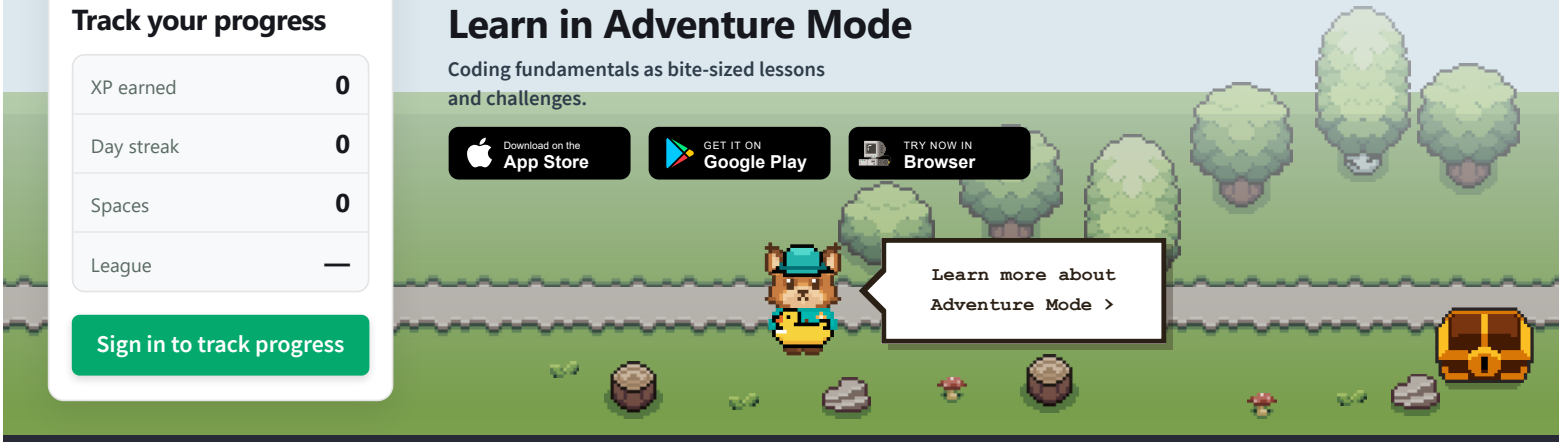

PLUS
SPACES
GET CERTIFIED
FOR TEACHERS
PRACTICE
CONTACT US

Top Tutorials
HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial

W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date toUTCString()

‹ Previous JavaScript Date Reference Next ›

Example

Get a date object as a string, according to UTC:

```
const d = new Date();
let text = d.toUTCString();
```

Try it Yourself »

Description

SHARE

The toUTCString() method returns a date object as a string, according to UTC.

Tip: The Universal Coordinated Time (UTC) is the time set by the World Time Standard.

Note: UTC time is the same as GMT time.

Browser Support

`toUTCString()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:







Chrome	Edge	Firefox	Safari	Opera

Syntax

```
Date.toUTCString()
```

Parameters

None

Technical Details

Return Value:	A String, representing the UTC date and time as a string
JavaScript Version:	ECMAScript 1

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›



REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date.UTC()

‹ Previous JavaScript Date Reference Next ›

Example

Get the number of milliseconds between a date and January 1, 1970:

```
let ms = Date.UTC(2020, 02, 30);
```

Try it Yourself »

More "Try it Yourself" examples below.

Description

SHARE

The Date.UTC() method returns the number of milliseconds between a specified date and midnight of January 1, 1970, according to UTC.

Notes

UTC (Universal Time Coordinated) is the time set by the World Time Standard.

UTC time is the same as GMT time (Greenwich Mean Time).

Browser Support

`Date.UTC()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

Syntax

```
Date.UTC(year, month, day, hours, minutes, seconds, millisec)
```

Date.UTC() is a static method of the Date object.

You cannot use it on a date like d.UTC()

The syntax is always Date.UTC().

Parameter Values

Parameter	Description
year	Required. A four-digit value representing the year, negative values are allowed
month	Required. An integer representing the month Expected values are 0-11, but other values are allowed: • -1 will result in the last month of the previous year • 12 will result in the first month of the next year • 13 will result in the second month of the next year
day	Optional. An integer representing the day of month Expected values are 1-31, but other values are allowed: • 0 will result in the last hour of the previous month • -1 will result in the hour before the last hour of the previous month If the month has 31 days: • 32 will result in the first day of the next month

	If the month has 30 days: • 32 will result in the second day of the next month
hour	Optional. Default 0. An integer representing the hour. Expected values are 0-23, but other values are allowed: • -1 will result in the last hour of the previous day • 24 will result in the first hour of the next day
min	Optional. Default 0. An integer representing the minutes. Expected values are 0-59, but other values are allowed: • -1 will result in the last minute of the previous hour • 60 will result in the first minute of the next hour
sec	Optional. Default 0. An integer representing the seconds Expected values are 0-59, but other values are allowed: • -1 will result in the last second of the previous minute • 60 will result in the first second of the next minute
millisec	Optional. Default 0. An integer representing the milliseconds Expected values are 0-999, but other values are allowed: • -1 will result in the last millisecond of the previous second • 1000 will result in the first millisecond of the next second

REMOVE ADS

Technical Details

Return Value:	A Number, representing the number of milliseconds between the specified date-time and midnight January 1 1970
JavaScript Version:	ECMAScript 1

More Examples

Example

Create a date object using UTC time instead of local time:

```
let d = new Date(Date.UTC(2020, 02, 30));
```

Try it Yourself »

Related Pages:


JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›

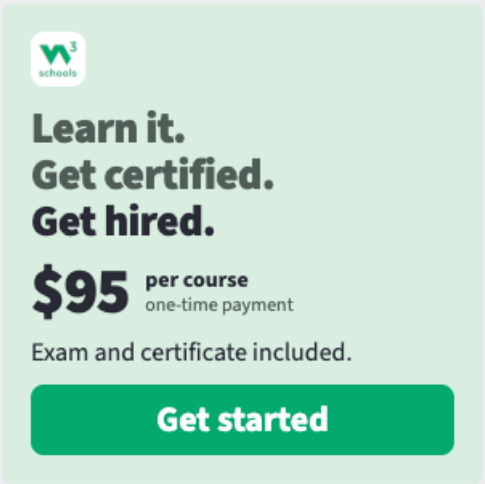

REMOVE ADS

Python - Syntax - W3Schools.com



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

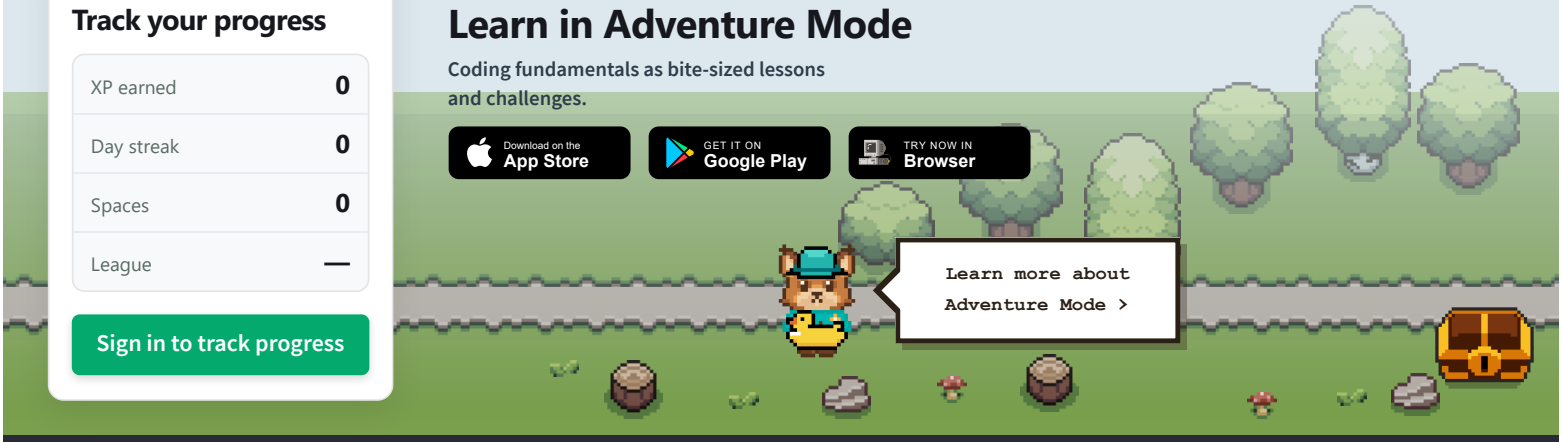

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Date valueOf()

‹ Previous JavaScript Date Reference Next ›

Example

Get the primitive value of a date object:

```
const d = new Date();
let ms = d.valueOf();
```

Try it Yourself »

Description

SHARE


The valueOf() method returns the primitive value of a date object.

Note: The primitive value is returned as the number of millisecond since midnight January 1, 1970 UTC.

Browser Support

`valueOf()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:



Chrome	Edge	Firefox	Safari	Opera

Syntax

```
Date.valueOf()
```

Parameters

None

Technical Details

Return Value:	A Number, representing the number of milliseconds between the date object and midnight January 1, 1970 UTC
JavaScript Version:	ECMAScript 1

Related Pages:

JavaScript Dates

JavaScript Date Formats

JavaScript Date Get Methods

JavaScript Date Set Methods

‹ Previous JavaScript Date Reference Next ›


Build skills.
Get hired.

$95 per paid course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

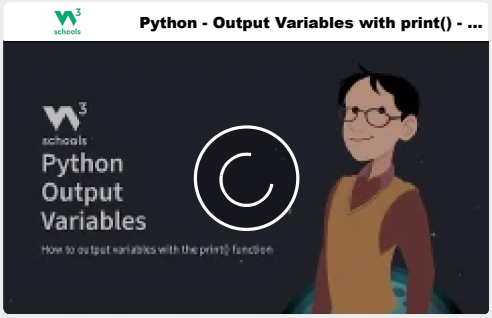

FREE ACCOUNT

Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Complete JavaScript References

‹ Home

Next ›

Revised June 2026

JavaScript Primitives

SHARE

Primitives | String | Number | Boolean | BigInt | Symbol | undefined | null

Object Methods and Properties

Array | Boolean | Classes | Date | Error | Function | Global | Iterator | JSON | Map | Math | Number | Object | Operators | Precedence | Promise | Proxy | Reflect | RegExp | Set | Statements | String | Temporal | Typed Array

Window Objects with Examples

Window | History | Location | Navigator | Screen

HTML DOM Objects with Examples

Document | Element | Attributes | Events | Event Objects | Collection | Style

REMOVE ADS

Web APIs with Examples

Canvas | Console | Fetch | Fullscreen | Geolocation | History | MediaQuery | Storage | Validation

HTML Elements with Examples

a | abbr | address | area | article | aside | audio | b | base | bdo | blockquote | body | br | button | canvas | caption | cite | code | col | colgroup | datalist | dd | del | details | dfn | dialog | div | dl | dt | em | embed | fieldset | figcaption | figure | footer | form | head | header | h1 - h6 | hr | html | i | iframe | img | ins | input button | input checkbox | input color | input date | input datetime | input datetime-local | input email | input file | input hidden | input image | input month | input number | input password | input radio | input range | input reset | input search | input submit | input text | input time | input url | input week | kbd | label | legend | li | link | map | mark | menu | menuitem | meta | meter | nav | object | ol | optgroup | option | output | p | param | pre | progress | q | s | samp | script | section | select | small | source | span | strong | style | sub | summary | sup | table | tbody | td | tfoot | th | thead | tr | textarea | time | title | track | u | ul | var | video

Other

CSSStyleDeclaration | JS Conversion


JavaScript Tutorial

Visit Our JavaScript Tutorial »

‹ Home | Sign in to track progress | Next ›




REMOVE ADS

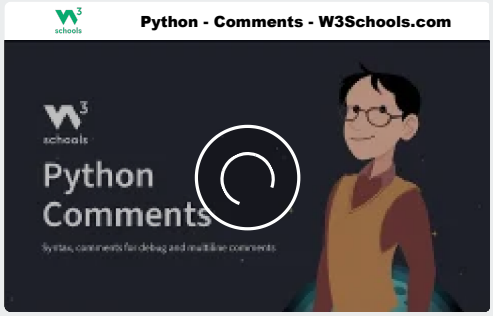

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

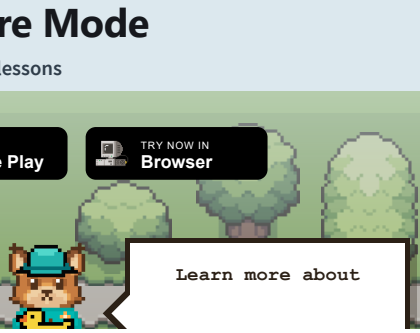



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.