JavaScript Number Reference

‹ Previous

Next ›

New to JavaScript Numbers?

SHARE

Visit Our Full JavaScript Number Tutorial

Complete Number Reference

Revised July 2025

Name	Description
constructor	Returns the function that created JavaScript's Number prototype
EPSILON	Returns the difference between 1 and the smallest number greater than 1
isFinite()	Checks whether a value is a finite number
isInteger()	Checks whether a value is an integer
isNaN()	Checks whether a value is Number.NaN
isSafeInteger()	Checks whether a value is a safe integer
MAX_SAFE_INTEGER	Returns the maximum safe integer in JavaScript.
MIN_SAFE_INTEGER	Returns the minimum safe integer in JavaScript
MAX_VALUE	Returns the largest number possible in JavaScript

MIN_VALUE	Returns the smallest number possible in JavaScript
NaN	Represents a "Not-a-Number" value
NEGATIVE_INFINITY	Represents negative infinity (returned on overflow)
POSITIVE_INFINITY	Represents infinity (returned on overflow)
parseFloat()	Parses a string an returns a number
parseInt()	Parses a string an returns a whole number
prototype	Allows you to add properties and methods to an object
toExponential(x)	Converts a number into an exponential notation
toFixed(x)	Formats a number with x numbers of digits after the decimal point
toLocaleString()	Converts a number into a string, based on the locale settings
toPrecision(x)	Formats a number to x length
toString()	Converts a number to a string
valueOf()	Returns the primitive value of a number

NOTE

All number methods return a new value.

They do not change the original number.

See Also:

Full JavaScript Number Tutorial

Full JavaScript Math Tutorial

Full JavaScript Math Reference

REMOVE ADS

‹ Previous


Sign in to track progress

Next ›


schools
Your next career move.
Get every certification. One payment.


$499 Pay once. Learn for life.
Invest in your future

REMOVE ADS

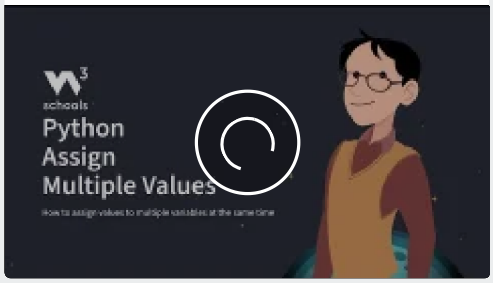Python - Assign Multiple Values to Vari...


FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

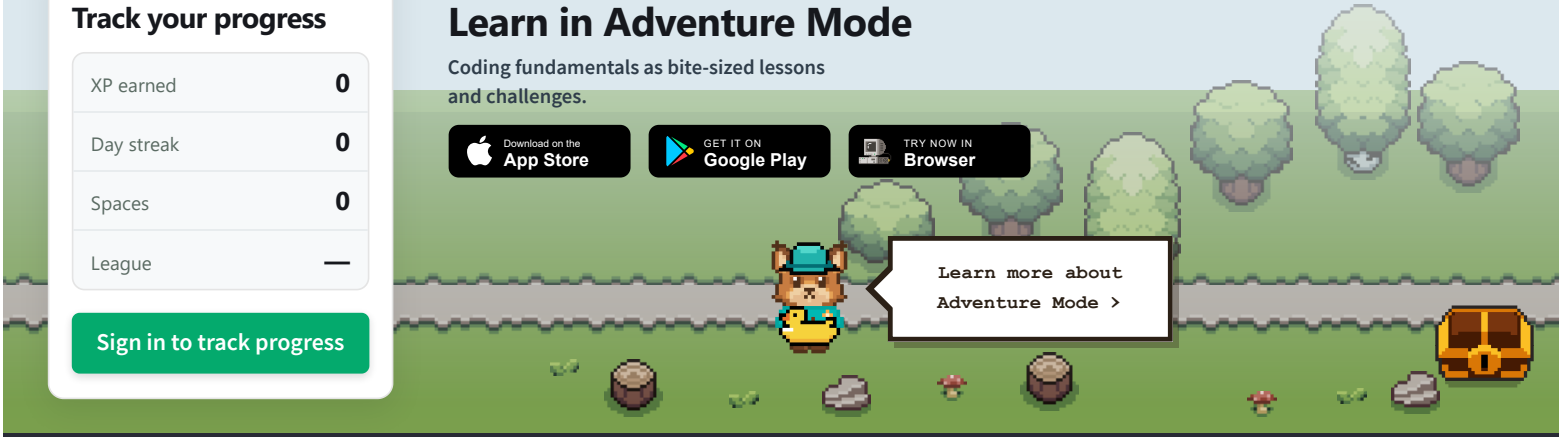NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser


schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Math.trunc()

‹ Previous | JavaScript Math Object | Next ›

Example

```
let x = Math.trunc(8.76);
```

Try it Yourself »

Description

SHARE

The `Math.trunc()` method returns the integer part of a number.

The `Math.trunc()` method removes the decimals (does NOT round the number).

JavaScript Rounding Functions

The Math.abs() Method
The Math.ceil() Method
The Math.floor() Method
The Math.round() Method
The Math.fround() Method
The Math.f16round() Method
The Math.trunc() Method

Syntax

```
Math.trunc(x)
```

Parameters

Parameter	Description
x	Required. A number.

Return Value

Type	Description
Number	The integer part of the number.

See Also:

Full JavaScript Math Tutorial

Full JavaScript Math Reference

Full JavaScript Numbers Tutorial

Full JavaScript Number Reference


Browser Support

`Math.trunc()` is an ECMAScript6 (ES6 2015) feature.


JavaScript 2015 is supported in all browsers since **June 2017**:

				
Chrome 51	Edge 15	Firefox 54	Safari 10	Opera 38
May 2016	Apr 2017	Jun 2017	Sep 2016	Jun 2016

‹ Previous JavaScript Math Object Next ›

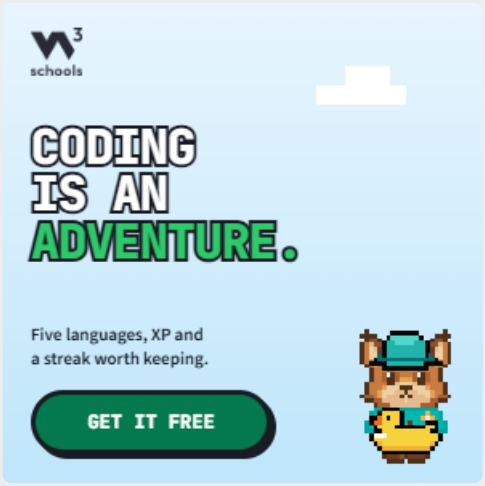

REMOVE ADS

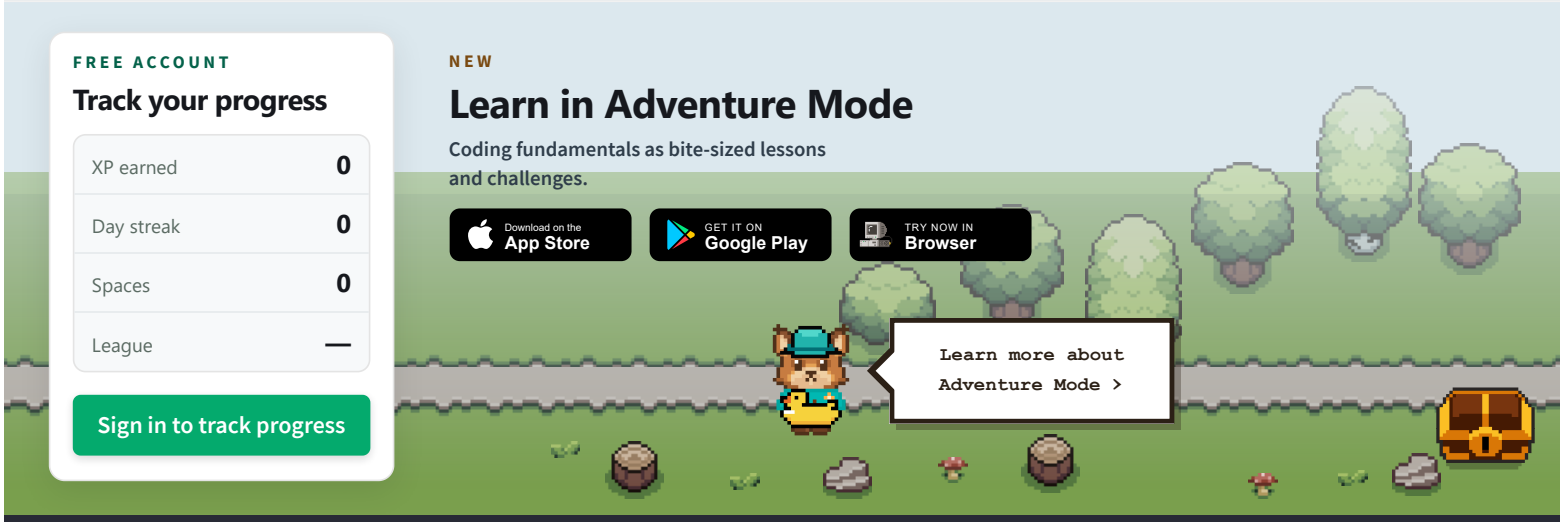

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate

Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number constructor

‹ Previous JavaScript Number Reference Next ›

Example

```
let num = 134.5;
let text = num.constructor;
```

Try it Yourself »

Description

SHARE

The `constructor` property returns the function that created the Number prototype.

For JavaScript numbers the `constructor` property returns:

function Number() { [native code] }

Browser Support

`constructor` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:



Chrome	Edge	Firefox	Safari	Opera

Syntax

```
number.constructor
```

Return Value

function Number() { [native code] }

‹ Previous | JavaScript Number Reference | Next ›



REMOVE ADS



FREE ACCOUNT NEW

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser



W3 schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference

PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number constructor

‹ Previous JavaScript Number Reference Next ›

Example

```
let num = 134.5;
let text = num.constructor;
```

Try it Yourself »

Description

SHARE

The `constructor` property returns the function that created the Number prototype.

For JavaScript numbers the `constructor` property returns:

function Number() { [native code] }

Browser Support

`constructor` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:



Chrome	Edge	Firefox	Safari	Opera

Syntax

```
number.constructor
```


Return Value

function Number() { [native code] }


‹ Previous | JavaScript Number Reference | Next ›

Build skills.
Get hired.
$95 per paid course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS

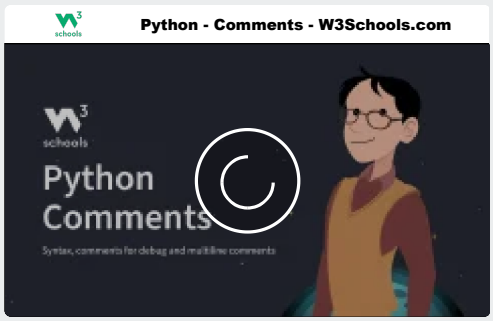

FREE ACCOUNT
NEW

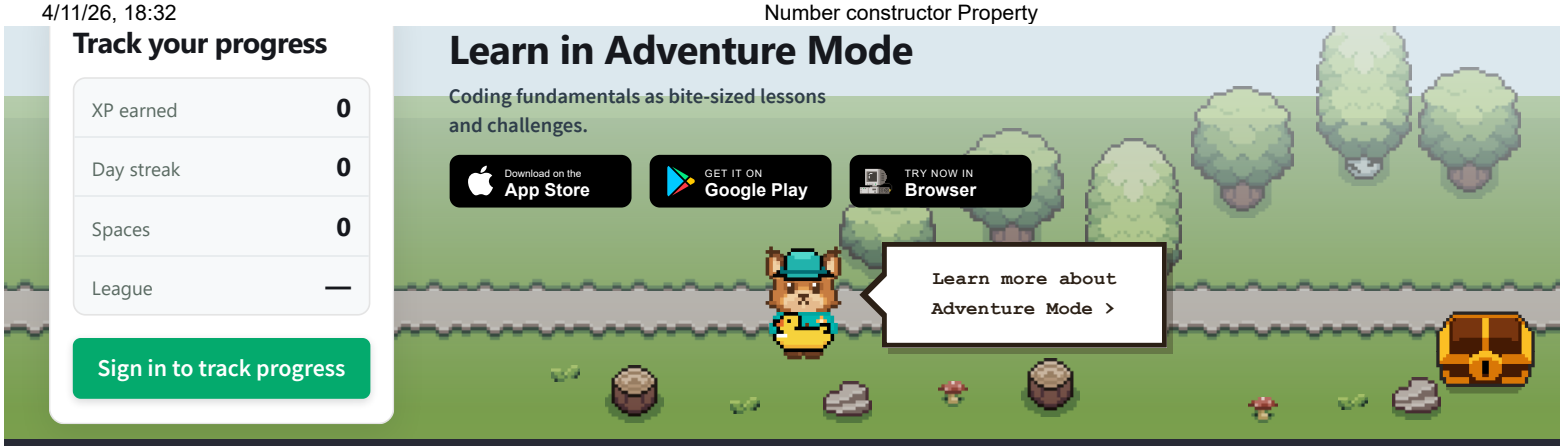

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference

PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number EPSILON

‹ Previous JavaScript Number Reference Next ›

Example

```
let x = Number.EPSILON;
```

Try it Yourself »

Description

SHARE

`Number.EPSILON` returns the difference between the smallest floating point number greater than 1 and 1.

`Number.EPSILON` has the value of 2.220446049250313e-16.

See Also:

The MAX_VALUE Property

The MIN_VALUE Property

The MAX_SAFE_INTEGER Property

The MIN_SAFE_INTEGER Property

The NEGATIVE_INFINITY Property

The POSITIVE_INFINITY Property

Number.EPSILON

EPSILON is a property of the JavaScript Number object.

You can only use it as `Number.EPSILON`.

Using x.EPSILON, where x is a variable, will return undefined:

Example

```
let x = 100;
x.EPSILON;
```

Try it Yourself »

Syntax

```
Number.EPSILON
```

Return Value

Type	Description
Number	2.220446049250313e-16

Browser Support

`Number.EPSILON` is an ECMAScript6 (ES6 2015) feature.

JavaScript 2015 is supported in all browsers since **June 2017**:

				
Chrome 51	Edge 15	Firefox 54	Safari 10	Opera 38
May 2016	Apr 2017	Jun 2017	Sep 2016	Jun 2016


‹ Previous

JavaScript Number Reference

Next ›



REMOVE ADS

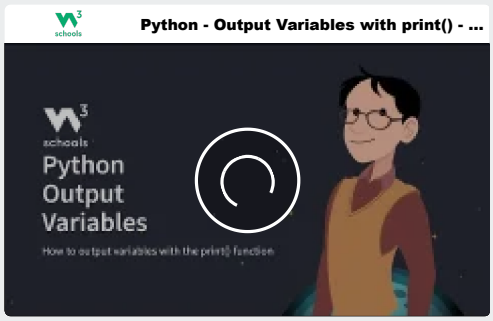

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

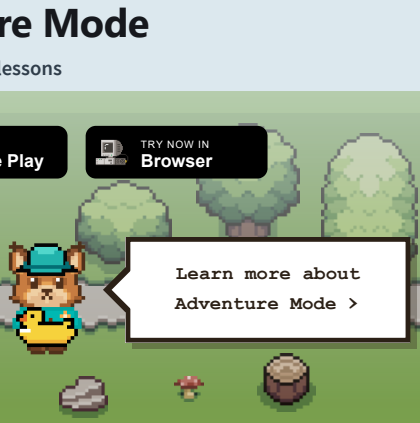

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number isFinite()

‹ Previous | JavaScript Number Reference | Next ›

Examples

Is 123 finite?

```
Number.isFinite(123)
```

Try it Yourself »

```
Number.isFinite("123")
```

Try it Yourself »

Description

SHARE

The `Number.isFinite()` method returns `true` if a number is a finite number.

Infinite (not finite) numbers are `Infinity`, `-Infinity`, or `NaN`

Otherwise it returns `false`.

See Also:

The Global isFinite() Method

The Global isNaN() Method

The Number.isNaN() Method

The POSITIVE_INFINITY Property

The NEGATIVE_INFINITY Property

Difference Between isFinite() and Number.isFinite()

`isFinite()` returns `true` if a **value** is a finite number.

`Number.isFinite()` returns `true` if a **number** is a finite number.

In other words:

`isFinite()` converts the value to a number before testing it.

Examples

```
// This returns true
isFinite(123)
```

Try it Yourself »

```
// This returns false
Number.isFinite("123")
```

Try it Yourself »

Syntax

```
Number.isFinite(value)
```

Parameters

Parameter	Description
value	Required. The value to be tested.

Return Value

Type	Description
A boolean	`true` if the value is a finite Number, otherwise `false`.

REMOVE ADS

More Examples

```
Number.isFinite(+1.23)
Number.isFinite(-1.23)
Number.isFinite('2005/12/12')
```

Try it Yourself »

```
Number.isFinite(5-2)
Number.isFinite(5/2)
Number.isFinite(0)
Number.isFinite(0/0)
Number.isFinite(Infinity)
Number.isFinite(-Infinity)
Number.isFinite(NaN)
```

Try it Yourself »

Browser Support

`Number.isFinite()` is an ECMAScript6 (ES6 2015) feature.


JavaScript 2015 is supported in all browsers since **June 2017**:

Chrome	Edge	Firefox	Safari	Opera
51	15	54	10	38
May 2016	Apr 2017	Jun 2017	Sep 2016	Jun 2016

‹ Previous JavaScript Number Reference Next ›



REMOVE ADS

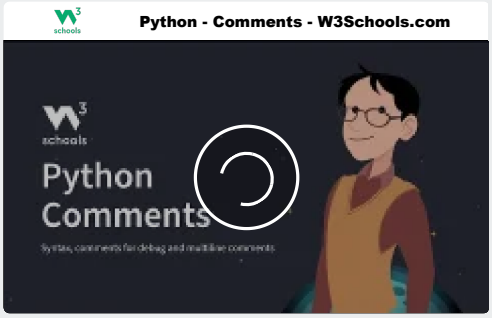



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number isInteger()

‹ Previous | JavaScript Number Reference | Next ›

Examples

Are these integers?

```
Number.isInteger(123);
Number.isInteger(-123);
Number.isInteger('123');
```

Try it Yourself »

```
Number.isInteger(4-2);
Number.isInteger(4/2);
Number.isInteger(5-2);
Number.isInteger(5/2);
```

Try it Yourself »

More examples below

Description

SHARE

The `Number.isInteger()` method returns `true` if a value is an integer of the datatype Number.

Otherwise it returns `false`.

See Also:

The Number.isSafeInteger() Method

The MAX_SAFE_INTEGER Property

The MIN_SAFE_INTEGER Property

Syntax

```
Number.isInteger(value)
```

Parameters

Parameter	Description
value	Required. The value to be tested.

Return Value

Type	Description
A boolean	`true` if the value is an integer of the datatype Number. Otherwise `false`.

More Examples

Are these integers?

```
Number.isInteger(0);
Number.isInteger(0/0);
Number.isInteger(0.5);
Number.isInteger(false);
Number.isInteger(NaN);
Number.isInteger(Infinity);
Number.isInteger(-Infinity);
```

Try it Yourself »

REMOVE ADS


Browser Support

`Number.isInteger()` is an ECMAScript6 (ES6 2015) feature.

JavaScript 2015 is supported in all browsers since **June 2017**:

Chrome	Edge	Firefox	Safari	Opera
51	15	54	10	38
May 2016	Apr 2017	Jun 2017	Sep 2016	Jun 2016

‹ Previous | JavaScript Number Reference | Next ›

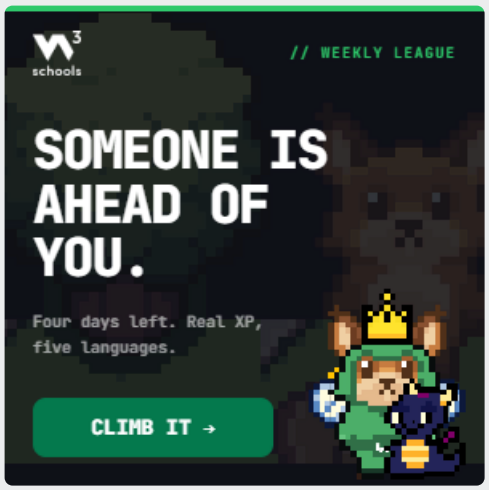

REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number isNaN()

‹ Previous JavaScript Number Reference Next ›

Examples

Check if a value is Number.NaN:

```
Number.isNaN(123);
Number.isNaN(-1.23);
Number.isNaN('123');
Number.isNaN(0/0);
```

Try it Yourself »

```
Number.isNaN(5-2);
Number.isNaN(0);
Number.isNaN('Hello');
Number.isNaN('2005/12/12');
Number.isNaN(' ');
```

Try it Yourself »

More examples below.

Description

SHARE

In JavaScript, `NaN` is short for "Not-a-Number".

In JavaScript, `NaN` is a number that is not a legal number.

The `Number.isNaN()` method returns `true` if the value is `NaN`, and the type is a Number.

See Also:

The NaN() Property

The Global isNaN() Method

Difference Between isnan() and Number.isnan()

`isNaN()` method returns `true` if a **value** is Not-a-Number.

`Number.isNaN()` returns `true` if a **number** is Not-a-Number.

In other words:

`isNaN()` converts the value to a number before testing it.

Examples

```
// This returns true;
isNaN('Hello');
```

Try it Yourself »

```
// This returns false;
Number.isNaN('Hello');
```

Try it Yourself »

Syntax

```
Number.isNaN(value)
```

Parameters

Parameter	Description

value	Required. The value to be tested.

REMOVE ADS

Return Value

Type	Description
A boolean.	`true` if the value is Number.NaN, otherwise `false`.

More Examples

Check if a value is Number.NaN:

```
Number.isNaN(false);
Number.isNaN(true);
Number.isNaN(undefined);
Number.isNaN('NaN');
Number.isNaN(NaN);
```

Try it Yourself »

Browser Support

`Number.isNaN()` is an ECMAScript6 (ES6 2015) feature.


JavaScript 2015 is supported in all browsers since **June 2017**:

Chrome	Edge	Firefox	Safari	Opera
51	15	54	10	38
May 2016	Apr 2017	Jun 2017	Sep 2016	Jun 2016

‹ Previous JavaScript Number Reference Next ›



REMOVE ADS

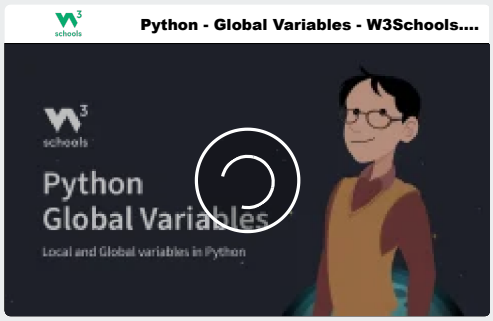



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number isSafeInteger()

‹ Previous | JavaScript Number Reference | Next ›

Examples

Are these safe integers?

```
Number.isSafeInteger(123);
Number.isSafeInteger(-123);
Number.isSafeInteger('123');
```

Try it Yourself »

```
Number.isSafeInteger(5-2);
Number.isSafeInteger(0);
Number.isSafeInteger(0.5);
Number.isSafeInteger(0/0);
```

Try it Yourself »

Description

SHARE

The `Number.isSafeInteger()` method returns `true` if a number is a safe integer.

Otherwise it returns `false`.

What is a JavaScript Safe Integer?

A safe integer is an integer that can be exactly represented as an IEEE-754 double precision number: all integers from $(2^{53} - 1)$ to $-(2^{53} - 1)$.

See Also:

The Number.isInteger() Method

The MAX_SAFE_INTEGER Property

The MIN_SAFE_INTEGER Property

Syntax

```
Number.isSafeInteger(value)
```

Parameters

Parameter	Description
value	Required. The value to be tested.

Return Value

Type	Description
A boolean	`true` if the value is a safe integer, otherwise `false`.

REMOVE ADS

More Examples

Are these safe integers?

```
Number.isSafeInteger(Math.pow(2, 53));
Number.isSafeInteger(Math.pow(2, 53) - 1);
```

Try it Yourself »

```
Number.isSafeInteger(true);
Number.isSafeInteger(false);
Number.isSafeInteger(Infinity);
Number.isSafeInteger(-Infinity);
```

Try it Yourself »

Browser Support

`Number.isSafeInteger()` is an ECMAScript6 (ES6 2015) feature.

JavaScript 2015 is supported in all browsers since **June 2017**:

Chrome	Edge	Firefox	Safari	Opera
51	15	54	10	38
May 2016	Apr 2017	Jun 2017	Sep 2016	Jun 2016

‹ Previous | JavaScript Number Reference | Next ›



REMOVE ADS

Python - Introduction - W3Schools.com



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

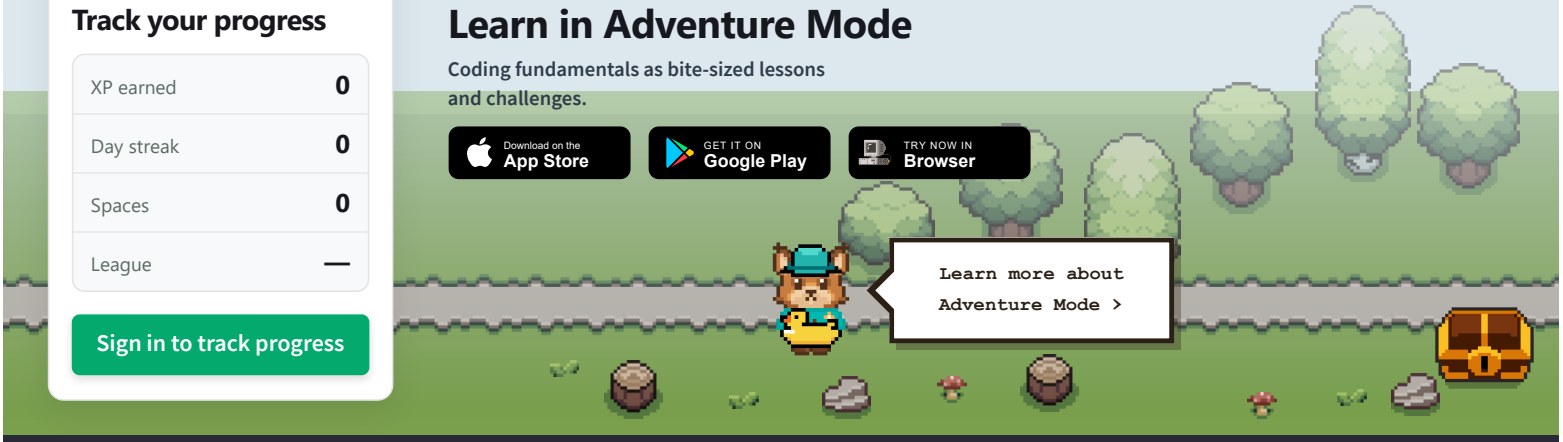

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript MAX_SAFE_INTEGER

‹ Previous JavaScript Number Reference Next ›

Example

```
let x = Number.MAX_SAFE_INTEGER;
```

Try it Yourself »

Description

SHARE

`Number.MAX_SAFE_INTEGER` represents the maximum safe integer in JavaScript.

`Number.MAX_SAFE_INTEGER` is (2^{53} - 1).

See Also

The MIN_SAFE_INTEGER Property

The MAX_VALUE Property

The MIN_VALUE Property

The NEGATIVE_INFINITY Property

The POSITIVE_INFINITY Property

Number.MAX_SAFE_INTEGER

MAX_SAFE_INTEGER is a property of the JavaScript Number object.

You can only use it as `Number.MAX_SAFE_INTEGER`.

Using x.MAX_VALUE, where x is a variable, will return undefined:

Example

```
let x = 100;
x.MAX_SAFE_INTEGER;
```

Try it Yourself »

Syntax

```
Number.MAX_SAFE_INTEGER
```

Return Value

Type	Description
Number	9007199254740991

Browser Support

`Number.MAX_SAFE_INTEGER` is an ECMAScript6 (ES6 2015) feature.

JavaScript 2015 is supported in all browsers since **June 2017**:

				
Chrome 51	Edge 15	Firefox 54	Safari 10	Opera 38
May 2016	Apr 2017	Jun 2017	Sep 2016	Jun 2016

‹ Previous JavaScript Number Reference Next ›

Learn it.
Get certified.
Get hired.

$95 per course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

Python - Variable Names - W3Schools.c...

Python
Variable Names
Rules for Variable Names

FREE ACCOUNT

Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

Learn more about Adventure Mode >

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript MIN_SAFE_INTEGER

‹ Previous JavaScript Number Reference Next ›

Example

```
let x = Number.MIN_SAFE_INTEGER;
```

Try it Yourself »

Description

SHARE

`Number.MIN_SAFE_INTEGER` represents the minimum safe integer in JavaScript.

`Number.MIN_SAFE_INTEGER` is $-(2^{53} - 1)$.

See Also

The MAX_SAFE_INTEGER Property

The MAX_VALUE Property

The MIN_VALUE Property

The NEGATIVE_INFINITY Property

The POSITIVE_INFINITY Property

Number.MIN_SAFE_INTEGER

MIN_SAFE_INTEGER is a property of the JavaScript Number object.

You can only use it as `Number.MIN_SAFE_INTEGER`.

Using x.MIN_VALUE, where x is a variable, will return undefined:

Example

```
let x = 100;
x.MIN_SAFE_INTEGER;
```

Try it Yourself »

Syntax

```
Number.MIN_SAFE_INTEGER
```

Return Value

Type	Description
Number	-9007199254740991

Browser Support

`Number.MIN_SAFE_INTEGER` is an ECMAScript6 (ES6 2015) feature.

JavaScript 2015 is supported in all browsers since **June 2017**:

				
Chrome 51	Edge 15	Firefox 54	Safari 10	Opera 38
May 2016	Apr 2017	Jun 2017	Sep 2016	Jun 2016

‹ Previous JavaScript Number Reference Next ›

Build skills.
Get hired.

$95 per paid course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

Python - Variables - W3Schools.com

Python
Variables

Containers for storing data values

FREE ACCOUNT

Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress


NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

Learn more about Adventure Mode >

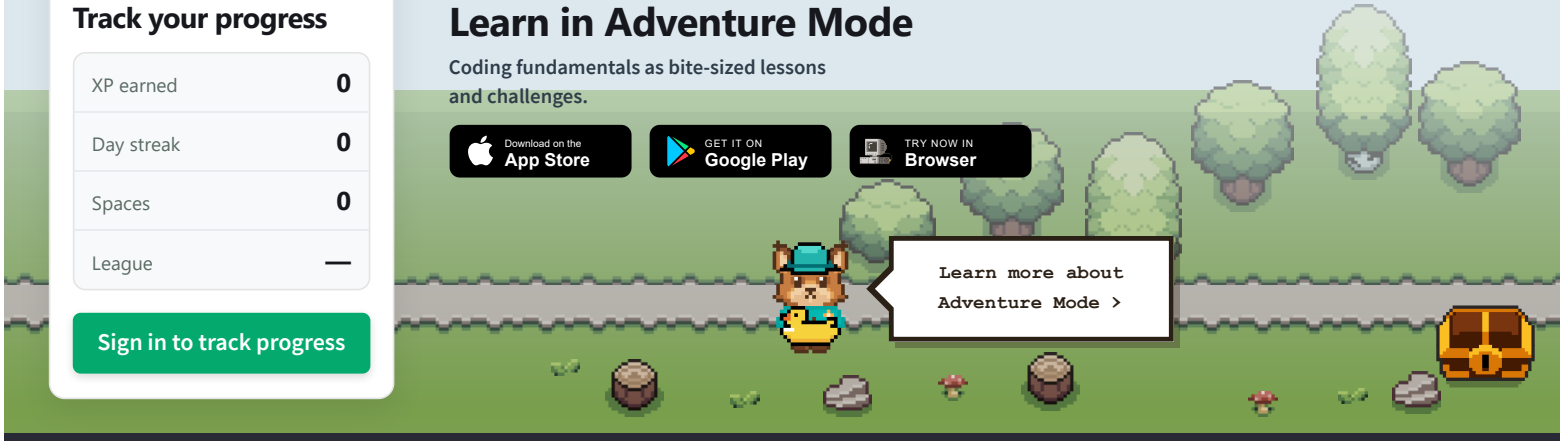

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number MAX_VALUE

‹ Previous | JavaScript Number Reference | Next ›

Example

```
let x = Number.MAX_VALUE;
```

Try it Yourself »

Description

SHARE

`Number.MAX_VALUE` returns the largest number possible in JavaScript.

`Number.MAX_VALUE` has the value of 1.7976931348623157e+308.

Note

Numbers larger than MAX_VALUE are represented as Infinity.

See Also:

The MIN_VALUE Property

The MAX_SAFE_INTEGER Property

The MIN_SAFE_INTEGER Property

The POSITIVE_INFINITY Property

The NEGATIVE_INFINITY Property

Number.MAX_VALUE

MAX_VALUE is a property of the JavaScript Number object.

You can only use it as `Number.MAX_VALUE`.

Using x.MAX_VALUE, where x is a variable, will return undefined:

Example

```
let x = 100;
x.MAX_VALUE;
```

Try it Yourself »

Syntax

```
Number.MAX_VALUE
```

Return Value

Type	Description
Number	1.7976931348623157e+308

Browser Support

`Number.MAX_VALUE` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

‹ Previous | JavaScript Number Reference | Next ›

schools

JS


Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

REMOVE ADS

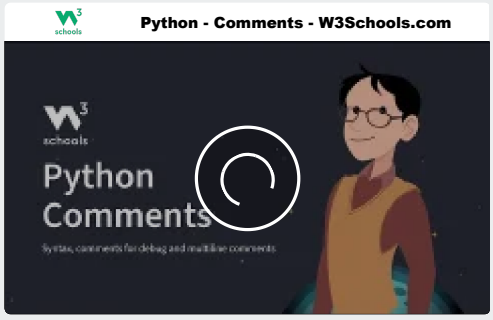

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

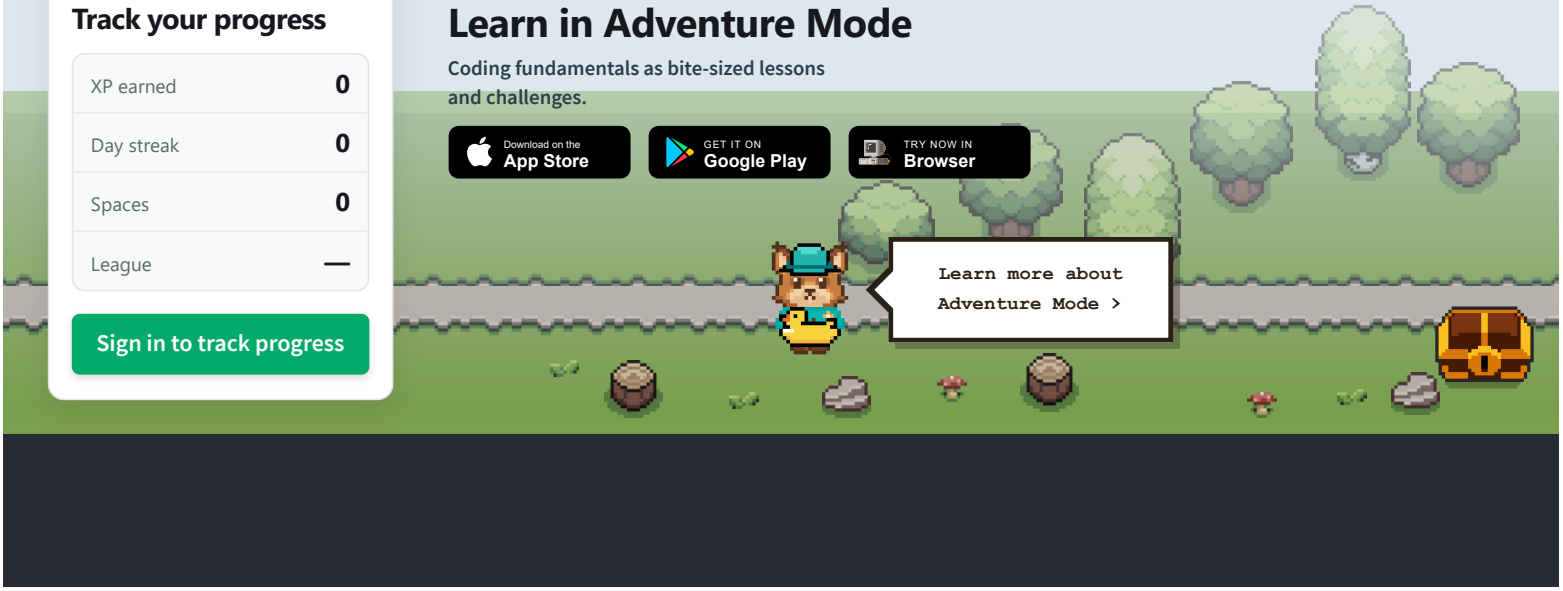

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Math.trunc()

‹ Previous | JavaScript Math Object | Next ›

Example

```
let x = Math.trunc(8.76);
```

Try it Yourself »

Description

SHARE

The `Math.trunc()` method returns the integer part of a number.

The `Math.trunc()` method removes the decimals (does NOT round the number).

JavaScript Rounding Functions

The Math.abs() Method
The Math.ceil() Method
The Math.floor() Method
The Math.round() Method
The Math.fround() Method
The Math.f16round() Method
The Math.trunc() Method

Syntax

```
Math.trunc(x)
```

Parameters

Parameter	Description
x	Required. A number.

Return Value

Type	Description
Number	The integer part of the number.

See Also:

Full JavaScript Math Tutorial

Full JavaScript Math Reference

Full JavaScript Numbers Tutorial

Full JavaScript Number Reference


Browser Support

`Math.trunc()` is an ECMAScript6 (ES6 2015) feature.

JavaScript 2015 is supported in all browsers since **June 2017**:

				
Chrome 51	Edge 15	Firefox 54	Safari 10	Opera 38
May 2016	Apr 2017	Jun 2017	Sep 2016	Jun 2016

‹ Previous JavaScript Math Object Next ›

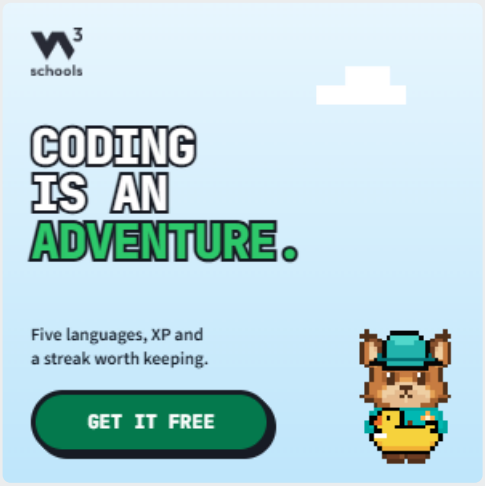

REMOVE ADS





schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number constructor

‹ Previous JavaScript Number Reference Next ›

Example

```
let num = 134.5;
let text = num.constructor;
```

Try it Yourself »

Description

SHARE

The `constructor` property returns the function that created the Number prototype.


For JavaScript numbers the `constructor` property returns:

function Number() { [native code] }

Browser Support

`constructor` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:



Chrome	Edge	Firefox	Safari	Opera

Syntax

```
number.constructor
```

Return Value

function Number() { [native code] }

‹ Previous | JavaScript Number Reference | Next ›

Build skills.
Get hired.
$95 per paid course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS



FREE ACCOUNT
NEW

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

Learn in Adventure Mode


Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

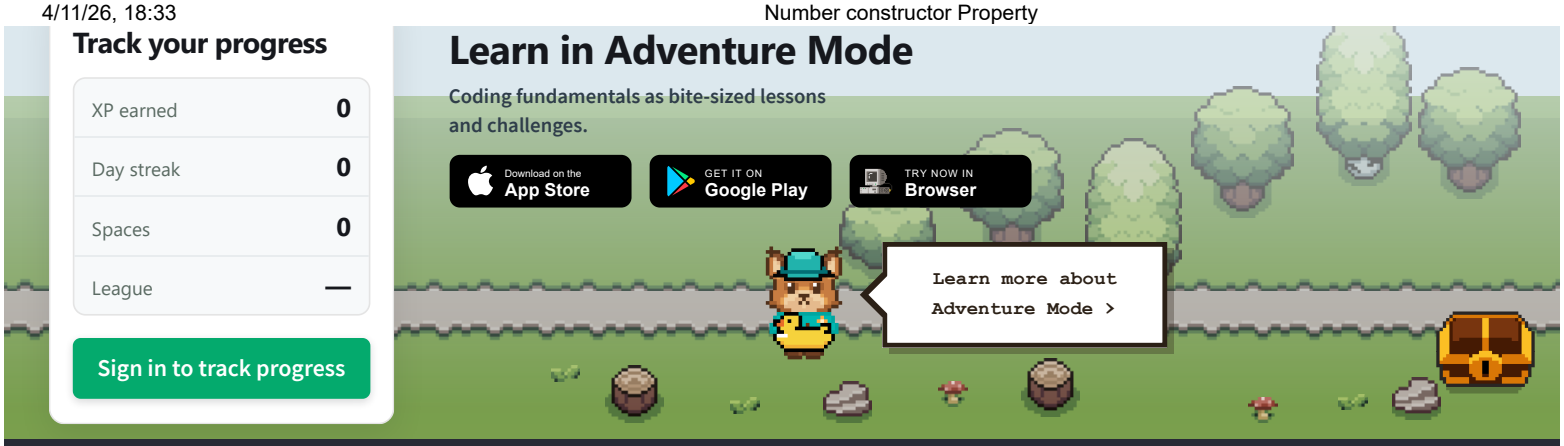

W3 schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference

PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number MIN_VALUE

‹ Previous | JavaScript Number Reference | Next ›

Example

```
let x = Number.MIN_VALUE;
```

Try it Yourself »

Description

SHARE

`Number.MIN_VALUE` returns the smallest number possible in JavaScript.

`Number.MIN_VALUE` has a value of 5e-324.

Note

MIN_VALUE is the value closest to 0.

Numbers smaller than this are converted to 0.

The most negative number is the negative MAX_NUMBER.

See Also:

The MAX_VALUE Property

The MAX_SAFE_INTEGER Property

The MIN_SAFE_INTEGER Property

The POSITIVE_INFINITY Property

The NEGATIVE_INFINITY Property

Number.MIN_VALUE

MIN_VALUE is a property of the JavaScript Number object.

You can only use it as Number.MIN_VALUE.

Using x.MIN_VALUE, where x is a variable, will return undefined:

Example

```
let x = 100;
x.MIN_VALUE;
```

Try it Yourself »

Syntax

```
Number.MIN_VALUE
```


Return Value

Type	Description
Number	5e-324

Browser Support

`Number.MIN_VALUE` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:



Chrome	Edge	Firefox	Safari	Opera


REMOVE ADS

‹ Previous | JavaScript Number Reference | Next ›



REMOVE ADS



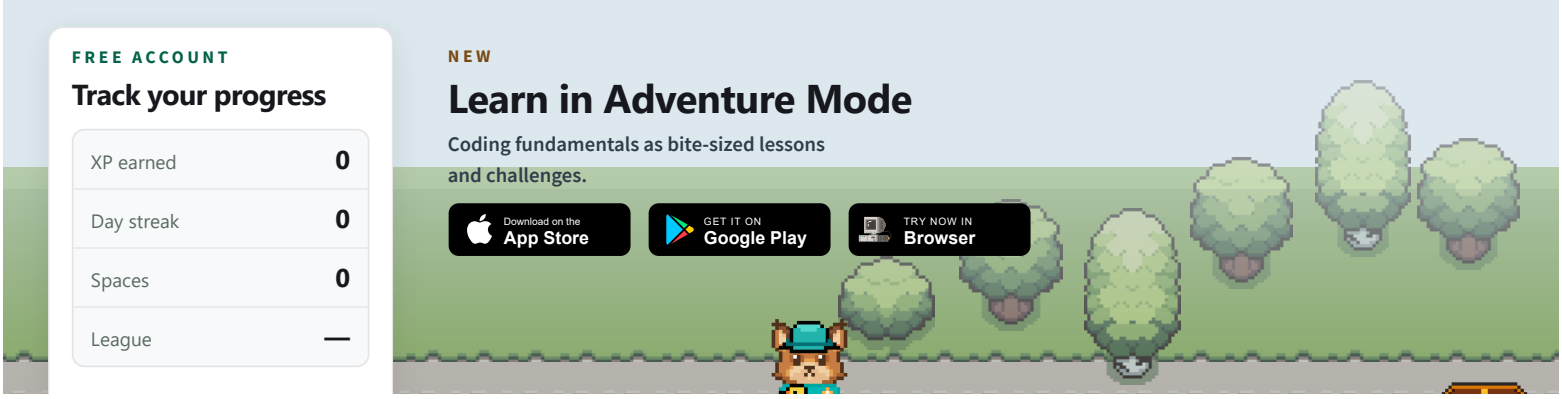

Sign in to track progress



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number NaN

‹ Previous JavaScript Number Reference Next ›

Examples

```
let x = Number.NaN;
```

Try it Yourself »

```
let x = NaN;
```

Try it Yourself »

Description

SHARE

In JavaScript, `NaN` is short for "Not-a-Number".

In JavaScript, `NaN` is a number that is not a legal number.

The Global `NaN` property is the same as the `Number.Nan` property.

See Also:

The Global isNaN() Method

The Number.isNaN() Method

Syntax

```
Number.NaN
```

Browser Support

`Number.NaN` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

‹ Previous | JavaScript Number Reference | Next ›

Build skills.
Get hired.
$95 per paid course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS

Python - Syntax - W3Schools.com



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

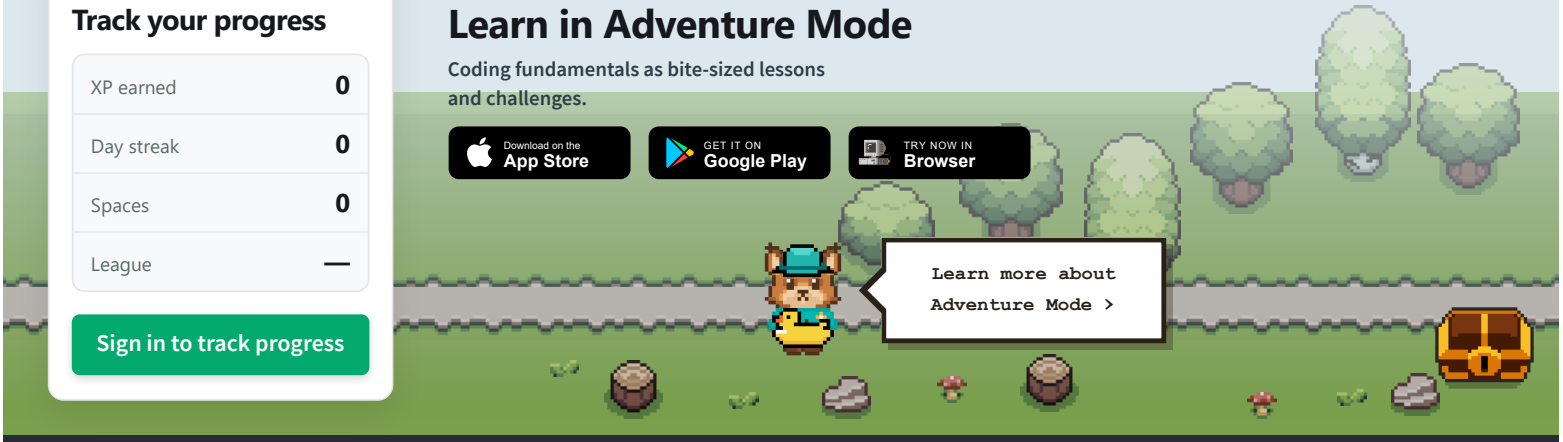

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number NEGATIVE_INFINITY

‹ Previous JavaScript Number Reference Next ›

Examples

```
let x = Number.NEGATIVE_INFINITY;
```

Try it Yourself »

Create a negative infinity:

```
let n = (-Number.MAX_VALUE) * 2;
```

Try it Yourself »

Description

SHARE

`Number.NEGATIVE_INFINITY` returns negative infinity.

`Number.NEGATIVE_INFINITY` is "a number lower than any other number".

See Also:

The POSITIVE_INFINITY Property

The MAX_VALUE Property

The MIN_VALUE Property

The MAX_SAFE_INTEGER Property

The MIN_SAFE_INTEGER Property

Number.NEGATIVE_INFINITY

NEGATIVE_INFINITY is a property of the JavaScript Number object.

You can only use it as Number.NEGATIVE_INFINITY.

Using x.NEGATIVE_INFINITY, where x is a variable, will return undefined:

Example

```
let x = 100;
x.NEGATIVE_INFINITY;
```

Try it Yourself »

REMOVE ADS

Syntax

```
Number.NEGATIVE_INFINITY
```

Return Value

Type	Description
A number	-Infinity

Browser Support

`Number.NEGATIVE_INFINITY` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:


Chrome	Edge	Firefox	Safari	Opera

‹ Previous | JavaScript Number Reference | Next ›



REMOVE ADS



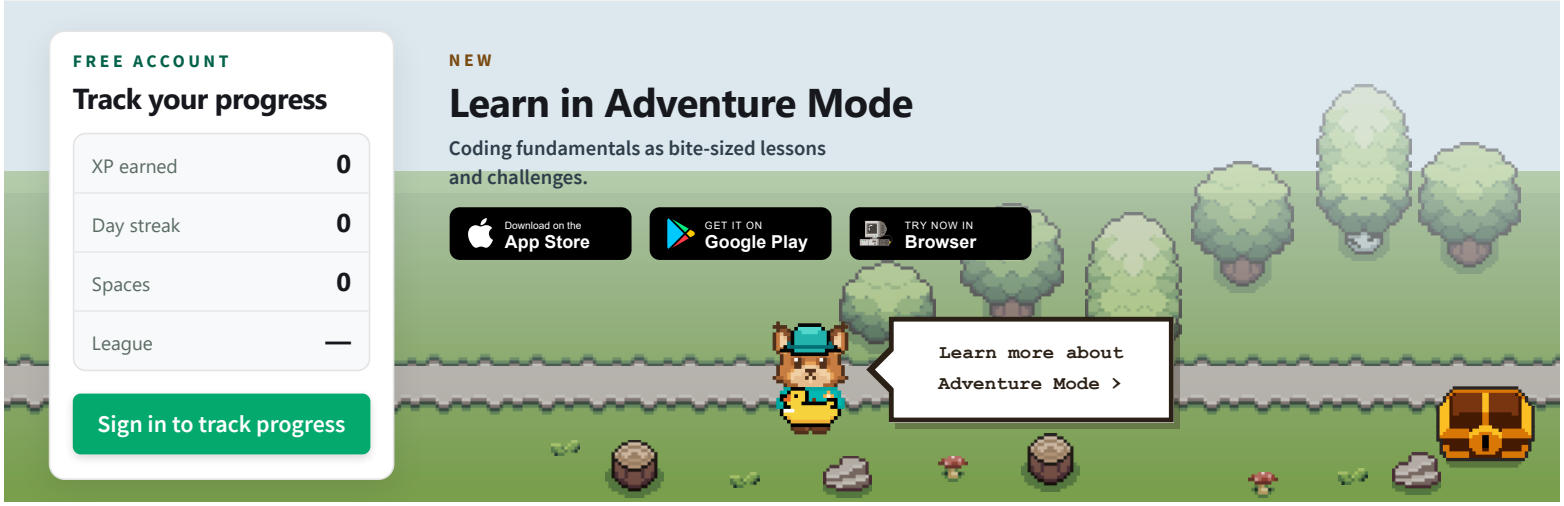

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number POSITIVE_INFINITY

‹ Previous JavaScript Number Reference Next ›

Examples

```
let x = Number.POSITIVE_INFINITY;
```

Try it Yourself »

Create a positive infinity:

```
let n = (Number.MAX_VALUE) * 2;
```

Try it Yourself »

Description

SHARE

`POSITIVE_INFINITY` returns positive infinity.

`POSITIVE_INFINITY` is "something higher than any other number".

See Also:

The NEGATIVE_INFINITY Property

The MAX_VALUE Property

The MIN_VALUE Property

The MAX_SAFE_INTEGER Property

The MIN_SAFE_INTEGER Property

Number.POSITIVE_INFINITY

POSITIVE_INFINITY a property of the JavaScript Number object.

You can only use it as Number.POSITIVE_INFINITY.

Using x.POSITIVE_INFINITY, where x is a variable, will return undefined:

Example

```
let x = 100;
x.NEGATIVE_INFINITY;
```

Try it Yourself »

REMOVE ADS

Syntax

```
Number.POSITIVE_INFINITY
```

Return Value

Type	Description
A number	Infinity

Browser Support

`Number.POSITIVE_INFINITY` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:


Chrome	Edge	Firefox	Safari	Opera

‹ Previous | JavaScript Number Reference | Next ›



REMOVE ADS



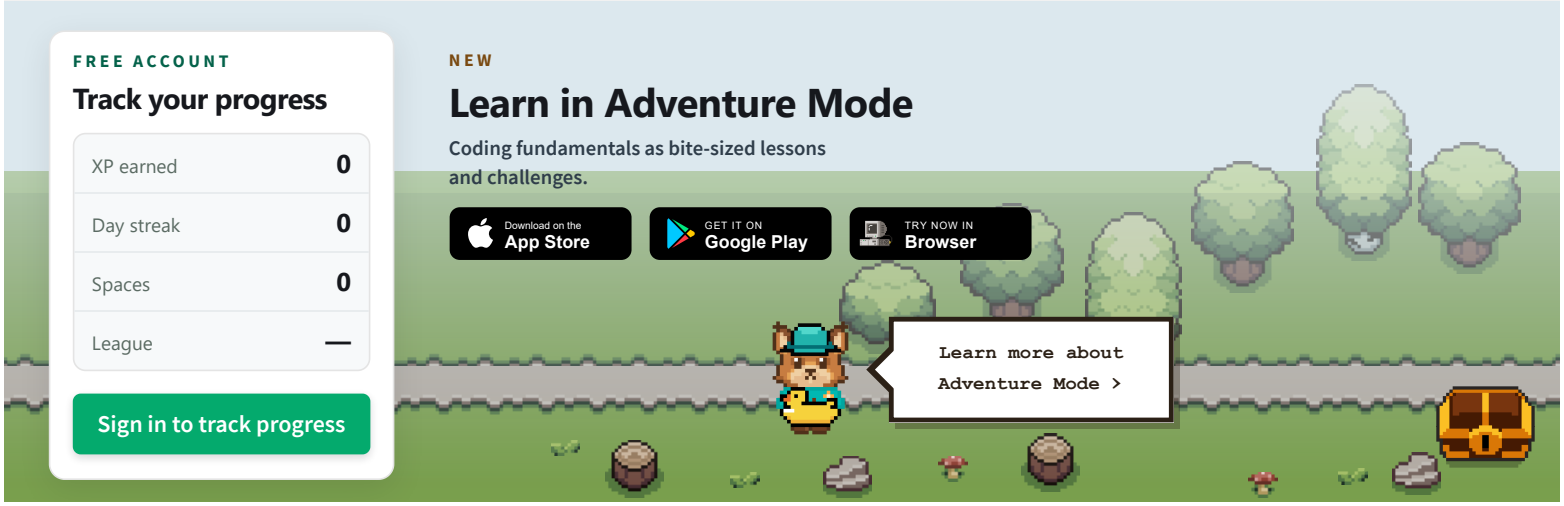

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number.parseFloat()

‹ Previous JavaScript Number Reference Next ›

Examples

```
Number.parseFloat(10);
Number.parseFloat("10");
Number.parseFloat("10.33");
Number.parseFloat("34 45 66");
Number.parseFloat("He was 40");
```

Try it Yourself »

```
Number.parseFloat("40.00");
Number.parseFloat(" 40 ");
Number.parseFloat("40 years");
Number.parseFloat("40H")
Number.parseFloat("H40");
```

Try it Yourself »

Description

SHARE

The `Number.parseFloat()` method parses a value as a string and returns the first number.

Notes

If the first character cannot be converted, `NaN` is returned.

Leading and trailing spaces are ignored.

Only the first number found is returned.

Syntax

```
Number.parseFloat(value)
```

Parameters

Parameter	Description
value	Required. The value to parse.

Return Value

Type	Description
Number	NaN if no number is found.

REMOVE ADS

Browser Support

`Number.parseFloat()` is an ECMAScript6 (ES6 2015) feature.

JavaScript 2015 is supported in all browsers since **June 2017**:

				
Chrome 51	Edge 15	Firefox 54	Safari 10	Opera 38
May 2016	Apr 2017	Jun 2017	Sep 2016	Jun 2016

‹ Previous | JavaScript Number Reference | Next ›

Build skills.
Get hired.

$95 per paid course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS



FREE ACCOUNT
Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

Learn more about Adventure Mode >

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number.parseInt()

‹ Previous JavaScript Number Reference Next ›

Examples

```
Number.parseInt("10");
Number.parseInt("10.00");
Number.parseInt("10.33");
Number.parseInt("34 45 66");
Number.parseInt(" 60 ");
Number.parseInt("40 years");
Number.parseInt("He was 40");
```

Try it Yourself »

```
Number.parseInt("10", 10);
Number.parseInt("010");
Number.parseInt("10", 8);
Number.parseInt("0x10");
Number.parseInt("10", 16);
```

Try it Yourself »

Description

SHARE

The `Number.parseInt` method parses a value as a string and returns the first integer.

A radix parameter specifies the number system to use:

2 = binary, 8 = octal, 10 = decimal, 16 = hexadecimal.

If radix is omitted, JavaScript assumes radix 10. If the value begins with "0x", JavaScript assumes radix 16.

Notes

If the first character cannot be converted, `NaN` is returned.

Leading and trailing spaces are ignored.

Only the first integer found is returned.

Syntax

```
Number.parseInt(string, radix)
```

Parameters

Parameter	Description
value	Required. The value to be parsed.
radix	Optional. Default is 10. A number (2 to 36) specifying the number system.

Return Value

Type	Description
Number	NaN if no integer is found.

REMOVE ADS

Browser Support

`Number.parseInt()` is an ECMAScript6 (ES6 2015) feature.


JavaScript 2015 is supported in all browsers since **June 2017**:

Chrome	Edge	Firefox	Safari	Opera
51	15	54	10	38
May 2016	Apr 2017	Jun 2017	Sep 2016	Jun 2016

‹ Previous | JavaScript Number Reference | Next ›



REMOVE ADS

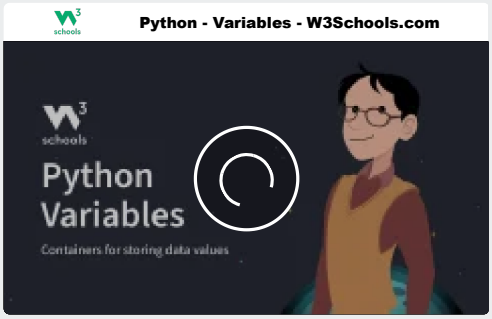

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

Sign in to track progress



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number prototype

‹ Previous JavaScript Number Reference Next ›

Example

Create a new number method that returns a number's half value:

```
Number.prototype.myMethod = function() {
  return this.valueOf() / 2;
};
```

Use the new method on a number:

```
let n = 55;
let x = n.myMethod();
```

Try it Yourself »

Description

SHARE

`prototype` allows you to add new properties and methods to numbers.

`prototype` is a property available with all JavaScript objects.

Syntax

```
Number.prototype.name = value
```

REMOVE ADS

Warning

You are not advised to change the prototype of an object that you do not control.

You should not change the prototype of built in JavaScript datatypes like:

- Numbers
- Strings
- Arrays
- Dates
- Booleans
- Function
- Objects

Only change the prototype of your own objects.

The prototype Property

The JavaScript `prototype` property allows you to add new properties to objects:

Example

```
function Person(first, last, age, eyecolor) {
  this.firstName = first;
  this.lastName = last;
  this.eyeColor = eyecolor;
}

Person.prototype.nationality = "English";
```

Try it Yourself »

Browser Support

`Number.prototype` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera


‹ Previous


JavaScript Number Reference

Next ›



REMOVE ADS

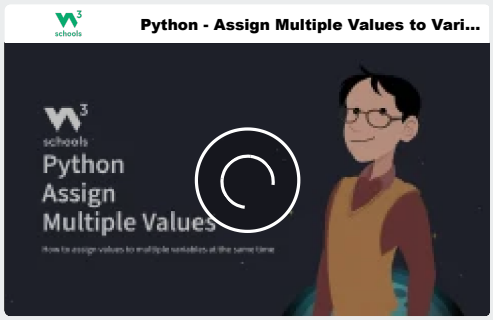

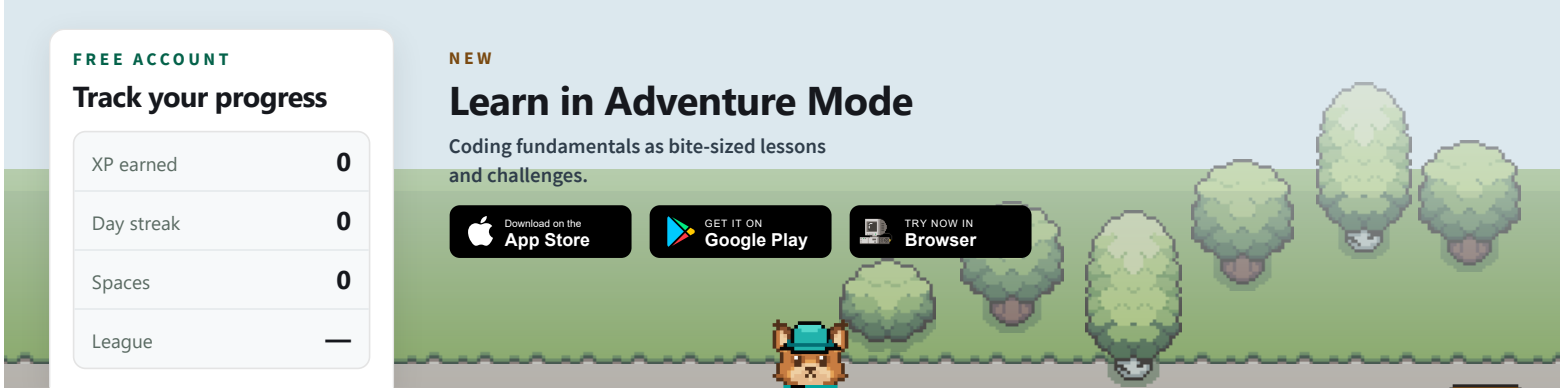

Sign in to track progress



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number toExponential()

‹ Previous JavaScript Number Reference Next ›

Example 1

Convert a number into an exponential notation:

```
let num = 5.56789;
let n = num.toExponential();
```

Try it Yourself »

Description

SHARE

The toExponential() method converts a number into an exponential notation.

Example 2

```
let num = 5.56789;
let n = num.toExponential(3);
```

Try it Yourself »

REMOVE ADS

Syntax

```
number.toExponential(x)
```

Parameters

Parameter	Description
x	Optional. An integer between 0 and 20 representing the number of digits in the notation after the decimal point. If omitted, it is set to as many digits as necessary to represent the value

Return Value

A String, representing the number as an exponential notation.

Browser Support

`toExponential()` is an ECMAScript3 (JavaScript 1999) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

‹ Previous JavaScript Number Reference Next ›



REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

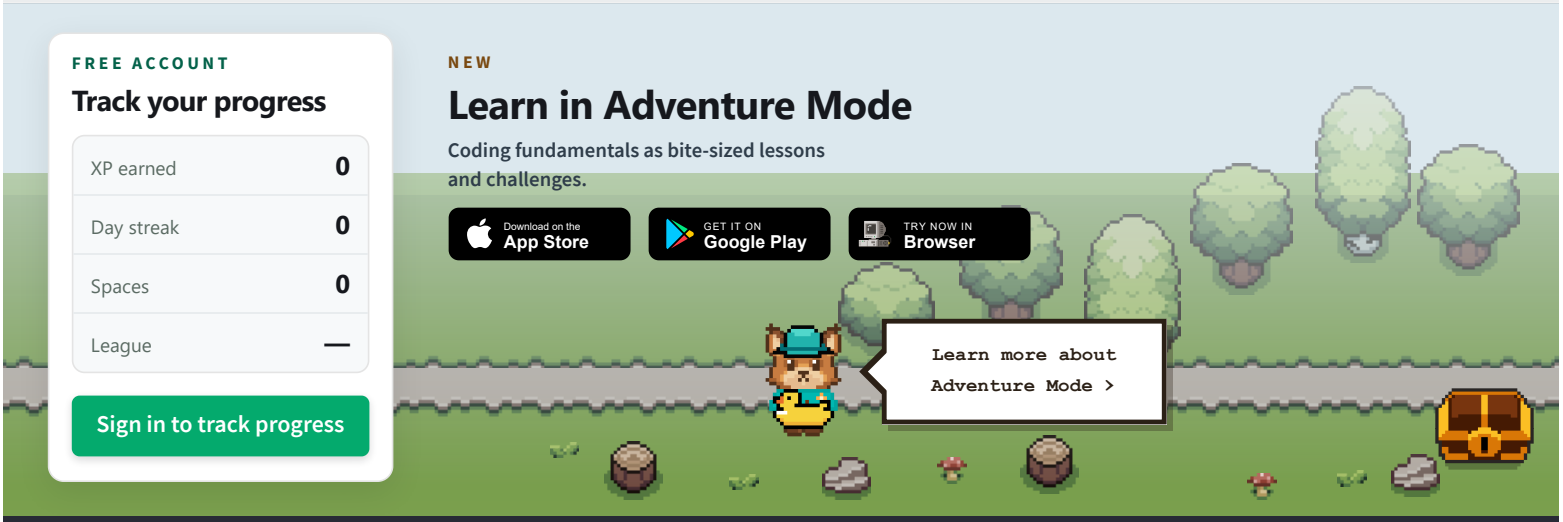

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number toFixed()

‹ Previous JavaScript Number Reference Next ›

Examples

```
let num = 5.56789;
let n = num.toFixed();
```

Try it Yourself »

```
let num = 5.56789;
let n = num.toFixed(2);
```

Try it Yourself »

More examples below

Description

SHARE

The `toFixed()` method converts a number to a string.

The `toFixed()` method rounds the string to a specified number of decimals.

Note

If the number of decimals are higher than in the number, zeros are added.

Syntax

```
number.toFixed(x)
```

Parameters

Parameter	Description
x	Optional. Number of decimals. Default is 0 (no decimals)

Return Value

Type	Description
A string	The representation of a number with (or without) decimals.

REMOVE ADS

More Examples

Round to 10 decimals

```
let num = 5.56789;
let n = num.toFixed(10);
```

Try it Yourself »

Browser Support

`toFixed()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:



Chrome	Edge	Firefox	Safari	Opera

‹ Previous | JavaScript Number Reference | Next ›

Build skills.
Get hired.

$95 per paid course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS




FREE ACCOUNT
Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

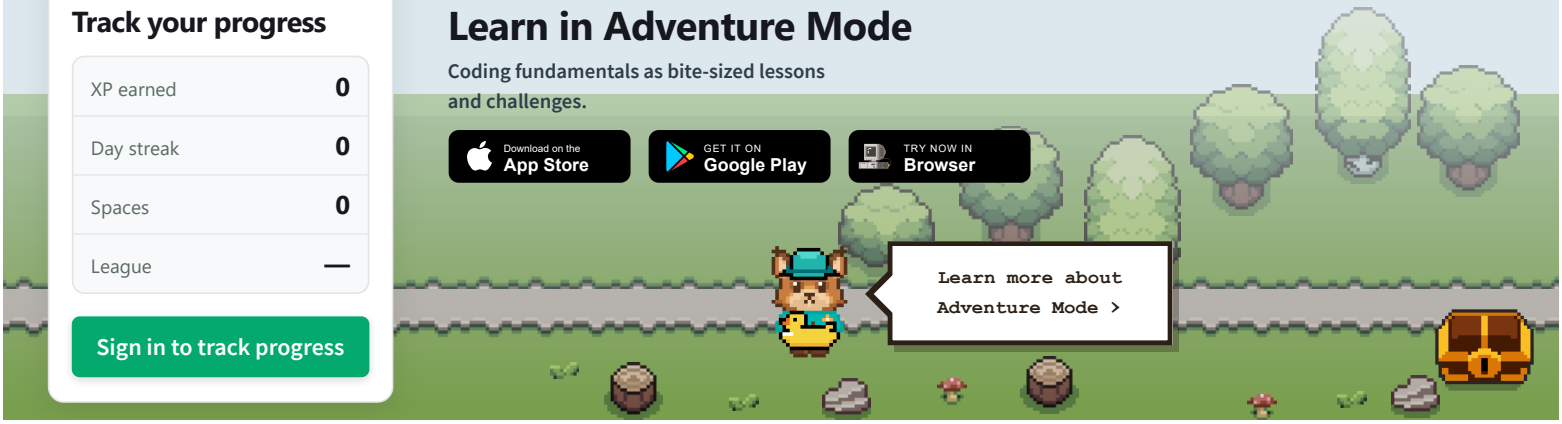

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number toLocaleString()

‹ Previous JavaScript Number Reference Next ›

Examples

Format a number into a string, using locale settings:

```
let num = 1000000;
let text = num.toLocaleString();
```

Try it Yourself »

Format a number into a string, using the locale specific of FINLAND:

```
let num = 1000000;
let text = num.toLocaleString("fi-FI");
```

Try it Yourself »

Format a number into a currency string, using the locale specific of USA:

```
let num = 1000000;
let text = num.toLocaleString("en-US", {style:"currency", currency:"USD"});
```

Try it Yourself »

More examples below

Description

SHARE

The `toLocaleString()` returns a number as a string, using local language format.

The language format depends on the locale setup on your computer.

Syntax

```
number.toLocaleString(locales, options)
```

Parameters

Parameter	Description
locales	Optional. The language specific format to use. Click on the "Try it" button to see all values in action. `ar-SA` Arabic (Saudi Arabia) `bn-BD` Bangla (Bangladesh) `bn-IN` Bangla (India) `cs-CZ` Czech (Czech Republic) `da-DK` Danish (Denmark) `de-AT` Austrian German `de-CH` "Swiss" German `de-DE` Standard German (as spoken in Germany) `el-GR` Modern Greek `en-AU` Australian English `en-CA` Canadian English `en-GB` British English `en-IE` Irish English `en-IN` Indian English `en-NZ` New Zealand English `en-US` US English `en-ZA` English (South Africa) `es-AR` Argentine Spanish `es-CL` Chilean Spanish `es-CO` Colombian Spanish `es-ES` Castilian Spanish (as spoken in Central-Northern Spain) `es-MX` Mexican Spanish `es-US` American Spanish `fi-FI` Finnish (Finland) `fr-BE` Belgian French `fr-CA` Canadian French `fr-CH` "Swiss" French `fr-FR` Standard French (especially in France)

`he-IL`	Hebrew (Israel)
`hi-IN`	Hindi (India)
`hu-HU`	Hungarian (Hungary)
`id-ID`	Indonesian (Indonesia)
`it-CH`	"Swiss" Italian
`it-IT`	Standard Italian (as spoken in Italy)
`ja-JP`	Japanese (Japan)
`ko-KR`	Korean (Republic of Korea)
`nl-BE`	Belgian Dutch
`nl-NL`	Standard Dutch (as spoken in The Netherlands)
`no-NO`	Norwegian (Norway)
`pl-PL`	Polish (Poland)
`pt-BR`	Brazilian Portuguese
`pt-PT`	European Portuguese (as written and spoken in Portugal)
`ro-RO`	Romanian (Romania)
`ru-RU`	Russian (Russian Federation)
`sk-SK`	Slovak (Slovakia)
`sv-SE`	Swedish (Sweden)
`ta-IN`	Indian Tamil
`ta-LK`	Sri Lankan Tamil
`th-TH`	Thai (Thailand)
`tr-TR`	Turkish (Turkey)
`zh-CN`	Mainland China, simplified characters
`zh-HK`	Hong Kong, traditional characters
`zh-TW`	Taiwan, traditional characters

options Optional.
An object with formatting options:

`currency`	Legal values: any currency code (like "EUR", "USD", "INR", etc.)

`currencyDisplay`	Legal values:
	`"symbol"` (default)
	`"code"`
	`"name"`

`localeMatcher`	Legal values: `"best-fit"` (default) `"lookup"`
`maximumFractionDigits`	A number from 0 to 20 (default is 3)
`maximumSignificantDigits`	A number from 1 to 21 (default is 21)
`minimumFractionDigits`	A number from 0 to 20 (default is 3)
`minimumIntegerDigits`	A number from 1 to 21 (default is 1)
`minimumSignificantDigits`	A number from 1 to 21 (default is 21)

	`style`	Legal values:
		`"currency"`
		`"decimal"` (default)
		`"percent"`

	`useGrouping`	Legal values: `"true"` (default) `"false"`

Return Value

Type	Description
A string	A string representing a number the local format.

REMOVE ADS

More Examples

Use the options parameter (object) for currency formatting:

```
let num = new Number(1000000);
const myObj = {
  style: "currency",
  currency: "EUR"
}
let text = num.toLocaleString("en-GB", myObj);
```

Try it Yourself »

```
let num = new Number(1000000);
let text = num.toLocaleString("en-GB", {style:"currency", currency:"EUR"});
```

Try it Yourself »

Using the locale specific of JAPAN:

```
let num = 1000000;
let text = num.toLocaleString("ja-JP", {style:"currency", currency:"JPY"});
```

Try it Yourself »

Browser Support

`toLocaleString()` is an ECMAScript3 (JavaScript 1999) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

Browser Support

`(locales, options)` is supported in all modern browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	11

‹ Previous JavaScript Number Reference Next ›


W3 schools
JS
Get Certified in JavaScript
Boost your career with an official certification
$95
Get certified

REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

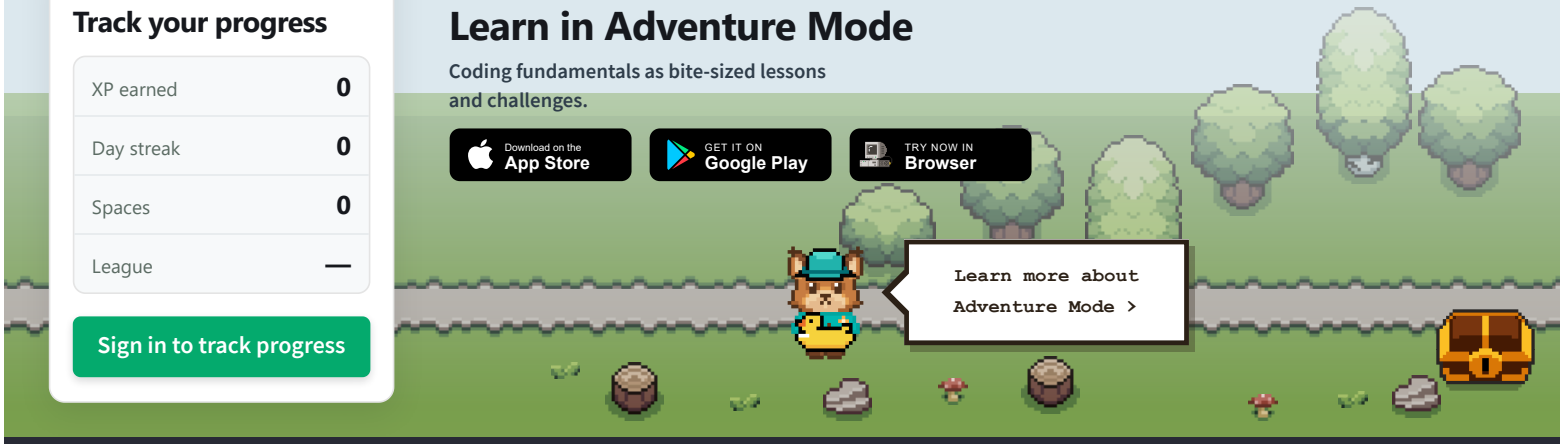

PLUS
SPACES
GET CERTIFIED
FOR TEACHERS
PRACTICE
CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number toPrecision()

‹ Previous JavaScript Number Reference Next ›

Example

Format a number to a specified length:

```
let num = 13.3714;
let n = num.toPrecision(2);
```

Try it Yourself »

Format a small number:

```
let num = 0.001658853;
num.toPrecision(2);
num.toPrecision(3);
num.toPrecision(10);
```

Try it Yourself »

More examples below.

Description

SHARE

The `toPrecision()` method formats a number to a specified length.

A decimal point and nulls are added (if needed), to create the specified length.

Syntax

```
number.toPrecision(x)
```

Parameters

Parameter	Description
x	Optional. The number of digits. If omitted, the number is returned without any formatting.

Return Value

Type	Description
A string	The number formatted to the specified precision.

REMOVE ADS

More Examples

Format a number to a specified length:

```
let num = 13.3714;
num.toPrecision(2);
num.toPrecision(3);
num.toPrecision(10);
```

Try it Yourself »

No formatting:

```
let num = 13.3714;
num.toPrecision();
```

Try it Yourself »


Browser Support

`toPrecision()` is an ECMAScript3 (JavaScript 1999) feature.


It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

‹ Previous | JavaScript Number Reference | Next ›

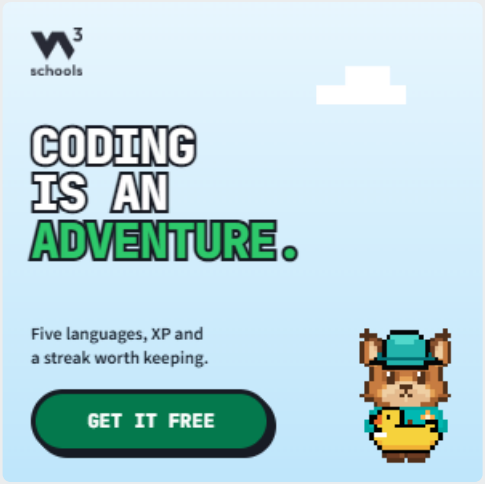

REMOVE ADS

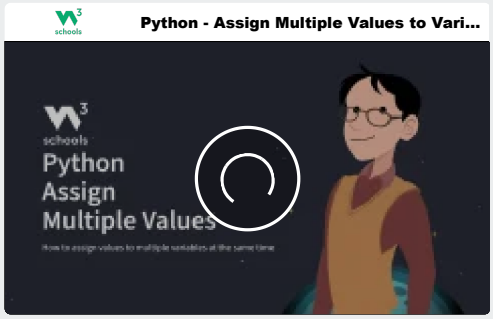

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number toString()

‹ Previous | JavaScript Number Reference | Next ›

Examples

Convert a number to a string:

```
let num = 15;
let text = num.toString();
```

Try it Yourself »

Convert a number to a string, using base 2 (binary):

```
let num = 15;
let text = num.toString(2);
```

Try it Yourself »

Description

SHARE

The `toString()` returns a number as a string.

Note

Every JavaScript object has a `toString()` method.

The `toString()` method is used by JavaScript when an object needs to be displayed as a text (like in HTML), or when an object needs to be used as a string.

Syntax

```
number.toString(radix)
```

Parameters

Parameter	Description
radix	Optional. The base to use. Must be an integer between 2 and 36. Base 2 is binary Base 8 is octal Base 16 is hexadecimal.

Return Value

Type	Description
A string	The number as a string.

REMOVE ADS

More Examples

Convert a number to a string, using base 8 (Octal):

```
let num = 15;
let text = num.toString(8);
```

Try it Yourself »

Convert a number to a string, using base 16 (Hexadecimal):

```
let num = 15;
let text = num.toString(16);
```

Try it Yourself »

Browser Support

`toString()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera

‹ Previous | JavaScript Number Reference | Next ›

W3 schools
JS
Get Certified in JavaScript
Boost your career with an official certification
$95
Get certified

REMOVE ADS

Python - Variables - W3Schools.com



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

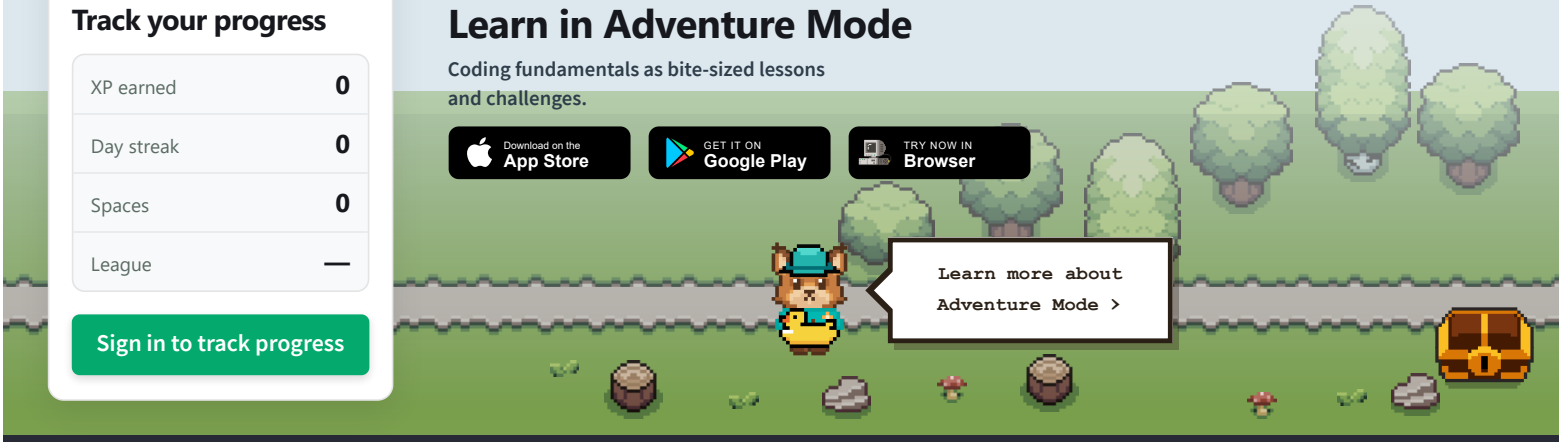

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Number valueOf()

‹ Previous | JavaScript Number Reference | Next ›

Example

Get the primitive value of a number:

```
let num = 15;
let n = num.valueOf();
```

Try it Yourself »

Description

SHARE

The `valueOf()` method returns the primitive value of a number.

Syntax

```
number.valueOf()
```

Parameters

NONE

Return Value

Type	Description
A number	The primitive value of the number.

Browser Support

`valueOf()` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

				
Chrome	Edge	Firefox	Safari	Opera

‹ Previous JavaScript Number Reference Next ›




REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

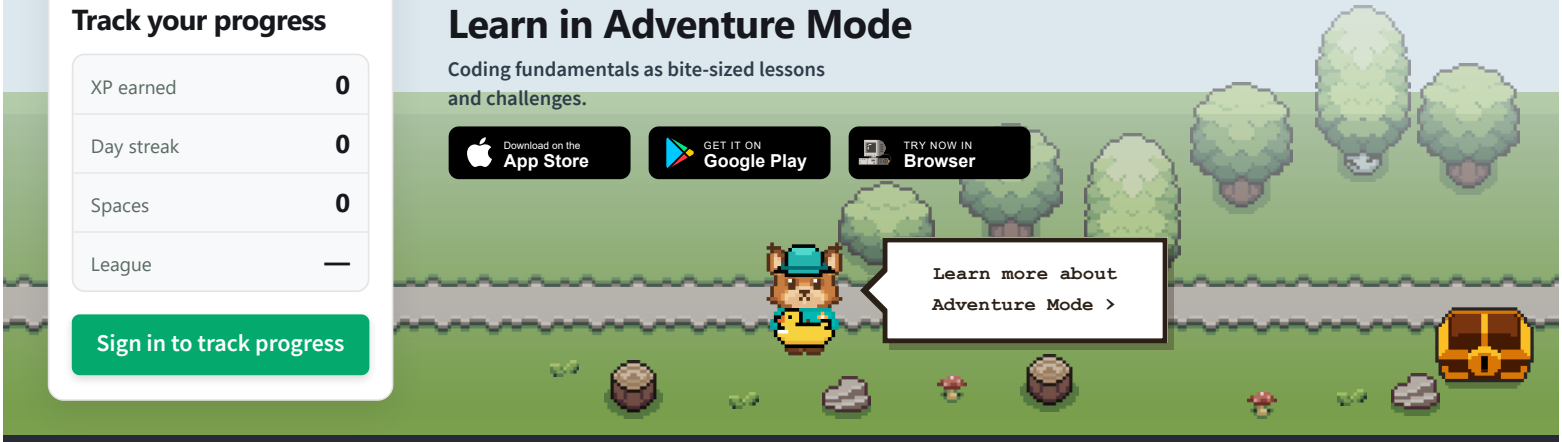

PLUS
SPACES
GET CERTIFIED
FOR TEACHERS
PRACTICE
CONTACT US

Top Tutorials
HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

JavaScript Math Reference

‹ Previous

Next ›

New to JavaScript Math?

SHARE

Visit Our Full JavaScript Math Tutorial

Complete Math Reference

Revised July 2025

Name	Description
abs(x)	Returns the absolute value of x
acos(x)	Returns the arccosine of x, in radians
acosh(x)	Returns the hyperbolic arccosine of x
asin(x)	Returns the arcsine of x, in radians
asinh(x)	Returns the hyperbolic arcsine of x
atan(x)	Returns the arctangent of x as a numeric value between -PI/2 and PI/2 radians
atan2(y, x)	Returns the arctangent of the quotient of its arguments
atanh(x)	Returns the hyperbolic arctangent of x

cbrt(x)	Returns the cubic root of x
ceil(x)	Returns x, rounded upwards to the nearest integer
clz32(x)	Returns the number of leading zeros in a 32-bit binary representation of x
cos(x)	Returns the cosine of x (x is in radians)
cosh(x)	Returns the hyperbolic cosine of x
E	Returns Euler's number (approx. 2.718)
exp(x)	Returns the value of E^x
expm1(x)	Returns the value of E^x minus 1
f16round(x)	Returns x, rounded downwards to the nearest integer
floor(x)	Returns x, rounded downwards to the nearest integer
fround(x)	Returns the nearest (32-bit single precision) float representation of a number
LN2	Returns the natural logarithm of 2 (approx. 0.693)
LN10	Returns the natural logarithm of 10 (approx. 2.302)
log(x)	Returns the natural logarithmof x
log10(x)	Returns the base-10 logarithm of x
LOG10E	Returns the base-10 logarithm of E (approx. 0.434)
log1p(x)	Returns the natural logarithm of 1 + x
log2(x)	Returns the base-2 logarithm of x
LOG2E	Returns the base-2 logarithm of E (approx. 1.442)
max(x1,x2,..)	Returns the number with the highest value
min(x1,x2,..)	Returns the number with the lowest value
PI	Returns PI (approx. 3.14)
pow(x, y)	Returns the value of x to the power of y
random()	Returns a random number between 0 and 1
round(x)	Rounds x to the nearest integer
sign(x)	Returns the sign of a number (checks whether it is positive, negative or zero)
sin(x)	Returns the sine of x (x is in radians)
sinh(x)	Returns the hyperbolic sine of x
sqrt(x)	Returns the square root of x

SQRT1_2	Returns the square root of 1/2 (approx. 0.707)
SQRT2	Returns the square root of 2 (approx. 1.414)
tan(x)	Returns the tangent of an angle
tanh(x)	Returns the hyperbolic tangent of a number
trunc(x)	Returns the integer part of a number (x)

See Also:

Full JavaScript Math Tutorial

Full JavaScript Number Tutorial

Full JavaScript Number Reference

REMOVE ADS

‹ Previous

Sign in to track progress

Next ›

Learn it.
Get certified.
Get hired.

$95 per course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

Python - Comments - W3Schools.com



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

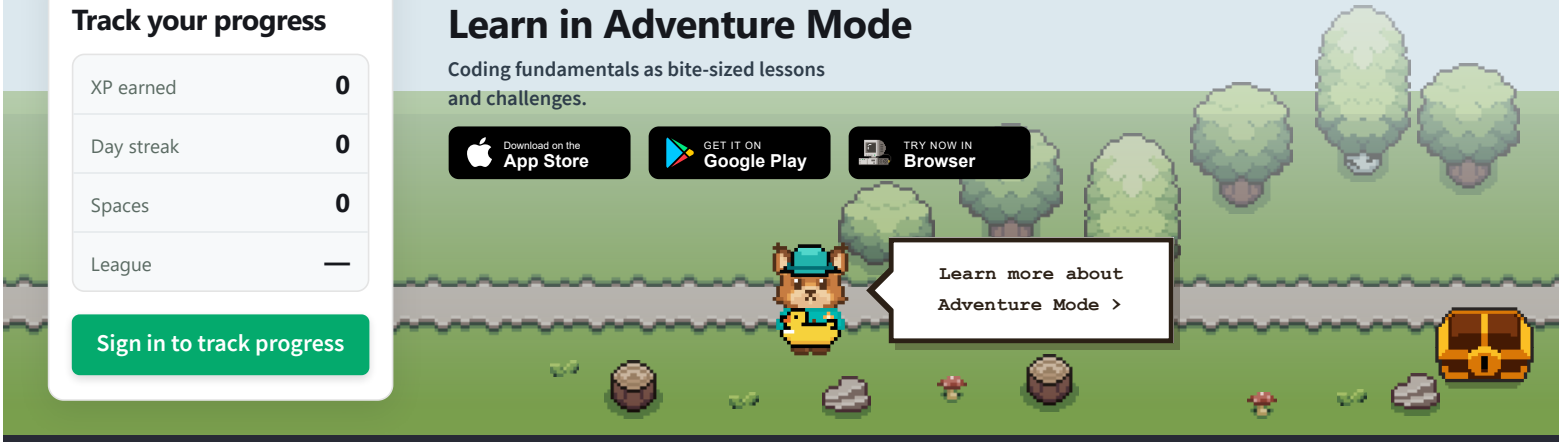

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Complete JavaScript References

‹ Home

Next ›

Revised June 2026

JavaScript Primitives

SHARE

Primitives | String | Number | Boolean | BigInt | Symbol | undefined | null

Object Methods and Properties

Array | Boolean | Classes | Date | Error | Function | Global | Iterator | JSON | Map | Math | Number | Object | Operators | Precedence | Promise | Proxy | Reflect | RegExp | Set | Statements | String | Temporal | Typed Array

Window Objects with Examples

Window | History | Location | Navigator | Screen

HTML DOM Objects with Examples

Document | Element | Attributes | Events | Event Objects | Collection | Style

REMOVE ADS

Web APIs with Examples

Canvas | Console | Fetch | Fullscreen | Geolocation | History | MediaQuery | Storage | Validation

HTML Elements with Examples

a | abbr | address | area | article | aside | audio | b | base | bdo | blockquote | body | br | button | canvas | caption | cite | code | col | colgroup | datalist | dd | del | details | dfn | dialog | div | dl | dt | em | embed | fieldset | figcaption | figure | footer | form | head | header | h1 - h6 | hr | html | i | iframe | img | ins | input button | input checkbox | input color | input date | input datetime | input datetime-local | input email | input file | input hidden | input image | input month | input number | input password | input radio | input range | input reset | input search | input submit | input text | input time | input url | input week | kbd | label | legend | li | link | map | mark | menu | menuitem | meta | meter | nav | object | ol | optgroup | option | output | p | param | pre | progress | q | s | samp | script | section | select | small | source | span | strong | style | sub | summary | sup | table | tbody | td | tfoot | th | thead | tr | textarea | time | title | track | u | ul | var | video

Other

CSSStyleDeclaration | JS Conversion

JavaScript Tutorial

Visit Our JavaScript Tutorial »

‹ Home | Sign in to track progress | Next ›


Build skills.
Get hired.

$95 per paid course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

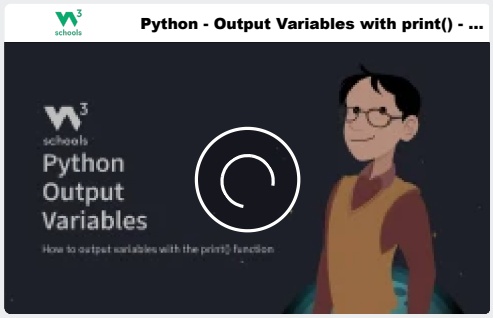


FREE ACCOUNT
Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

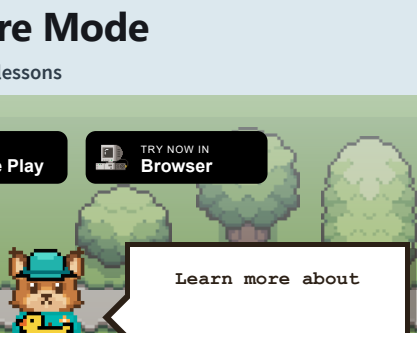



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.