The Window Object

‹ Previous

Next ›

Window Object

SHARE

The window object represents an open window in a browser.

If a document contain frames (<iframe> tags), the browser creates one window object for the HTML document, and one additional window object for each frame.

Window Object Properties

Property	Description
closed	Returns a boolean true if a window is closed.
console	Returns the Console Object for the window. See also The Console Object.
defaultStatus	Deprecated.
document	Returns the Document object for the window. See also The Document Object.
frameElement	Returns the frame in which the window runs.
frames	Returns all window objects running in the window.
history	Returns the History object for the window. See also The History Object.

innerHeight	Returns the height of the window's content area (viewport) including scrollbars
innerWidth	Returns the width of a window's content area (viewport) including scrollbars
length	Returns the number of <iframe> elements in the current window
localStorage	Allows to save key/value pairs in a web browser. Stores the data with no expiration date
location	Returns the Location object for the window. See also the The Location Object.
name	Sets or returns the name of a window
navigator	Returns the Navigator object for the window. See also The Navigator object.
opener	Returns a reference to the window that created the window
outerHeight	Returns the height of the browser window, including toolbars/scrollbars
outerWidth	Returns the width of the browser window, including toolbars/scrollbars
pageXOffset	Returns the pixels the current document has been scrolled (horizontally) from the upper left corner of the window
pageYOffset	Returns the pixels the current document has been scrolled (vertically) from the upper left corner of the window
parent	Returns the parent window of the current window
screen	Returns the Screen object for the window See also The Screen object
screenLeft	Returns the horizontal coordinate of the window relative to the screen
screenTop	Returns the vertical coordinate of the window relative to the screen
screenX	Returns the horizontal coordinate of the window relative to the screen
screenY	Returns the vertical coordinate of the window relative to the screen
sessionStorage	Allows to save key/value pairs in a web browser. Stores the data for one session
scrollX	An alias of pageXOffset
scrollY	An alias of pageYOffset
self	Returns the current window
status	Deprecated. Avoid using it.
top	Returns the topmost browser window

REMOVE ADS

Window Object Methods

Method	Description
addEventListener()	Attaches an event handler to the window
alert()	Displays an alert box with a message and an OK button
atob()	Decodes a base-64 encoded string
blur()	Removes focus from the current window
btoa()	Encodes a string in base-64
clearInterval()	Clears a timer set with setInterval()
clearTimeout()	Clears a timer set with setTimeout()
close()	Closes the current window
confirm()	Displays a dialog box with a message and an OK and a Cancel button
focus()	Sets focus to the current window
getComputedStyle()	Gets the current computed CSS styles applied to an element
getSelection()	Returns a Selection object representing the range of text selected by the user
matchMedia()	Returns a MediaQueryList object representing the specified CSS media query string
moveBy()	Moves a window relative to its current position
moveTo()	Moves a window to the specified position
open()	Opens a new browser window
print()	Prints the content of the current window
prompt()	Displays a dialog box that prompts the visitor for input
removeEventListener()	Removes an event handler from the window
requestAnimationFrame()	Requests the browser to call a function to update an animation before the next repaint
resizeBy()	Resizes the window by the specified pixels
resizeTo()	Resizes the window to the specified width and height
scroll()	Deprecated. Use scrollTo() instead.
scrollBy()	Scrolls the document by the specified number of pixels
scrollTo()	Scrolls the document to the specified coordinates

setInterval()	Calls a function or evaluates an expression at specified intervals (in milliseconds)
setTimeout()	Calls a function or evaluates an expression after a specified number of milliseconds
stop()	Stops the window from loading

‹ Previous

Sign in to track progress

Next ›

Build skills.
Get hired.

$95 per paid course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode ›

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

ZonedDateTime Reference

‹ Previous

Next ›

The Temporal.ZonedDateTime Object

SHARE

A **Temporal.ZonedDateTime** is a timezone and calendar-aware date and time object that represents a real time of a particular region on Earth.

It is optimized for cases that require a time zone, **DST-safe arithmetic** and interoperability with an **RFC 5545 calendar**.

Example

Example: December 7th, 1995 at 3:24:30 AM in US Pacific time (in Gregorian calendar).

```
const zonedDate = Temporal.ZonedDateTime.from({
  timeZone: 'Europe/Oslo',
  year: 2026,
  month: 5,
  day: 17,
  hour: 14,
  minute: 30,
  second: 0,
});
```

Try it Yourself »

Temporal.ZonedDateTime Methods

Revised March 2026

Constructing	Description
new	Creates a ZonedDateTime object
from()	Creates a ZonedDateTime object from an object or a string
Converting	
getTimeZone Transition()	Returns a ZonedDateTime object representing the closest instant after or before this instant
toInstant()	Returns a Instant object representing this date-time
toPlainDate()	Returns a PlainDate object representing this date-time
toPlainDateTime()	Returns a PlainDateTime object representing this date-time
toPlainTime()	Returns a PlainTime object representing this date-time
startOfDay()	Returns a ZonedDateTime representing the first instant of this date
Updating	
with()	Returns a ZonedDateTime with specified fields modified
withCalendar()	Returns a ZonedDateTime with a different calendar system
withPlainTime()	Returns a ZonedDateTime the time part replaced by a new time
withTimeZone()	Returns a ZonedDateTime representing this date in a new time zone
Arithmetic	
add()	Returns a ZonedDateTime with a duration added
subtract()	Returns a ZonedDateTime with a duration subtracted
round()	Returns a ZonedDateTime rounded to a given unit
Comparing	
compare()	Returns -1, 0, or 1 from comparing two dates
equals()	Returns true if two ZonedDateTime objects are identical
since()	Returns the difference from another date
until()	Returns the difference until another date
Formatting	
toJSON()	Returns an ISO 8601 string for JSON serialization

toLocaleString()	Returns a language-sensitive representation of the date
toString()	Returns an ISO 8601 string representation
valueOf()	Throws a TypeError (prevents temporals from being converted to primitives)

Temporal.ZonedDateTime Properties

Property	Description
calendarId	Calendar system identifier ("iso8601")
day	The day as an integer (1-31)
dayOfWeek	The day of the week as an integer (1 = Monday)
dayOfYear	The ordinal day of the year
daysInMonth	The total number of days in that month
daysInWeek	The total number of days in that week
daysInYear	The total number of days in that year
epochMilliseconds	Number of milliseconds since Unix epoch
epochNanoseconds	Number of nanoseconds since Unix epoch
era	The era name of the calendar, if applicable
eraYear	The year within the era, if applicable
hour	The hour as an integer (0-23)
hoursInDay	Hours in this day in this time zone(0-25)
inLeapYear	A boolean indicating if the date falls in a leap year
microsecond	The microsecond as an integer (0-999)
millisecond	The millisecond as an integer (0-999)
minute	The minute as an integer (0-59)
month	The month as an integer (1-12)
monthCode	A calendar-specific string code for the month ("M01")
monthsInYear	The total number of months in that year
nanosecond	The nanosecond as an integer (0-999)
offset	Offset used to interpret this instant (+HH:mm:ss.sssssssss)
offsetNanoseconds	Offset used to interpret this instant in nanoseconds

second	The second as an integer (0-59)
timeZoneId	Time zone identifier used to interpret this instant
weekOfYear	The week number within the year
year	The year as an integer
yearOfWeek	The year that the week belongs to

Learn More:

JavaScript Temporal.ZonedDateTime Tutorial

REMOVE ADS

Browser Support

Temporal is a major update to the JavaScript standard (TC39).

It is currently supported in Chrome, Edge, Firefox, and Opera Safari has not shipped it yet.

Chrome	Edge	Firefox	Safari	Opera
144	144	139		128
Jan 2026	Jan 2026	May 2025	🚫	Feb 2026

The **Safari** implementation can be tested in Safari Technology Preview by enabling the --use-temporal runtime flag.

Polyfill

Until Safari supports Temporal natively, you can use the official polyfill:

```
<script
src="https://cdn.jsdelivr.net/npm/@js-temporal/polyfill@0.5.1/dist/index.umd.js">
</script>
```

‹ Previous

Sign in to track progress

Next ›



REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window Console Object

‹ Previous

Next ›

The Console Object

SHARE

The **console object** provides access to the browser's debugging console.

The **console object** is a property of the **window object**.

The **console object** is accessed with:

`window.console` or just `console`

Examples

```
window.console.error("You made a mistake");
```

Try it Yourself »

```
console.error("You made a mistake");
```

Try it Yourself »

Console Object Methods


Method	Description
assert()	Logs a message only if the provided assertion is false. If true, nothing is outputted, which helps keep logs clean.
clear()	Clears the console.
dir()	Displays an interactive, hierarchical listing of the properties of a specified JavaScript object. This can provide a more detailed view than console.log() for complex objects.
count()	Logs the number of times that this particular call to count() has been called.
error()	Displays an error message (often red text/background) to the console, useful for highlighting critical issues.
group()	Creates a new inline group in the console. This indents following console messages by an additional level, until console.groupEnd() is called.
groupCollapsed()	Creates a new inline group in the console. However, the new group is created collapsed. The user will need to use the disclosure button to expand it.
groupEnd()	Exits the current inline group in the console.
info()	Outputs an informational message to the console
log()	The most widely used method, it outputs a general message, variable value, or object to the console. It accepts multiple arguments, allowing you to combine text and object displays.
table()	Displays tabular data as a table, which is very useful for visualizing arrays of objects.
time()	Starts a timer (can track how long an operation takes).
timeEnd()	Stops a timer that was previously started by console.time().
trace()	Outputs a stack trace to the console.
warn()	Similar to console.log(), but displays a message with a warning format (often yellow text/background) and a different log level, allowing filtering in developer tools.

REMOVE ADS


‹ Previous

Sign in to track progress

Next ›

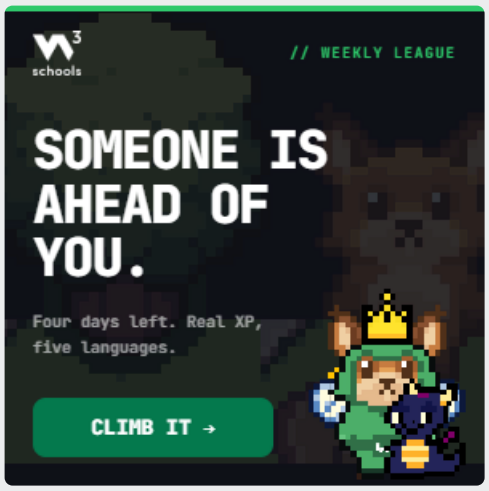

REMOVE ADS

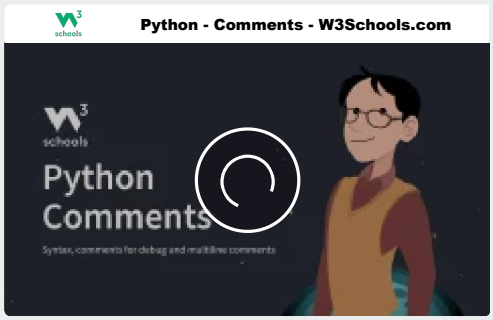

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window closed

‹ Previous ‹ Window Object Reference Next ›

Example

A function to check if a window is closed:

```
function checkWin() {
  if (!myWindow) {
    text = "It has never been opened!";
  } else {
    if (myWindow.closed) {
      text = "It is closed.";
    } else {
      text = "It is open.";
    }
  }
}
```

Try it Yourself »

Description

SHARE

The `closed` property returns `true` if the window is closed.

The `closed` property is read-only.

See Also:

The open() Method

The close() Method

Syntax

```
window.closed
```

Return Value

Type	Description
A boolean	`true` if the window is closed, otherwise `false`.

Browser Support

`window.closed` is an ECMAScript1 (JavaScript 1997) feature.

It is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera


‹ Previous ‹ Window Object Reference Next ›

Learn it.
Get certified.
Get hired.

$95 per course
one-time payment

Exam and certificate included.

Get started

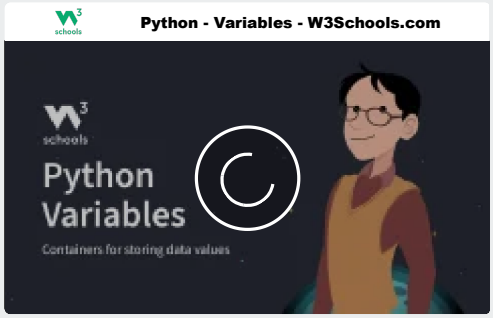

REMOVE ADS

FREE ACCOUNT
Track your progress


XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

Learn more about Adventure Mode >

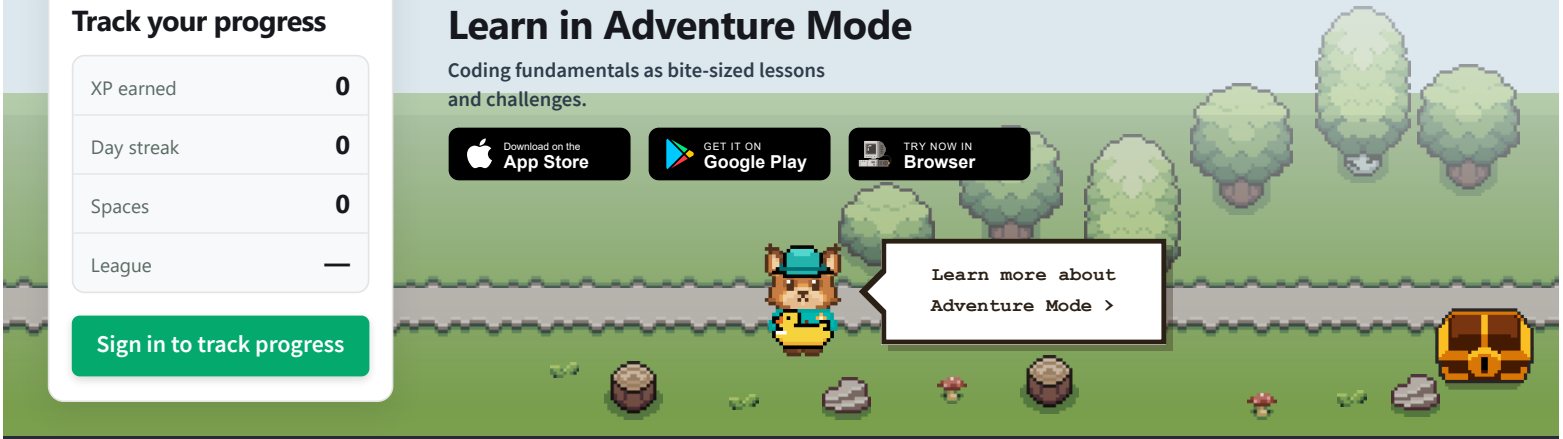

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window Console Object

SHARE

‹ Previous ‹ Window Object Reference Next ›

The Console Object

The **console object** provides access to the browser's debugging console.

The **console object** is a property of the **window object**.

The **console object** is accessed with:

`window.console` or just `console`

Examples

```
window.console.error("You made a mistake");
```

Try it Yourself »

```
console.error("You made a mistake");
```

Try it Yourself »

Console Object Methods

Method	Description
assert()	Logs a message only if the provided assertion is false. If true, nothing is outputted, which helps keep logs clean.
clear()	Clears the console.
dir()	Displays an interactive, hierarchical listing of the properties of a specified JavaScript object. This can provide a more detailed view than console.log() for complex objects.
count()	Logs the number of times that this particular call to count() has been called.
error()	Displays an error message (often red text/background) to the console, useful for highlighting critical issues.
group()	Creates a new inline group in the console. This indents following console messages by an additional level, until console.groupEnd() is called.
groupCollapsed()	Creates a new inline group in the console. However, the new group is created collapsed. The user will need to use the disclosure button to expand it.
groupEnd()	Exits the current inline group in the console.
info()	Outputs an informational message to the console
log()	The most widely used method, it outputs a general message, variable value, or object to the console. It accepts multiple arguments, allowing you to combine text and object displays.
table()	Displays tabular data as a table, which is very useful for visualizing arrays of objects.
time()	Starts a timer (can track how long an operation takes).
timeEnd()	Stops a timer that was previously started by console.time().
trace()	Outputs a stack trace to the console.
warn()	Similar to console.log(), but displays a message with a warning format (often yellow text/background) and a different log level, allowing filtering in developer tools.

‹ Previous ‹ Window Object Reference Next ›


REMOVE ADS

CODING
IS AN
ADVENTURE

Five languages, XP,
streaks and a lynx.

GET IT FREE

REMOVE ADS

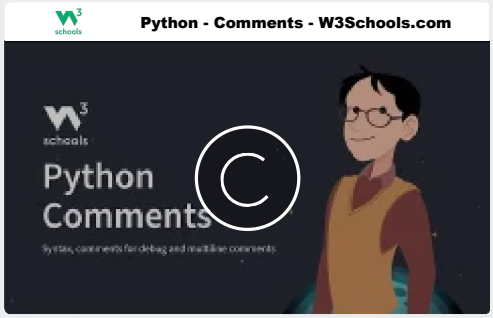

FREE ACCOUNT
Track your progress


XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons
and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

Learn more about
Adventure Mode >

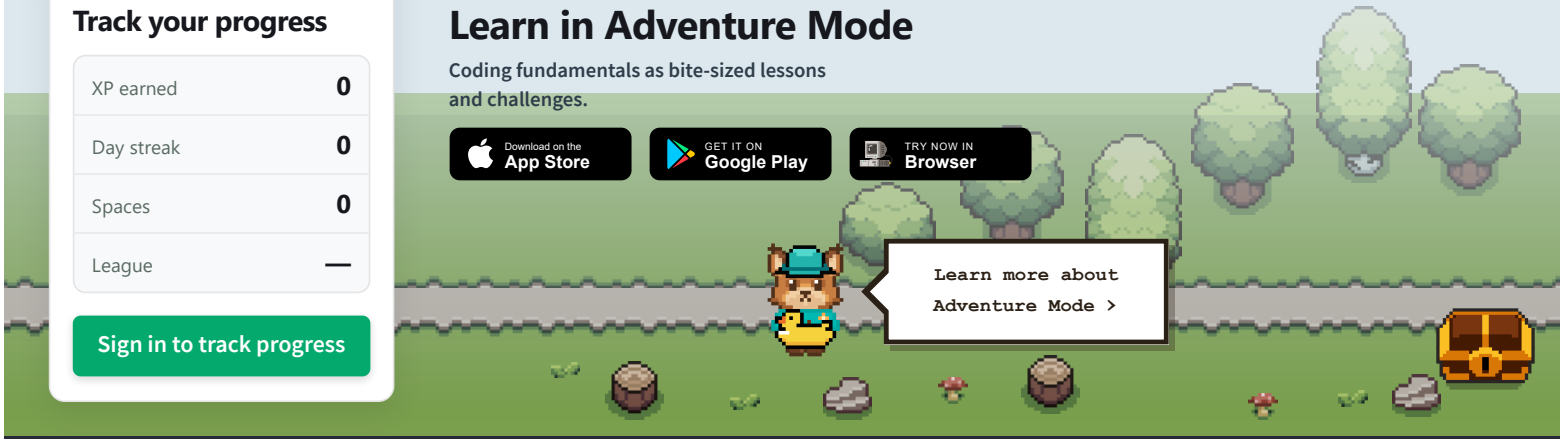

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window Console Object

‹ Previous

Next ›

The Console Object

SHARE

The **console object** provides access to the browser's debugging console.

The **console object** is a property of the **window object**.

The **console object** is accessed with:

`window.console` or just `console`

Examples

```
window.console.error("You made a mistake");
```

Try it Yourself »

```
console.error("You made a mistake");
```

Try it Yourself »

Console Object Methods


Method	Description
assert()	Logs a message only if the provided assertion is false. If true, nothing is outputted, which helps keep logs clean.
clear()	Clears the console.
dir()	Displays an interactive, hierarchical listing of the properties of a specified JavaScript object. This can provide a more detailed view than console.log() for complex objects.
count()	Logs the number of times that this particular call to count() has been called.
error()	Displays an error message (often red text/background) to the console, useful for highlighting critical issues.
group()	Creates a new inline group in the console. This indents following console messages by an additional level, until console.groupEnd() is called.
groupCollapsed()	Creates a new inline group in the console. However, the new group is created collapsed. The user will need to use the disclosure button to expand it.
groupEnd()	Exits the current inline group in the console.
info()	Outputs an informational message to the console
log()	The most widely used method, it outputs a general message, variable value, or object to the console. It accepts multiple arguments, allowing you to combine text and object displays.
table()	Displays tabular data as a table, which is very useful for visualizing arrays of objects.
time()	Starts a timer (can track how long an operation takes).
timeEnd()	Stops a timer that was previously started by console.time().
trace()	Outputs a stack trace to the console.
warn()	Similar to console.log(), but displays a message with a warning format (often yellow text/background) and a different log level, allowing filtering in developer tools.

REMOVE ADS


‹ Previous

Sign in to track progress

Next ›

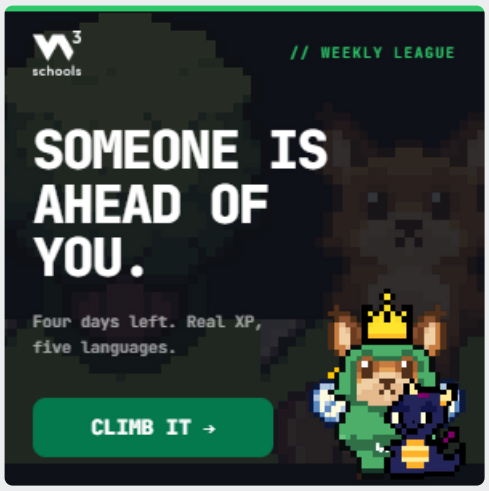

REMOVE ADS

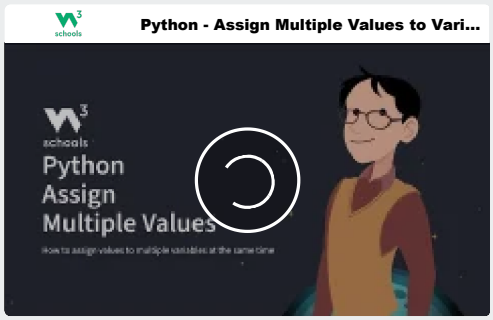

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

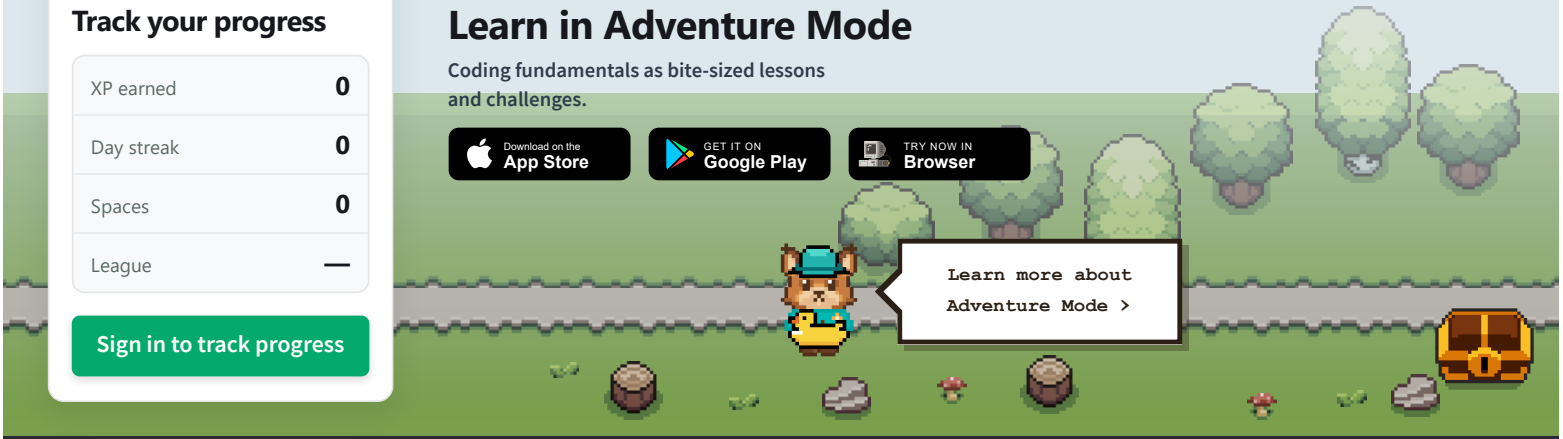

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window defaultStatus

‹ Previous ‹ Window Object Reference Next ›

Example

Set a default text in the window status bar:

```
window.defaultStatus = "Default text in the status bar!"
```

Try it Yourself »

Description

SHARE

The defaultStatus property is deprecated.

Remove it to prevent RUN-TIME ERRORS in the future.

Syntax

```
window.defaultStatus
```

Return Value

The default text in the window's status bar.

‹ Previous ‹ Window Object Reference Next ›

schools

JS


Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

REMOVE ADS

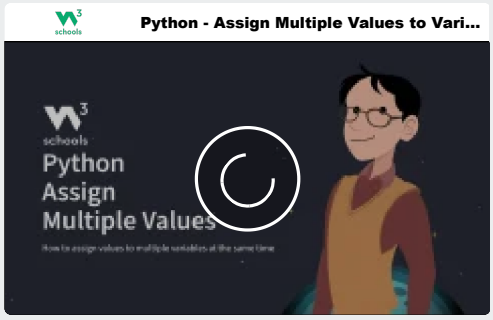

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

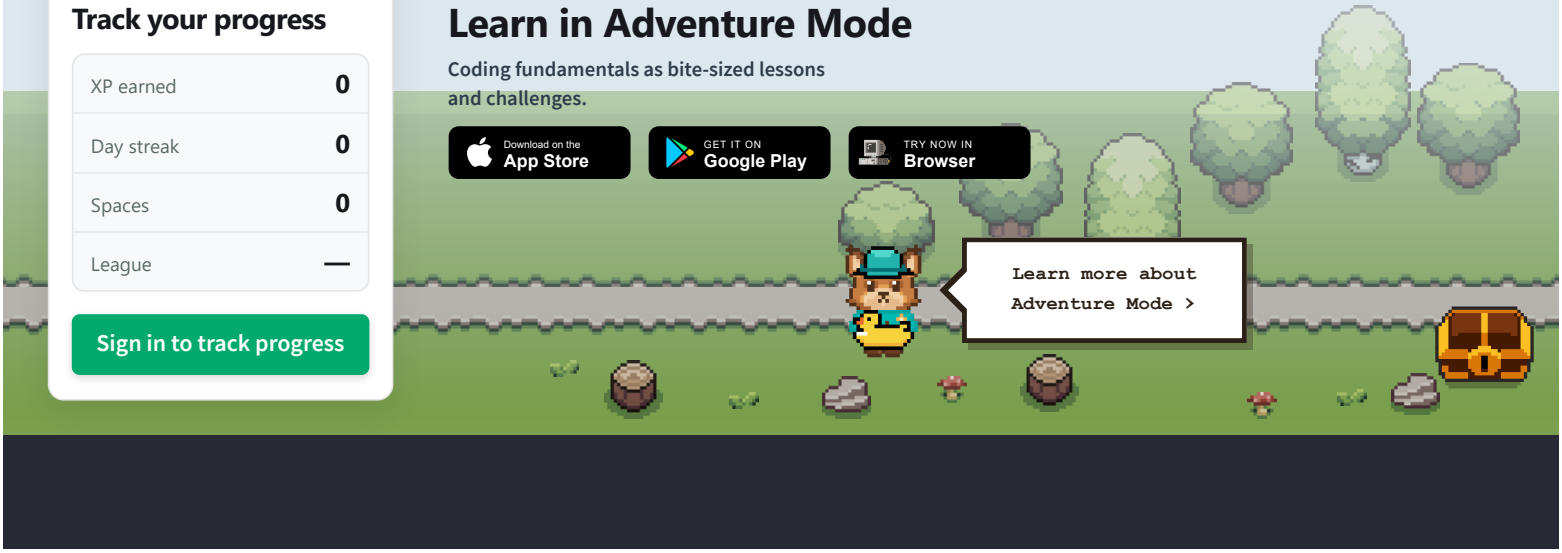

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window Document

SHARE

‹ Previous ‹ Window Object Reference Next ›

The Document Object

When an HTML document is loaded into a web browser, it becomes a **document object**.

The **document object** is the root node of the HTML document.

The **document object** is a property of the **window object**.

The **document object** is accessed with:

`window.document` or just `document`

Examples

```
let url = window.document.URL;
```

Try it Yourself »

```
let url = document.URL;
```

Try it Yourself »

Name	Description

activeElement	Returns the currently focused element in the document
addEventListener()	Attaches an event handler to the document
adoptNode()	Adopts a node from another document
anchors	DEPRECATED
applets	DEPRECATED
baseURI	Returns the absolute base URI of a document
body	Sets or returns the document's body (the <body> element)
charset	DEPRECATED
characterSet	Returns the character encoding for the document
close()	Closes the output stream previously opened with document.open()
cookie	Returns all name/value pairs of cookies in the document
createAttribute()	Creates an attribute node
createComment()	Creates a Comment node with the specified text
createDocumentFragment()	Creates an empty DocumentFragment node
createElement()	Creates an Element node
createEvent()	Creates a new event
createTextNode()	Creates a Text node
defaultView	Returns the window object associated with a document, or null if none is available.
designMode	Controls whether the entire document should be editable or not.
doctype	Returns the Document Type Declaration associated with the document
documentElement	Returns the Document Element of the document (the <html> element)
documentMode	DEPRECATED
documentURI	Sets or returns the location of the document
domain	Returns the domain name of the server that loaded the document
domConfig	DEPRECATED
embeds	Returns a collection of all <embed> elements the document
execCommand()	DEPRECATED
forms	Returns a collection of all <form> elements in the document
getElementById()	Returns the element that has the ID attribute with the specified value

getElementsByClassName()	Returns an HTMLCollection containing all elements with the specified class name
getElementsByName()	Returns an live NodeList containing all elements with the specified name
getElementsByTagName()	Returns an HTMLCollection containing all elements with the specified tag name
hasFocus()	Returns a Boolean value indicating whether the document has focus
head	Returns the <head> element of the document
images	Returns a collection of all <img> elements in the document
implementation	Returns the DOMImplementation object that handles this document
importNode()	Imports a node from another document
inputEncoding	DEPRECATED
lastModified	Returns the date and time the document was last modified
links	Returns a collection of all <a> and <area> elements in the document that have a href attribute
normalize()	Removes empty Text nodes, and joins adjacent nodes
normalizeDocument()	DEPRECATED
open()	Opens an HTML output stream to collect output from document.write()
querySelector()	Returns the first element that matches a specified CSS selector(s) in the document
querySelectorAll()	Returns a static NodeList containing all elements that matches a specified CSS selector(s) in the document
readyState	Returns the (loading) status of the document
referrer	Returns the URL of the document that loaded the current document
removeEventListener()	Removes an event handler from the document (that has been attached with the addEventListener() method)
renameNode()	DEPRECATED
scripts	Returns a collection of <script> elements in the document
strictErrorChecking	DEPRECATED
title	Sets or returns the title of the document
URL	Returns the full URL of the HTML document
write()	Writes HTML expressions or JavaScript code to a document
writeln()	Same as write(), but adds a newline character after each statement

‹ Previous ‹ Window Object Reference Next ›

REMOVE ADS

schools


JS

Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

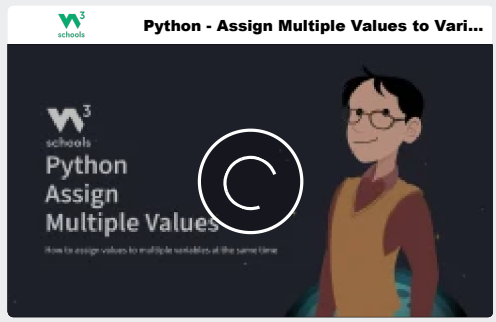

REMOVE ADS

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

Sign in to track progress



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples

JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

HTML DOM Documents

‹ Previous

Next ›

The Document Object

SHARE

When an HTML document is loaded into a web browser, it becomes a **document object**.

The **document object** is the root node of the HTML document.

The **document object** is a property of the **window object**.

The **document object** is accessed with:

`window.document` or just `document`

Examples

```
let url = window.document.URL;
```

Try it Yourself »

```
let url = document.URL;
```

Try it Yourself »

HTML DOM Properties and Methods

Revised January 2026

Name	Description
activeElement	Returns the currently focused element in the document
addEventListener()	Attaches an event handler to the document
adoptNode()	Adopts a node from another document
anchors	DEPRECATED
applets	DEPRECATED
baseURI	Returns the absolute base URI of a document
body	Sets or returns the document's body (the <body> element)
charset	DEPRECATED
characterSet	Returns the character encoding for the document
close()	Closes the output stream previously opened with document.open()
cookie	Returns all name/value pairs of cookies in the document
createAttribute()	Creates an attribute node
createComment()	Creates a Comment node with the specified text
createDocumentFragment()	Creates an empty DocumentFragment node
createElement()	Creates an Element node
createEvent()	Creates a new event
createTextNode()	Creates a Text node
defaultView	Returns the window object associated with a document, or null if none is available.
designMode	Controls whether the entire document should be editable or not.
doctype	Returns the Document Type Declaration associated with the document
documentElement	Returns the Document Element of the document (the <html> element)
documentMode	DEPRECATED
documentURI	Sets or returns the location of the document
domain	Returns the domain name of the server that loaded the document
domConfig	DEPRECATED
embeds	Returns a collection of all <embed> elements the document
execCommand()	DEPRECATED


forms	Returns a collection of all <form> elements in the document
getElementById()	Returns the element that has the ID attribute with the specified value
getElementsByClassName()	Returns an HTMLCollection containing all elements with the specified class name
getElementsByName()	Returns an live NodeList containing all elements with the specified name
getElementsByTagName()	Returns an HTMLCollection containing all elements with the specified tag name
hasFocus()	Returns a Boolean value indicating whether the document has focus
head	Returns the <head> element of the document
images	Returns a collection of all <img> elements in the document
implementation	Returns the DOMImplementation object that handles this document
importNode()	Imports a node from another document
inputEncoding	DEPRECATED
lastModified	Returns the date and time the document was last modified
links	Returns a collection of all <a> and <area> elements in the document that have a href attribute
normalize()	Removes empty Text nodes, and joins adjacent nodes
normalizeDocument()	DEPRECATED
open()	Opens an HTML output stream to collect output from document.write()
querySelector()	Returns the first element that matches a specified CSS selector(s) in the document
querySelectorAll()	Returns a static NodeList containing all elements that matches a specified CSS selector(s) in the document
readyState	Returns the (loading) status of the document
referrer	Returns the URL of the document that loaded the current document
removeEventListener()	Removes an event handler from the document (that has been attached with the addEventListener() method)
renameNode()	DEPRECATED
scripts	Returns a collection of <script> elements in the document
strictErrorChecking	DEPRECATED
title	Sets or returns the title of the document
URL	Returns the full URL of the HTML document
write()	Writes HTML expressions or JavaScript code to a document
writeln()	Same as write(), but adds a newline character after each statement

REMOVE ADS

‹ Previous


Sign in to track progress

Next ›

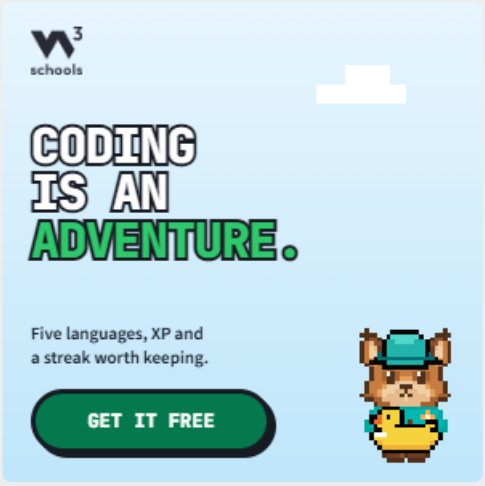

REMOVE ADS



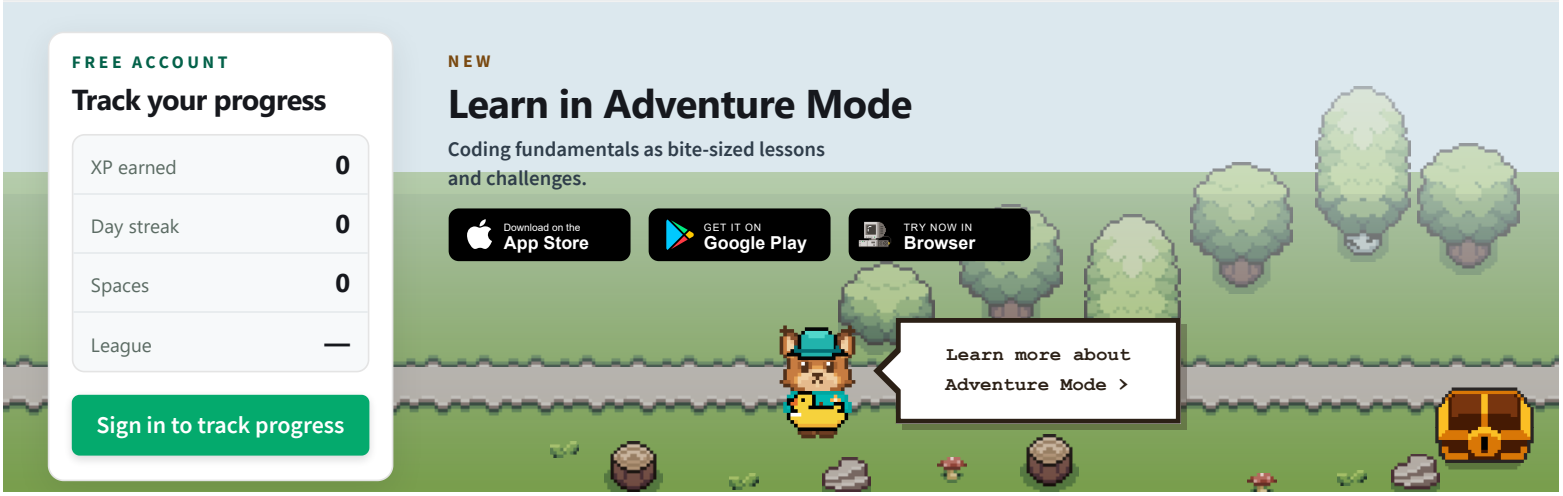

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples

How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window frameElement

‹ Previous ‹ Window Object Reference Next ›

Example

Is the current window in a frame?

```
if (window.frameElement) {
  let answer = "YES";
}
```

Try it Yourself »

More example below.

Description

SHARE

The `frameElement` property returns the frame where the window runs.

The `frameElement` property returns `null` if the window does not run in a frame.

The `frameElement` property is read only.

Note

A frame can be any embedding element:

<frame>, <iframe>, <embed>, <object>, etc.

See Also:

The length Property

The frames Property

Syntax

```
window.frameElement
```

or:

```
frameElement
```

Return Value

Type	Description
An object	The host of the window (the parent document). Or `null` if no host exists.

REMOVE ADS

More Examples

Example

If the window is in a frame, change the URL to "w3schools.com":

```
const frame = window.frameElement;

if (frame) {
  frame.src = "https://www.w3schools.com/";
}
```

Try it Yourself »

Related Pages:

HTML DOM IFrame Object

HTML <iframe> tag

Browser Support

`window.frameElement` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

❮ Previous ❮ Window Object Reference Next ❯




REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

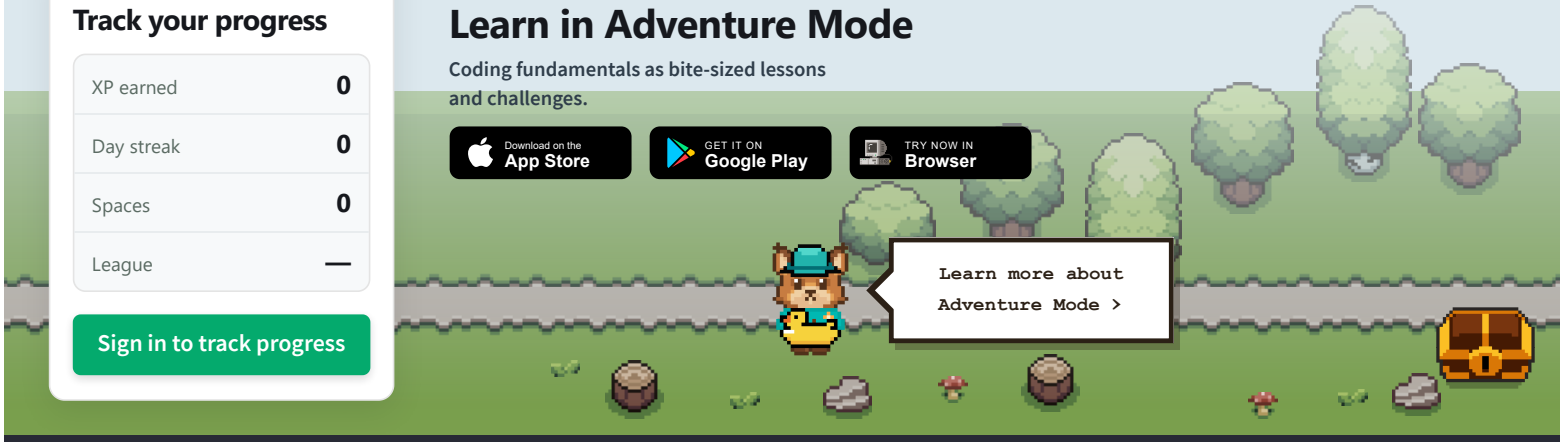

PLUS
SPACES
GET CERTIFIED
FOR TEACHERS
PRACTICE
CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window frames

‹ Previous ‹ Window Object Reference Next ›

Example

Change the location of the first frame:

```
window.frames[0].location = "https://www.w3schools.com/jsref/";
```

Try it Yourself »

More examples below.

Description

SHARE

The `frames` property returns an array with all window objects in the window.

The `frames` property is read-only.

The windows can be accessed by index numbers. The first index is 0.

Note

A frame can be any embedding element:

<frame>, <iframe>, <embed>, <object>, etc.

See Also:

The length Property

The frameElement Property

Syntax

```
window.frames
```

Return Value

Type	Description
An array	All window objects in the window.

REMOVE ADS

More Examples

Example

Loop through all frames and change the color:

```
const frames = window.frames;

for (let i = 0; i < frames.length; i++) {
  frames[i].document.body.style.background = "red";
}
```

Try it Yourself »

Related Pages:

HTML DOM IFrame Object

HTML <iframe> tag

Browser Support


`window.frames` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›



REMOVE ADS

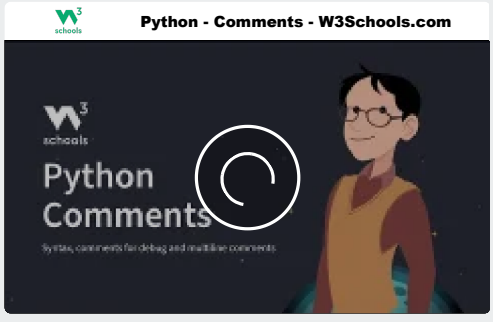


FREE ACCOUNT
Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

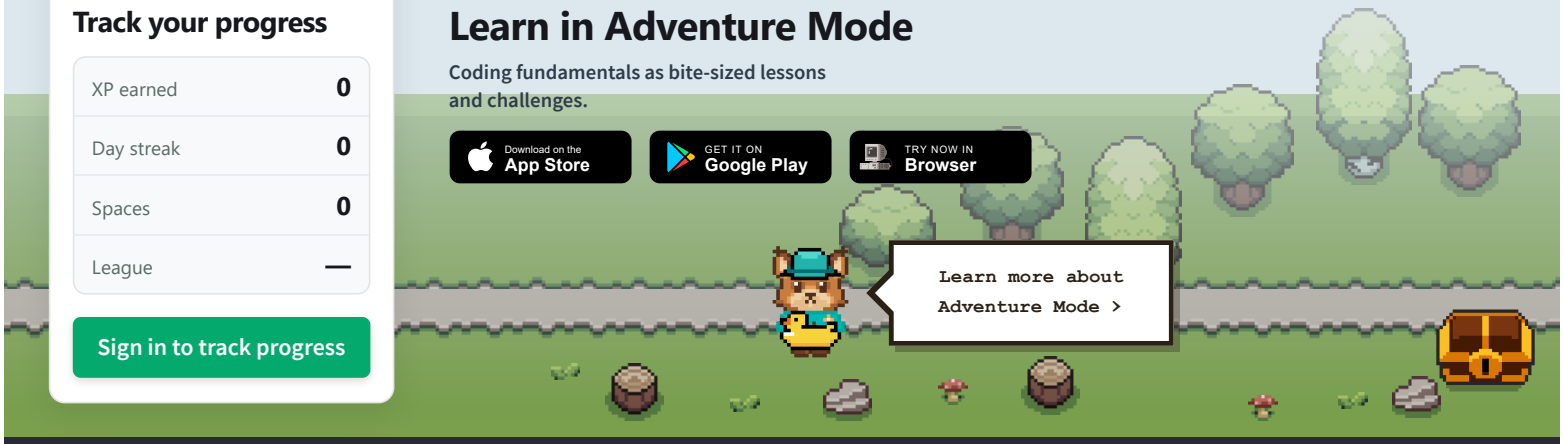

W3 schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference

Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window History

SHARE

‹ Previous ‹ Window Object Reference Next ›

The Window History Object

The **history object** contains the URLs visited by the user (in the browser window).

The **history object** is a property of the **window object**.

The **history object** is accessed with:

`window.history` or just `history`:

Examples

```
let length = window.history.length;
```

Try it Yourself »

```
let length = history.length;
```


Try it Yourself »

History Object Properties and Methods


Property/Method	Description
back()	Loads the previous URL (page) in the history list
forward()	Loads the next URL (page) in the history list
go()	Loads a specific URL (page) from the history list
length	Returns the number of URLs (pages) in the history list

‹ Previous ‹ Window Object Reference Next ›

REMOVE ADS

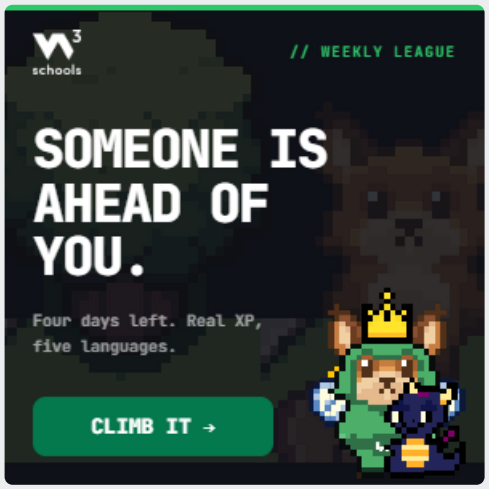

REMOVE ADS

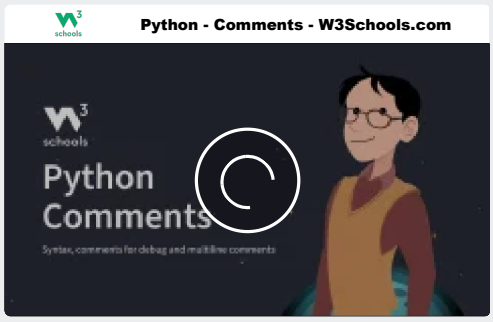


FREE ACCOUNT
Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

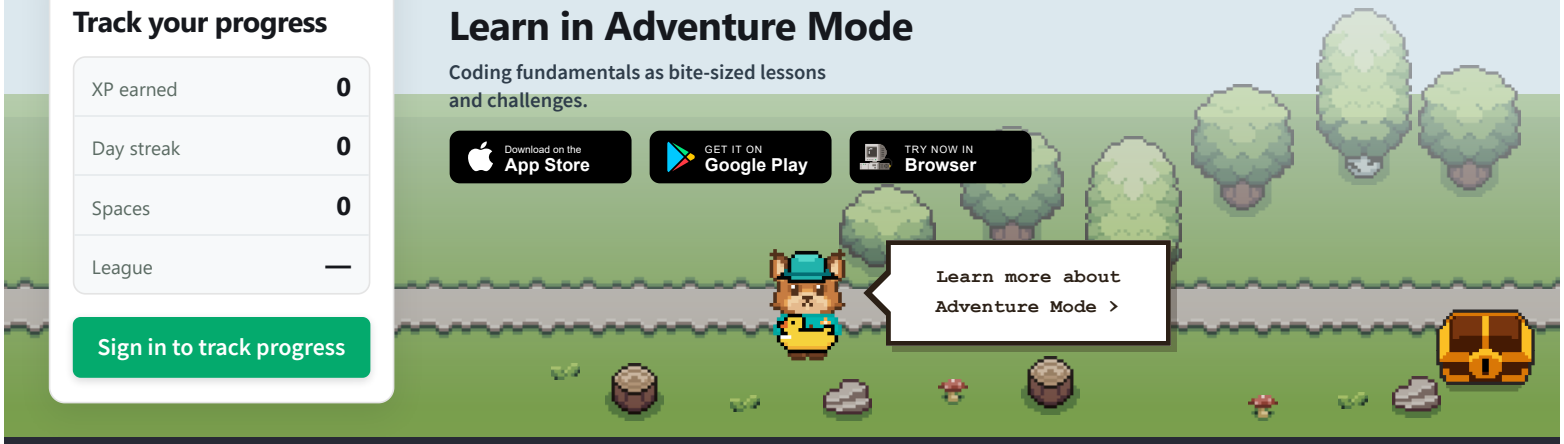

W3 schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference

Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window History

‹ Previous

Next ›

The Window History Object

SHARE

The **history object** contains the URLs visited by the user (in the browser window).

The **history object** is a property of the **window object**.

The **history object** is accessed with:

`window.history` or just `history`:

Examples

```
let length = window.history.length;
```

Try it Yourself »

```
let length = history.length;
```

Try it Yourself »

History Object Properties and Methods

Property/Method	Description
back()	Loads the previous URL (page) in the history list
forward()	Loads the next URL (page) in the history list
go()	Loads a specific URL (page) from the history list
length	Returns the number of URLs (pages) in the history list

REMOVE ADS

‹ Previous

Sign in to track progress

Next ›



REMOVE ADS



FREE ACCOUNT
Track your progress

NEW
Learn in Adventure Mode

XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser



W3 schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference

HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window innerHeight

‹ Previous ‹ Window Object Reference Next ›

Example

Get the window height:

```
let height = window.innerHeight;
```

Try it Yourself »

```
let height = innerHeight;
```

Try it Yourself »

More examples below.

Description

SHARE

The `innerHeight` property returns the height of a window's content area.

The `innerHeight` property is read only.

See Also:

The innerWidth Property.

The outerWidth Property.

The outerHeight Property.

Syntax

```
window.innerHeight
```

or just:

```
innerHeight
```

Return Value

Type	Description
A number	The the inner height of the browser window's content area in pixels.

REMOVE ADS

More Examples

All height and width properties:

```
let text =
"<p>innerWidth: " + window.innerWidth + "</p>" +
"<p>innerHeight: " + window.innerHeight + "</p>" +
"<p>outerWidth: " + window.outerWidth + "</p>" +
"<p>outerHeight: " + window.outerHeight + "</p>";
```

Try it Yourself »

Browser Support

`window.innerHeight` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	9-11

❮ Previous ❮ Window Object Reference Next ❯

Learn it.
Get certified.
Get hired.
$95 per course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

Sign in to track progress



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples

How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window innerWidth

‹ Previous ‹ Window Object Reference Next ›

Example

Get window width:

```
let width = window.innerWidth;
```

Try it Yourself »

```
let width = innerWidth;
```

Try it Yourself »

More examples below.

Description

SHARE

The `innerWidth` property returns the width of a window's content area.

The `innerWidth` property is read-only.

See Also:

The innerHeight Property.

The outerWidth Property.

The outerHeight Property.

Syntax

```
window.innerWidth
```

or just:

```
innerWidth
```

Return Value

Type	Description
A number	The the inner width of the browser window's content area in pixels.

REMOVE ADS

More Examples

All height and width properties:

```
let text =
"<p>innerWidth: " + window.innerWidth + "</p>" +
"<p>innerHeight: " + window.innerHeight + "</p>" +
"<p>outerWidth: " + window.outerWidth + "</p>" +
"<p>outerHeight: " + window.outerHeight + "</p>";
```

Try it Yourself »

Browser Support


`window.innerWidth` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	9-11

❮ Previous ❮ Window Object Reference Next ❯


Learn it.
Get certified.
Get hired.
$95 per course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS

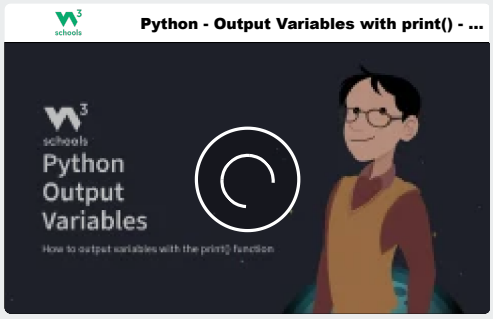

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

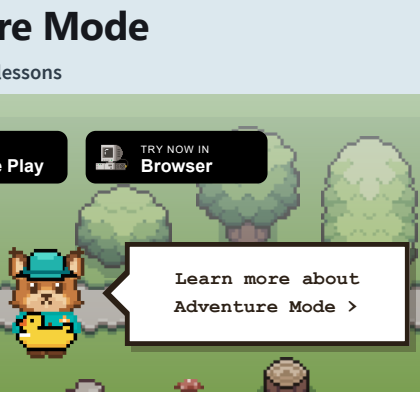

Sign in to track progress



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples

How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window length

❮ Previous ❮ Window Object Reference Next ❯

Example

How many windows are in the window:

```
let length = window.length;
```

Try it Yourself »

More examples below.

Description

SHARE

The `length` property returns the number of (framed) windows in the window.

The `length` property is read-only.

The windows can be accessed by index numbers. The first index is 0.

Note

A frame can be any embedding element:

<frame>, <iframe>, <embed>, <object>, etc.

See Also:

The frames property

The frameElement Property

Syntax

```
window.length
```

Return Value

Type	Description
A number	The number of windows in the current window.

REMOVE ADS

More Examples

Loop through all frames and change the color:

```
const frames = window.frames;

for (let i = 0; i < frames.length; i++) {
  frames[i].document.body.style.background = "red";
}
```

Try it Yourself »

Related Pages:

HTML DOM IFrame Object

HTML <iframe> tag

Browser Support


`window.lenght` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›



REMOVE ADS

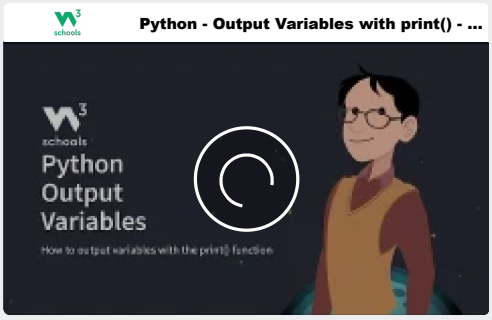


FREE ACCOUNT
Track your progress
XP earned 0

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Day streak 0
Spaces 0
League —
Sign in to track progress

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference

AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window localStorage

‹ Previous ‹ Window Object Reference Next ›

Example

Set and retrieve localStorage name/value pair:

```
localStorage.setItem("lastname", "Smith");
localStorage.getItem("lastname");
```

Try it Yourself »

More examples below.

Description

SHARE

The `localStorage` object allows you to save key/value pairs in the browser.

Note

The localStorage object stores data with no expiration date.

The data is not deleted when the browser is closed, and are available for future sessions.

See Also:

The sessionStorage Object which stores data for one session.

(The data is deleted when the browser window is closed)

Syntax

```
window.localStorage
```

or just:

```
localStorage
```

Save Data to Local Storage

```
localStorage.setItem(key, value);
```

Read Data from Local Storage

```
let lastname = localStorage.getItem(key);
```

Remove Data from Local Storage

```
localStorage.removeItem(key);
```

Remove All (Clear Local Storage)

```
localStorage.clear();
```

Parameters

Parameter	Description
key	Required. The name of a key.
value	Required. The value of the key.

Return Value

Type	Description
An object	A localStorage object.

REMOVE ADS

More Examples

Count the number of times a user has clicked a button:

```
if (localStorage.clickcount) {
  localStorage.clickcount = Number(localStorage.clickcount) + 1;
} else {
  localStorage.clickcount = 1;
}
```

Try it Yourself »

Browser Support

`window.localStorage` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	9-11

‹ Previous ‹ Window Object Reference Next ›



REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window Location

SHARE

❮ Previous ❮ Window Object Reference Next ❯

The Window Location Object

The **location object** contains information about the current URL.

The **location object** is a property of the **window object**.

The **location object** is accessed with:

`window.location` or just `location`

Examples

```
let origin = window.location.origin;
```

Try it Yourself »

```
let origin = location.origin;
```

Try it Yourself »

Location Object Properties

Property	Description
hash	Sets or returns the anchor part (#) of a URL
host	Sets or returns the hostname and port number of a URL
hostname	Sets or returns the hostname of a URL
href	Sets or returns the entire URL
origin	Returns the protocol, hostname and port number of a URL
pathname	Sets or returns the path name of a URL
port	Sets or returns the port number of a URL
protocol	Sets or returns the protocol of a URL
search	Sets or returns the querystring part of a URL

Location Object Methods

Method	Description
assign()	Loads a new document
reload()	Reloads the current document
replace()	Replaces the current document with a new one

‹ Previous ‹ Window Object Reference Next ›

REMOVE ADS

CODING IS AN ADVENTURE.

Five languages, XP and a streak worth keeping.

GET IT FREE

REMOVE ADS

Python - Global Variables - W3Schools....

Python Global Variables

Local and Global variables in Python

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window Location

❮ Previous

Next ❯

The Window Location Object

SHARE

The **location object** contains information about the current URL.

The **location object** is a property of the **window object**.

The **location object** is accessed with:

`window.location` or just `location`

Examples

```
let origin = window.location.origin;
```

Try it Yourself »

```
let origin = location.origin;
```

Try it Yourself »

Location Object Properties

Property	Description
hash	Sets or returns the anchor part (#) of a URL
host	Sets or returns the hostname and port number of a URL
hostname	Sets or returns the hostname of a URL
href	Sets or returns the entire URL
origin	Returns the protocol, hostname and port number of a URL
pathname	Sets or returns the path name of a URL
port	Sets or returns the port number of a URL
protocol	Sets or returns the protocol of a URL
search	Sets or returns the querystring part of a URL

Location Object Methods

Method	Description
assign()	Loads a new document
reload()	Reloads the current document
replace()	Replaces the current document with a new one

REMOVE ADS

‹ Previous


Sign in to track progress

Next ›

schools
Your next career move.
Get every certification. One payment.



$499 Pay once. Learn for life.
Invest in your future

REMOVE ADS

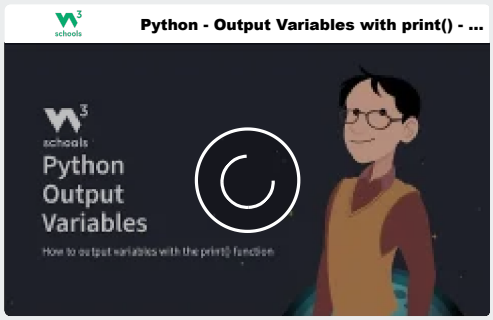

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

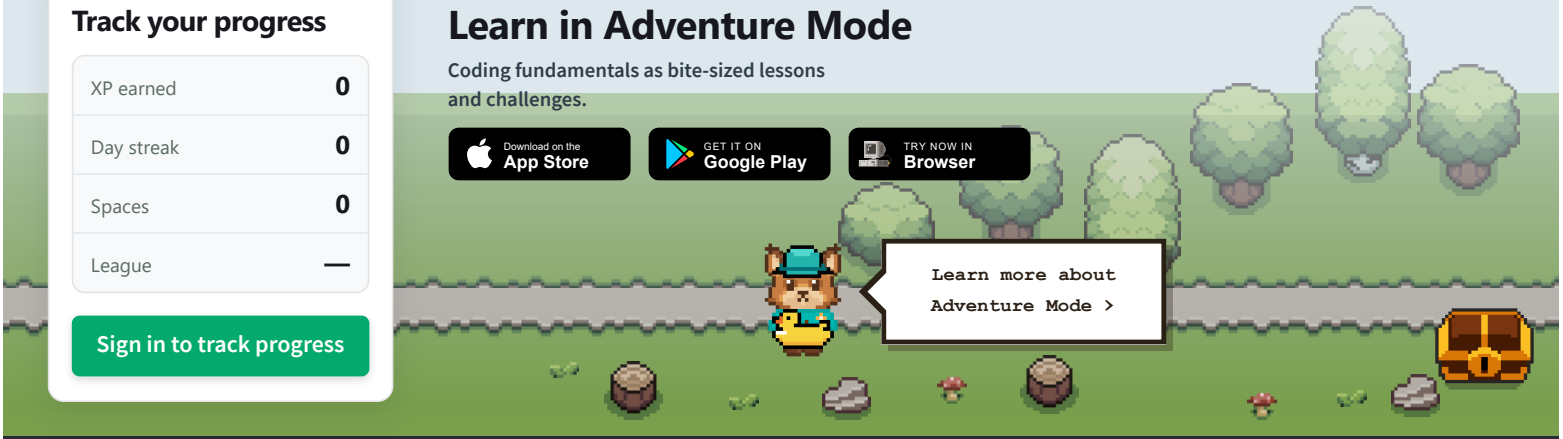

schools
PLUS
SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window name

❮ Previous ❮ Window Object Reference Next ❯

Examples

Get window name:

```
let name = window.name;
```

Try it Yourself »

Set window name:

```
window.name = "myWindowName";
```

Try it Yourself »

More examples below.

Description

SHARE

The `name` property sets or returns the name of the window.

Note

A windows does not need to have a name.

Syntax

Return the name property:

```
window.name
```

Set the name property:

```
window.name = winName
```

Property Value

Type	Description
winName	The name of the window.

Return Value

Type	Description
A string	The name of the window. Or "view" (If the window has no name).

REMOVE ADS

More Examples

Open a frame with a special name:

```
const otherWindow = window.open();
otherWindow.name = "Butterfly";
```

Try it Yourself »

Browser Support


`window.name` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

Learn it.
Get certified.
Get hired.
$95 per course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS

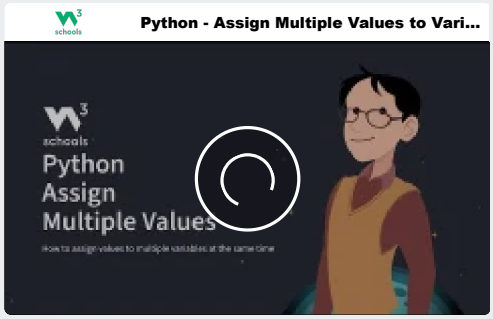

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window Navigator

SHARE

‹ Previous ‹ Window Object Reference Next ›

The Window Navigator Object

The **navigator object** contains information about the browser.

The **navigator object** is a property of the **window object**.

The **navigator object** is accessed with:

`window.navigator` or just `navigator`:

Examples

```
let url = window.navigator.language;
```

Try it Yourself »

```
let url = navigator.language;
```

Try it Yourself »

Navigator Object Properties

Property	Description
appCodeName	Deprecated. All browsers returns **Mozilla**.
appName	Deprecated. All browsers returns **Netscape**.
appVersion	Deprecated. Most browsers returns 4.0 or 5.0 ().
cookieEnabled	Returns true if browser cookies are enabled
geolocation	Returns a geolocation object for the user's location
language	Returns browser language
onLine	Returns true if the browser is online
platform	Deprecated. Avoid using it.
product	Deprecated. All browsers return **Geco**.
userAgent	Returns browser user-agent header

Navigator Object Methods

Method	Description
javaEnabled()	Deprecated. All browsers return **false**.
taintEnabled()	Removed in JavaScript version 1.2 (1999).

‹ Previous ‹ Window Object Reference Next ›

REMOVE ADS

CODING IS AN ADVENTURE.

Five languages, XP and a streak worth keeping.

GET IT FREE

REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode


Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

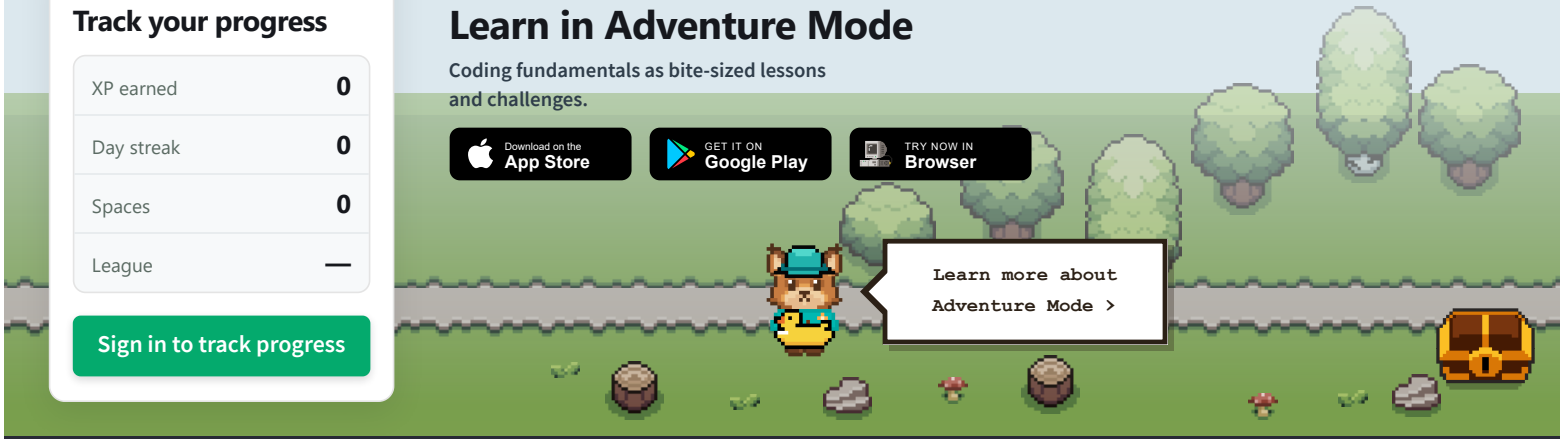

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window Navigator

‹ Previous

Next ›

The Window Navigator Object

SHARE

The **navigator object** contains information about the browser.

The **navigator object** is a property of the **window object**.

The **navigator object** is accessed with:

`window.navigator` or just `navigator`:

Examples

```
let url = window.navigator.language;
```

Try it Yourself »

```
let url = navigator.language;
```

Try it Yourself »

Navigator Object Properties

Property	Description
appCodeName	Deprecated. All browsers returns **Mozilla**.
appName	Deprecated. All browsers returns **Netscape**.
appVersion	Deprecated. Most browsers returns 4.0 or 5.0 ().
cookieEnabled	Returns true if browser cookies are enabled
geolocation	Returns a geolocation object for the user's location
language	Returns browser language
onLine	Returns true if the browser is online
platform	Deprecated. Avoid using it.
product	Deprecated. All browsers return **Geco**.
userAgent	Returns browser user-agent header

Navigator Object Methods

Method	Description
javaEnabled()	Deprecated. All browsers return **false**.
taintEnabled()	Removed in JavaScript version 1.2 (1999).

REMOVE ADS

‹ Previous

Sign in to track progress

Next ›

Build skills.
Get hired.

$95 per paid course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS



FREE ACCOUNT
Track your progress


XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

Learn more about Adventure Mode >

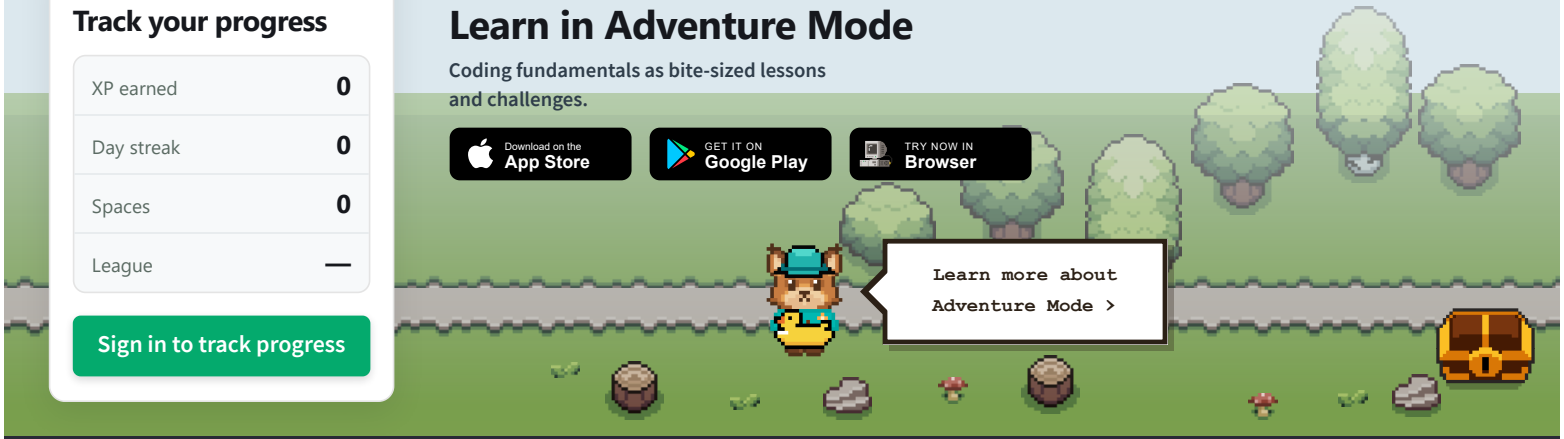

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window opener Property

❮ Previous ❮ Window Object Reference Next ❯

Example

Open a window and write some text in the opener window:

```
const myWindow = window.open("", "", "width=300,height=300");
myWindow.opener.document.getElementById("demo").innerHTML = "HELLO!";
```

Try it Yourself »

Description

SHARE

The `opener` property returns a reference to the window that created the window.

If window xxx opens window yyy:

yyy.opener returns xxx.

yyy.opener.close() closes xxx.

See Also:

The open Method

The parent Property

Syntax

```
window.opener
```

Return Value

Type	Description
A window	The window that created the window.

Browser Support


`window.opener` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›



REMOVE ADS

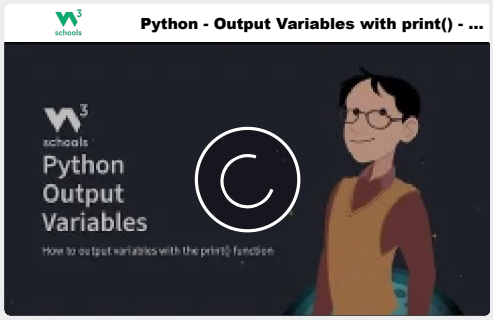

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

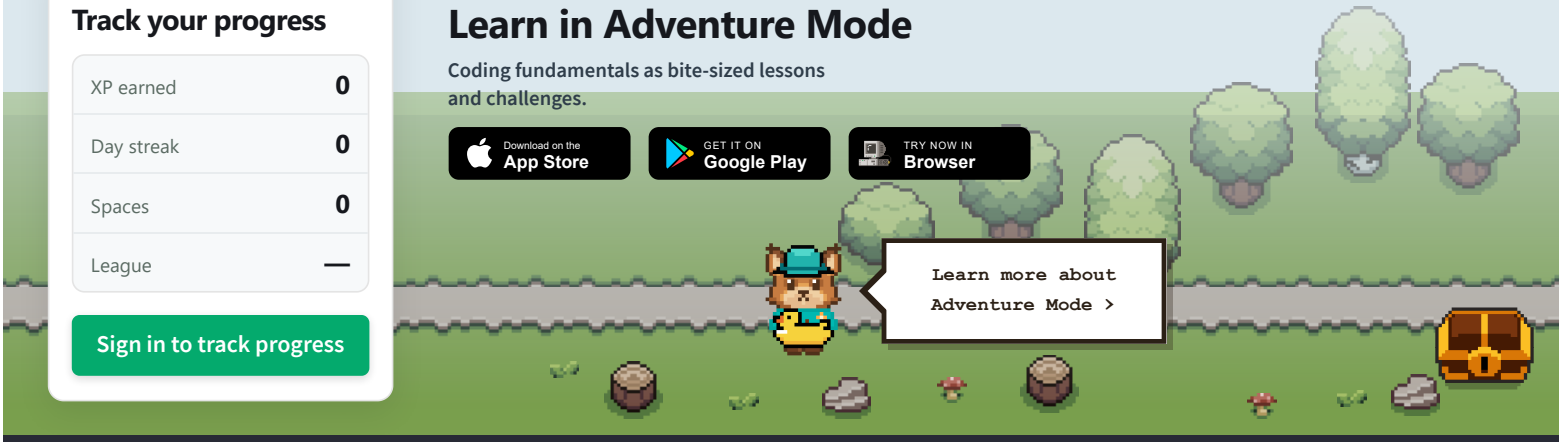

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial

Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window outerHeight

‹ Previous ‹ Window Object Reference Next ›

Example

Get the browser window's height and width:

```
let height = window.outerHeight;
```

Try it Yourself »

```
let height = outerHeight;
```

Try it Yourself »

More examples below.

Description

SHARE

The `outerHeight` property returns the outer height of the browser window, including all interface elements (like toolbars/scrollbars).

The `outerHeight` property is read only.

See Also:

The outerWidth Property.

The innerWidth Property.

The innerHeight Property.

Syntax

```
window.outerHeight
```

or just:

```
outerHeight
```

Return Value

Type	Description
A number	The height of the browser's window, including all interface elements, in pixels.

REMOVE ADS

More Examples

All height and width properties:

```
let text =
"<p>innerWidth: " + window.innerWidth + "</p>" +
"<p>innerHeight: " + window.innerHeight + "</p>" +
"<p>outerWidth: " + window.outerWidth + "</p>" +
"<p>outerHeight: " + window.outerHeight + "</p>";
```

Try it Yourself »

Browser Support

`window.outerHeight` is supported in all browsers:










Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	9-11

‹ Previous ‹ Window Object Reference Next ›

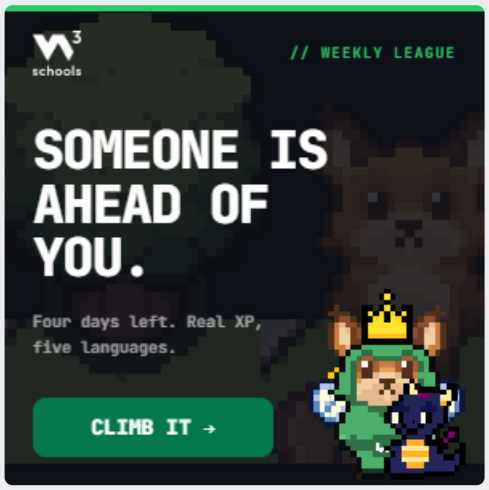

REMOVE ADS



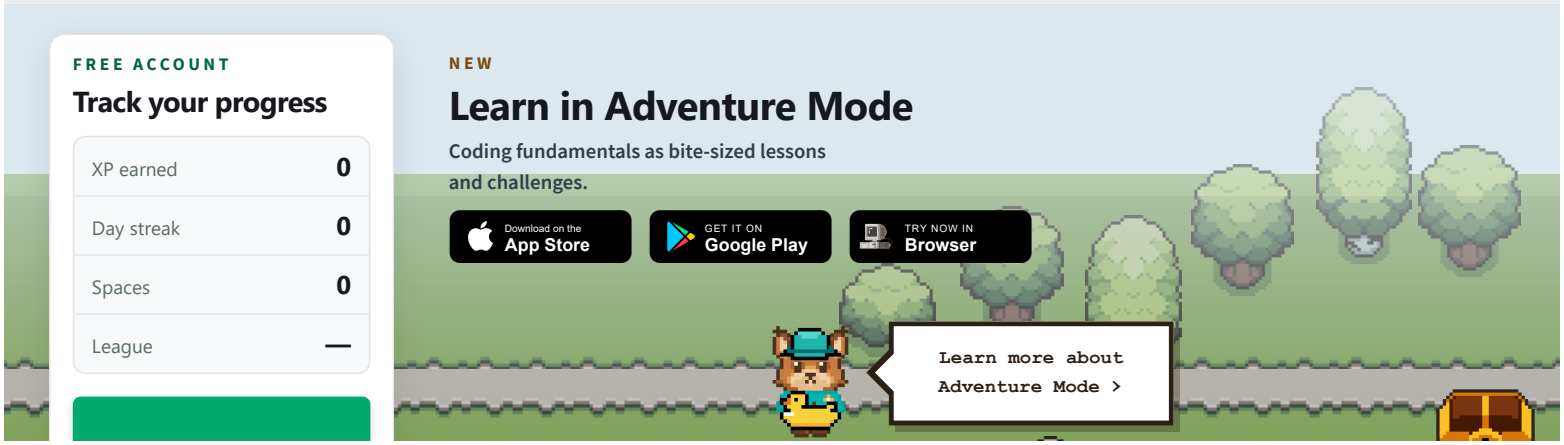

Sign in to track progress



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples

JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window outerWidth

‹ Previous ‹ Window Object Reference Next ›

Example

Get the browser window's height and width:

```
let width = window.outerWidth;
```

Try it Yourself »

```
let width = outerWidth;
```

Try it Yourself »

More examples below.

Description

SHARE

The `outerWidth` property returns the outer width of the browser window, including all interface elements (like toolbars/scrollbars).

The `outerWidth` property is read only.

See Also:

The outerHeight Property.

The innerWidth Property.

The innerHeight Property.

Syntax

```
window.outerWidth
```

or just:

```
outerWidth
```

Return Value

Type	Description
A number	The width of the browser's window, including all interface elements, in pixels.

REMOVE ADS

More Examples

All height and width properties:

```
let text =
"<p>innerWidth: " + window.innerWidth + "</p>" +
"<p>innerHeight: " + window.innerHeight + "</p>" +
"<p>outerWidth: " + window.outerWidth + "</p>" +
"<p>outerHeight: " + window.outerHeight + "</p>";
```

Try it Yourself »

Browser Support

`window.outerWidth` is supported in all browsers:









Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	9-11

‹ Previous ‹ Window Object Reference Next ›



REMOVE ADS



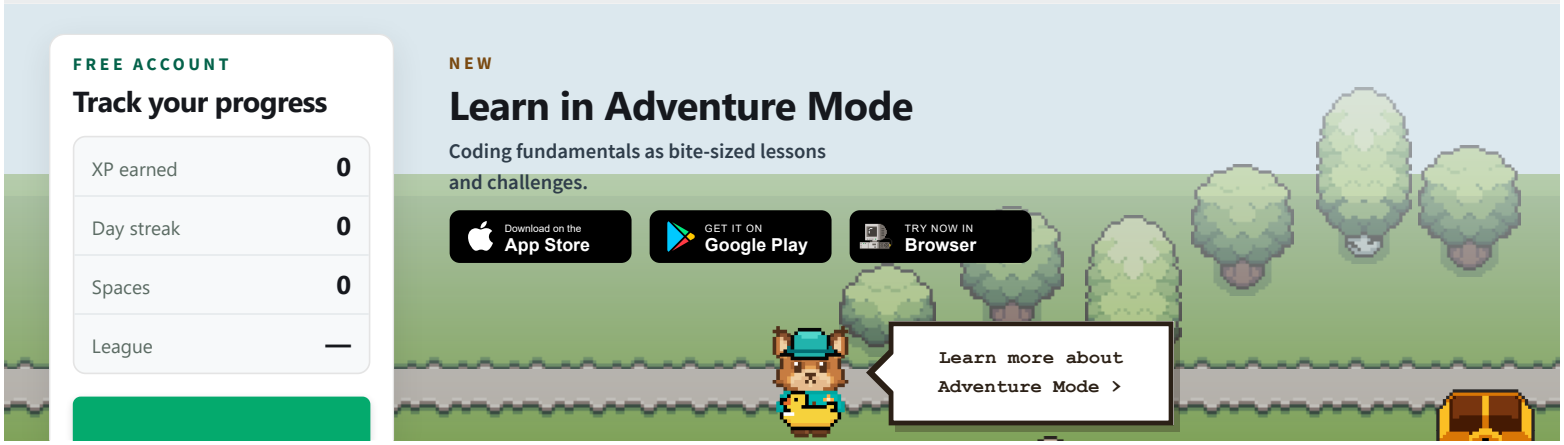

Sign in to track progress



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples

JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window pageXOffset

‹ Previous ‹ Window Object Reference Next ›

Example 1

Scroll the content by 100 pixels, and alert the pageXOffset and pageYOffset:

```
window.scrollBy(100, 100);
alert(window.pageXOffset + window.pageYOffset);
```

Try it Yourself »

More examples below.

Description

SHARE

The `pageXOffset` property returns the pixels a document has scrolled from the upper left corner of the window.

The `pageXOffset` property is equal to the `scrollX` property.

The `pageXOffset` property is read-only.

See Also:

The screenX Property

The screenY Property

Syntax

```
window.pageXOffset
```

or just:

```
pageXOffset
```

Return Value

Type	Description
A number	The number of pixels the document has scrolled from the upper left corner of the window.

REMOVE ADS

More Examples

Create a sticky navigation bar:

```
// Get the navbar
const navbar = document.getElementById("navbar");

// Get the offset position of the navbar
const sticky = navbar.offsetTop;

// Add the sticky class to the navbar when you reach its scroll position. Remove the sticky class when you leave the scroll position.
function myFunction() {
  if (window.pageYOffset >= sticky) {
    navbar.classList.add("sticky")
  } else {
    navbar.classList.remove("sticky");
  }
}
```

Try it Yourself »

Browser Support

`window.pageXOffset` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	9-11

‹ Previous ‹ Window Object Reference Next ›

Learn it.
Get certified.
Get hired.
$95 per course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS




FREE ACCOUNT
Track your progress
XP earned 0

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Day streak 0
Spaces 0
League —
Sign in to track progress

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference

AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window pageXOffset

‹ Previous ‹ Window Object Reference Next ›

Example 1

Scroll the content by 100 pixels, and alert the pageXOffset and pageYOffset:

```
window.scrollBy(100, 100);
alert(window.pageXOffset + window.pageYOffset);
```

Try it Yourself »

More examples below.

Description

SHARE

The `pageXOffset` property returns the pixels a document has scrolled from the upper left corner of the window.

The `pageXOffset` property is equal to the `scrollX` property.

The `pageXOffset` property is read-only.

See Also:

The screenX Property

The screenY Property

Syntax

```
window.pageXOffset
```

or just:

```
pageXOffset
```

Return Value

Type	Description
A number	The number of pixels the document has scrolled from the upper left corner of the window.

REMOVE ADS

More Examples

Create a sticky navigation bar:

```
// Get the navbar
const navbar = document.getElementById("navbar");

// Get the offset position of the navbar
const sticky = navbar.offsetTop;

// Add the sticky class to the navbar when you reach its scroll position. Remove the sticky class when you leave the scroll position.
function myFunction() {
  if (window.pageYOffset >= sticky) {
    navbar.classList.add("sticky")
  } else {
    navbar.classList.remove("sticky");
  }
}
```


Try it Yourself »

Browser Support


`window.pageXOffset` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	9-11

‹ Previous ‹ Window Object Reference Next ›

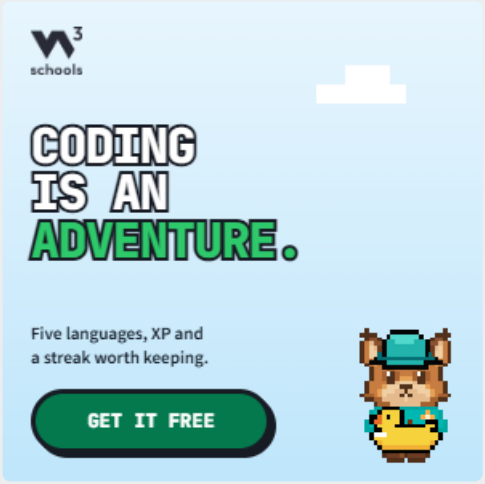

REMOVE ADS

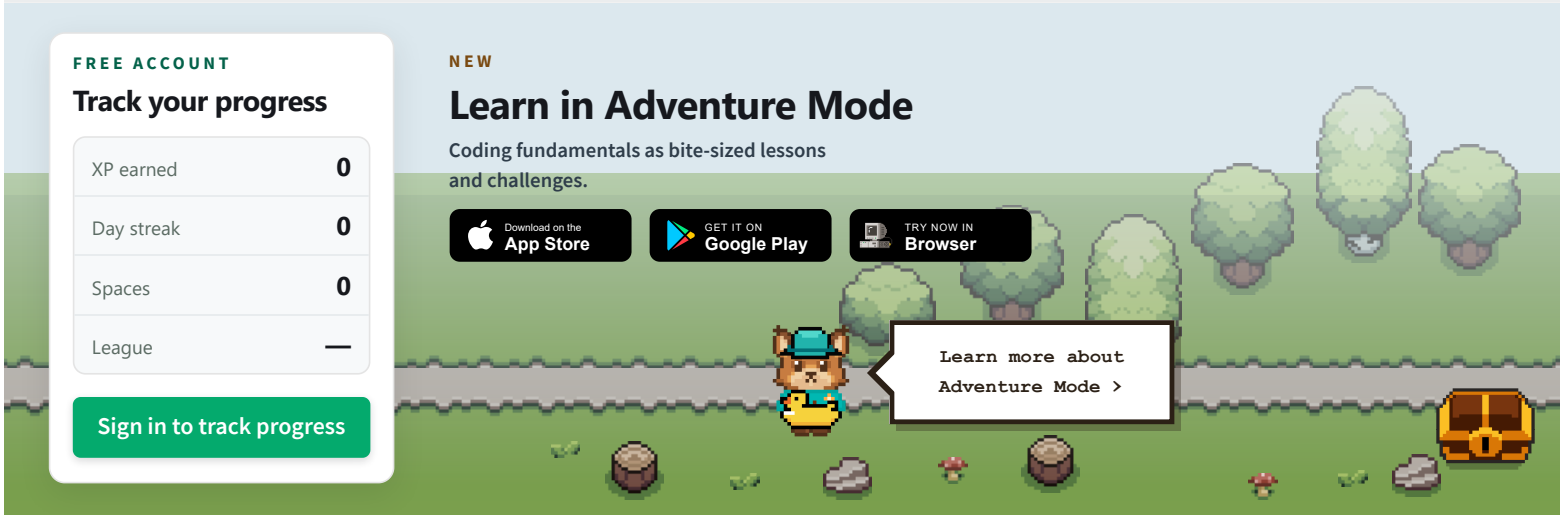

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window parent

❮ Previous ❮ Window Object Reference Next ❯

Example

Change the background-color of the parent:

```
parent.document.body.style.backgroundColor = "lightblue";
```

Try it Yourself »

Description

SHARE

The `parent` property returns the parent window (of the current window).

The `parent` property is read-only.

Note

The `parent` property is not the same as the `top` property.

`window.parent` returns the immediate parent of a window.

`window.top` returns the topmost window in the hierarchy of windows.

See Also:

The top Property

Syntax

```
window.parent
```

or just:

```
parent
```

Return Value

Type	Description
An object	The parent window of the current window.

More Examples

The location of the parent window:

```
location = window.parent.location;
```

Try it Yourself »

Browser Support

`window.parent` is supported in all browsers:

					
Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous | ‹ Window Object Reference | Next ›


schools
Your next career move.
Get every certification. One payment.


$499 Pay once. Learn for life.
Invest in your future

REMOVE ADS

Python - Variable Names - W3Schools.c...


FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

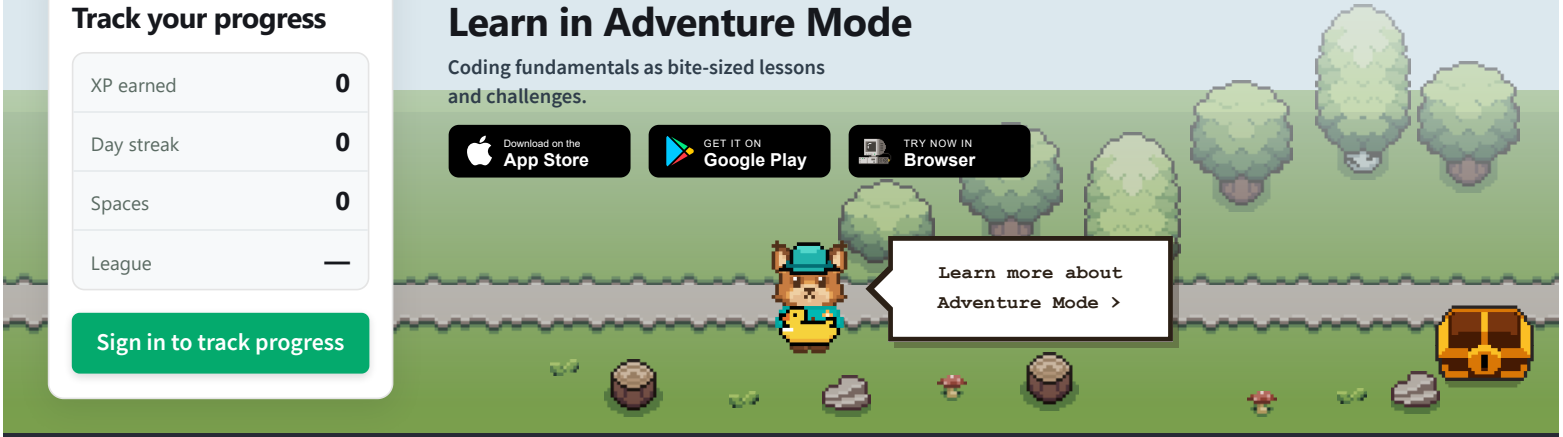NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser


schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window Screen

SHARE

‹ Previous ‹ Window Object Reference Next ›

The Window Screen Object

The screen object contains information about the visitor's screen.

Screen Object Properties

Property	Description
availHeight	Returns the height of the screen (excluding the Windows Taskbar)
availWidth	Returns the width of the screen (excluding the Windows Taskbar)
colorDepth	Returns the bit depth of the color palette for displaying images
height	Returns the total height of the screen
pixelDepth	Returns the color resolution (in bits per pixel) of the screen
width	Returns the total width of the screen


‹ Previous ‹ Window Object Reference Next ›

REMOVE ADS


schools
Your next career move.
Get every certification. One payment.


$499 Pay once. Learn for life.
Invest in your future

REMOVE ADS

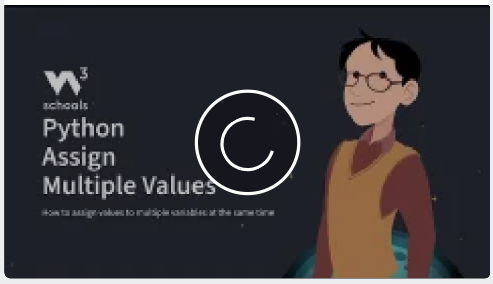Python - Assign Multiple Values to Vari...


FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

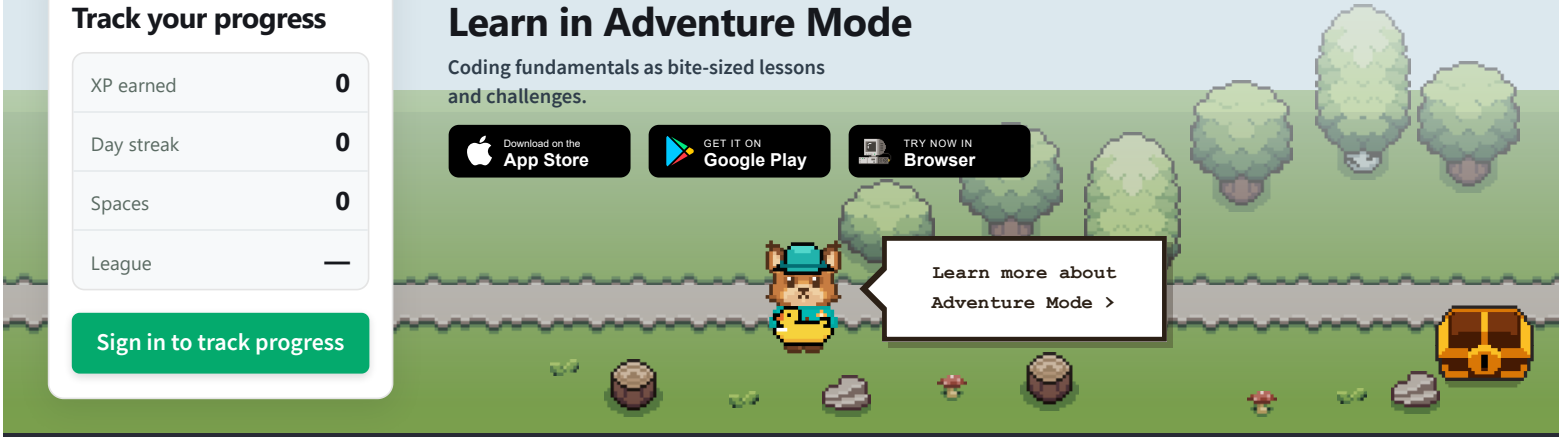NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser


schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window Screen

‹ Previous

Next ›

The Window Screen Object

SHARE

The screen object contains information about the visitor's screen.

Screen Object Properties

Property	Description
availHeight	Returns the height of the screen (excluding the Windows Taskbar)
availWidth	Returns the width of the screen (excluding the Windows Taskbar)
colorDepth	Returns the bit depth of the color palette for displaying images
height	Returns the total height of the screen
pixelDepth	Returns the color resolution (in bits per pixel) of the screen
width	Returns the total width of the screen

REMOVE ADS

‹ Previous

Next ›

Sign in to track progress

schools

JS


Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

REMOVE ADS

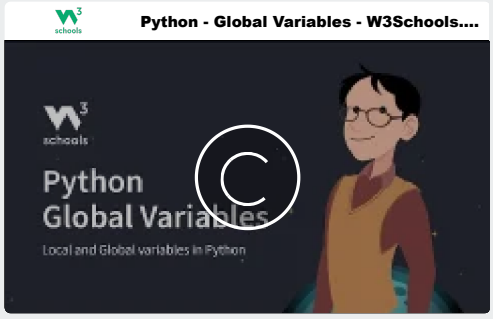

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW


Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

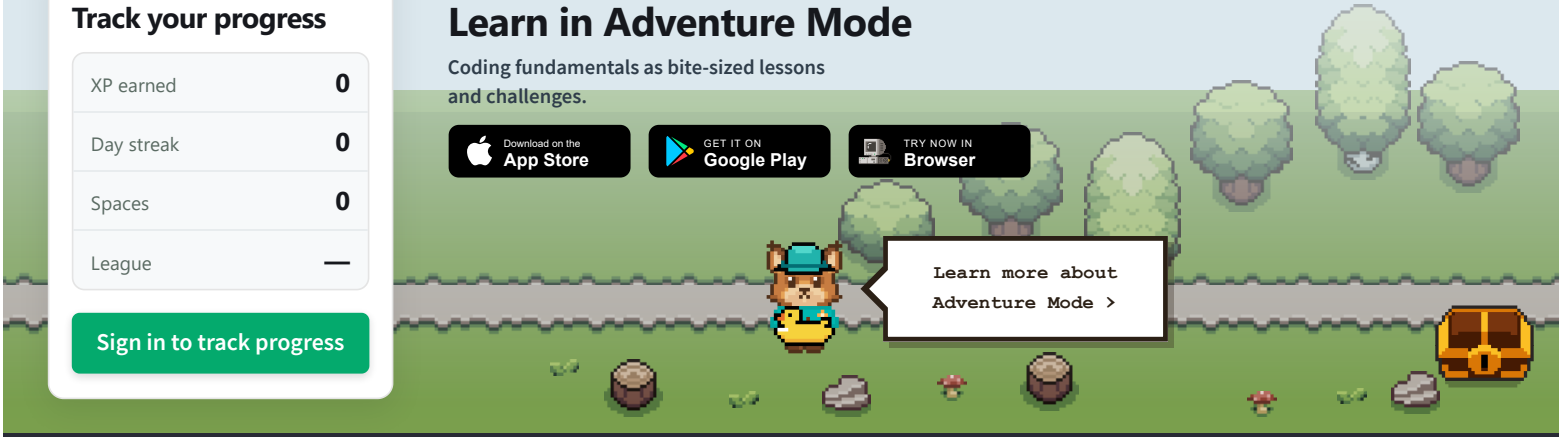

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples

Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window screenLeft

‹ Previous ‹ Window Object Reference Next ›

Example

Return the x and y coordinates of the window:

```
let x = window.screenLeft;
let y = window.screenTop;
```

Try it Yourself »

Description

SHARE

The `screenLeft` property returns the x (horizontal) position of a window, relative to the screen.

See Also:

The screenTop Property

The screenX Property

The screenY Property

Syntax

```
window.screenLeft
```

Return Value

Type	Description
A number	The x (horizontal) position of the window relative to the screen, in pixels.

Browser Support

`window.screenLeft` is supported in all modern browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	11

`window.screenLeft` was not supported in Firefox before version 64 (Nov 2018).

‹ Previous ‹ Window Object Reference Next ›


W3schools
JS
Get Certified in JavaScript
Boost your career with an official certification
$95
Get certified

REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

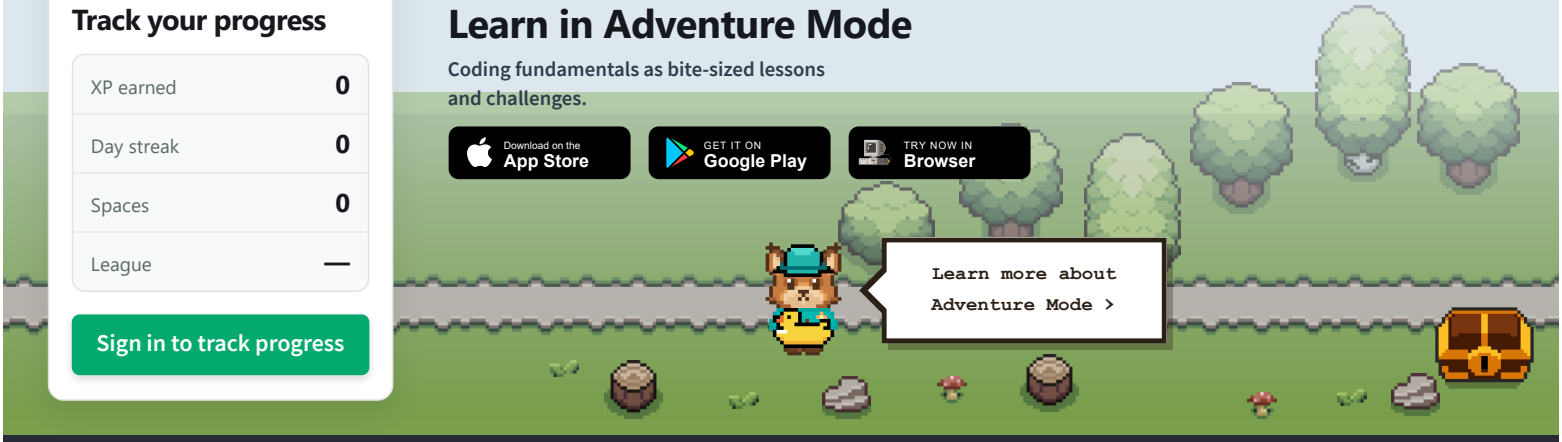

PLUS
SPACES
GET CERTIFIED
FOR TEACHERS
PRACTICE
CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window screenTop

‹ Previous ‹ Window Object Reference Next ›

Example

Return the x and y coordinates of the window:

```
let x = window.screenLeft;
let y = window.screenTop;
```

Try it Yourself »

Description

SHARE

The `screenTop` property returns the y (vertical) position of the window relative to the screen.

See Also:

The screenLeft Property

The screenX Property

The screenY Property

Syntax

```
window.screenTop
```

Return Value

Type	Description
A number	The y (vertical) position of the window relative to the screen, in pixels.

Browser Support

`window.screenTop` is supported in all modern browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	11

`window.screenLeft` was not supported in Firefox before version 64 (Nov 2018).

‹ Previous ‹ Window Object Reference Next ›




REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

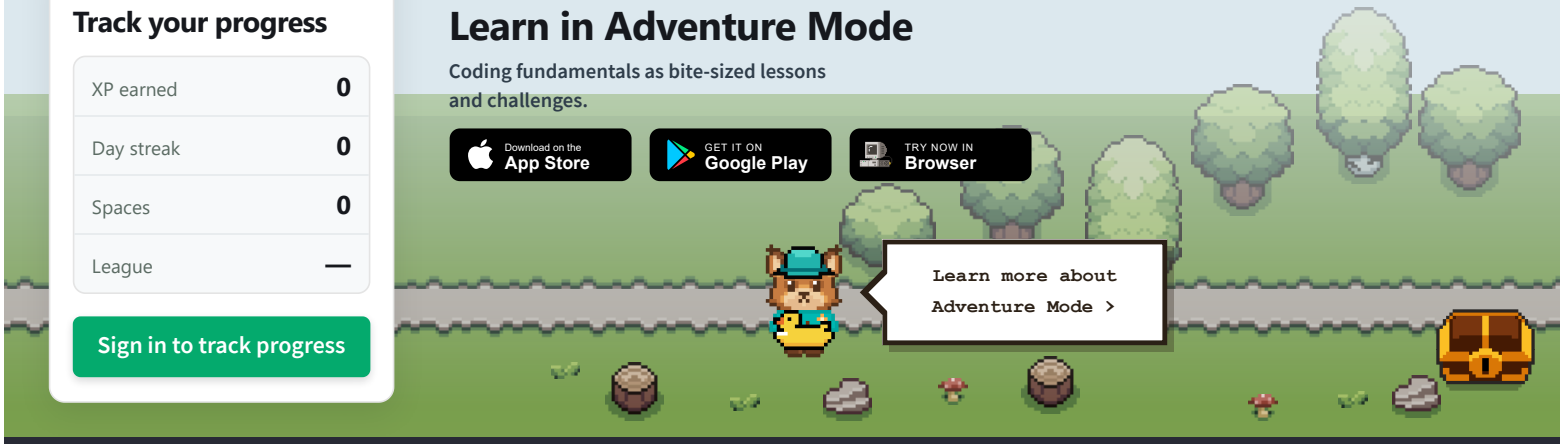

PLUS
SPACES
GET CERTIFIED
FOR TEACHERS
PRACTICE
CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window screenX

‹ Previous ‹ Window Object Reference Next ›

Example

Open a new window with a specified left and top position, and return its coordinates:

```
const myWin = window.open("", "", "left=700,top=350,width=200,height=100");
let x = myWin.screenX;
let y = myWin.screenY;
```

Try it Yourself »

More examples below.

Description

SHARE

The `screenX` property returns the x (horizontal) coordinate of a window, relative to the screen.

See Also:

The screenY Property

The screenTop Property

The screenLeft Property

Syntax

```
window.screenX
```

or just:

```
screenX
```

Parameters

NONE

Return Value

Parameter	Description
A number	The horizontal distance of the window relative to the screen, in pixels

REMOVE ADS

More Examples

Open a new window and return its coordinates:

```
const myWin = window.open("", "", "width=200,height=100");
let x = myWin.screenX;
let y = myWin.screenY;
```

Try it Yourself »

Browser Support

`window.screenX` is supported in all browsers:

Chrome	IE	Edge	Firefox	Safari	Opera

Yes	10-11	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

Learn it.
Get certified.
Get hired.
$95 per course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window screenY

‹ Previous ‹ Window Object Reference Next ›

Example 1

Open a new window with a specified left and top position, and return its coordinates:

```
const myWin = window.open("", "", "left=700,top=350,width=200,height=100");
let x = myWin.screenX;
let y = myWin.screenY;
```

Try it Yourself »

More examples below.

Description

SHARE

The `screenY` property returns the y (vertical) coordinate of a window, relative to the screen.

See Also:

The screenX Property

The screenLeft Property

The screenTop Property

Syntax

```
window.screenY
```

or just:

```
screenY
```

Parameters

NONE

Return Value

Parameter	Description
A number	The vertical distance of the window relative to the screen, in pixels

REMOVE ADS

More Examples

Open a new window and return its coordinates:

```
const myWin = window.open("", "", "width=200,height=100");
let x = myWin.screenX;
let y = myWin.screenY;
```

Try it Yourself »

Browser Support

`window.screenY` is supported in all browsers:

Chrome	IE	Edge	Firefox	Safari	Opera


Yes	10-11	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›



REMOVE ADS



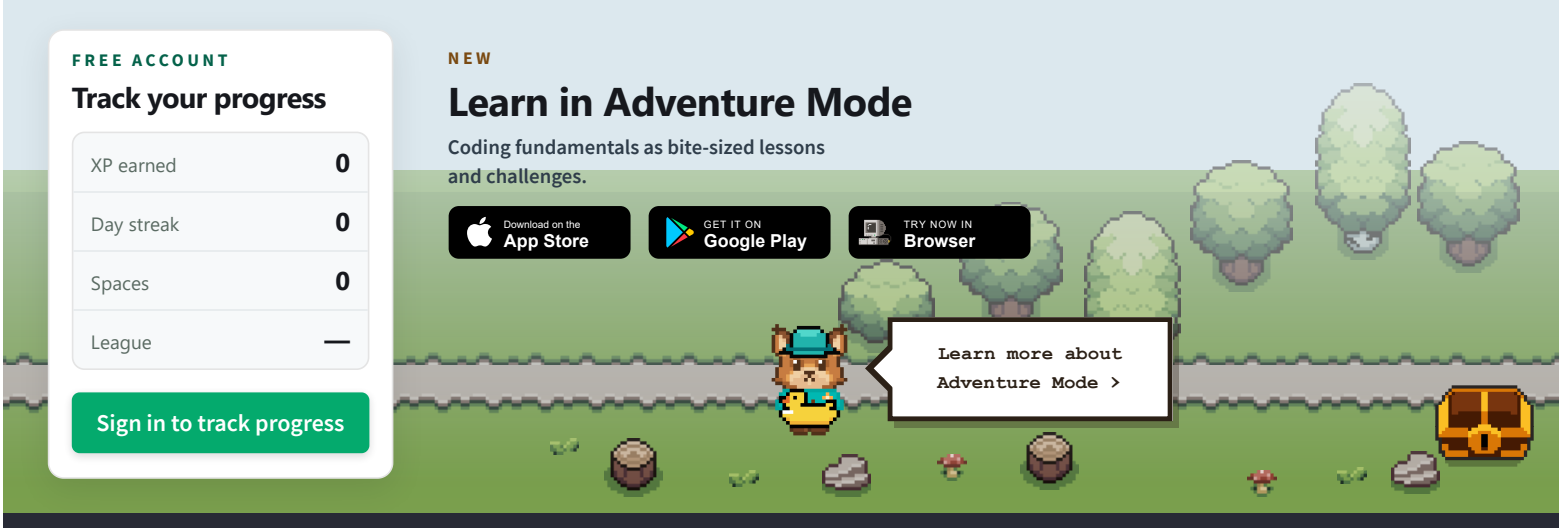

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window sessionStorage

‹ Previous ‹ Window Object Reference Next ›

Example

Set and retrieve a sessionStorage name/value pair:

```
sessionStorage.setItem("lastname", "Smith");
sessionStorage.getItem("lastname");
```

Try it Yourself »

More examples below.

Description

SHARE

The `sessionStorage` object let you store key/value pairs in the browser.

Note

The `sessionStorage` object stores data for only one session.

(The data is deleted when the browser is closed).

See Also:

The localStorage Object which stores data with no expiration date.

(The data is not deleted when the browser is closed, and are available in future sessions).

Syntax

```
window.sessionStorage
```

Or just:

```
sessionStorage
```

Save Data to Session Storage

```
sessionStorage.setItem("key", "value");
```

Read Data from Session Storage

```
let lastname = sessionStorage.getItem("key");
```

Remove Data from Session Storage

```
sessionStorage.removeItem("key");
```

Remove All (Clear session Storage)

```
sessionStorage.clear();
```

Parameters

Parameter	Description
key	Required. The name of a key.
value	Required. The value of the key.

Return Value

Type	Description
Object	A sessionStorage object.

REMOVE ADS

More Examples

Count the number of times a user has clicked a button:

```
if (sessionStorage.clickcount) {
  sessionStorage.clickcount = Number(sessionStorage.clickcount) + 1;
} else {
  sessionStorage.clickcount = 1;
}
```

Try it Yourself »

Browser Support

`window.sessionStorage` is supported in all browsers:

					
Chrome	IE	Edge	Firefox	Safari	Opera
Yes	8-11	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

CODING IS AN ADVENTURE.

Five languages, XP and a streak worth keeping.

GET IT FREE

REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode


Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

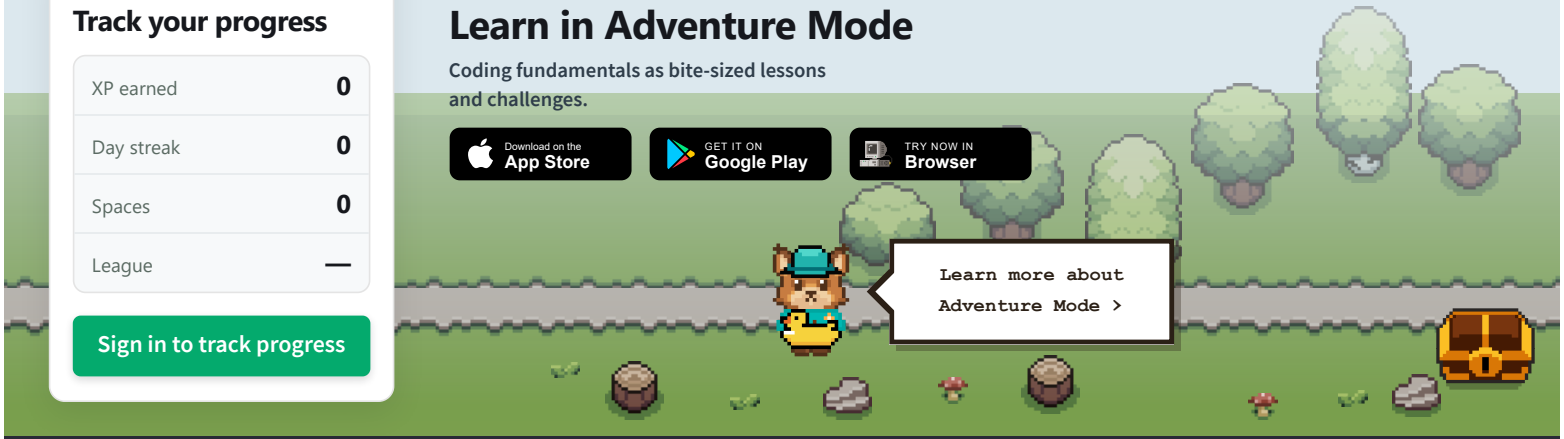

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window scrollX

‹ Previous ‹ Window Object Reference Next ›

Example 1

Scroll the content by 100 pixels, and alert the scrollX and scrollY:

```
window.scrollBy(100, 100);
alert(window.scrollX + window.scrollY);
```

Try it Yourself »

More examples below.

Description

SHARE

The `scrollX` property returns the pixels a document has scrolled from the upper left corner of the window.

The `scrollX` property is read-only.

Note

The `scrollX` property is equal to the `pageXOffset` property.

For cross-browser compatibility, use window.pageXOffset instead of window.scrollX.

See Also:

The pageXOffset Property

The pageYOffset Property

Syntax

```
window.scrollX
```

or just:

```
scrollX
```

Return Value

Type	Description
A number	The number of pixels the document has scrolled from the upper left corner of the window.

REMOVE ADS

More Examples

Create a sticky navigation bar:

```
// Get the navbar
const navbar = document.getElementById("navbar");

// Get the offset position of the navbar
const sticky = navbar.offsetTop;

// Add the sticky class to the navbar when you reach its scroll position. Remove the sticky class when you leave the scroll position.
function myFunction() {
  if (window.scrollY >= sticky) {
    navbar.classList.add("sticky")
  } else {
    navbar.classList.remove("sticky");
  }
}
```

Try it Yourself »

Browser Support

`window.scrollX` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	9-11

‹ Previous ‹ Window Object Reference Next ›



REMOVE ADS




FREE ACCOUNT
Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

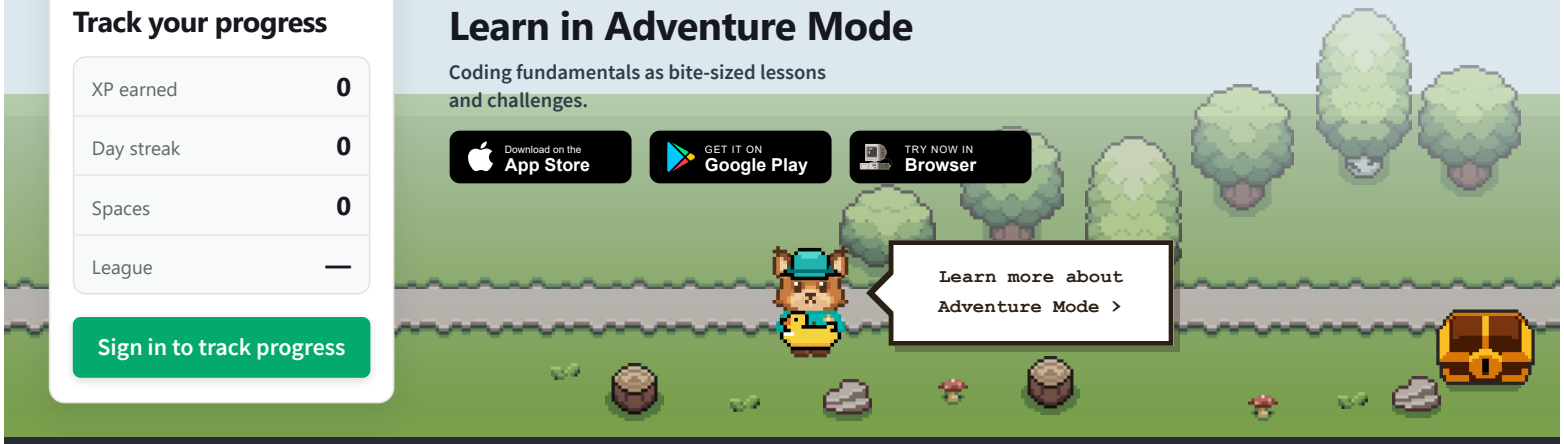

W3schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference

Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window pageXOffset

‹ Previous ‹ Window Object Reference Next ›

Example 1

Scroll the content by 100 pixels, and alert the pageXOffset and pageYOffset:

```
window.scrollBy(100, 100);
alert(window.pageXOffset + window.pageYOffset);
```

Try it Yourself »

More examples below.

Description

SHARE

The `pageXOffset` property returns the pixels a document has scrolled from the upper left corner of the window.

The `pageXOffset` property is equal to the `scrollX` property.

The `pageXOffset` property is read-only.

See Also:

The screenX Property

The screenY Property

Syntax

```
window.pageXOffset
```

or just:

```
pageXOffset
```

Return Value

Type	Description
A number	The number of pixels the document has scrolled from the upper left corner of the window.

REMOVE ADS

More Examples

Create a sticky navigation bar:

```
// Get the navbar
const navbar = document.getElementById("navbar");

// Get the offset position of the navbar
const sticky = navbar.offsetTop;

// Add the sticky class to the navbar when you reach its scroll position. Remove the sticky class when you leave the scroll position.
function myFunction() {
  if (window.pageYOffset >= sticky) {
    navbar.classList.add("sticky")
  } else {
    navbar.classList.remove("sticky");
  }
}
```

Try it Yourself »

Browser Support


`window.pageXOffset` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	9-11

‹ Previous ‹ Window Object Reference Next ›



REMOVE ADS

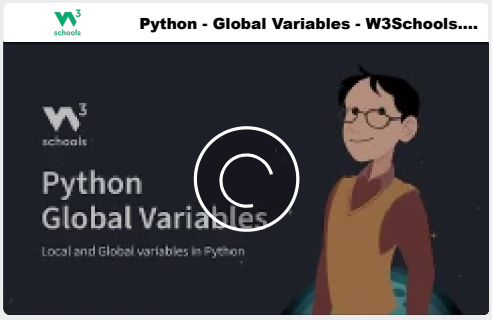

FREE ACCOUNT

Track your progress

XP earned 0


NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Day streak 0
Spaces 0
League —
Sign in to track progress

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference

AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window scrollY

‹ Previous ‹ Window Object Reference Next ›

Example 1

Scroll the content by 100 pixels, and alert the scrollX and scrollY:

```
window.scrollBy(100, 100);
alert(window.scrollX + window.scrollY);
```

Try it Yourself »

More examples below.

Description

SHARE

The `scrollY` property returns the pixels a document has scrolled from the upper left corner of the window.

The `scrollY` property is read-only.

Note

The `scrollY` property is equal to the `pageYOffset` property.

For cross-browser compatibility, use window.pageYOffset instead of window.scrollY.

See Also:

The pageXOffset Property

The pageYOffset Property

Syntax

```
window.scrollY
```

or just:

```
scrollY
```

Return Value

Type	Description
A number	The number of pixels the document has scrolled from the upper left corner of the window.

REMOVE ADS

More Examples

Create a sticky navigation bar:

```
// Get the navbar
const navbar = document.getElementById("navbar");

// Get the offset position of the navbar
const sticky = navbar.offsetTop;

// Add the sticky class to the navbar when you reach its scroll position. Remove the sticky class when you leave the scroll position.
function myFunction() {
  if (window.scrollY >= sticky) {
    navbar.classList.add("sticky")
  } else {
    navbar.classList.remove("sticky");
  }
}
```

Try it Yourself »

Browser Support

`window.scrollY` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	9-11

‹ Previous ‹ Window Object Reference Next ›



REMOVE ADS




FREE ACCOUNT
Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

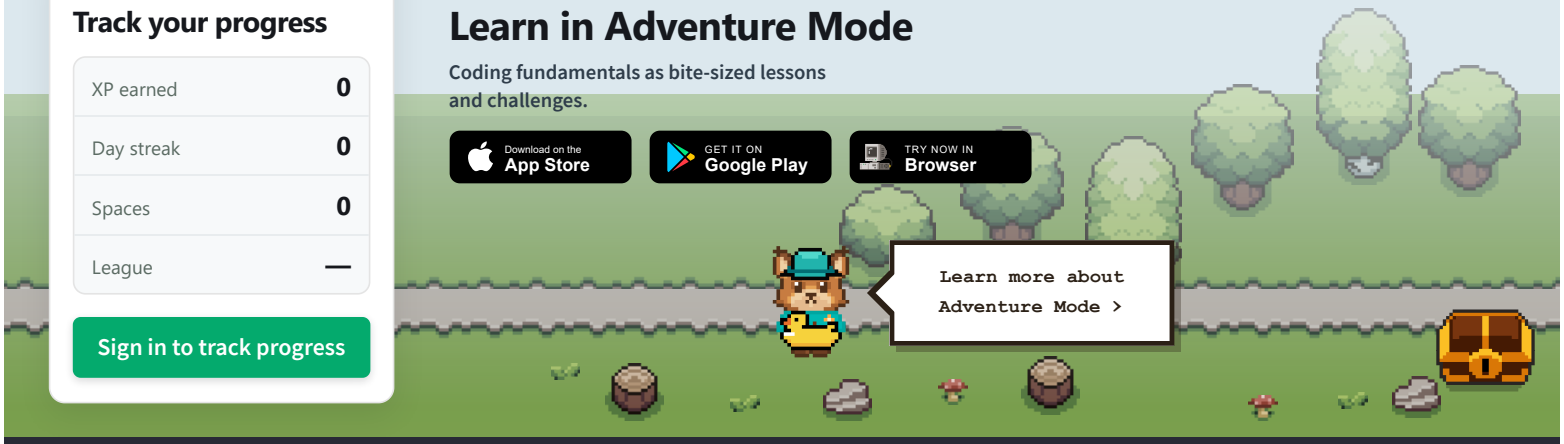

W3 schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference

Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window pageXOffset

‹ Previous ‹ Window Object Reference Next ›

Example 1

Scroll the content by 100 pixels, and alert the pageXOffset and pageYOffset:

```
window.scrollBy(100, 100);
alert(window.pageXOffset + window.pageYOffset);
```

Try it Yourself »

More examples below.

Description

SHARE

The `pageXOffset` property returns the pixels a document has scrolled from the upper left corner of the window.

The `pageXOffset` property is equal to the `scrollX` property.

The `pageXOffset` property is read-only.

See Also:

The screenX Property

The screenY Property

Syntax

```
window.pageXOffset
```

or just:

```
pageXOffset
```

Return Value

Type	Description
A number	The number of pixels the document has scrolled from the upper left corner of the window.

REMOVE ADS

More Examples

Create a sticky navigation bar:

```
// Get the navbar
const navbar = document.getElementById("navbar");

// Get the offset position of the navbar
const sticky = navbar.offsetTop;

// Add the sticky class to the navbar when you reach its scroll position. Remove the sticky class when you leave the scroll position.
function myFunction() {
  if (window.pageYOffset >= sticky) {
    navbar.classList.add("sticky")
  } else {
    navbar.classList.remove("sticky");
  }
}
```

Try it Yourself »

Browser Support


`window.pageXOffset` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	9-11

‹ Previous ‹ Window Object Reference Next ›



REMOVE ADS

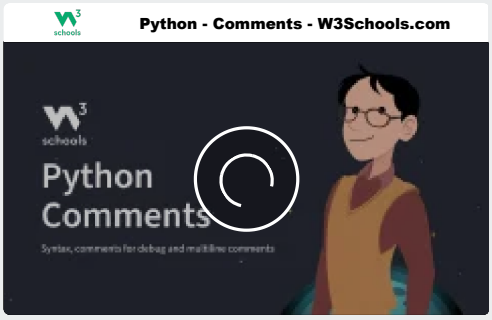

FREE ACCOUNT

Track your progress

XP earned 0


NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Day streak 0
Spaces 0
League —
Sign in to track progress

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference

AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window self Property

‹ Previous ‹ Window Object Reference Next ›

Example

Is this window the topmost window:

```
if (window.top != window.self) {
  text = "This window is NOT the topmost window!";
} else {
  text = "This window is the topmost window!";
}
```

Try it Yourself »

Description

SHARE

The `self` property returns the current window.

The `self` property is read-only.

Note

The `self` property is often used in comparisons (see example above).

Syntax

```
window.self
```

Return Value

Type	Description
An object	The Window object itself.

Browser Support

`window.self` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›



REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode


Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

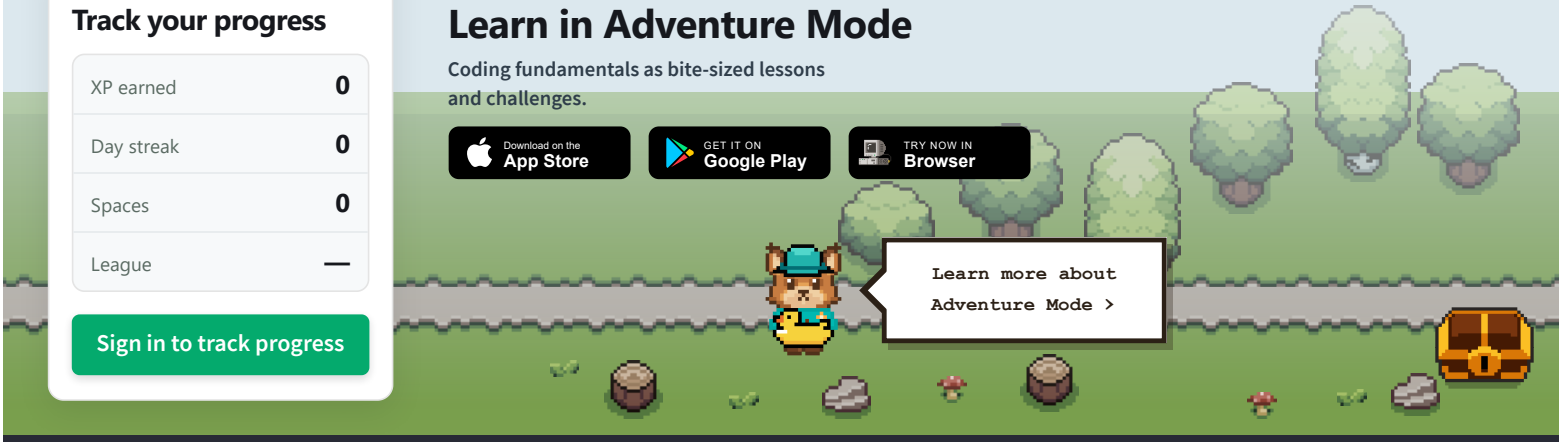

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window status

❮ Previous ❮ Window Object Reference Next ❯

Example

Set the text in the status bar:

```
window.status = "Some text in the status bar!!";
```

Try it Yourself »

Description

SHARE

The status property is deprecated.

It should be avoided to prevent RUN-TIME ERRORS in the future.

Syntax

```
window.status
```

Return Value

The text displayed in the status bar

‹ Previous ‹ Window Object Reference Next ›


Build skills.
Get hired.
$95 per paid course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

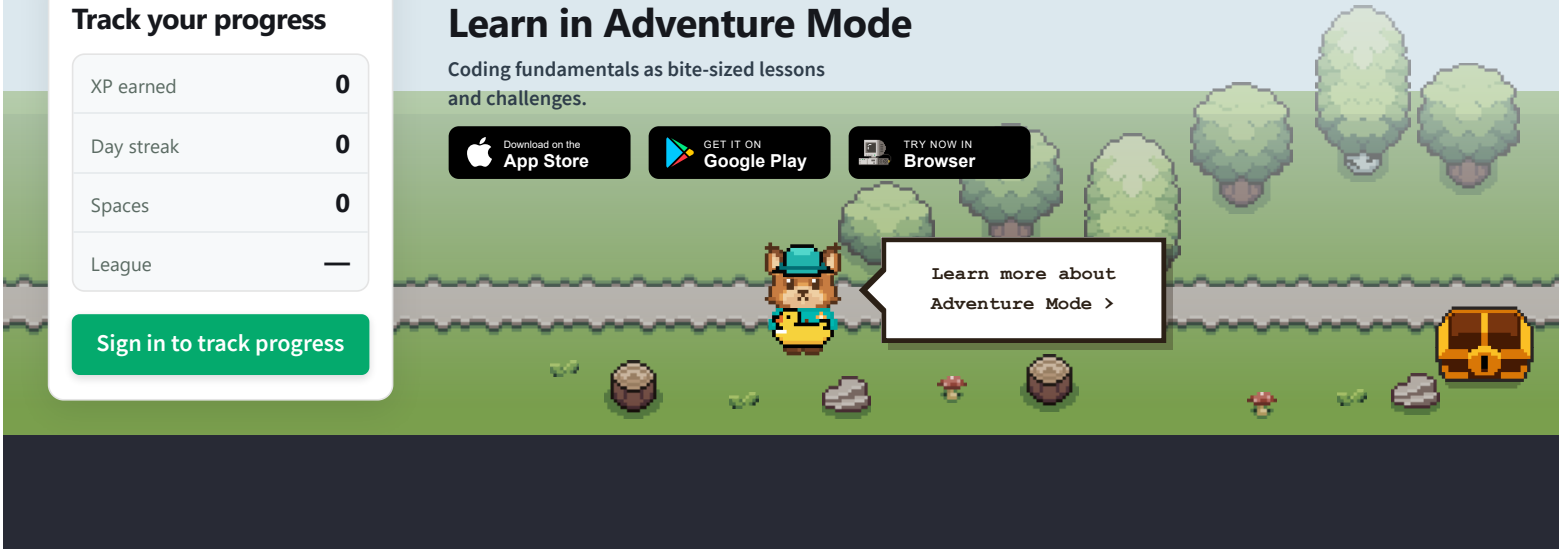

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window top Property

❮ Previous ❮ Window Object Reference Next ❯

Example

Is this window the topmost window:

```
if (window.top != window.self) {
  text = "This window is NOT the topmost window!";
} else {
  text = "This window is the topmost window!";
}
```

Try it Yourself »

Description

SHARE

The `top` property returns the topmost window in the current browser window.

The `top` property is read-only.

Note

The `top` property is not the same as the `parent` property.

`window.top` returns the topmost window in the hierarchy of windows.

`window.parent` returns the immediate parent of a window.

See Also:

The parent Property

Syntax

```
window.top
```

Return Value

Type	Description
An object.	The topmost window in the hierarchy of windows in the current browser window.

Browser Support

`window.top` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

REMOVE ADS

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode


Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

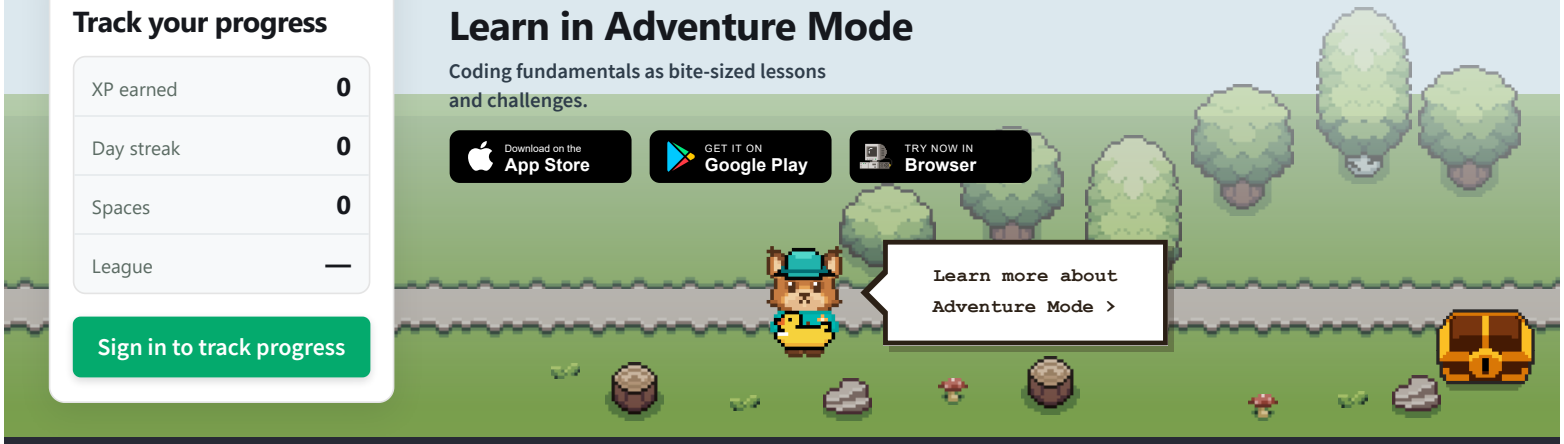

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate

Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window addEventListener()

‹ Window Object Reference

Next ›

Examples

Add a click event handler to the window:

```
window.addEventListener("click", myFunction);

function myFunction() {
  document.getElementById("demo").innerHTML = "Hello World";
}
```

Try it Yourself »

Simpler syntax:

```
window.addEventListener("click", function(){
  document.getElementById("demo").innerHTML = "Hello World";
});
```

Try it Yourself »

More examples below.

Description

SHARE

The `addEventListener()` method attaches an event handler to a window.

Document Methods

The addEventListener() Method

The removeEventListener() Method

Element Methods

The addEventListener() Method

The removeEventListener() Method

Tutorials

HTML DOM EventListener

The Complete List of DOM Events

Syntax

```
window.addEventListener(event, function, Capture)
```

Parameters

Parameter	Description
event	Required. The event name. Do not use the "on" prefix. Use "click" instead of "onclick". All HTML DOM events are listed in the: HTML DOM Event Object Reference.
function	Required. The function to run when the event occurs. When the event occurs, an event object is passed to the function as the first parameter. The type of the event object depends on the specified event. For example, the "click" event belongs to the MouseEvent object.
capture	Optional (default = false). `true` - The handler is executed in the capturing phase. `false` - The handler is executed in the bubbling phase.

Return Value

NONE

REMOVE ADS

More Examples

You can add many event listeners to a window:

```
window.addEventListener("click", myFunction1);
window.addEventListener("click", myFunction2);
```

Try it Yourself »

You can add different types of events:

```
window.addEventListener("mouseover", myFunction);
document.addEventListener("click", someOtherFunction);
window.addEventListener("mouseout", someOtherFunction);
```

Try it Yourself »

When passing parameters, use an "anonymous function" to call a function with the parameters:

```
window.addEventListener("click", function() {
  myFunction(p1, p2);
});
```

Try it Yourself »

Change the background color of a document:

```
window.addEventListener("click", function(){
  document.body.style.backgroundColor = "red";
});
```

Try it Yourself »

Using the removeEventListener() method:

```
// Add an event listener
window.addEventListener("mousemove", myFunction);

// Remove the event listener
window.removeEventListener("mousemove", myFunction);
```

Try it Yourself »

Browser Support

`addEventListener` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Window Object Reference

Next ›



REMOVE ADS



FREE ACCOUNT
Track your progress


XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

Learn more about Adventure Mode >

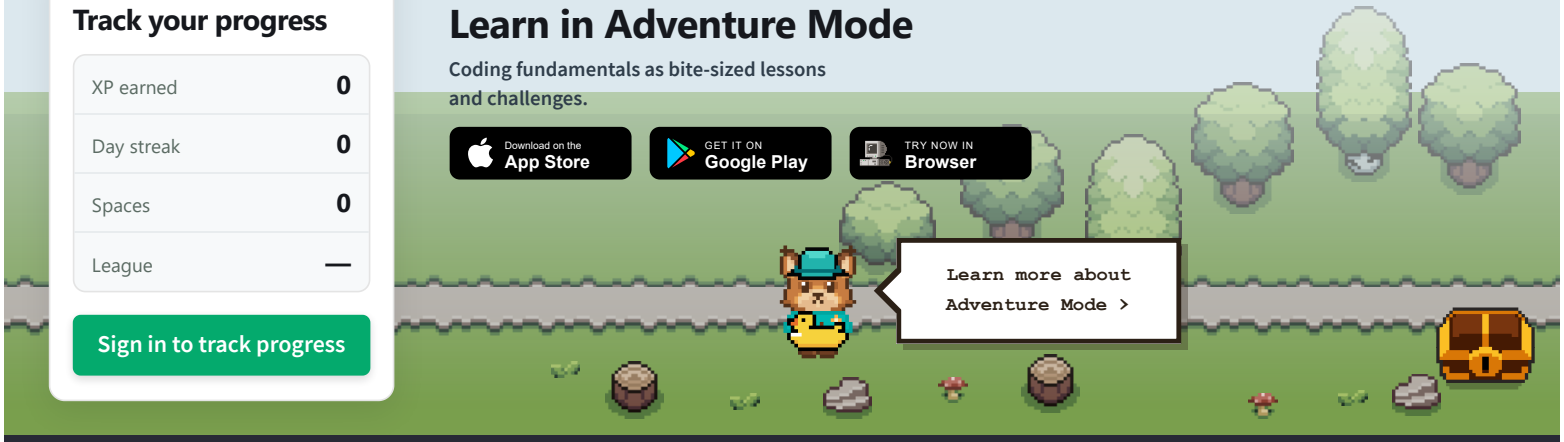

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial

W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window alert()

‹ Previous ‹ Window Object Reference Next ›

Example

Display an alert box:

```
alert("Hello! I am an alert box!!");
```

Try it Yourself »

More examples below.

Description

SHARE

The `alert()` method displays an alert box with a message and an OK button.

The `alert()` method is used when you want information to come through to the user.

Note

The alert box takes the focus away from the current window, and forces the user to read the message.

Do not overuse this method. It prevents the user from accessing other parts of the page until the alert box is closed.

See Also:

The confirm() Method

The prompt() Method

Syntax

```
alert(message)
```

Parameters

Parameter	Description
message	Optional. The text to display in the alert box.

Return Value

NONE

REMOVE ADS

More Examples

Alert box with line-breaks:

```
alert("Hello\nHow are you?");
```

Try it Yourself »

Alert the hostname of the current URL:

```
alert(location.hostname);
```

Try it Yourself »

Browser Support

`alert()` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

Learn it.
Get certified.
Get hired.
$95 per course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS




FREE ACCOUNT
Track your progress
XP earned 0

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Day streak 0
Spaces 0
League —
Sign in to track progress

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference

AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window atob()

❮ Previous ❮ Window Object Reference Next ❯

Example

Decode a base-64 encoded string:

```
let text = "Hello World!";
let encoded = window.btoa(text);
let decoded = window.atob(encoded);
```

Try it Yourself »

Description

SHARE

The `atob()` method decodes a base-64 encoded string.

Note

The `atob()` method decodes a string that has been encoded by the `btoa()` method.

See Also:

The btoa() Method.

Syntax

```
window.atob(encoded)
```

Parameters

Parameter	Description
encoded	Required. The string to be decoded.

Return Value

Type	Description
A string	The decoded string.

Browser Support

`atob()` is supported in all browsers:

Chrome	IE	Edge	Firefox	Safari	Opera
Yes	10-11	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

schools

JS

Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

REMOVE ADS

Python - Variables - W3Schools.com

Python Variables

Containers for storing data values

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window blur()

‹ Previous ‹ Window Object Reference Next ›

Example

Open a new window and blur it:

```
const myWindow = window.open("", "", "width=200, height=100");
myWindow.blur();
```

Try it Yourself »

Open a new window and set focus to it:

```
const myWindow = window.open("", "", "width=200, height=100"); myWindow.focus();
```

Try it Yourself »

Description

SHARE

The `blur()` method removes focus from a window.

The `focus()` method sets focus to a window.

Note

The `blur()` method makes a request to bring a window to the background.

It may not work as you expect, due to different user settings.

See Also:

The focus() Method

Syntax

```
window.blur()
```

Parameters

None

Return Value

NONE

Browser Support

`blur()` is supported in all browsers:

					
Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›


Build skills.
Get hired.

$95 per paid course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

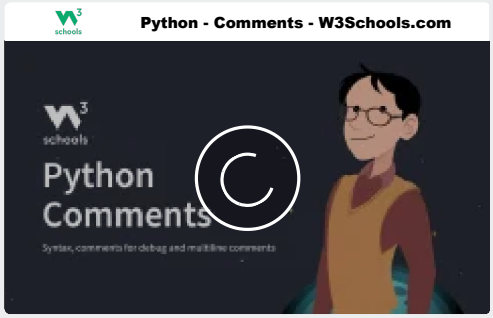

FREE ACCOUNT

Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress


NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

Learn more about Adventure Mode >

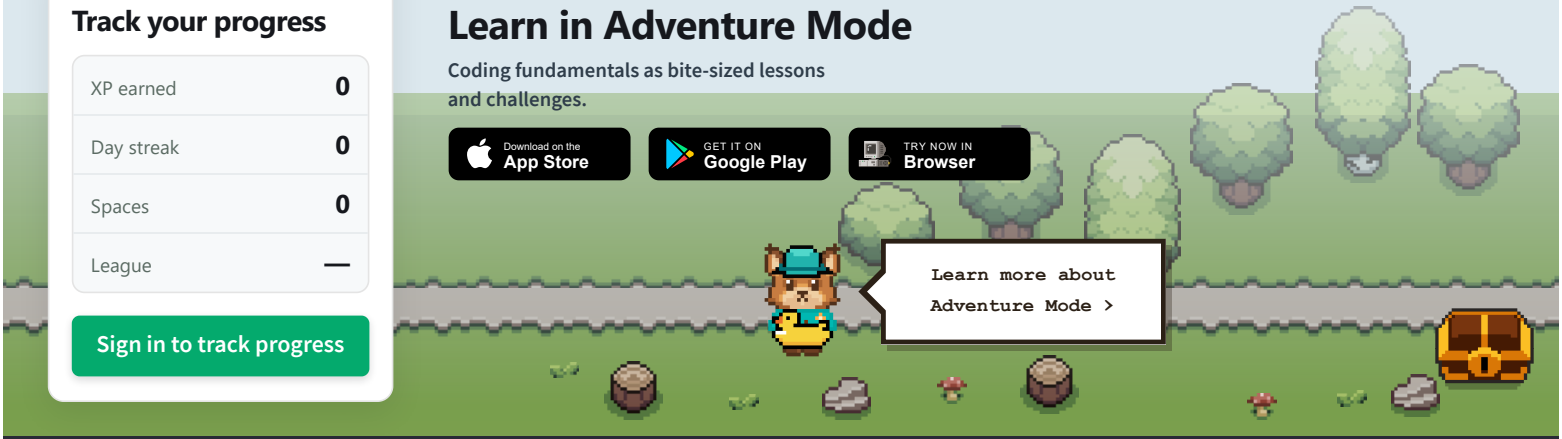

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window btoa()

❮ Previous ❮ Window Object Reference Next ❯

Example

Encode a string in base-64:

```
let text = "Hello World!";
let encoded = window.btoa(text);
```

Try it Yourself »

Description

SHARE

The `btoa()` method encodes a string in base-64.

The `btoa()` method uses the "A-Z", "a-z", "0-9", "+", "/" and "=" characters to encode the string.

Note

Use the The `atob()` method to decode a base-64 encoded string.

See Also:

The atob() Method.

Syntax

```
window.btoa(string)
```

Parameters

Parameter	Description
string	Required. The string to be encoded.

Return Value

Type	Description
A string	The base-64 encoded string.

Browser Support

`btoa()` is supported in all browsers:

Chrome	IE	Edge	Firefox	Safari	Opera
Yes	10-11	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›


Build skills.
Get hired.

$95 per paid course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

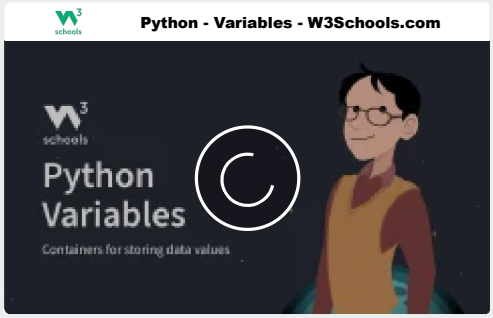

FREE ACCOUNT
Track your progress


XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

Learn more about Adventure Mode >

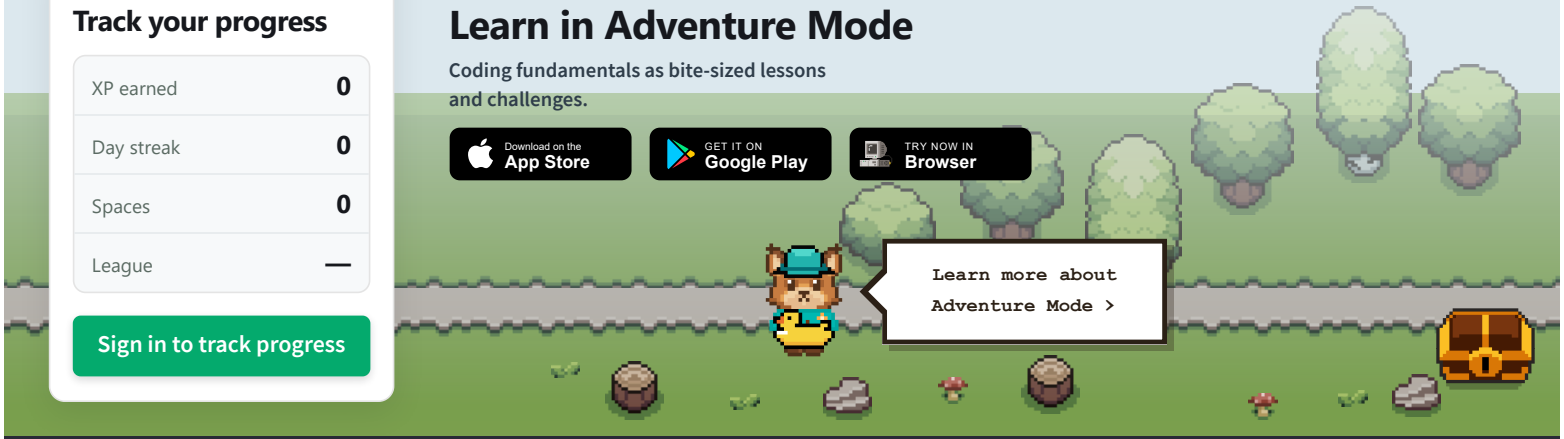

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window clearInterval()

‹ Previous ‹ Window Object Reference Next ›

Example

Display the time once every second. Use clearInterval() to stop the time:

```
const myInterval = setInterval(myTimer, 1000);

function myTimer() {
  const date = new Date();
  document.getElementById("demo").innerHTML = date.toLocaleTimeString();
}

function myStopFunction() {
  clearInterval(myInterval);
}
```

Try it Yourself »

More examples below.

Description

SHARE

The `clearInterval()` method clears a timer set with the `setInterval()` method.

Note

To clear an interval, use the **id** returned from setInterval():

```
myInterval = setInterval(function, milliseconds);
```

Then you can to stop the execution by calling clearInterval():

```
clearInterval(myInterval);
```

See Also:

The setInterval() Method

The setTimeout() Method

The clearTimeout() Method

Syntax

```
clearInterval(intervalId)
```

Parameters

Parameter	Description
intervalId	Required. The interval id returned from setInterval().

Return Value

NONE

REMOVE ADS

More Examples

Toggle between two background colors once every 500 milliseconds:

```
const myInterval = setInterval(setColor, 500);

function setColor() {
```

```
  let x = document.body;
  x.style.backgroundColor = x.style.backgroundColor == "yellow" ? "pink" : "yellow";
}

function stopColor() {
  clearInterval(myInterval);
}
```

Try it Yourself »

Using setInterval() and clearInterval() to create a dynamic progress bar:

```
function move() {
  const element = document.getElementById("myBar");
  let width = 0;
  const id = setInterval(frame, 100);
  function frame() {
    if (width == 100) {
      clearInterval(id);
    } else {
      width++;
      element.style.width = width + '%';
    }
  }
}
```

Try it Yourself »

Browser Support

`clearInterval()` is supported in all browsers:


					
Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous | ‹ Window Object Reference | Next ›

schools
Your next career move.
Get every certification. One payment.



$499 Pay once. Learn for life.
Invest in your future

REMOVE ADS

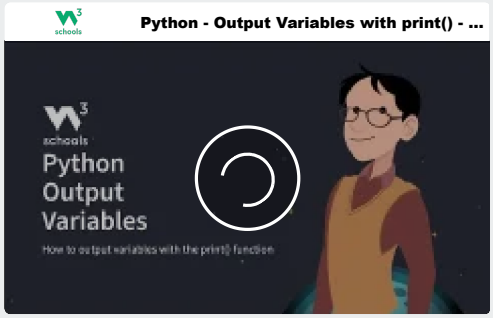

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

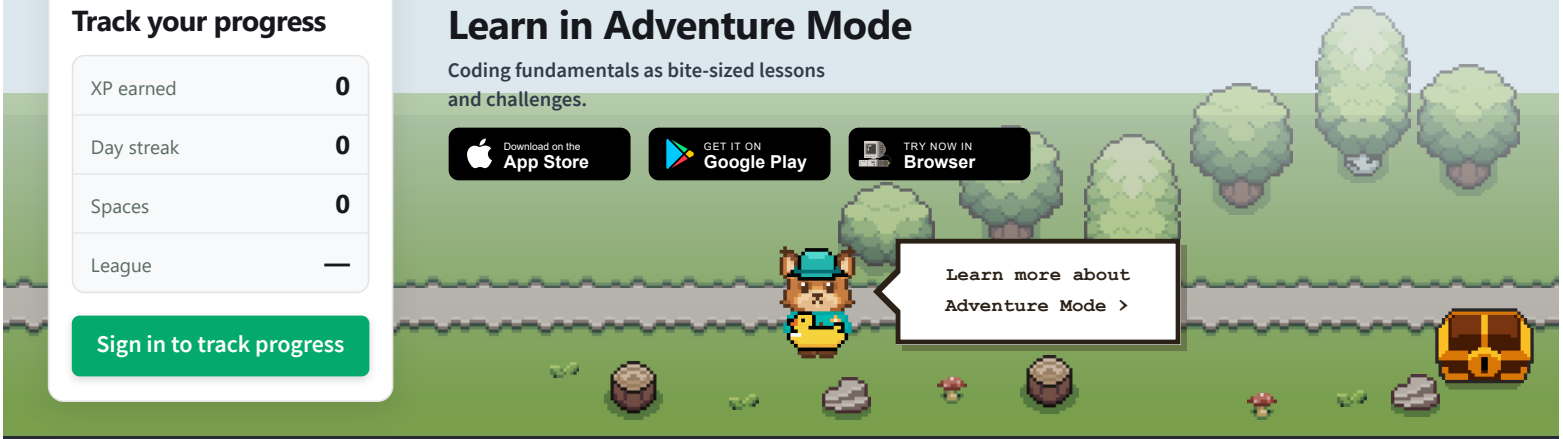

schools
PLUS
SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window clearTimeout()

❮ Previous ❮ Window Object Reference Next ❯

Example 1

How to prevent myGreeting() to execute:

```
const myTimeout = setTimeout(myGreeting, 3000);

function myGreeting() {
  document.getElementById("demo").innerHTML = "Happy Birthday to You !!"
}

function myStopFunction() {
  clearTimeout(myTimeout);
}
```

Try it Yourself »

More examples below.

Description

SHARE

The `clearTimeout()` method clears a timer set with the `setTimeout()` method.

Note

To clear a timeout, use the **id** returned from setTimeout():

```
myTimeout = setTimeout(function, milliseconds);
```

Then you can to stop the execution by calling clearTimeout():

```
clearTimeout(myTimeout);
```

See Also:

The setTimeout() Method

The setInterval() Method

The clearInterval() Method

Syntax

```
clearTimeout(id_of_settimeout)
```

Parameters

Parameter	Description
timeout id	Required. The id returned by the setTimeout() method.

Return Value

NONE

REMOVE ADS

More Examples

This example has a "Start" button to start a timer, an input field for a counter, and a "Stop" button to stop the timer:

```
<button onclick="startCount()">Start count!</button>
<input type="text" id="demo">
<button onclick="stopCount()">Stop count!</button>
```

```
<script>
let counter = 0;
let timeout;
let timer_on = 0;

function timedCount() {
  document.getElementById("demo").value = counter;
  counter++;
  timeout = setTimeout(timedCount, 1000);
}

function startCount() {
  if (!timer_on) {
    timer_on = 1;
    timedCount();
  }
}

function stopCount() {
  clearTimeout(timeout);
  timer_on = 0;
}
</script>
```

Try it Yourself »

Browser Support

`clearTimeout()` is supported in all browsers:


					
Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous | ‹ Window Object Reference | Next ›



REMOVE ADS



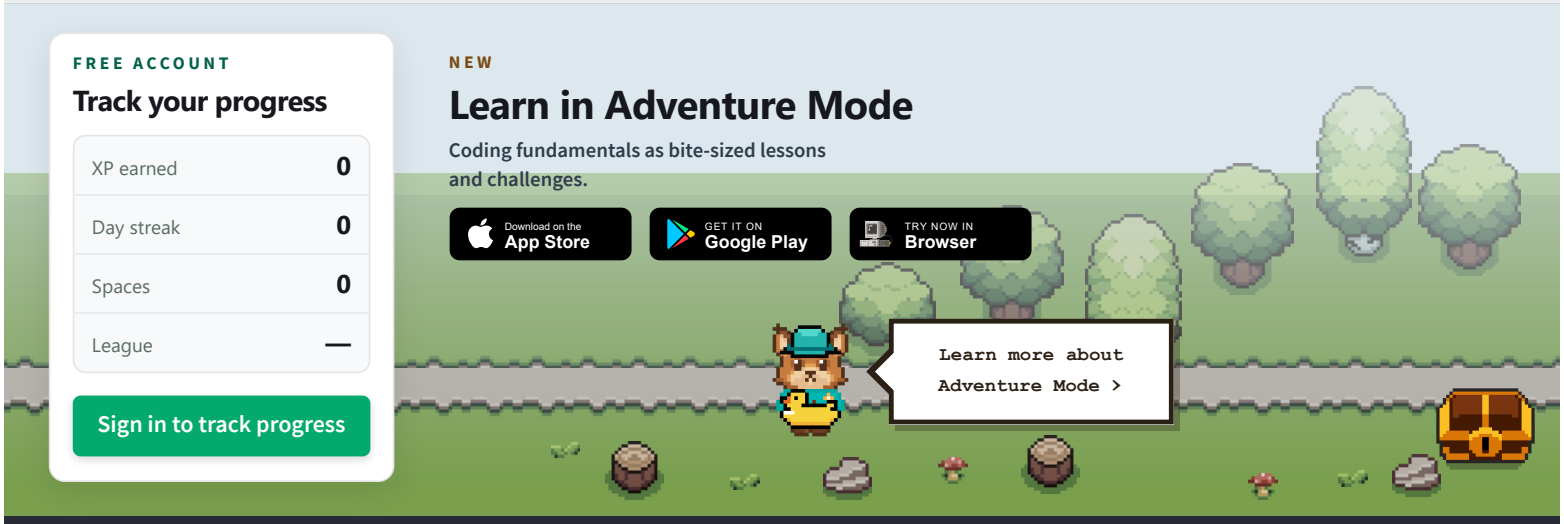

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window close()

‹ Previous ‹ Window Object Reference Next ›

Example

Use open() to open a window and close() to close the window:

```
let myWindow;

function openWin() {
  myWindow = window.open("", "myWindow", "width=200, height=100");
}

function closeWin() {
  myWindow.close();
}
```

Try it Yourself »

More examples below.

Description

SHARE

The `close()` method closes a window.

See Also:

The open() method.

Syntax

```
window.close()
```

Parameters

NONE

Return Value

NONE

More Examples

Example

Open "www.w3schools.com" in a new window, and use close() to close it:

```
function openWin() {
  myWindow = window.open("https://www.w3schools.com", "_blank", "width=200, height=100");
}

function closeWin() {
  myWindow.close();
}
```

Try it Yourself »

Browser Support

`close()` is supported in all browsers:


					
Chrome	Edge	Firefox	Safari	Opera	IE

Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›


Build skills.
Get hired.
$95 per paid course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS

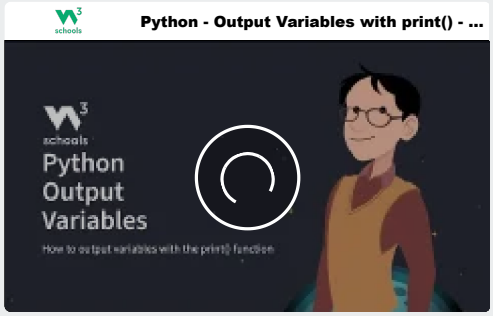

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

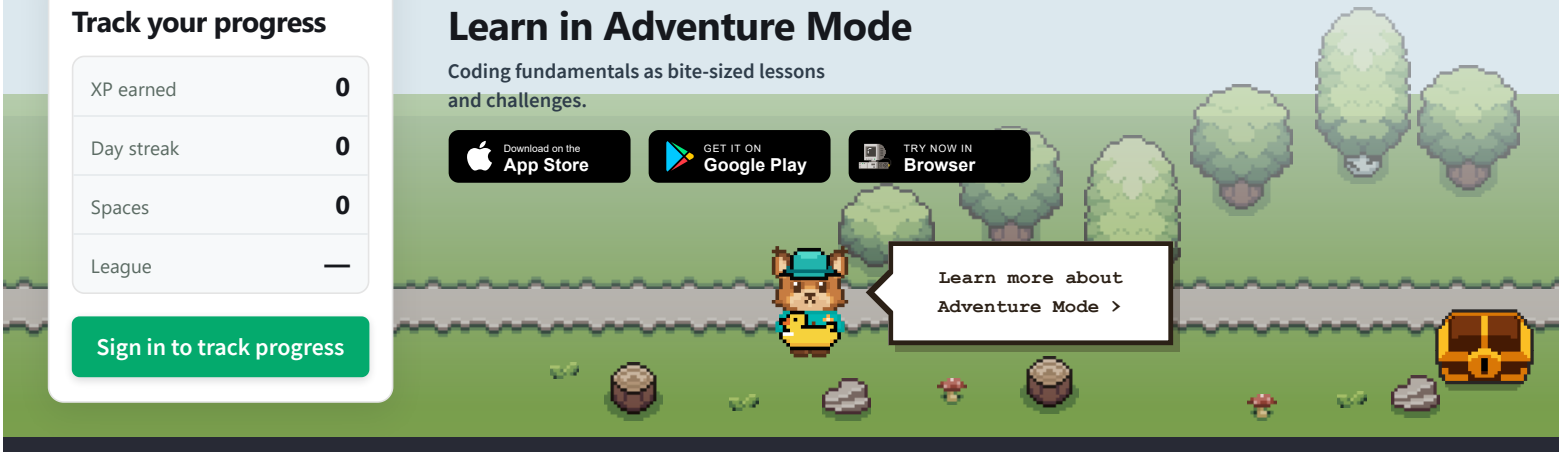

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window confirm()

‹ Previous ‹ Window Object Reference Next ›

Examples

Display a confirmation box:

```
confirm("Press a button!");
```

Try it Yourself »

Confirmation box with line-breaks:

```
confirm("Press a button!\nEither OK or Cancel.");
```

Try it Yourself »

More examples below.

Description

SHARE

The `confirm()` method displays a dialog box with a message, an OK button, and a Cancel button.

The `confirm()` method returns `true` if the user clicked "OK", otherwise `false`.

Note

A confirm box is often used if you want the user to verify or accept something.

A confirm box takes the focus away from the current window, and forces the user to read the message.

Do not overuse this method. It prevents the user from accessing other parts of the page until the box is closed.

See Also:

The alert() Method

The prompt() Method

Syntax

```
confirm(message)
```

Parameters

Parameter	Description
message	Optional. The text to display in the confirm box.

Return Value

Type	Description
A boolean	`true` if the user clicked OK, otherwise `false`.

REMOVE ADS

More Examples

Display a confirmation box, and output what the user clicked:

```
let text;
if (confirm("Press a button!") == true) {
  text = "You pressed OK!";
```

```
} else {
  text = "You canceled!";
}
```

Try it Yourself »

Browser Support

`confirm()` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›




REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

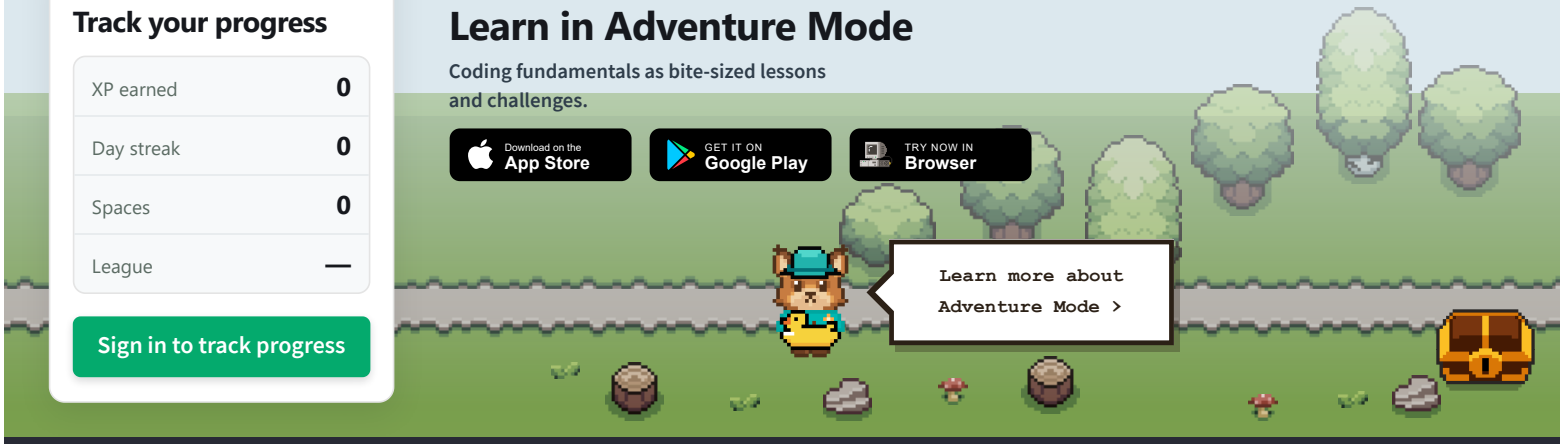

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window focus()

‹ Previous ‹ Window Object Reference Next ›

SHARE

Examples

Open a new window and set focus to it:

```
const myWindow = window.open("", "", "width=200, height=100"); myWindow.focus();
```

Try it Yourself »

Open a new window and blur it:

```
const myWindow = window.open("", "", "width=200, height=100");
myWindow.blur();
```

Try it Yourself »

Description

The `focus()` method sets focus to a window.

The `blur()` method removes focus from a window.

Note

The `focus()` method makes a request to bring a window to the front.

It may not work as you expect, due to different user settings.

See Also:

The blur() Method

Syntax

```
window.focus()
```

Parameters

None

Return Value

NONE

Browser Support

`focus()` is supported in all browsers:

					
Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes


‹ Previous ‹ Window Object Reference Next ›

schools
Your next career move.
Get every certification. One payment.


$499 Pay once. Learn for life.
Invest in your future




REMOVE ADS

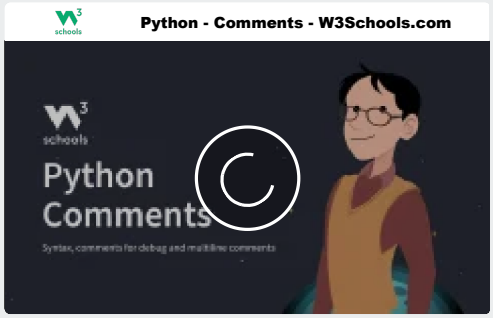

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

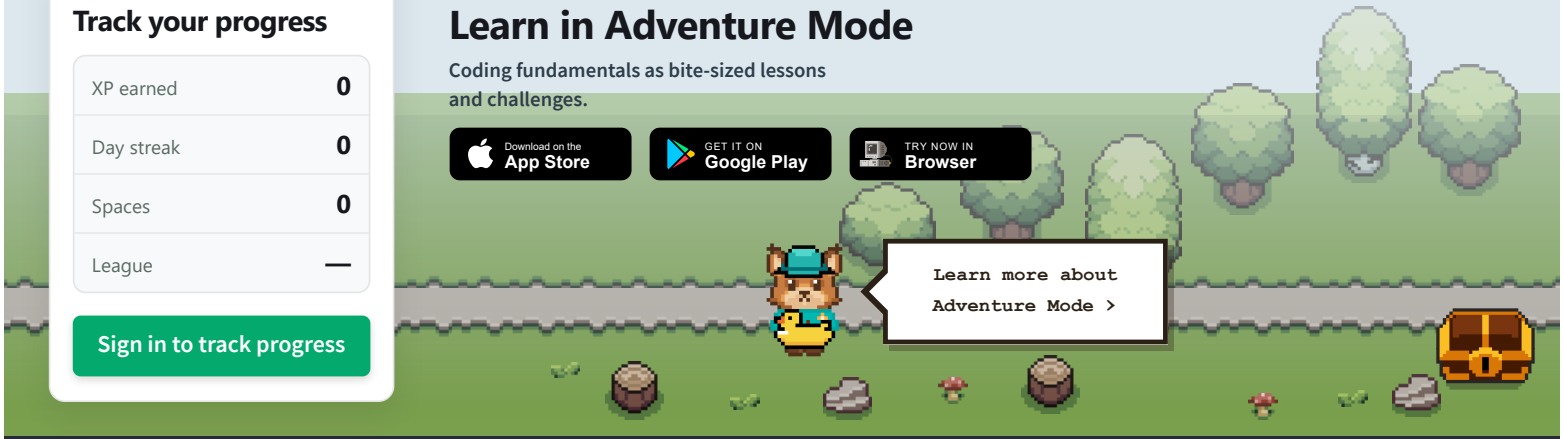

schools
PLUS
SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window getComputedStyle()

‹ Previous ‹ Window Object Reference Next ›

Example

Get the computed background color of an element:

```
const element = document.getElementById("test");
const cssObj = window.getComputedStyle(element, null);

let bgColor = cssObj.getPropertyValue("background-color");
```

Try it Yourself »

More examples below.

Description

SHARE

The `getComputedStyle()` method gets the computed CSS properties and values of an HTML element.

The `getComputedStyle()` method returns a `CSSStyleDeclaration object`.

Computed Style

The computed style is the style used on the element after all styling sources have been applied.

Style sources: external and internal style sheets, inherited styles, and browser default styles.

See Also:

The CSSStyleDeclaration Object.

Syntax

```
window.getComputedStyle(element, pseudoElement)
```

Parameters

Parameter	Description
element	Required. The element to get the computed style for.
pseudoElement	Optional. A pseudo-element to get.

Return Value

Type	Description
An object	A CSSStyleDeclaration object with all the CSS properties and values of the element.

REMOVE ADS

More Examples

Get all the computed styles from an element:

```
const element = document.getElementById("test");
const cssObj = window.getComputedStyle(element, null);

let text = "";
for (x in cssObj) {
  cssObjProp = cssObj.item(x)
  text += cssObjProp + " = " + cssObj.getPropertyValue(cssObjProp) + "<br>";
}
```

Try it Yourself »

Get computed font size of the first letter in an element (using pseudo-element):

```
const element = document.getElementById("test"); const cssObj = window.getComputedStyle(element, ":first-letter")

let size = cssObj.getPropertyValue("font-size");
```

Try it Yourself »

Browser Support


`getComputedStyle()` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	9-11

‹ Previous ‹ Window Object Reference Next ›



REMOVE ADS

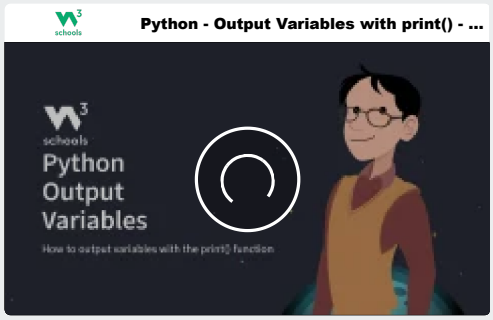

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode


Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

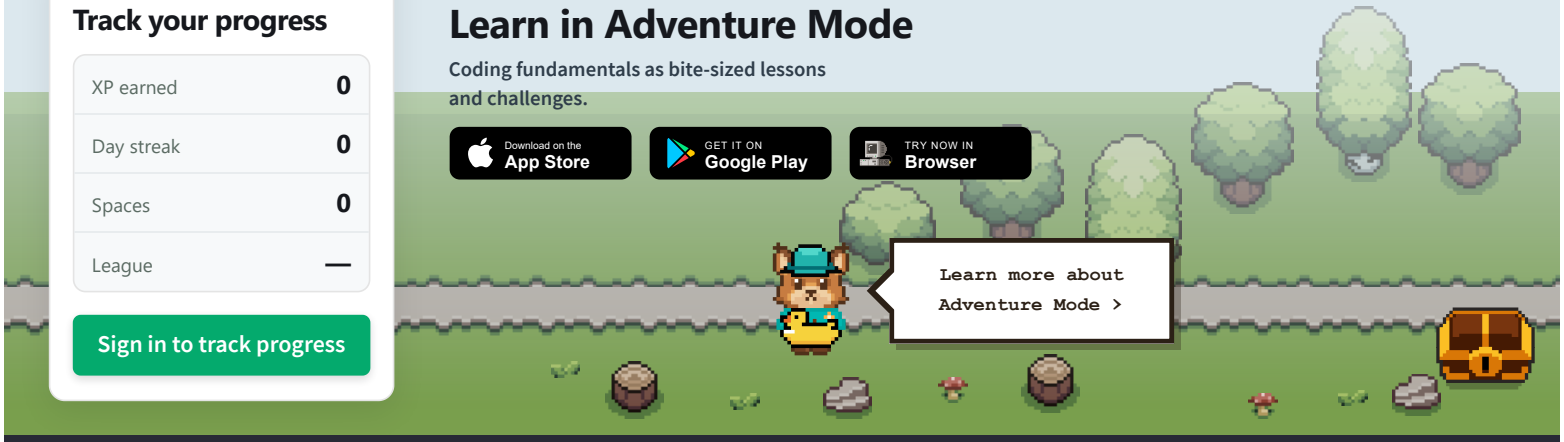

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial

W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window matchMedia()

‹ Previous ‹ Window Object Reference Next ›

Example 1

Is the screen/viewport greater than 700 pixels wide:

```
if (window.matchMedia("(max-width: 700px)").matches) {
  // Viewport is less or equal to 700 pixels wide
} else {
  // Viewport is greater than 700 pixels wide
}
```

Try it Yourself »

Description

SHARE

The `matchMedia()` method returns a **MediaQueryList** with the results from the query.

See Also:

The MediaQueryList Object

Media Queries

The media queries of the `matchMedia()` method can be any of the media features of the CSS @media rule, like min-height, min-width, orientation, etc.

Examples

```
matchMedia("(max-height: 480px)").matches;
```

```
matchMedia("(max-width: 640px)").matches;
```

Syntax

```
window.matchMedia(mediaQuery)
```

Parameters

Parameter	Description
mediaQuery	Required. A string representing a media query.

Return Value

Type	Description
An object	A MediaQueryList object with the results of the media query.

REMOVE ADS

Examples Explained

The first example on this page runs a media query and compares it to the **current** window state.

To run **responsive** media query **whenever** the window state changes, add an event listener to the MediaQueryList object (See "More Examples" below):

More Examples

If the viewport is less or equal to 500 pixels wide, set background color to yellow, otherwise to pink:

```
// Create a match Function
function myFunction(x) {
  if (x.matches) {
    document.body.style.backgroundColor = "yellow";
  } else {
    document.body.style.backgroundColor = "pink";
  }
}

// Create a MediaQueryList object
const mmObj = window.matchMedia("(max-width: 500px)")

// Call the match function at run time
myFunction(mmObj);

// Add the match function as a listener for state changes
mmObj.addEventListener("change", function() {
  myFunction(mmObj);
});
```

Try it Yourself »

Browser Support

`matchMedia()` is supported in all modern browsers:

					
Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	11

‹ Previous | ‹ Window Object Reference | Next ›

Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified

REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode


Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

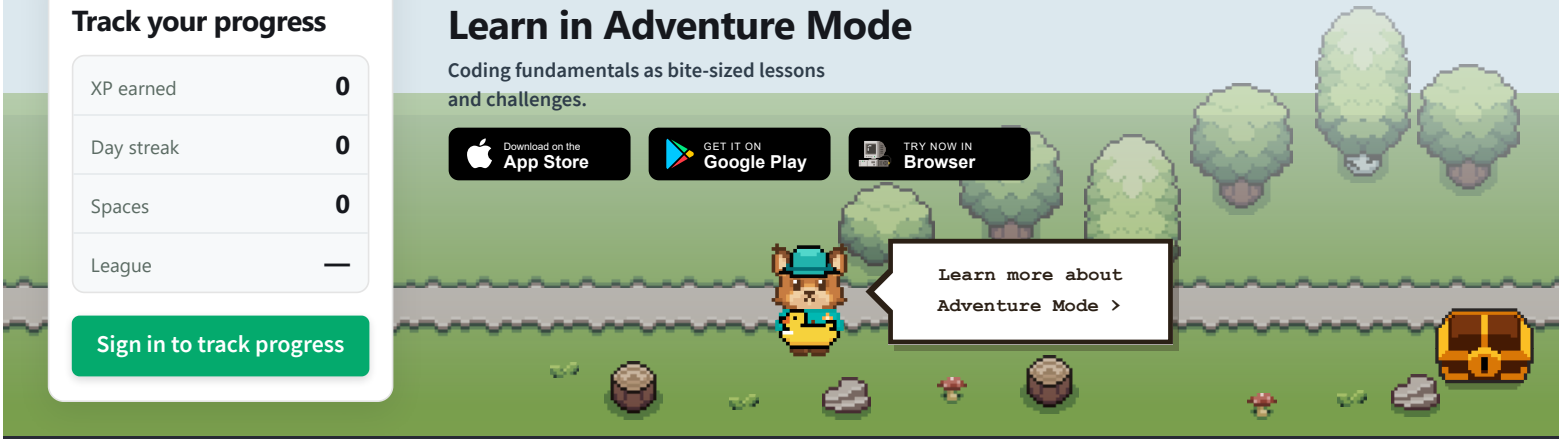

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window moveBy()

‹ Previous ‹ Window Object Reference Next ›

Example

Open a new window and move it 250px relative to its current position:

```
function openWin() {
  myWindow = window.open('', '', 'width=400, height=400');
}

function moveWin() {
  myWindow.moveBy(250, 250);
}
```

Try it Yourself »

More examples below.

Description

SHARE

The `moveBy()` method moves a window a number of pixels relative to its current coordinates.

See Also:

The moveTo() Method

The resizeBy() Method

The resizeTo() Method

Syntax

```
window.moveBy(x, y)
```

Parameters

Parameter	Description
x	Required. A positive or negative number. The number of pixels to move the window horizontally.
y	Required. A positive or negative number. The number of pixels to move the window vertically.

Return Value

NONE

REMOVE ADS

More Examples

Using moveBy() together with moveTo():

```
function moveWinTo() {
  myWindow.moveTo(150, 150);
}

function moveWinBy() {
  myWindow.moveBy(75, 75);
}
```

Try it Yourself »

Browser Support

`moveBy()` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

Build skills.
Get hired.
$95 per paid course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS



FREE ACCOUNT
Track your progress

NEW
Learn in Adventure Mode

XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser



W3schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors

Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window moveTo()

‹ Previous ‹ Window Object Reference Next ›

Example

Open a new window, and move it to position 500 x 100:

```
function openWin() {
  myWindow = window.open('', '', 'width=400, height=200');
}

function moveWin() {
  myWindow.moveTo(500, 100);
}
```

Try it Yourself »

More examples below.

Description

SHARE

The `moveTo()` method moves a window to the specified coordinates.

See Also:

The moveBy() Method

The resizeBy() Method

The resizeTo() Method

Syntax

```
window.moveTo(x, y)
```

Parameters

Parameter	Description
x	Required. A positive or negative number. The horizontal coordinate to move to.
y	Required. A positive or negative number. The vertical coordinate to move to.

Return Value

NONE

REMOVE ADS

More Examples

Using moveTo() together with moveBy():

```
function moveWinTo() {
  myWindow.moveTo(150, 150);
}

function moveWinBy() {
  myWindow.moveBy(75, 50);
}
```

Try it Yourself »

Browser Support


`moveTo()` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

schools
JS
Get Certified in JavaScript
Boost your career with an official certification
$95
Get certified

REMOVE ADS

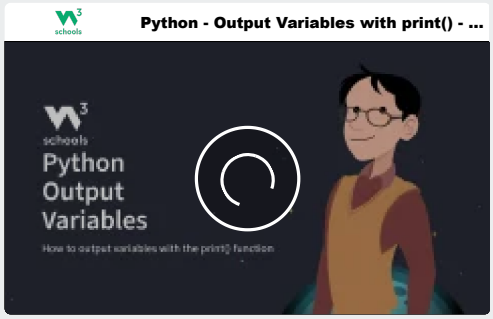

FREE ACCOUNT
Track your progress

NEW
Learn in Adventure Mode

XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser



W3 schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors

Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window open()

❮ Previous ❮ Window Object Reference Next ❯

Example 1

Open "www.w3schools.com" in a new browser tab:

```
window.open("https://www.w3schools.com");
```

Try it Yourself »

More examples below.

Description

SHARE

The `open()` method opens a new browser window, or a new tab, depending on your browser settings and the parameter values.

See Also:

The close() method.

Syntax

```
window.open(URL, name, specs, replace)
```

Parameters

Parameter	Description
URL	Optional. The URL of the page to open. If no URL is specified, a new blank window/tab is opened
name	Optional. The target attribute or the name of the window. The following values are supported:

Value	Description
_blank	URL is loaded into a new window, or tab. This is the default
_parent	URL is loaded into the parent frame
_self	URL replaces the current page
_top	URL replaces any framesets that may be loaded
name	The name of the window (does not specify the title of the window)

specs	Optional. A comma-separated list of items, no whitespaces. The following values are supported:

fullscreen=yes|no|1|0	Whether or not to display the browser in full-screen mode. Default is no. A window in full-screen mode must also be in theater mode. IE only
height=pixels	The height of the window. Min. value is 100
left=pixels	The left position of the window. Negative values not allowed
location=yes|no|1|0	Whether or not to display the address field. Opera only
menubar=yes|no|1|0	Whether or not to display the menu bar
resizable=yes|no|1|0	Whether or not the window is resizable. IE only
scrollbars=yes|no|1|0	Whether or not to display scroll bars. IE, Firefox & Opera only
status=yes|no|1|0	Whether or not to add a status bar
titlebar=yes|no|1|0	Whether or not to display the title bar. Ignored unless the calling application is an HTML Application or a trusted dialog box

toolbar=yes|no|1|0	Whether or not to display the browser toolbar. IE and Firefox only
top=pixels	The top position of the window. Negative values not allowed
width=pixels	The width of the window. Min. value is 100

replace	**Deprecated** Specifies whether the URL creates a new entry or replaces the current entry in the history list. The following values are supported: • true - URL replaces the current document in the history list • false - URL creates a new entry in the history list **Warning** Chrome throws an exception when using this parameter. Source: Bugs Chromium Issue 1164959.

Return Value

A reference to the new window, or *null* if the call failed.

REMOVE ADS

More Examples

Open an about:blank page in a new window/tab:

```
var myWindow = window.open("", "", "width=200,height=100");
```

Try it Yourself »

Open a new window called "MsgWindow", and write some text into it:

```
var myWindow = window.open("", "MsgWindow", "width=200,height=100");
myWindow.document.write("<p>This is 'MsgWindow'. I am 200px wide and 100px tall!</p>");
```

Try it Yourself »

Replace the current window with a new window:

```
var myWindow = window.open("", "_self");
myWindow.document.write("<p>I replaced the current window.</p>");
```

Try it Yourself »

Open a new window and control its appearance:

```
window.open("https://www.w3schools.com", "_blank",
"toolbar=yes,scrollbars=yes,resizable=yes,top=500,left=500,width=400,height=400");
```

Try it Yourself »

Open multiple tabs:

```
window.open("http://www.google.com/");
window.open("https://www.w3schools.com/");
```

Try it Yourself »

Open a new window. Use close() to close the new window:

```
function openWin() {
  myWindow = window.open("", "myWindow", "width=200,height=100");   // Opens a new window
}

function closeWin() {
  myWindow.close();   // Closes the new window
}
```

Try it Yourself »

Open a new window. Use the name property to return the name of the new window:

```
var myWindow = window.open("", "MsgWindow", "width=200,height=100");
myWindow.document.write("<p>This window's name is: " + myWindow.name + "</p>");
```

Try it Yourself »

Using the opener property to return a reference to the window that created the new window:

```
var myWindow = window.open("", "myWindow", "width=200,height=100");   // Opens a new window
myWindow.document.write("<p>This is 'myWindow'</p>");   // Text in the new window
myWindow.opener.document.write("<p>This is the source window!</p>");  // Text in the window that created the new window
```


Try it Yourself »

Browser Support


`open()` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

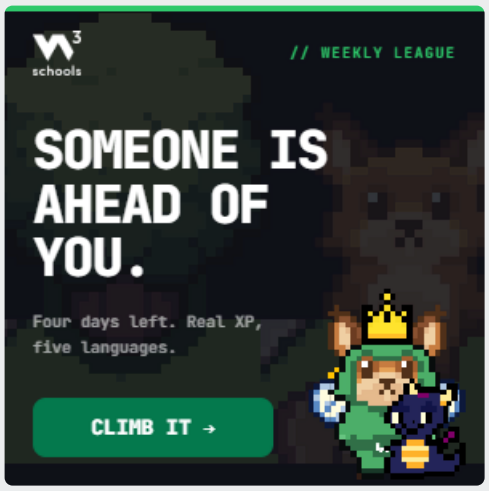

REMOVE ADS

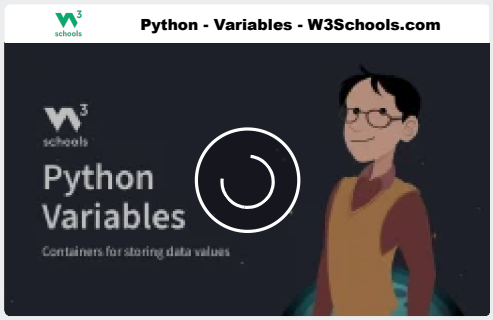

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

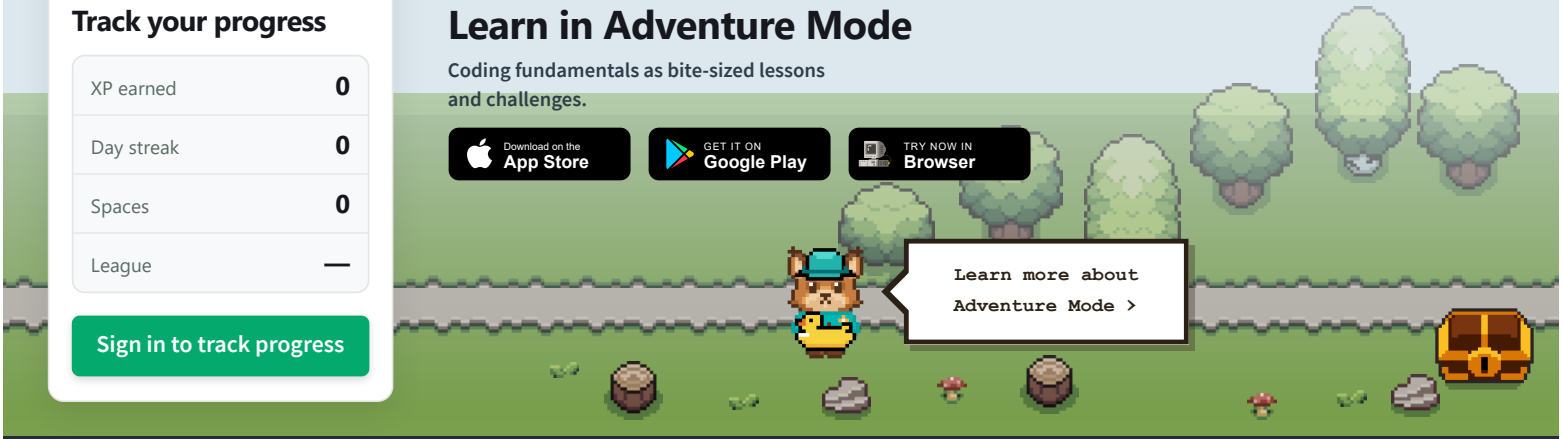

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window print() Method

❮ Previous ❮ Window Object Reference Next ❯

Example

Print the current page:

```
window.print();
```

Try it Yourself »

Description

SHARE

The print() method prints the contents of the current window.

The print() method opens the Print Dialog Box, which lets the user to select preferred printing options.

Browser Support

Method					
print()	Yes	Yes	Yes	Yes	Yes

Syntax

```
window.print()
```

Parameters

None

Technical Details

Return Value:	No return value

‹ Previous ‹ Window Object Reference Next ›



REMOVE ADS



FREE ACCOUNT

Track your progress

NEW


Learn in Adventure Mode

XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

Learn more about Adventure Mode >

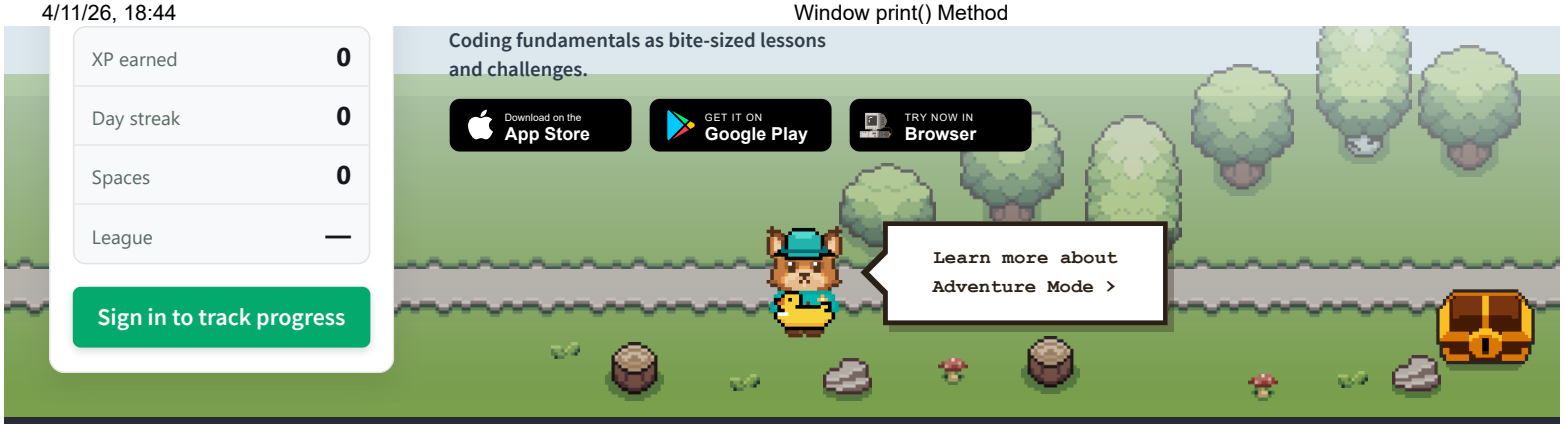

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference

HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window prompt()

‹ Previous ‹ Window Object Reference Next ›

Example 1

Prompt for a user name and output a message:

```
let person = prompt("Please enter your name", "Harry Potter");

if (person != null) {
  document.getElementById("demo").innerHTML =
  "Hello " + person + "! How are you today?";
}
```

Try it Yourself »

More examples below.

Description

SHARE

The `prompt()` method displays a dialog box that prompts the user for input.

The `prompt()` method returns the input value if the user clicks "OK", otherwise it returns `null`.

Note

A prompt box is used if you want the user to input a value.

When a prompt box pops up, the user will have to click either "OK" or "Cancel" to proceed.

Do not overuse this method. It prevents the user from accessing other parts of the page until the box is closed.

See Also:

The alert() Method

The confirm() Method

Syntax

```
prompt(text, defaultText)
```

Parameters

Parameter	Description
text	Optional. The text to display in the dialog box.
defaultText	Optional. The default input text.

Return Value

Parameter	Description
A string	If the user clicks "OK", the input value is returned. Otherwise `null` is returned.

REMOVE ADS

More Examples

Prompt for his favourite drink:

```
let text;
let favDrink = prompt("What's your favorite cocktail drink?");
switch(favDrink) {
  case "Coca-Cola":
```

```
    text = "Excellent choice! Coca-Cola is good for your soul.";
    break;
  case "Pepsi":
    text = "Pepsi is my favorite too!";
    break;
  case "Sprite":
    text = "Really? Are you sure the Sprite is your favorite?";
    break;
  default:
    text = "I have never heard of that one!";
}
```

Try it Yourself »

Browser Support

`prompt()` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›




REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

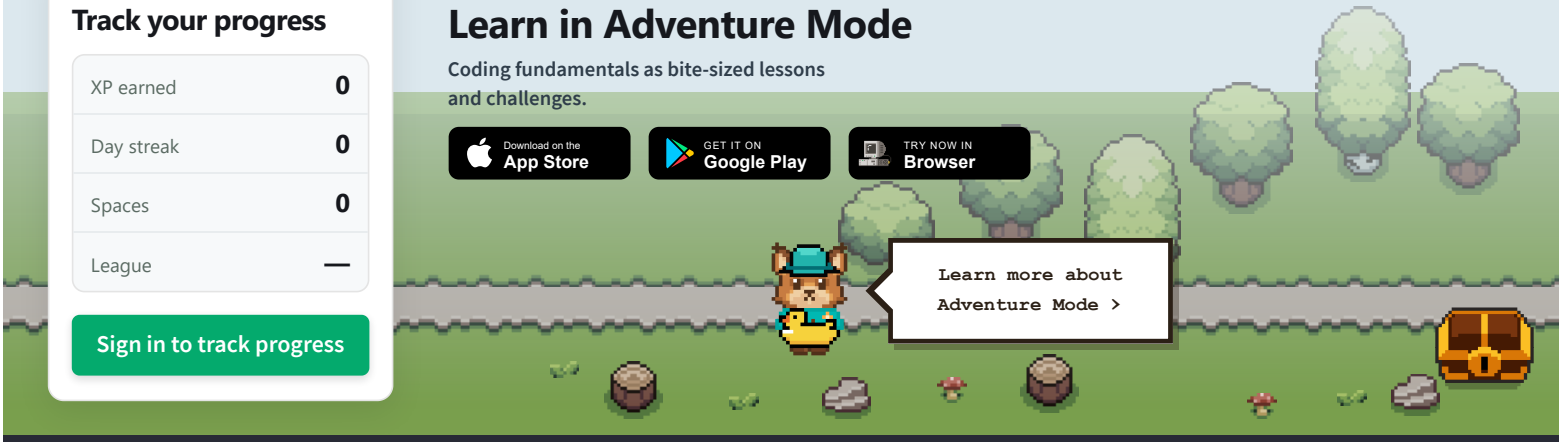

PLUS
SPACES
GET CERTIFIED
FOR TEACHERS
PRACTICE
CONTACT US

Top Tutorials
HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial

W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window removeEventListener()

‹ Previous ‹ Window Object Reference Next ›

Example

Remove a "mousemove" event handler:

```
window.removeEventListener("mousemove", myFunction);
```

Try it Yourself »

Description

SHARE

The `removeEventListener()` method removes an event handler from a window.

Document Methods

The addEventListener() Method

The removeEventListener() Method

Element Methods

The addEventListener() Method

The removeEventListener() Method

Tutorials

HTML DOM EventListener

The Complete List of DOM Events

REMOVE ADS

Syntax

```
window.removeEventListener(event, function, capture)
```

Parameters

Parameter	Description
event	Required. The name of the event to remove. Do not use the "on" prefix. use "click" instead of "onclick". All HTML DOM events are listed in the: HTML DOM Event Object Reference.
function	Required. The function to remove.
capture	Optional (default = false). `true` - Remove the handler from capturing. `false` - Remove the handler from bubbling. If the event handler was attached two times, one with capturing and one with bubbling, each must be removed separately.

Return Value

NONE

Browser Support

`removeEventListener()` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

Build skills.
Get hired.
$95 per paid course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >



schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window requestAnimationFrame() Method

‹ Window Object

Example

Use of the requestAnimationFrame() method:

```
const adiv = document.getElementById('mydiv');
let leftpos = 0;

function movediv(timestamp){
  leftpos += 1;
  adiv.style.left = leftpos + 'px';
  requestAnimationFrame(movediv);
}

requestAnimationFrame(movediv);
```

Try it Yourself »

Description

The requestAnimationFrame() method tells the browser that you wish to perform an animation and requests that the browser call a specified function to update an animation before the next repaint.

Note: Your callback routine must itself call requestAnimationFrame() if you want to animate another frame at the next repaint.

Tip: You should call this method whenever you are ready to update your animation onscreen because:

- The browser can optimize it, so animations will be smoother
- Animations in inactive tabs will stop, allowing the CPU to chill
- More battery-friendly

Browser Support

Method					
requestAnimationFrame()	24.0	10.0	23.0	6.1	15.0

Syntax

```
requestAnimationFrame(callback)
```

Parameter Values

Parameter	Type	Description
callback	Function	Required. The function to call when it is time to update your animation for the next repaint. The callback has one single argument, a DOMHighResTimeStamp, which indicates the current time (the time returned from performance.now()) for when requestAnimationFrame() starts to fire callbacks

REMOVE ADS

Technical Details

Return Value:	A long integer. The request id, that uniquely identifies the entry in the callback list. You can pass this value to window.cancelAnimationFrame() to cancel the refresh callback request

Related Pages

Window Object: cancelAnimationFrame() Method

‹ Window Object

schools
Your next career move.
Get every certification. One payment.


$499 Pay once. Learn for life.
Invest in your future

REMOVE ADS

Python - Variable Names - W3Schools.c...
Python Variable Names
Rules for Variable Names

FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window resizeBy()

‹ Previous ‹ Window Object Reference Next ›

Example 1

Open a new window, and resize (increase) the width and height:

```
function openWin() {
  myWindow = window.open("", "", "width=100, height=100");
}

function resizeWin() {
  myWindow.resizeBy(250, 250);
}
```

Try it Yourself »

More examples below.

Description

SHARE

The `resizeBy()` method resizes a window by a specified amount.

See Also:

The resizeTo() Method

The moveBy() Method

The moveTo() Method

Syntax

```
resizeBy(width, height)
```

Parameters

Parameter	Description
width	Required. A positive or a negative number. The number of pixels to resize the width by.
height	Required. A positive or a negative number. The number of pixels to resize the height by.

Return Value

NONE

REMOVE ADS

More Examples

Open a new window, and decrease the width by 50px and increase the height by 50px:

```
myWindow.resizeBy(-50, 50);
```

Try it Yourself »

Using resizeBy() with resizeTo():

```
function resizeWinTo() {
  myWindow.resizeTo(800, 600);
```

```
  myWindow.focus();
}

function resizeWinBy() {
  myWindow.resizeBy(-100, -50);
}
```


Try it Yourself »

Browser Support

`resizeBy()` is supported in all browsers:

					
Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

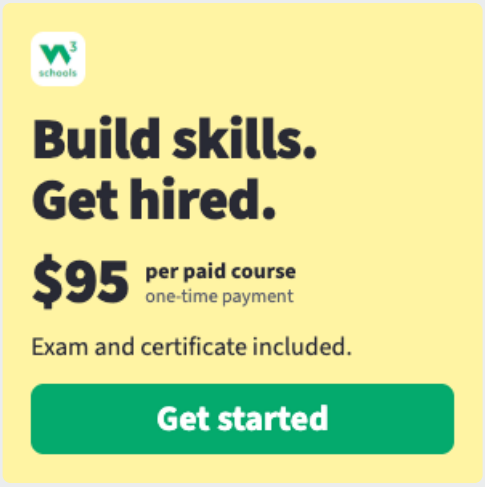


REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0
Day streak 0
Spaces 0
League —
Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.
Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser
Learn more about Adventure Mode >

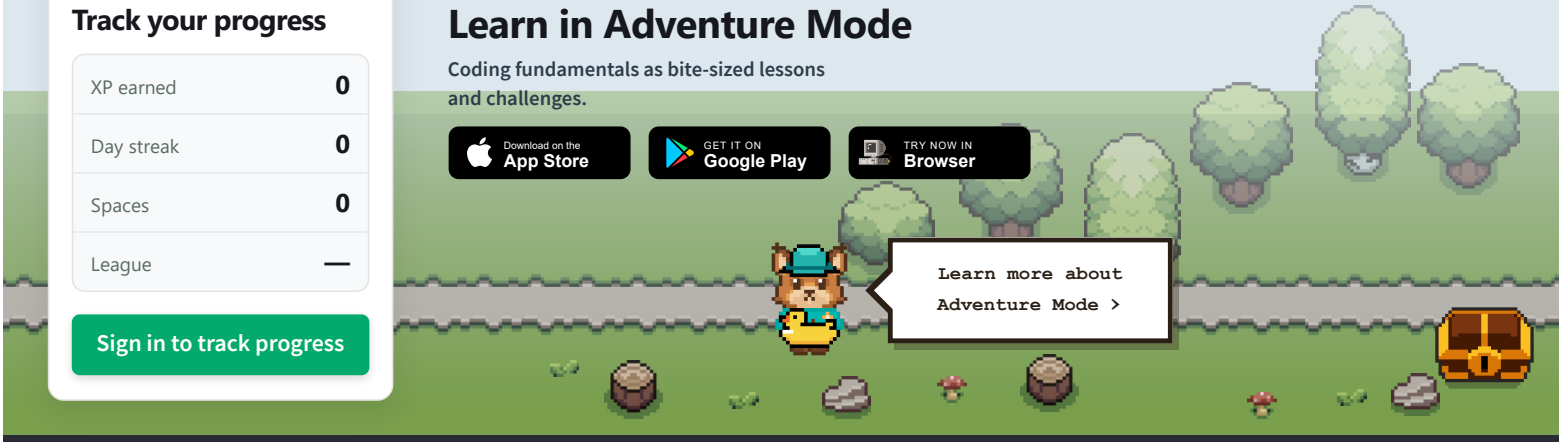

PLUS
SPACES
GET CERTIFIED
FOR TEACHERS
PRACTICE
CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window resizeTo()

‹ Previous ‹ Window Object Reference Next ›

Example 1

Open a new window, and resize it to 300 x 300:

```
function openWin() {
  myWindow = window.open("", "", "width=200, height=100");
}

function resizeWin() {
  myWindow.resizeTo(300, 300);
}
```

Try it Yourself »

More examples below.

Description

SHARE

The `resizeTo()` method resizes a window to a new width and height.

See Also:

The resizeBy() Method

The moveTo() Method

The moveTo() Method

Syntax

```
window.resizeTo(width, height)
```

Parameters

Parameter	Description
width	Required. The new window width, in pixels
height	Required. The new window height, in pixels

Return Value

NONE

REMOVE ADS

More Examples

Using resizeTo() with resizeBy():

```
function resizeWinTo() {
  myWindow.resizeTo(800, 600);
}

function resizeWinBy() {
  myWindow.resizeBy(-100, -50);
}
```

Try it Yourself »

Browser Support

`resizeTo()` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

Learn it.
Get certified.
Get hired.
$95 per course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS




FREE ACCOUNT
Track your progress
XP earned 0

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Day streak 0
Spaces 0
League —
Sign in to track progress

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference

AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window scrollTo()

‹ Previous ‹ Window Object Reference Next ›

Example

Scroll the document to the horizontal position 500:

```
window.scrollTo(500, 0);
```

Try it Yourself »

Scroll the document to the vertical position 500:

```
window.scrollTo(0, 500);
```

Try it Yourself »

More examples below.

Description

SHARE

The `scrollTo()` method scrolls the document to specified coordinates.

Note

For the `scrollTo()` method to work, the document must be larger than the screen, and the scrollbar must be visible.

See Also:

The scrollBy() method.

Syntax

```
window.scrollTo(x, y)
```

or just:

```
scrollTo(x, y)
```

Parameters

Parameter	Description
x	Required. The coordinate to scroll to (horizontally), in pixels.
y	Required. The coordinate to scroll to (vertically), in pixels.

Return Value

NONE

REMOVE ADS

More Examples

Scroll the document to position 300 horizontally and 500 vertically:

```
window.scrollTo(300, 500);
```

Try it Yourself »

Browser Support

`scrollTo()` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

W3Schools
JS
Get Certified in JavaScript
Boost your career with an official certification
$95
Get certified

REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Day streak 0
Spaces 0
League —
Sign in to track progress

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference

AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window scrollBy()

‹ Previous ‹ Window Object Reference Next ›

Example

Scroll the document 100px horizontally:

```
window.scrollBy(100, 0);
```

Try it Yourself »

Scroll the document 100px vertically:

```
window.scrollBy(0, 100);
```

Try it Yourself »

More examples below.

Description

SHARE

The `scrollBy()` method scrolls the document by the specified number of pixels.

Note

For the `scrollBy()` method to work, the document must be larger than the screen, and the scrollbar must be visible.

See Also:

The scrollTo() method.

Syntax

```
window.scrollBy(x, y)
```

or just:

```
scrollBy(x, y)
```

Parameters

Parameter	Description
x	Required. Number of pixels to scroll (horizontally). Positive values scroll to the right, negative values to the left.
y	Required. Number ofpixels to scroll (vertically). Positive values scroll down, negative values scroll up.

Return Value

NONE

REMOVE ADS

More Examples

Scroll the document up and down:

```
<button onclick="scrollWin(0, 50)">Scroll down</button>
<button onclick="scrollWin(0, -50)">Scroll up</button>

<script>
function scrollWin(x, y) {
  window.scrollBy(x, y);
```

```
}
</script>
```

Try it Yourself »

Scroll the document right and left:

```
<button onclick="scrollWin(100, 0)">Scroll right</button>
<button onclick="scrollWin(-100, 0)">Scroll left</button>

<script>
function scrollWin(x, y) {
  window.scrollBy(x, y);
}
</script>
```


Try it Yourself »

Browser Support


`scrollBy()` is supported in all browsers:

					
Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

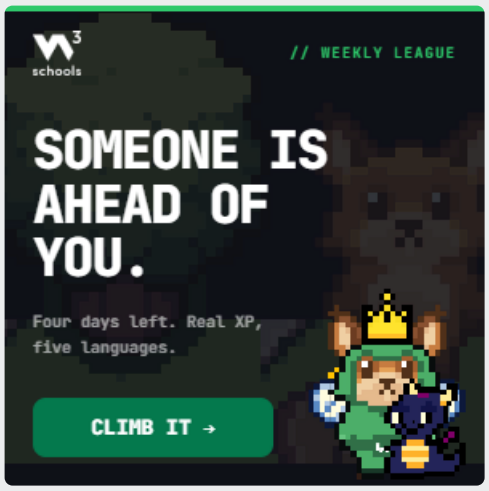

REMOVE ADS

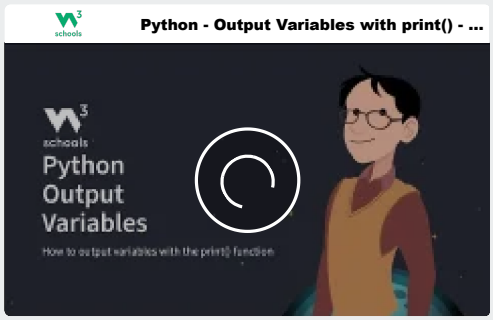

FREE ACCOUNT

Track your progress

XP earned	0
Day streak	0
Spaces	0
League	—


Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store | GET IT ON Google Play | TRY NOW IN Browser

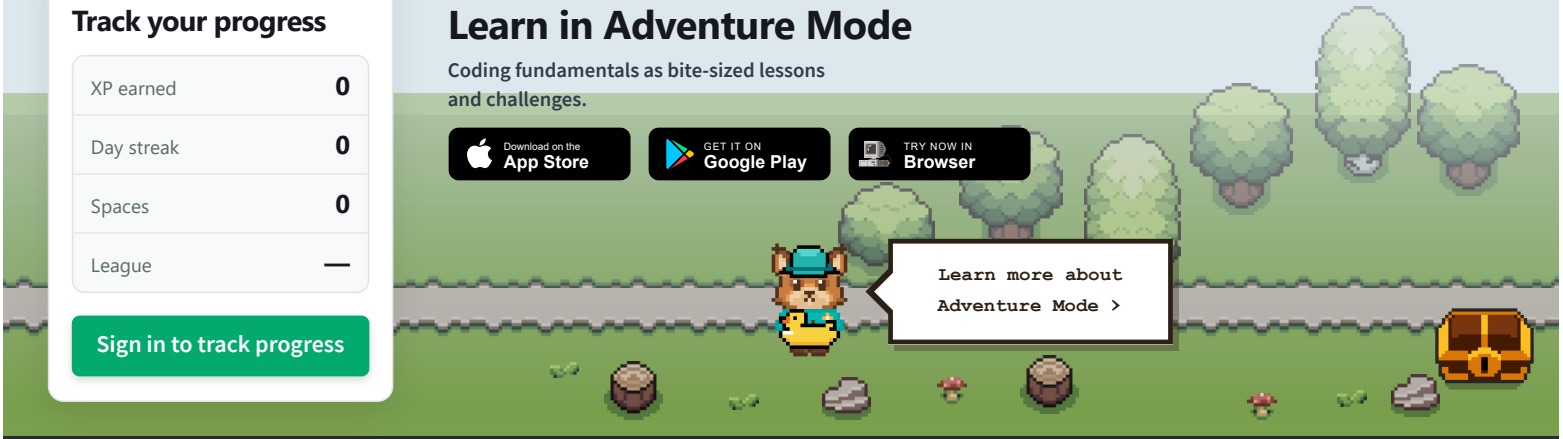

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window scrollTo()

‹ Previous ‹ Window Object Reference Next ›

Example

Scroll the document to the horizontal position 500:

```
window.scrollTo(500, 0);
```

Try it Yourself »

Scroll the document to the vertical position 500:

```
window.scrollTo(0, 500);
```

Try it Yourself »

More examples below.

Description

SHARE

The `scrollTo()` method scrolls the document to specified coordinates.

Note

For the `scrollTo()` method to work, the document must be larger than the screen, and the scrollbar must be visible.

See Also:

The scrollBy() method.

Syntax

```
window.scrollTo(x, y)
```

or just:

```
scrollTo(x, y)
```

Parameters

Parameter	Description
x	Required. The coordinate to scroll to (horizontally), in pixels.
y	Required. The coordinate to scroll to (vertically), in pixels.

Return Value

NONE

REMOVE ADS

More Examples

Scroll the document to position 300 horizontally and 500 vertically:

```
window.scrollTo(300, 500);
```

Try it Yourself »

Browser Support

`scrollTo()` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

Learn it.
Get certified.
Get hired.
$95 per course
one-time payment
Exam and certificate included.
Get started

REMOVE ADS



FREE ACCOUNT
Track your progress
XP earned 0

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Day streak 0
Spaces 0
League —
Sign in to track progress

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference

AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

ZonedDateTime Reference

‹ Previous

Next ›

The Temporal.ZonedDateTime Object

SHARE

A **Temporal.ZonedDateTime** is a timezone and calendar-aware date and time object that represents a real time of a particular region on Earth.

It is optimized for cases that require a time zone, **DST-safe arithmetic** and interoperability with an **RFC 5545 calendar**.

Example

Example: December 7th, 1995 at 3:24:30 AM in US Pacific time (in Gregorian calendar).

```
const zonedDate = Temporal.ZonedDateTime.from({
  timeZone: 'Europe/Oslo',
  year: 2026,
  month: 5,
  day: 17,
  hour: 14,
  minute: 30,
  second: 0,
});
```

Try it Yourself »

Temporal.ZonedDateTime Methods

Revised March 2026

Constructing	Description
new	Creates a ZonedDateTime object
from()	Creates a ZonedDateTime object from an object or a string
Converting	
getTimeZone Transition()	Returns a ZonedDateTime object representing the closest instant after or before this instant
toInstant()	Returns a Instant object representing this date-time
toPlainDate()	Returns a PlainDate object representing this date-time
toPlainDateTime()	Returns a PlainDateTime object representing this date-time
toPlainTime()	Returns a PlainTime object representing this date-time
startOfDay()	Returns a ZonedDateTime representing the first instant of this date
Updating	
with()	Returns a ZonedDateTime with specified fields modified
withCalendar()	Returns a ZonedDateTime with a different calendar system
withPlainTime()	Returns a ZonedDateTime the time part replaced by a new time
withTimeZone()	Returns a ZonedDateTime representing this date in a new time zone
Arithmetic	
add()	Returns a ZonedDateTime with a duration added
subtract()	Returns a ZonedDateTime with a duration subtracted
round()	Returns a ZonedDateTime rounded to a given unit
Comparing	
compare()	Returns -1, 0, or 1 from comparing two dates
equals()	Returns true if two ZonedDateTime objects are identical
since()	Returns the difference from another date
until()	Returns the difference until another date
Formatting	
toJSON()	Returns an ISO 8601 string for JSON serialization

toLocaleString()	Returns a language-sensitive representation of the date
toString()	Returns an ISO 8601 string representation
valueOf()	Throws a TypeError (prevents temporals from being converted to primitives)

Temporal.ZonedDateTime Properties

Property	Description
calendarId	Calendar system identifier ("iso8601")
day	The day as an integer (1-31)
dayOfWeek	The day of the week as an integer (1 = Monday)
dayOfYear	The ordinal day of the year
daysInMonth	The total number of days in that month
daysInWeek	The total number of days in that week
daysInYear	The total number of days in that year
epochMilliseconds	Number of milliseconds since Unix epoch
epochNanoseconds	Number of nanoseconds since Unix epoch
era	The era name of the calendar, if applicable
eraYear	The year within the era, if applicable
hour	The hour as an integer (0-23)
hoursInDay	Hours in this day in this time zone(0-25)
inLeapYear	A boolean indicating if the date falls in a leap year
microsecond	The microsecond as an integer (0-999)
millisecond	The millisecond as an integer (0-999)
minute	The minute as an integer (0-59)
month	The month as an integer (1-12)
monthCode	A calendar-specific string code for the month ("M01")
monthsInYear	The total number of months in that year
nanosecond	The nanosecond as an integer (0-999)
offset	Offset used to interpret this instant (+HH:mm:ss.sssssssss)
offsetNanoseconds	Offset used to interpret this instant in nanoseconds

second	The second as an integer (0-59)
timeZoneId	Time zone identifier used to interpret this instant
weekOfYear	The week number within the year
year	The year as an integer
yearOfWeek	The year that the week belongs to

Learn More:

JavaScript Temporal.ZonedDateTime Tutorial

REMOVE ADS

Browser Support

Temporal is a major update to the JavaScript standard (TC39).

It is currently supported in Chrome, Edge, Firefox, and Opera Safari has not shipped it yet.

Chrome	Edge	Firefox	Safari	Opera
144	144	139		128
Jan 2026	Jan 2026	May 2025	🚫	Feb 2026

The **Safari** implementation can be tested in Safari Technology Preview by enabling the --use-temporal runtime flag.

Polyfill

Until Safari supports Temporal natively, you can use the official polyfill:

```
<script
src="https://cdn.jsdelivr.net/npm/@js-temporal/polyfill@0.5.1/dist/index.umd.js">
</script>
```

‹ Previous

Sign in to track progress

Next ›

Learn it.
Get certified.
Get hired.

$95 per course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

Python - Global Variables - W3Schools....

Python
Global Variables

Local and Global variables in Python

FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode

Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode ›

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window Console Object

‹ Previous

Next ›

The Console Object

SHARE

The **console object** provides access to the browser's debugging console.

The **console object** is a property of the **window object**.

The **console object** is accessed with:

`window.console` or just `console`

Examples

```
window.console.error("You made a mistake");
```

Try it Yourself »

```
console.error("You made a mistake");
```

Try it Yourself »

Console Object Methods

Method	Description
assert()	Logs a message only if the provided assertion is false. If true, nothing is outputted, which helps keep logs clean.
clear()	Clears the console.
dir()	Displays an interactive, hierarchical listing of the properties of a specified JavaScript object. This can provide a more detailed view than console.log() for complex objects.
count()	Logs the number of times that this particular call to count() has been called.
error()	Displays an error message (often red text/background) to the console, useful for highlighting critical issues.
group()	Creates a new inline group in the console. This indents following console messages by an additional level, until console.groupEnd() is called.
groupCollapsed()	Creates a new inline group in the console. However, the new group is created collapsed. The user will need to use the disclosure button to expand it.
groupEnd()	Exits the current inline group in the console.
info()	Outputs an informational message to the console
log()	The most widely used method, it outputs a general message, variable value, or object to the console. It accepts multiple arguments, allowing you to combine text and object displays.
table()	Displays tabular data as a table, which is very useful for visualizing arrays of objects.
time()	Starts a timer (can track how long an operation takes).
timeEnd()	Stops a timer that was previously started by console.time().
trace()	Outputs a stack trace to the console.
warn()	Similar to console.log(), but displays a message with a warning format (often yellow text/background) and a different log level, allowing filtering in developer tools.

REMOVE ADS

‹ Previous

Sign in to track progress

Next ›

schools

JS

Get Certified in JavaScript

Boost your career with an official certification

$95

Get certified



REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode


Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

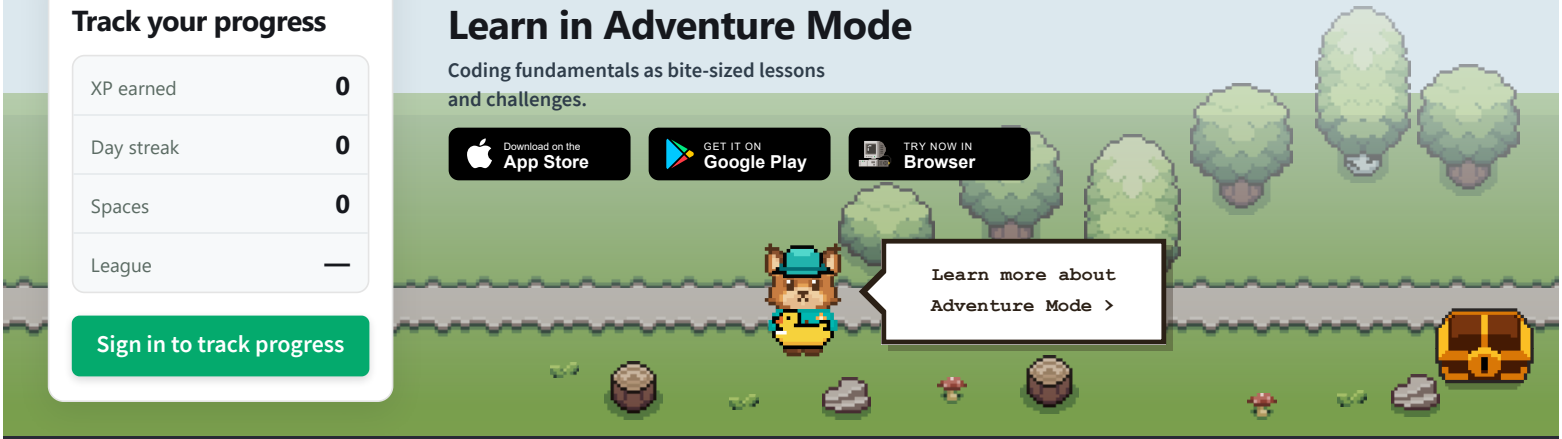

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window setInterval()

‹ Previous ‹ Window Object Reference Next ›

Examples

Display "Hello" every second (1000 milliseconds):

```
setInterval(function () {element.innerHTML += "Hello"}, 1000);
```

Try it Yourself »

Call displayHello every second:

```
setInterval(displayHello, 1000);
```

Try it Yourself »

More examples below.

Description

SHARE

The `setInterval()` method calls a function at specified intervals (in milliseconds).

The `setInterval()` method continues calling the function until `clearInterval()` is called, or the window is closed.

1 second = 1000 milliseconds.

Note

To execute the function only once, use the `setTimeout()` method instead.

To clear an interval, use the **id** returned from setInterval():

```
myInterval = setInterval(function, milliseconds);
```

Then you can to stop the execution by calling clearInterval():

```
clearInterval(myInterval);
```

See Also:

The clearInterval() Method

The setTimeout() Method

The clearTimeout() Method

Syntax

```
setInterval(function, milliseconds, param1, param2, ...)
```

Parameters

Parameter	Description
function	Required. The function to execute
milliseconds	Required. The execution interval. If the value is less than 10, 10 is used
param1, param2, ...	Optional. Additional parameters to pass to the *function* Not supported in IE9 and earlier.

Return Value

Type	Description

A number	The id of the timer. Use this id with clearInterval() to cancel the timer.

REMOVE ADS

More Examples

Example

Display the time like a digital watch:

```
setInterval(myTimer, 1000);

function myTimer() {
  const date = new Date();
  document.getElementById("demo").innerHTML = date.toLocaleTimeString();
}
```

Try it Yourself »

Example

Using clearInterval() to stop the digital watch:

```
const myInterval = setInterval(myTimer, 1000);

function myTimer() {
  const date = new Date();
  document.getElementById("demo").innerHTML = date.toLocaleTimeString();
}

function myStopFunction() {
  clearInterval(myInterval);
}
```

Try it Yourself »

Example

Using setInterval() and clearInterval() to create a dynamic progress bar:

```
function move() {
  const element = document.getElementById("myBar");
  let width = 0;
  let id = setInterval(frame, 10);
  function frame() {
    if (width == 100) {
      clearInterval(id);
    } else {
      width++;
      element.style.width = width + '%';
    }
  }
}
```

Try it Yourself »

Example

Toggle between two background colors once every 500 milliseconds:

```
const myInterval = setInterval(setColor, 500);

function setColor() {
  let x = document.body;
  x.style.backgroundColor = x.style.backgroundColor == "yellow" ? "pink" : "yellow";
}

function stopColor() {
  clearInterval(myInterval);
}
```

Try it Yourself »

Example

Pass parameters to the function (does not work in IE9 and earlier):

```
setInterval(myFunc, 2000, "param1", "param2");
```

Try it Yourself »

However, if you use an anonymous function it works in all browsers:

```
setInterval(function() {myFunc("param1", "param2")}, 2000);
```

Try it Yourself »

Browser Support


`setInterval()` is supported in all browsers:

Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›



REMOVE ADS

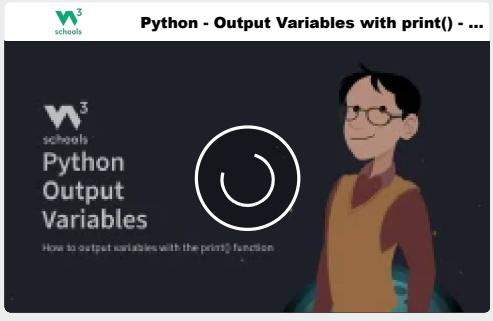


FREE ACCOUNT
Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

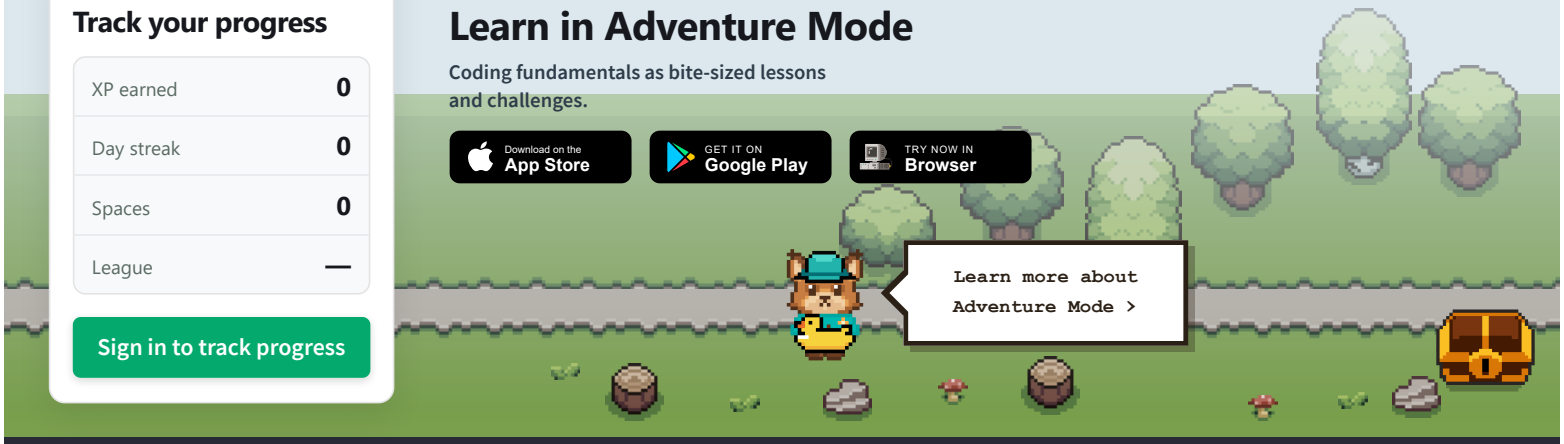

W3schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference

Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate

FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window setTimeout()

‹ Previous ‹ Window Object Reference Next ›

Examples

Wait 5 seconds for the greeting:

```
const myTimeout = setTimeout(myGreeting, 5000);
```

Try it Yourself »

Use clearTimeout(myTimeout) to prevent myGreeting from running:

```
const myTimeout = setTimeout(myGreeting, 5000);

function myStopFunction() {
  clearTimeout(myTimeout);
}
```

Try it Yourself »

More examples below.

Description

SHARE

The `setTimeout()` method calls a function after a number of milliseconds.

1 second = 1000 milliseconds.

Notes

The `setTimeout()` is executed only once.

If you need repeated executions, use `setInterval()` instead.

Use the `clearTimeout()` method to prevent the function from starting.

To clear a timeout, use the **id** returned from setTimeout():

```
myTimeout = setTimeout(function, milliseconds);
```

Then you can to stop the execution by calling clearTimeout():

```
clearTimeout(myTimeout);
```

See Also:

The clearTimeout() Method

The setInterval() Method

The clearInterval() Method

Syntax

```
setTimeout(function, milliseconds, param1, param2, ...)
```

Parameters

Parameter	Description
function	Required. The function to execute.
milliseconds	Optional. Number of milliseconds to wait before executing. Default value is 0.
param1, *param2,* ...	Optional. Parameters to pass to the *function*. Not supported in IE9 and earlier.

Return Value

Type	Description
A number	The id of the timer. Use this id with clearTimeout(id) to cancel the timer.

REMOVE ADS

More Examples

Display an alert box after 3 seconds (3000 milliseconds):

```
let timeout;

function myFunction() {
  timeout = setTimeout(alertFunc, 3000);
}

function alertFunc() {
  alert("Hello!");
}
```

Try it Yourself »

Display a timed text:

```
let x = document.getElementById("txt");
setTimeout(function(){ x.value = "2 seconds" }, 2000);
setTimeout(function(){ x.value = "4 seconds" }, 4000);
setTimeout(function(){ x.value = "6 seconds" }, 6000);
```

Try it Yourself »

Open a new window and close the window after three seconds (3000 milliseconds):

```
const myWindow = window.open("", "", "width=200, height=100");
setTimeout(function() {myWindow.close()}, 3000);
```

Try it Yourself »

Count forever - but with the ability to stop the count:

```
function startCount()
function stopCount()
```

Try it Yourself »

A clock created with timing events:

```
function startTime() {
  const date = new Date();
  document.getElementById("txt").innerHTML = date.toLocaleTimeString();
  setTimeout(function() {startTime()}, 1000);
}
```

Try it Yourself »

Pass parameters to the function (does not work in IE9 and earlier):

```
setTimeout(myFunc, 2000, "param1", "param2");
```

Try it Yourself »

However, if you use an anonymous function, it will work in all browsers:

```
setTimeout(function() {myFunc("param1", "param2")}, 2000);
```

Try it Yourself »

Browser Support

`setTimeout()` is supported in all browsers:

					
Chrome	Edge	Firefox	Safari	Opera	IE
Yes	Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

Learn it.
Get certified.
Get hired.

$95 per course
one-time payment

Exam and certificate included.

Get started

REMOVE ADS

Python - Get Started - W3Schools.com

Python
Get Started
Install and write your first program

FREE ACCOUNT
Track your progress

XP earned 0
Day streak 0
Spaces 0
League —

Sign in to track progress

NEW
Learn in Adventure Mode
Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store
GET IT ON Google Play
TRY NOW IN Browser

Learn more about Adventure Mode >

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples

SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Window stop()

❮ Previous ❮ Window Object Reference Next ❯

Example

Stop the loading of a window:

```
window.stop();
```

Try it Yourself »

Description

SHARE

The `stop()` method stops window loading.

The `stop()` method is the same as clicking stop in the browser.

Note

The `stop()` method can be used to stop loading an image if it takes too long.

Syntax

```
window.stop()
```

Parameters

NONE

Return Value

NONE

Browser Support

`window.stop()` is supported in all modern browsers:

Chrome	Edge	Firefox	Safari	Opera
Yes	Yes	Yes	Yes	Yes

‹ Previous ‹ Window Object Reference Next ›

W3schools
JS
Get Certified in JavaScript
Boost your career with an official certification
$95
Get certified

REMOVE ADS



FREE ACCOUNT

Track your progress

XP earned 0

Day streak 0

Spaces 0

League —

Sign in to track progress

NEW

Learn in Adventure Mode


Coding fundamentals as bite-sized lessons and challenges.

Download on the App Store

GET IT ON Google Play

TRY NOW IN Browser

Learn more about Adventure Mode >

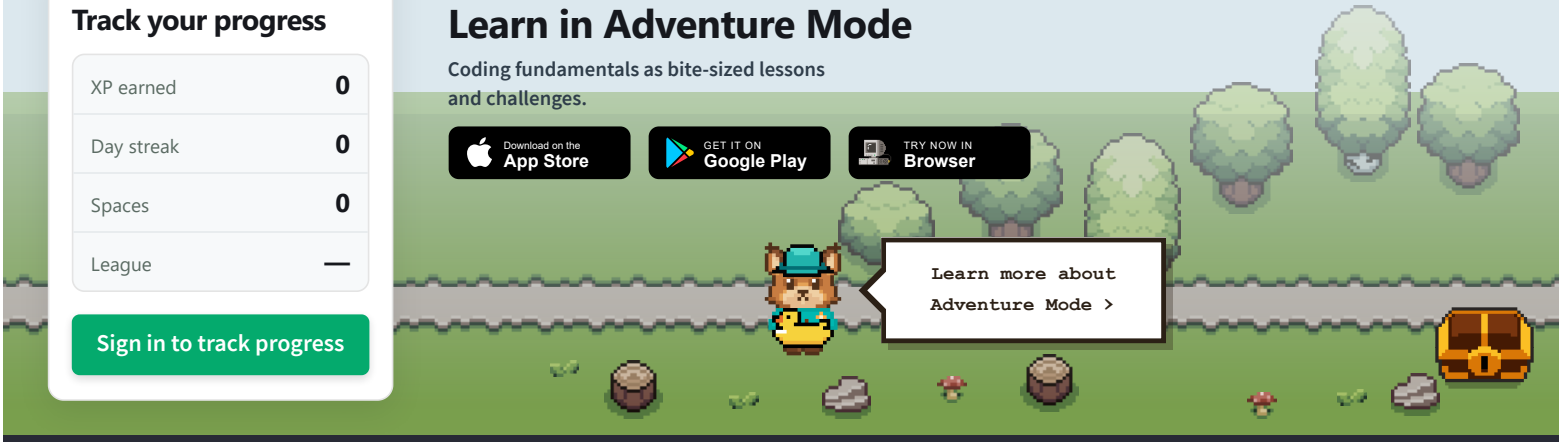

schools

PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial

PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted

our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.

Complete JavaScript References

‹ Home

Next ›

Revised June 2026

JavaScript Primitives

SHARE

Primitives | String | Number | Boolean | BigInt | Symbol | undefined | null

Object Methods and Properties

Array | Boolean | Classes | Date | Error | Function | Global | Iterator | JSON | Map | Math | Number | Object | Operators | Precedence | Promise | Proxy | Reflect | RegExp | Set | Statements | String | Temporal | Typed Array

Window Objects with Examples

Window | History | Location | Navigator | Screen

HTML DOM Objects with Examples

Document | Element | Attributes | Events | Event Objects | Collection | Style

REMOVE ADS

Web APIs with Examples

Canvas | Console | Fetch | Fullscreen | Geolocation | History | MediaQuery | Storage | Validation

HTML Elements with Examples

a | abbr | address | area | article | aside | audio | b | base | bdo | blockquote | body | br | button | canvas | caption | cite | code | col | colgroup | datalist | dd | del | details | dfn | dialog | div | dl | dt | em | embed | fieldset | figcaption | figure | footer | form | head | header | h1 - h6 | hr | html | i | iframe | img | ins | input button | input checkbox | input color | input date | input datetime | input datetime-local | input email | input file | input hidden | input image | input month | input number | input password | input radio | input range | input reset | input search | input submit | input text | input time | input url | input week | kbd | label | legend | li | link | map | mark | menu | menuitem | meta | meter | nav | object | ol | optgroup | option | output | p | param | pre | progress | q | s | samp | script | section | select | small | source | span | strong | style | sub | summary | sup | table | tbody | td | tfoot | th | thead | tr | textarea | time | title | track | u | ul | var | video

Other

CSSStyleDeclaration | JS Conversion

JavaScript Tutorial


Visit Our JavaScript Tutorial »

‹ Home | Sign in to track progress | Next ›



REMOVE ADS



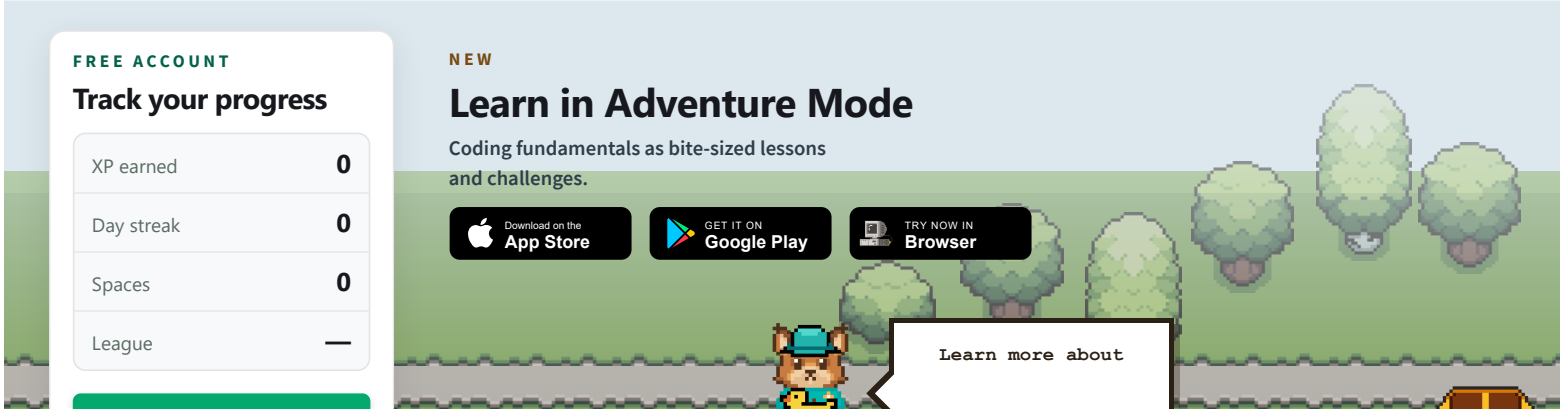



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

PRACTICE

CONTACT US

Top Tutorials

HTML Tutorial
CSS Tutorial
JavaScript Tutorial
How To Tutorial
SQL Tutorial
Python Tutorial
W3.CSS Tutorial
Bootstrap Tutorial
PHP Tutorial
Java Tutorial
C++ Tutorial
jQuery Tutorial

Top References

HTML Reference
CSS Reference
JavaScript Reference
SQL Reference
Python Reference
W3.CSS Reference
Bootstrap Reference
PHP Reference
HTML Colors
Java Reference
AngularJS Reference
jQuery Reference

Top Examples

HTML Examples
CSS Examples
JavaScript Examples
How To Examples
SQL Examples
Python Examples
W3.CSS Examples
Bootstrap Examples
PHP Examples
Java Examples
XML Examples
jQuery Examples

Get Certified

HTML Certificate
CSS Certificate
JavaScript Certificate
Front End Certificate
SQL Certificate
Python Certificate
PHP Certificate
jQuery Certificate
Java Certificate
C++ Certificate
C# Certificate
XML Certificate



FORUM ABOUT CAMPUS

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our terms of use, cookies and privacy policy.

Copyright 1999-2026 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.