

APLICACIONES WEB



TIID_04_01

Jose Angel Ramirez Lucario

Diana Xochitl Ruano Vargas

Enero-Abril


```
index.html U .gitattributes styles.css U
index.html > html > head
1 1 <!DOCTYPE html>
2 2 <html lang="es">
3 3 <head>
4 4   <meta charset="UTF-8">
5 5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6 6   <title>Práctica 2: Aplicaciones Web</title>
7 7
8 8   <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.8/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-sRlI4kxLFLvY47J16cr9Zw007vP4JB+LH7qKQnugkuIAvMMLzeN8tE5YBujZqJLB" crossorigin="anonymous">
9 9
10 10 </head>
11 11 <body>
12 12
13 13   <header>
14 14     <h1>Mi Primer sitio web :D </h1>
15 15     <meta charset="utf-8">
16 16     <meta name="viewport" content="width=device-width, initial-scale=1">
17 17     <link rel="stylesheet" href="https://cdn.jsdelivr.net/npm/bootstrap@4.6.2/dist/css/bootstrap.min.css">
18 18     <script src="https://cdn.jsdelivr.net/npm/jquery@3.7.1/dist/jquery.slim.min.js"></script>
19 19     <script src="https://cdn.jsdelivr.net/npm/popper.js@1.16.1/dist/umd/popper.min.js"></script>
20 20     <script src="https://cdn.jsdelivr.net/npm/bootstrap@4.6.2/dist/js/bootstrap.bundle.min.js"></script>
21 21   </header>
22 22
23 23
```

```
<main class="container mt-4">
  <div class="card mb-3">
    <div class="card-body">
      <h5 class="card-title">Bienvenido</h5>
      <p class="card-text">
        Esta es mi primera interfaz web mejorada con Bootstrap.
      </p>
      
      
    </div>
  </div>
</main>

<footer>
  <p>© 2026 Aplicaciones Web TIID</p>
</footer>

<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.8/dist/js/bootstrap.bundle.min.js" integrity="sha384-FKyoEFoRCGlyvwx9Hj09JcYn3nv7wiPV1z7YYwJrWVcXK/BmnVDxM+D2scQbITxi" crossorigin="anonymous"></script>

</body>
</html>
```

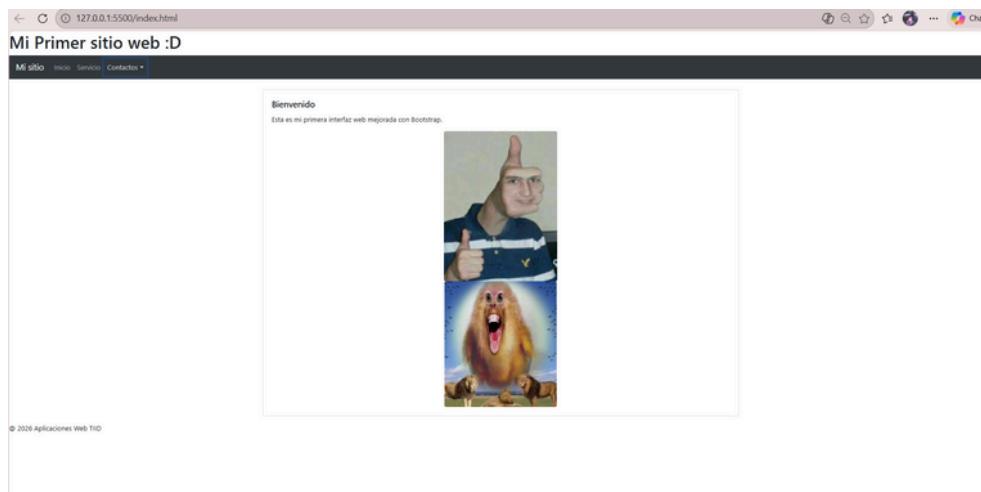

Dimensions: Responsive 446 x 692 100% No throttling Save Data: default

Mi Primer sitio web :D

Inicio

Mi sitio

Servicio

Contactos

Bienvenido

Esta es mi primera interfaz web mejorada con Bootstrap.



Code injected by live-server ->

```
<!DOCTYPE html>
<html lang="es"> </html>
  > head => </head>
    > body => </body>
      > header => <header>
        > nav class="navbar navbar-expand-sm bg-dark navbar-dark" => <nav> <a href="#">
          > main class="container mt-4" => <main>
            > script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/js/bootstrap.bundle.min.js" integrity="sha384-ExBLL2hntT4u0xR+R06QoCJvCEcURMOpnK8A+a0716DjPaQo3a8E6Z5n0Z07H6" crossorigin="anonymous"></script>
            <!-- Code injected by live-server -->
          > script => </script>
        </nav>
      </header>
      > footer => </footer>
    </body>
</html>
```

Event Listeners

Ancestors All

- ▶ DOMContentLoaded
- ▶ blur
- ▶ click
- ▶ focus
- ▶ focusin
- ▶ focusout
- ▶ keydown
- ▶ keyup
- ▶ load
- ▶ resize

Dimensions: Responsive 446 x 692 100% No throttling Save Data: default



Code injected by live-server ->

```
<!DOCTYPE html>
<html lang="es"> </html>
  > head => </head>
    > body => </body>
      > header => <header>
        > nav class="navbar navbar-expand-sm bg-dark navbar-dark" => <nav> <a href="#">
          > main class="container mt-4" => <main>
            > script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/js/bootstrap.bundle.min.js" integrity="sha384-ExBLL2hntT4u0xR+R06QoCJvCEcURMOpnK8A+a0716DjPaQo3a8E6Z5n0Z07H6" crossorigin="anonymous"></script>
            <!-- Code injected by live-server -->
          > script => </script>
        </nav>
      </header>
      > footer => </footer>
    </body>
</html>
```

Event Listeners

Ancestors All

- ▶ DOMContentLoaded
- ▶ blur
- ▶ click
- ▶ focus
- ▶ focusin
- ▶ focusout
- ▶ keydown
- ▶ keyup
- ▶ load
- ▶ resize