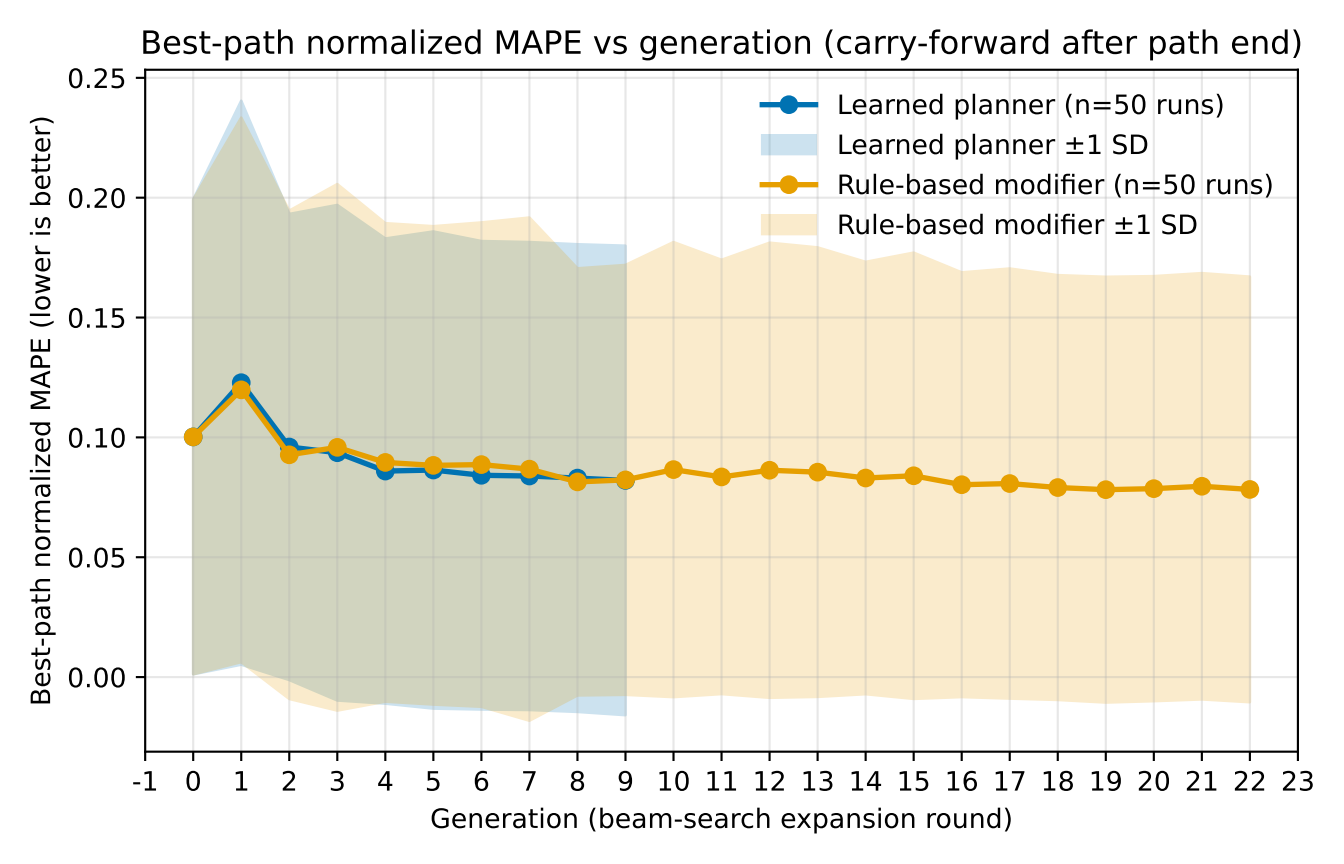
Best-path normalized MAPE vs generation (carry-forward after path end)
Learned planner (n=50 runs)
Learned planner ±1 SD
Rule-based modifier (n=50 runs)
Rule-based modifier ±1 SD
Best-path normalized MAPE (lower is better)
0.25
0.20
0.15
0.10
0.05
0.00
-1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
Generation (beam-search expansion round)