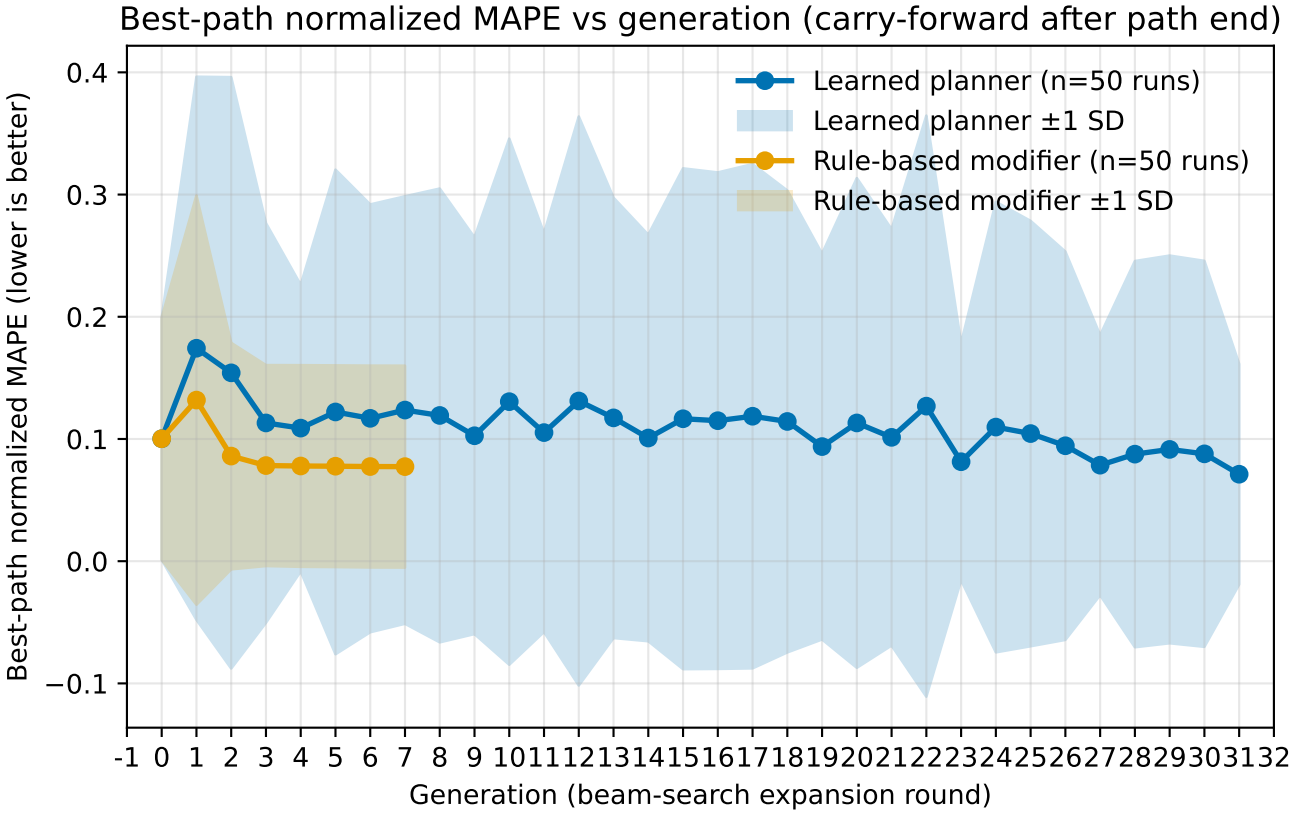
Best-path normalized MAPE vs generation (carry-forward after path end)
Learned planner (n=50 runs)
Learned planner ±1 SD
Rule-based modifier (n=50 runs)
Rule-based modifier ±1 SD
Best-path normalized MAPE (lower is better)
0.4
0.3
0.2
0.1
0.0
−0.1
-1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32
Generation (beam-search expansion round)