

# Weed and Corn segmentation through Convolutional Neuronal Networks

Andrea Concepción Córdova Cruzatty <sup>\*</sup>, Mauricio Daniel Barreno Barreno <sup>†</sup> and José Misael Jácome Barrionuevo<sup>‡</sup>

Department of Energy and Mechanics, University of the Army ESPE

Latacunga - Quijano y Ordoñez and Hermanas Paéz

Email: <sup>\*</sup>accordova@espe.edu.ec, <sup>†</sup>mdbarreno@espe.edu.ec, <sup>‡</sup>jmjacome1@espe.edu.ec

**Abstract**—Today the computation stays i

## I. INTRODUCTION

I wish you the best of success.

mds

August 26, 2015

### A. Subsection Heading Here

Subsection text here.

1) Subsubsection Heading Here: Subsubsection text here.

## II. INTRODUCTION

During the last centuries, huge progress has taken place in science and technology developments. Significant milestones such as Communications, Numerical Computer Control and the miniaturization of components have benefited social and industrial sectors on its approach to solve specific problems.

Globalization has permitted countries who are not leader technology developers, like Ecuador, to receive bleeding edge technological products in order to satisfy requirements and propose solutions to still-unresolved problems.

Industry transformation is a science evolution example; manufacturing, food, and information industries, among others, are signs of this industrial revolution. However there are fields still unexplored in Ecuador like agroindustry. Agriculture in Ecuador has not changed much since precolombine times; while it is true that there are efficient agriculture practices, the lack of technological resources make it impossible for the country to exploit its true potential as an agricultural producer.

Nowadays, one of agriculture challenges is the development of precision agriculture techniques focused on Weed and Crop segmentation. There are studies that show the impact of Weed in corn crops [1]; its yield is affected by 5000 kg/ha. Currently, growing development of Artificial Vision and Machine Learning algorithms allow researchers to propose solutions for Weed Segmentation in Crops.

One of the first approximations to the algorithms of detection of Crops was developed in 1996[2], this algorithm

permitted to segment crops from weed, it could be possible by the use of IR Images, the image is processed by a hysteresis umbral and the method of Min Neighbouring to identify the row of crops. In recent years the implementation of Machine Learning has opened new possibilities for differentiate the Weed from the crops, recently [3] there had been developed an algorithm by the use of Harris Corner detector, Feature Detector and using the DBSCAN (Density-based spartial clustering of aplications with noise) , it demonstrates an effectiveness of 98% in the identification of Weeds in the Rice, Araguez *et. al* [5] performed their segmentation through the analysis of the green hystogram and performing the segmentation of the crop and weed by classifiers not specified in the document.

Hong and Lei [4] developed their approximation by using an optimal method for detection in various types of luminosity, they achived this by the use an ANN for weed and maize classification, with a precision of 92.5%, also there had been developed [6] through binarization methods of OTSU and Watershed for the segmentation of the images, while the classification was given through a areas analysis to perform a thresholding, although the method is computationally effective when the Weed distribution does not resemble the size to the crop plant, its error increases when there is more density of crop than of weed. Romeo *et. al* [7] propose to use a fuzzy clustering approach to correctly segment the crop green and the same algorithm to classify the soil crop.

The segmentation of weed and crops is not closed to color images, using a multispectral camera [8] permitted to obtain RGB and NIR images, for the segmentation and classification, then the images used a light CNN for the first process and a Deep CNN for classification in Crops, its accuracy is up to 98% in the identification of weeds. One of the most difcults things for the identification of crops is the generation of Datasets due to presence of Weed in the images of training, but there could be correctly generated by a Convolutional Neural Network [9] achieving a acceptable accuracy for the generation of Datasets

### III. MATERIALS AND METHODS

The development of the model for the weed and maize detection algorithm using convolutional neural networks is described below.

#### A. Hardware

For the stages of obtaining images and training net we used the following elements: A Raspberry Pi 3 with Pi Camera V2.1 for the record of images, it was configured to obtain a video at a resolution of 640x480 pixels in order to improve the performance of image processing. Due to the popularity of the GPU computing, it was necessary to consider hardware compatible with Parallel Computing like the Graphic Cards manufactured by NVIDIA, they have the advantage of better times of processing compared to CPU, in order to optimize the time of image processing and training of Deep Learning Models, so we used a Computer with a Nvidia Graphics Card GTX950M.

#### B. Software

For the application in this documents requires the use of powerful libraries of Image Processing and Deep Learning Development, we considered to use Open Software for extend its use in future prototypes, due to this considerations we had chosen the OpenCV library for its computational efficiency and focus on real-time application [11] in this case, it was used for acquisition and segmentation of the sample images. Also we had considered Caffe because it is intended to use in training and developing general-purpose Convolutional Neural Networks and other Deep Learning models [12] with fully support of CUDA GPU Computation and a generous database of resources for learning,

Also in the development stage was important the use of Linux OS , its features are: lightweight and free OS also fully compatible with the software mentioned above. For the main computer was used Ubuntu Linux 16.04 for its official support to CUDA, Caffe and OpenCV, also in the Raspberry Pi we used the Pixel OS for acquire images and processing of the CNN.

#### C. Dataset Description

Due to the lack of datasets of Weed and Maize plants, it was necessary to search crops of maize in its initial stage, for that purpose we had traslated to Píllaro, it is a city located in the Tungurahua Province on the center of the the Ecuadoring Highlands region, Píllaro is recognized producer of Andean Crops such as: Maize, Potatoes and Fruits so here we could find many crops of Maize useful for our purpose.

Samples were obtained from images captured in those maize fields , we considered to choose Maize Crops where we could visually discriminate the plants of the crop and the

weed. To record the samples we centered the camera insuring that the capture shows all the features of the maize plant, it was possible by monitoring the get of samples by an external display. An examples of the images captured are shown below.



Fig. 1. Crops chosen to obtain samples, notice that it is easy to discriminate weed from maize

Then, through a digital image processing, the images were segmented to differentiate them from the soil and other non-plant elements, then the images were masked to provide the dataset features of color of the Maize and Weed. Once the segmented images were obtained, they were removed those that had a resolution lower than 64x64 pixels, because it's smaller than size of input layer of the network, besides it was not convenient its processing since its total area was much smaller than the samples of corn, which is the purpose of this document. To highlight we had labelled the samples manually in two classes. In the following image we present the final results of the processed images that conform the dataset.

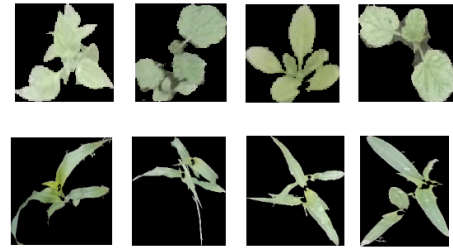


Fig. 2. Segmented and Masked images of dataset Above: Weed, Below: Maize

Once we completed the processing of the images were obtained 2369 images of Maize and 632 images of Weed, **Seng** [13] said that once CNN has reached an acceptable accuracy, the dataset could extend by Geometric Transformations, because we will develop a system for classify the maize in any position , we considered to rotate the source sample to 90,180 and 270 so the dataset will be treble, improving the accuracy of the model.

For the Validation Phase, we had chosen randomly a fifth part of the total images of each class, so we have the following chart with the distribution of the dataset.

#### D. Convolutional Neuronal Network

After the last step have been terminated, it is necessary classify the images of Maize and Weed, a high accurate method of Image Classification is Convolutional Neuronal Networks(CNN), those models are complex but efficient with

Phase	Train	Validation	Test	Total
Maize	7581	1895	787	9476
Weed	2023	505	300	2528

TABLE I  
DISTRIBUTION OF THE DATASET OF EACH CLASS

a highly rate of discrimination and its demonstrated that they have good results in Image Classification, Object Detection and Fine-Grained Classification [10]. Their are also applied in Precision Agriculture [8] for the correct identification of plants.

One of the characteristics of the CNN is that they can have multiple architectures, each architecture can reach different result depending of the application , for the present document we have considered four CNN architectures: Two models were chose of the Caffe Zoo Model(it's a free resource provided by Caffe Developers), LeNet and AlexNet also Potena and Nardi had used two additional types of Models, sNET and cNET, they were sucessfully proved in identification of plants in crops[8], with the Nets chosen, each one was trained with a same Solver of type AdaDelta and with the same dataset, the results of training are the following.

Parameters	LeNet	AlexNet	cNET	sNET
Input size of images	32x32	64x64	64x64	64x64
Layers numbers	9	11	8	4
Number of parameters	652500	20166688	6421568	135872
Iterations	3000	3000	4500	3000
Accuracy(%)	78.84	95.266	99.33	90.4
Loss(%)	44.8471	12.7256	5.86	781.3

TABLE II  
DISTRIBUTION OF THE DATASET OF EACH CLASS

Inside of the shown parameters in the Table table:1, we considered the net who achieved the highest rate of accuracy and lowest rate of loss, clearly the cNET is the chosen due it shows a precession equal to human classification. The following picture shows the process of training of the cNET

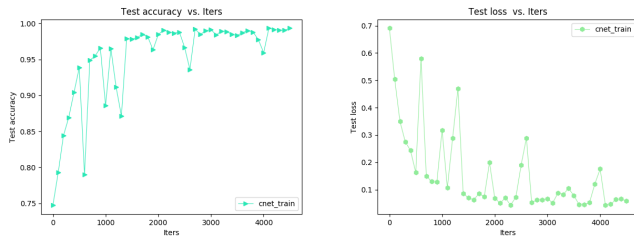


Fig. 3. Left: Accuracy vs Iterations, Right: Loss vs Iterations

#### IV. TEST

#### V. CONCLUSION

The conclusion goes here.

#### ACKNOWLEDGMENT

The authors would like to thank...

#### REFERENCES

- [1] R. Suárez, J. Piñero and J. Valladares *Distintos Sistemas De Escarda En Maíz Forrajero* . Vol II. Gijón , Spain: Publicaciones SERIDA, 2005. Web. 3 Mar. 2017.
- [2] R. Brivot and J. A. Marchant, *Segmentation of plants and weeds for a precision crop protection robot using infrared images* Vol 143 Issue 2 Harlow, England: IEE Proceedings - Vision, Image and Signal Processing, 1996.
- [3] B. Cheng and E.T. Matson, *A Feature-Based Machine Learning Agent for Automatic Rice and Weed Discrimination* Artificial Intelligence and Soft Computing: 14th International Conference, ICAISC 2015 Part II Zakopane, Poland , 2015.
- [4] Hong. Y. Jeon, Lei F. Tian and Heping Zhu, *Robust Crop and Weed Segmentation under Uncontrolled Outdoor Illumination* Vol 143 Issue 2 Harlow, England: IEE Proceedings - Vision, Image and Signal Processing, 2011.
- [5] D. Abadía, R. Aragués, A. Cirujeda, R. del Hoyo, J. Paniagua, T. Seco, V. Urdanoz, F. Usón and C. Zaragoza , *SAAFIN: Un robot para el desherbado de cultivos y valoración de salinidad del suelo* Vol 143 Issue 2 Harlow, England: IEE Proceedings - Vision, Image and Signal Processing, 206.
- [6] R. Cheng and J. A. Mason, *Segmentation of plants and weeds for a precision crop protection robot using infrared images* Vol 143 Issue 2 Harlow, England: IEE Proceedings - Vision, Image and Signal Processing, 1996.
- [7] J. Romeo, G. Pajares M. Montalvo, J.M. Guerrero, M. Guijarro, and A. Ribeiro, *Crop Row Detection in Maize fields Inspired on the Human Visual Perception* Vol 143 Issue 2 Harlow, England: IEE Proceedings - Vision, Image and Signal Processing, 2012.
- [8] C. Potena, D. Nardi and A. Pretto *Fast and Accurate Crop and Weed Identification with Summarized Train Sets for Precision Agriculture* Vol 143 Issue 2 Harlow, England: IEE Proceedings - Vision, Image and Signal Processing, 1996.
- [9] M. Di Cicco, C. Potena, G. Grisetti and A. Pretto, *Automatic Model Based Dataset Generation for Fast and Accurate Crop and Weeds Detecion* Vol 143 Issue 2 Harlow, England: IEE Proceedings - Vision, Image and Signal Processing, 2017.
- [10] A. S. Razavian, C. Potena, G. Grisetti and A. Pretto, *CNN Features off-the-shelf: an Astounding Baseline for Recognition* Vol 143 Issue 2 Harlow, England: IEE Proceedings - Vision, Image and Signal Processing, 2017.
- [11] A. S. Razavian, C. Potena, G. Grisetti and A. Pretto, *CNN Features off-the-shelf: an Astounding Baseline for Recognition* Vol 143 Issue 2 Harlow, England: IEE Proceedings - Vision, Image and Signal Processing, 2017.
- [12] Jia, Yangqing and Shelhamer, Evan and Donahue, Jeff and Karayev, Sergey and Long, Jonathan and Girshick, Ross and Guadarrama, Sergio and Darrell, Trevor, *Caffe: Convolutional Architecture for Fast Feature Embedding* Vol 143 Issue 2 Harlow, England: IEE Proceedings - Vision, Image and Signal Processing, 2014.
- [13] Seng Chang *Caffe: Convolutional Architecture for Fast Feature Embedding* Vol 143 Issue 2 Harlow, England: IEE Proceedings - Vision, Image and Signal Processing, 2014.
- [14] H. Kopka and P. W. Daly, *A Guide to L<sup>A</sup>T<sub>E</sub>X*, 3rd ed. Harlow, England: Addison-Wesley, 1999.