
CITICNORE

Lenguajes de Marcas y Sistemas de Gestión de la Información





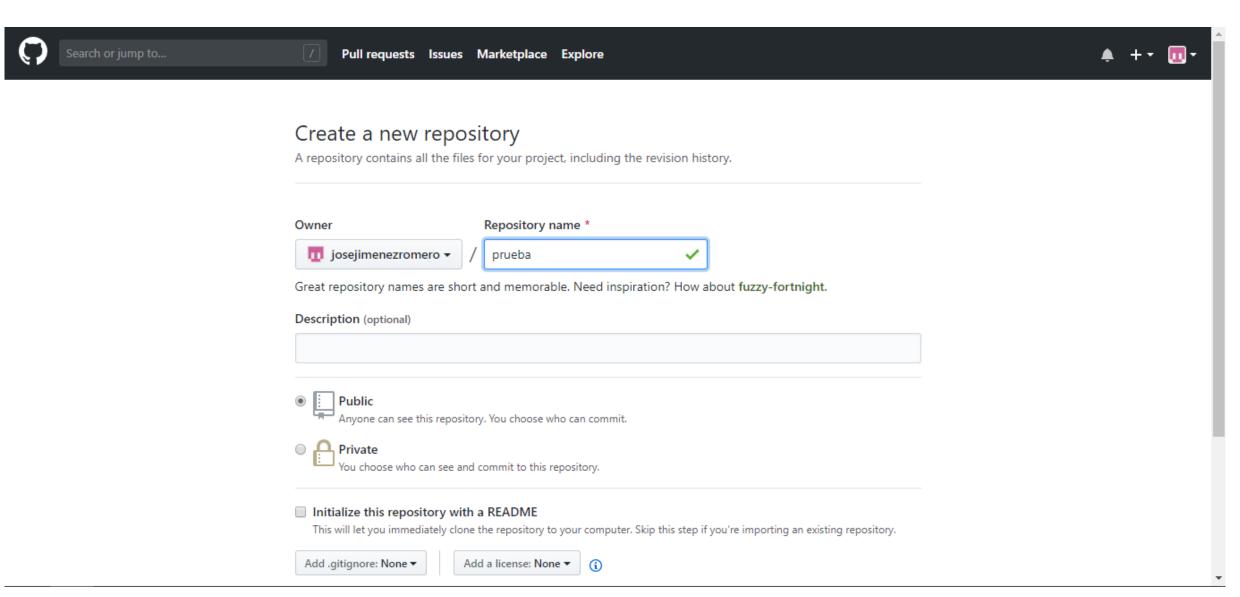

Nombre	Fecha de modifica	Tipo	Tamaño
gitignore .gitignore	28/01/2019 19:19	Documento de tex	0 KB
index.html	28/01/2019 19:17	Chrome HTML Do	0 KB
LMSGI.zip	28/01/2019 19:16	Archivo WinRAR Z	1 KB
prueba.txt	28/01/2019 19:16	Documento de tex	0 KB
Test.docx	28/01/2019 19:17	Documento de Mi	0 KB
MINGW64:/c/Users/asus/Desktop/prueba		_	п ×
asus@portatil MINGW64 ~ \$ cd ~/Desktop/prueba/			^
asus@portatil MINGW64 ~/Desktop/prueb \$ mv test.txt .gitignore	a		
asus@portatil MINGW64 ~/Desktop/prueb \$	a		
			V



```
MINGW64:/c/Users/asus/Desktop/prueba
                                                                                 \times
asus@portatil MINGW64 ~/Desktop/prueba
$ git init
Initialized empty Git repository in C:/Users/asus/Desktop/prueba/.git/
asus@portatil MINGW64 ~/Desktop/prueba (master)
```



```
MINGW64:/c/Users/asus/Desktop/prueba
asus@portatil MINGW64 ~/Desktop/prueba (master)
$ git status
On branch master
No commits yet
Untracked files:
  (use "git add <file>..." to include in what will be committed)
nothing added to commit but untracked files present (use "git add" to track)
asus@portatil MINGW64 ~/Desktop/prueba (master)
```





gitignore: Bloc de notas

Archivo Edición Formato Ver Ayuda



```
×
 MINGW64:/c/Users/asus/Desktop/prueba
asus@portatil MINGW64 ~/Desktop/prueba (master)
$ git status
On branch master
No commits yet
Untracked files:
  (use "git add <file>..." to include in what will be committed)
nothing added to commit but untracked files present (use "git add" to track)
asus@portatil MINGW64 ~/Desktop/prueba (master)
```



```
MINGW64:/c/Users/asus/Desktop/prueba
asus@portatil MINGW64 ~/Desktop/prueba (master)
$ git add -A
asus@portatil MINGW64 ~/Desktop/prueba (master)
$ git status
On branch master
No commits yet
Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
       new file:
                   .gitignore
       new file:
                   index.html
       new file:
                   test.docx
asus@portatil MINGW64 ~/Desktop/prueba (master)
```



```
MINGW64:/c/Users/asus/Desktop/prueba
                                                                               X
asus@portatil MINGW64 ~/Desktop/prueba (master)
$ git commit -m "ExposicionLSMGI"
[master (root-commit) 6b26e26] ExposicionLSMGI
3 files changed, 1 insertion(+)
create mode 100644 .gitignore
create mode 100644 index.html
create mode 100644 test.docx
asus@portatil MINGW64 ~/Desktop/prueba (master)
```




```
MINGW64:/c/Users/asus/Desktop/prueba
asus@portatil MINGW64 ~/Desktop/prueba (master)
$ git remote add origin https://github.com/josejimenezromero/prueba.git
asus@portatil MINGW64 ~/Desktop/prueba (master)
```



```
MINGW64:/c/Users/asus/Desktop/prueba
asus@portatil MINGW64 ~/Desktop/prueba (master)
$ git push -u origin master
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 4 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (4/4), 304 bytes | 152.00 KiB/s, done.
Total 4 (delta 0), reused 0 (delta 0)
To https://github.com/josejimenezromero/prueba.git
 * [new branch]
                    master -> master
Branch 'master' set up to track remote branch 'master' from 'origin'.
asus@portatil MINGW64 ~/Desktop/prueba (master)
```



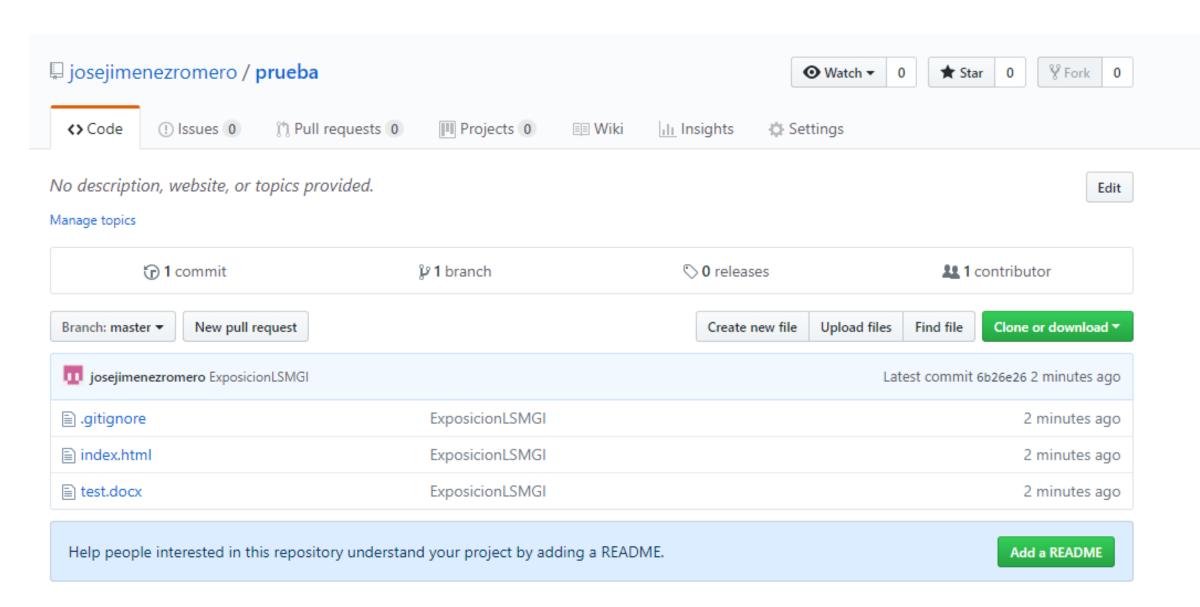



REALIZADO POR:

José David Villegas Mendoza José Jiménez Romero

