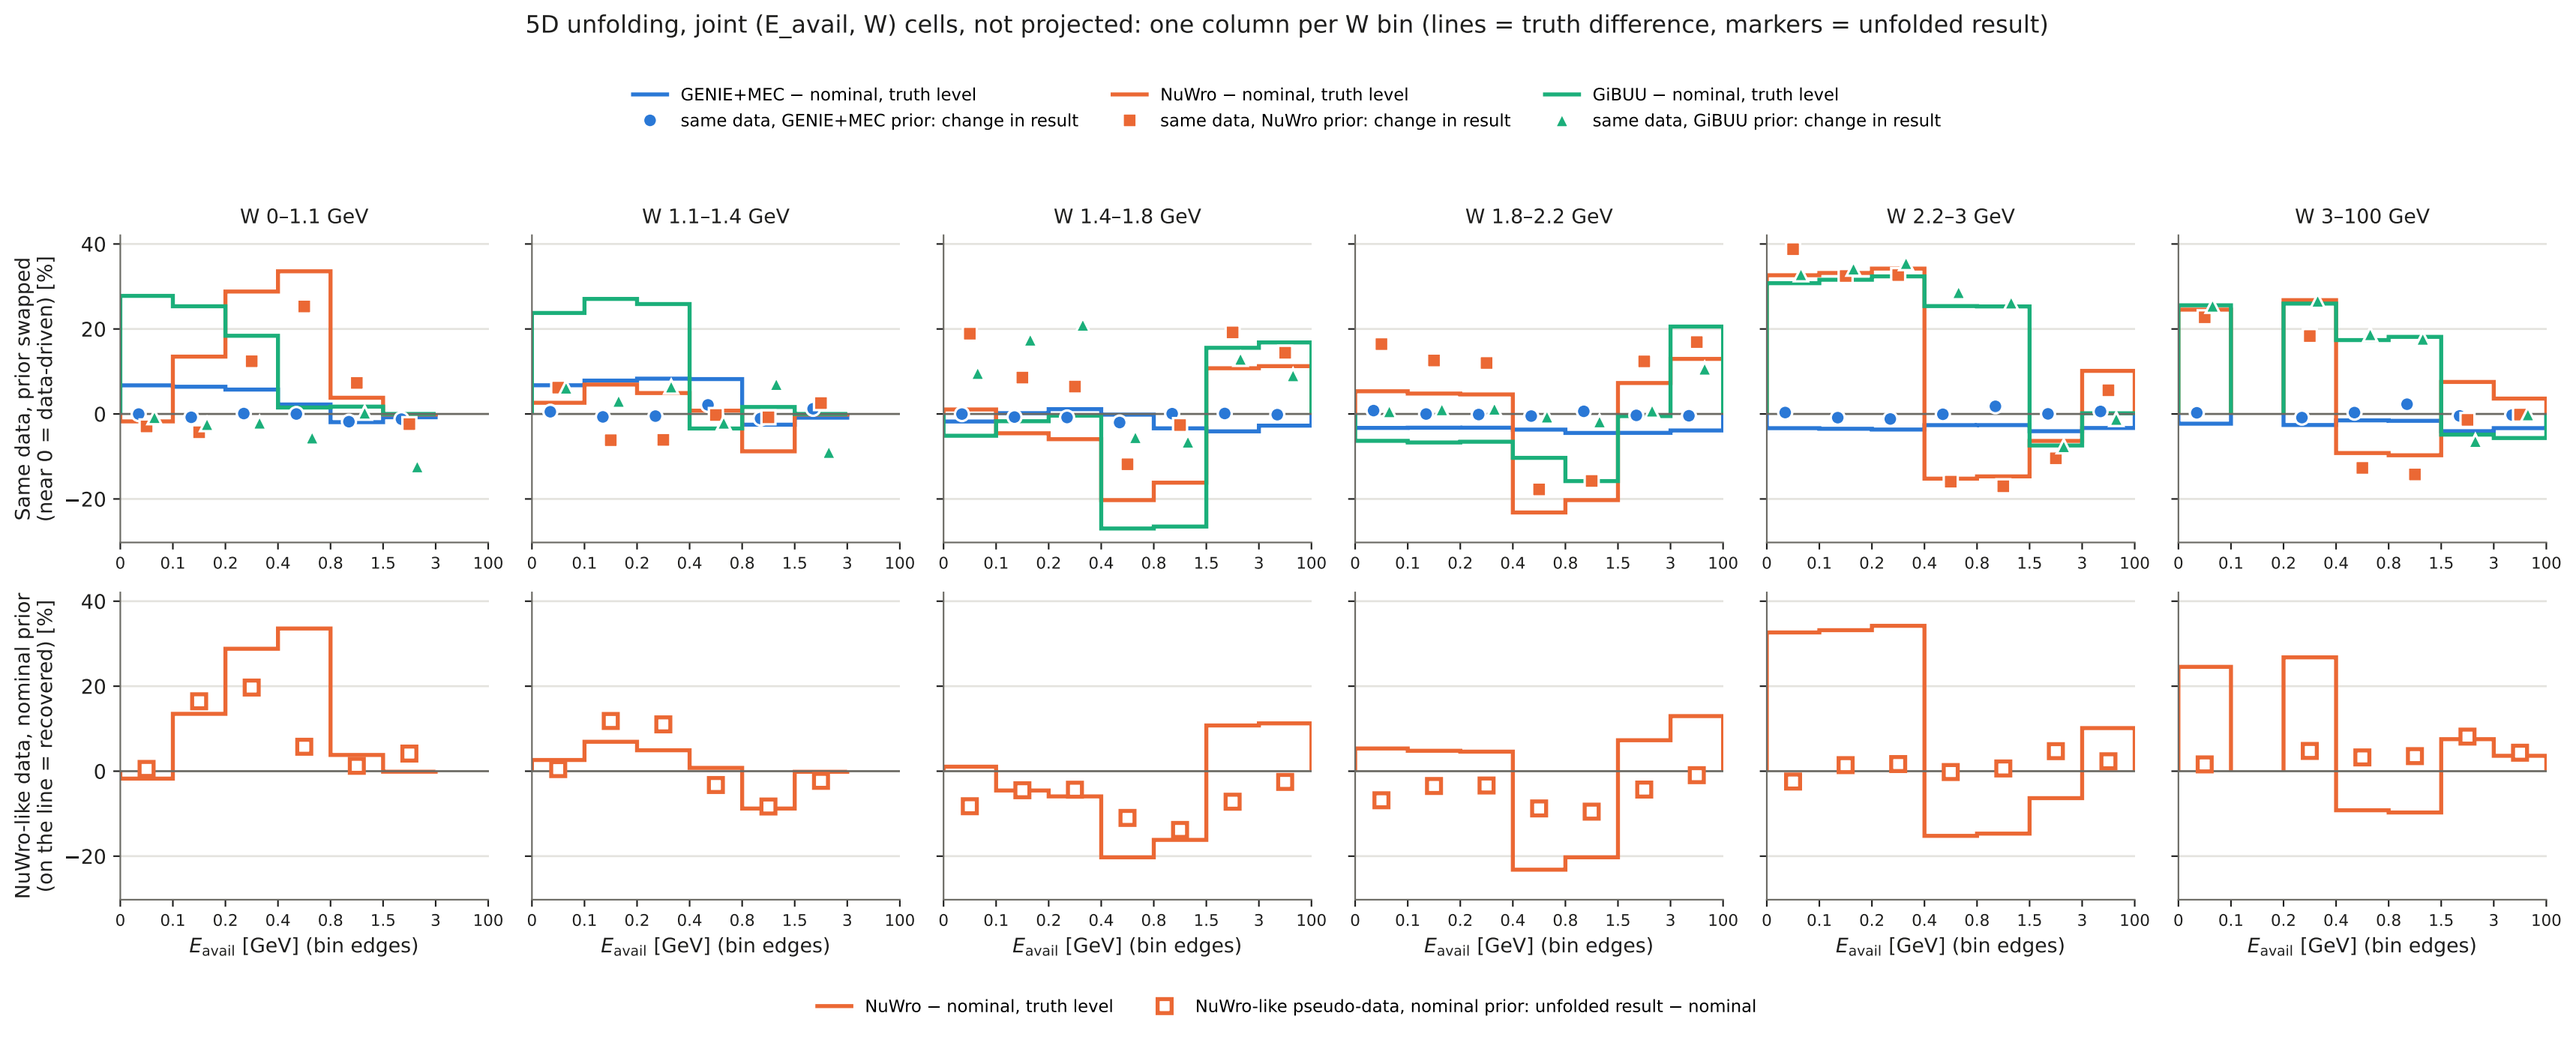
5D unfolding, joint (E_avail, W) cells, not projected: one column per W bin (lines = truth difference, markers = unfolded result)
GENIE+MEC − nominal, truth level
same data, GENIE+MEC prior: change in result
NuWro − nominal, truth level
same data, NuWro prior: change in result
GiBUU − nominal, truth level
same data, GiBUU prior: change in result
W 0–1.1 GeV
W 1.1–1.4 GeV
W 1.4–1.8 GeV
W 1.8–2.2 GeV
W 2.2–3 GeV
W 3–100 GeV
Same data, prior swapped (near 0 = data-driven) [%]
NuWro-like data, nominal prior (on the line = recovered) [%]
40
20
0
−20
0
0.1
0.2
0.4
0.8
1.5
3
100
E_{avail} [GeV] (bin edges)
NuWro − nominal, truth level
NuWro-like pseudo-data, nominal prior: unfolded result − nominal